



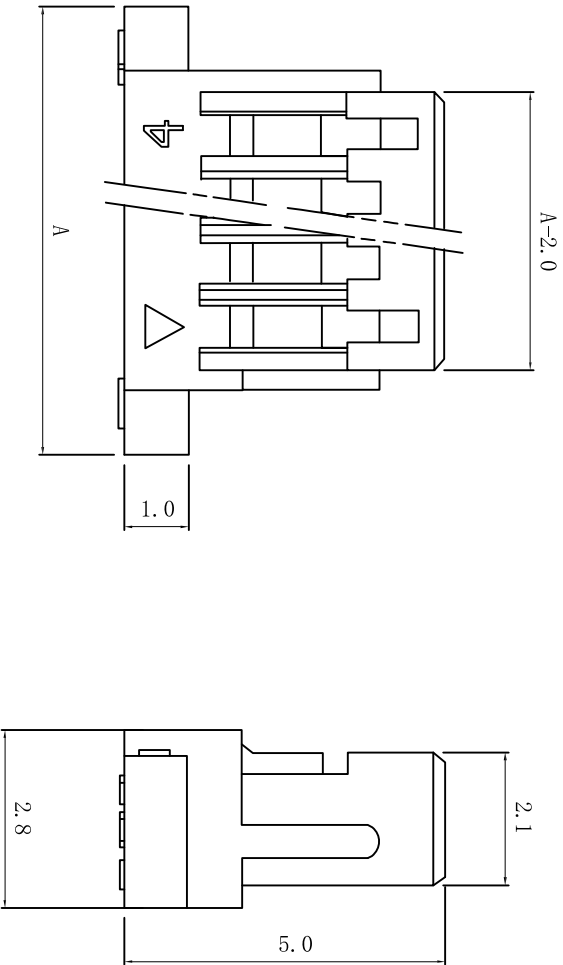

Specifications:  
Current Rating: 1A  
Voltage Rating: 50V AC/DC  
Contact Resistance:20 Milliohms Max  
Contact Resistance:100mW/min  
Withstanding Voltage: 500V.AC/min  
Operating TemPerture Range:-25°C~+85°C

Material:  
Insulation: PA66

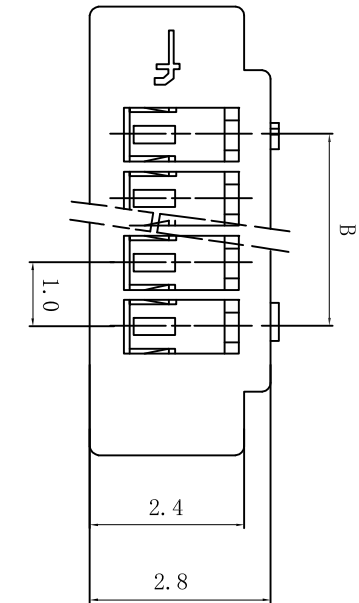

| Poles | Part No.        | Dimensions mm |      |
|-------|-----------------|---------------|------|
|       |                 | A             | B    |
| 2     | 2-1001H02P-0000 | 5.0           | 1.0  |
| 3     | 2-1001H03P-0000 | 6.0           | 2.0  |
| 4     | 2-1001H04P-0000 | 7.0           | 3.0  |
| 5     | 2-1001H05P-0000 | 8.0           | 4.0  |
| 6     | 2-1001H06P-0000 | 9.0           | 5.0  |
| 7     | 2-1001H07P-0000 | 10.0          | 6.0  |
| 8     | 2-1001H08P-0000 | 11.0          | 7.0  |
| 9     | 2-1001H09P-0000 | 12.0          | 8.0  |
| 10    | 2-1001H10P-0000 | 13.0          | 9.0  |
| 11    | 2-1001H11P-0000 | 14.0          | 10.0 |
| 12    | 2-1001H12P-0000 | 15.0          | 11.0 |
| 13    | 2-1001H13P-0000 | 16.0          | 12.0 |
| 14    | 2-1001H14P-0000 | 17.0          | 13.0 |
| 15    | 2-1001H15P-0000 | 18.0          | 14.0 |
| 16    | 2-1001H16P-0000 | 19.0          | 15.0 |

|           |            |                                                                |                 |       |         |
|-----------|------------|----------------------------------------------------------------|-----------------|-------|---------|
| APPROVED: | DATE:      | <div>Ckmtw 深圳市灿科盟实业有限公司<br/>CHANKLEMENT INDUSTRYCO., LTD</div> |                 |       |         |
| CHECKED:  | DATE:      | TITLE:<br>SH1.0H-xP (Pitch:1.0mm)                              |                 |       |         |
| DRAWN:    | DATE:      | CLIENT P/N                                                     |                 | /     |         |
| LYF       | 2019-04-08 | UNIT                                                           | mm              | SCALE | free    |
|           |            | FILE NO.                                                       | Ckmtw-SH10-0020 | REV.  | A J LXI |

|                 |       |
|-----------------|-------|
| TOLERANCE TABLE |       |
| .0              | ±0.20 |
| .00             | ±0.10 |
| .000            | ±0.05 |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for* [Headers & Wire Housings](#) *category:*

*Click to view products by* [Cankemeng](#) *manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#)  
[CSU011177004](#) [622-0430](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#)  
[65817-010LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#)  
[71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)  
[803-43-024-10-001000](#)