

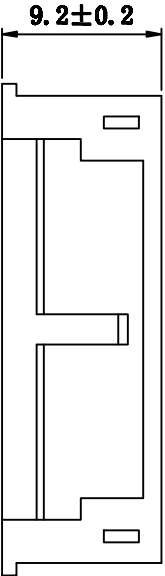


SPECIFICATIONS

Current rating: 3A AC/DC
Voltage rating: 250V AC/DC
Contact resistance: 20mΩ max.
Withstand voltage: 1000V AC/min
Insulation resistance: 1000MΩ/min.
Temperature range: -25°C~+85°C
Applicable PC board thickness: 0.063”(1.6)

Material:
Part No: 2-20
HOUSING: Nylon66, UL 94V-2

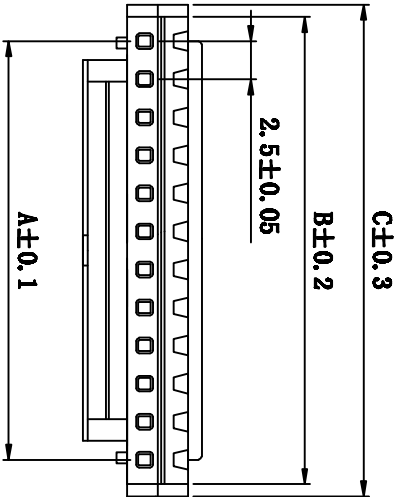

Poles	Part No.	Dimension mm		
		A	B	C
2	2501HB-2P	2.50	5.70	7.20
3	2501HB-3P	5.00	8.20	9.70
4	2501HB-4P	7.50	10.70	12.20
5	2501HB-5P	10.00	13.20	14.70
6	2501HB-6P	12.50	15.70	17.20
7	2501HB-7P	15.00	18.20	19.70
8	2501HB-8P	17.50	20.70	22.20
9	2501HB-9P	20.00	23.20	24.70
10	2501HB-10P	22.50	25.70	27.20
11	2501HB-11P	25.00	28.20	29.70
12	2501HB-12P	27.50	30.70	32.20
13	2501HB-13P	30.00	33.20	34.70
14	2501HB-14P	32.50	35.70	37.20
15	2501HB-15P	35.00	38.20	39.70
16	2501HB-16P	37.50	40.70	42.20
17	2501HB-17P	40.00	43.20	44.70
18	2501HB-18P	42.50	45.70	47.20
19	2501HB-19P	45.00	48.20	49.70
20	2501HB-20P	47.50	50.70	52.20

TOLERANCE TABLE

.0	±0.20
.00	±0.10
.000	±0.05

APPROVED:	DATE:	TITLE: 2501HB-XP (带扣) 深圳市灿科盟实业有限公司 CHAN KLIMENT INDUSTRY CO., LTD					
CHECKED:	DATE:						
DRAWN:	DATE:						
L.Y.F	2008-04-07	CLIENT P/N	/				
UNIT	mm	SCALE	free	Φ	≡	REV.	A
FILE NO.	ChanTW-2501-0005						

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) ***category:***

Click to view products by [Cankemeng](#) ***manufacturer:***

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)