

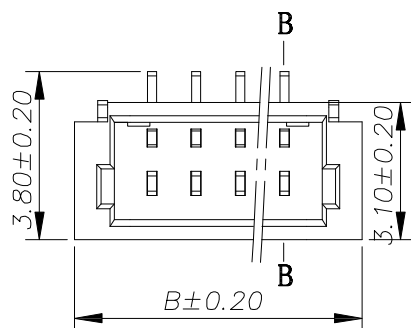

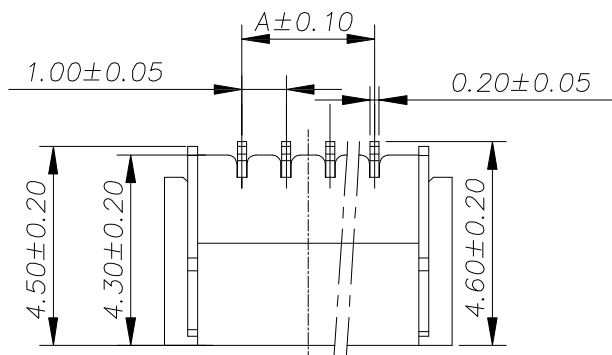


SECTION B-B

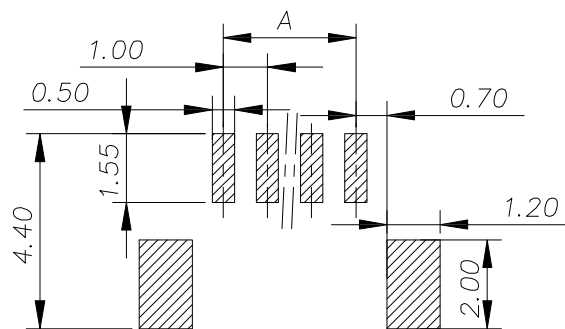

RECOMMEND PCB LAYOUT

TOLERANCE: ± 0.05

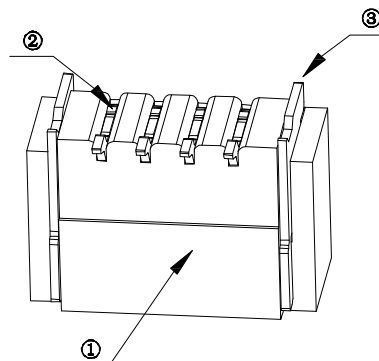

Specifications:

Current Rating: 1A

Voltage Rating: 50V AC/DC

Contact Resistance: 20 Milliohms Max

Contact Resistance: 100M Ω /min

Withstanding Voltage: 500V.AC/min

Operating Temperature Range: -25°C ~ +85°C

Poles	Part No.	Dimension mm	
		A	B
2	W-1001N02P-0000	1.0	4.5
3	W-1001N03P-0000	2.0	5.5
4	W-1001N04P-0000	3.0	6.5
5	W-1001N05P-0000	4.0	7.5
6	W-1001N06P-0000	5.0	8.5
7	W-1001N07P-0000	6.0	9.5
8	W-1001N08P-0000	7.0	10.5
9	W-1001N09P-0000	8.0	11.5
10	W-1001N10P-0000	9.0	12.5
11	W-1001N11P-0000	10.0	13.5
12	W-1001N12P-0000	11.0	14.5
13	W-1001N13P-0000	12.0	15.5
14	W-1001N14P-0000	13.0	16.5
15	W-1001N15P-0000	14.0	17.5

序号	零件名称	数量	材料	备注
①	底座	1	LCP	
②	端子	N	磷铜	镍底, 镀锡
③	焊片	2	黄铜	镍底, 镀锡

TOLERANCE TABLE	
.0	± 0.20
.00	± 0.10
.000	± 0.05

APPROVED:	DATE:	Ckmtw 深圳市灿科盟实业有限公司 CHANKLEMENT INDUSTRY CO., LTD				
CHECKED:	DATE:	TITLE: SH1.0 SMT-XP 立贴 (Pitch: 1.5mm)				
DRAWN: LYF	DATE: 2019-04-08	CLIENT P/N /				
		UNIT	mm	SCALE	free	
		FILE NO.	Ckmtw-SH10-0021	REV.	A	JLX1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) *category:*

Click to view products by [Cankemeng](#) *manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#)
[CSU011177004](#) [622-0430](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#)
[65817-010LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#)
[71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)
[803-43-024-10-001000](#)