
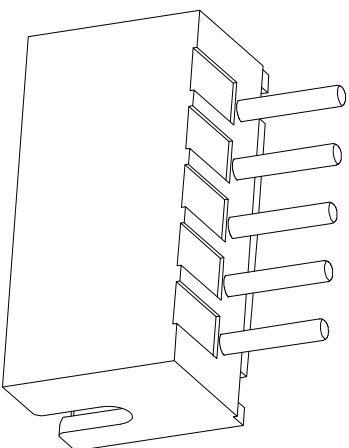
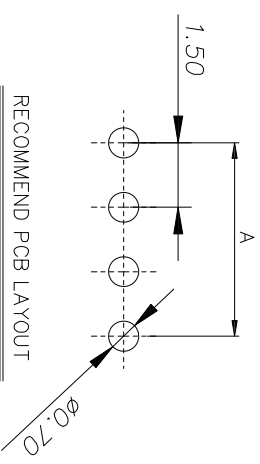
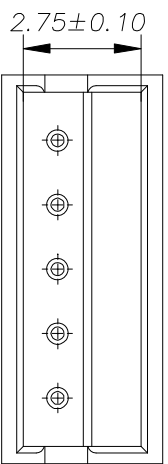
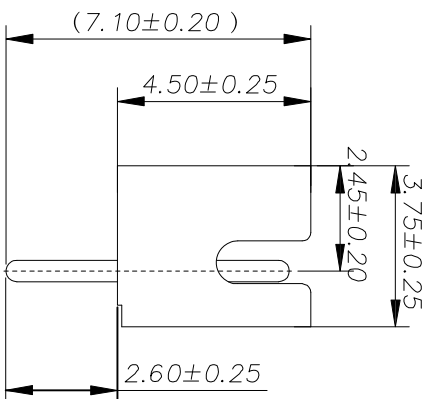


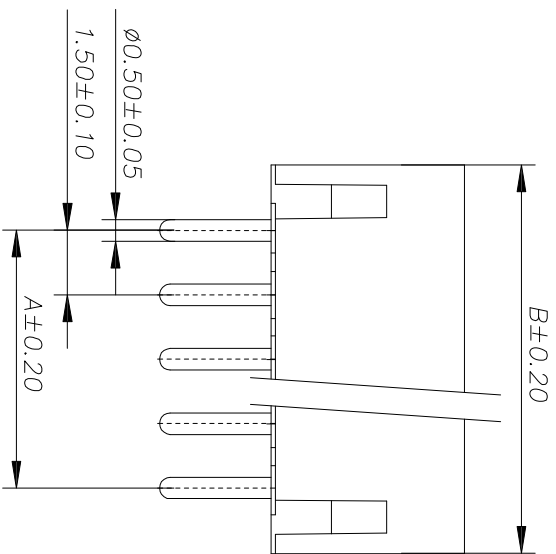

Specifications:
Current Rating: 1A
Voltage Rating: 50V AC/DC
Contact Resistance: 20 Milliohms Max
Contact Resistance: 500mΩ/min
Withstanding Voltage: 500V.AC/min
Operating Temperture Range: -25°C ~ +85°C

Material:
Contact: Brass
Plastic: PA66 UL94V-0/2
Plating: Tin Plating

Poles	Part No.	Dimension mm	
		A	B
2	W-1501S02P-0200	1.5	4.5
3	W-1501S03P-0200	3.0	6.0
4	W-1501S04P-0200	4.5	7.5
5	W-1501S05P-0200	6.0	9.0
6	W-1501S06P-0200	7.5	10.5
7	W-1501S07P-0200	9.0	12.0
8	W-1501S08P-0200	10.5	13.5
9	W-1501S09P-0200	12.0	15.0
10	W-1501S10P-0200	13.5	16.5
11	W-1501S11P-0200	15.0	18.0
12	W-1501S12P-0200	16.5	19.5
13	W-1501S13P-0200	18.0	21.0
14	W-1501S14P-0200	19.5	22.5
15	W-1501S15P-0200	21.0	24.0

RECOMMEND PCB LAYOUT
TOLERANCE: ±0.05

APPROVED:		DATE:		 深圳市灿科盟实业有限公司 CHANKLEMENT INDUSTRYCO., LTD					
CHECKED:		DATE:		TITLE: 1501S-xP 米黄色 (Pitch:1.5mm)					
DRAWN: LYF		DATE: 2019-04-08		CLIENT P/N /					
TOLERANCE TABLE									
.0	±0.20			UNIT	mm	SCALE	free		
.00	±0.10			FILE NO.	Ckmtw-1501-0018				
.000	±0.05			REV.	A	JLXI			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) *category:*

Click to view products by [Cankemeng](#) *manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#)
[CSU011177004](#) [622-0430](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#)
[65817-010LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#)
[71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)
[803-43-024-10-001000](#)