


■ Features:

- Universal AC input / Full range
- Wall mounted type, Isolation class II design
- ErP step II / CEC level VI compliance
- No load power consumption $P < 0.075W$
- Protections: Overload / Short circuit / Over Temperature

ELECTRICAL SPECIFICATION

MODEL	CLW-1005-W2E-EB25
OUTPUT	
<i>Rated Voltage</i>	5V
<i>Rated Current</i>	2A
<i>Current Range</i>	0 ÷ 2A
<i>Rated Power</i>	10W
<i>Line Regulation</i>	± 1%
<i>Load Regulation</i>	± 1%
<i>Tolerance [3]</i>	± 5%
<i>Ripple & Noise (max.) [2]</i>	150mV _{P-P}
<i>Setup, Rise Time [4]</i>	1000ms, 20ms / 230VAC at full load
<i>Hold up Time (typ.)</i>	10ms / 230VAC at full load

INPUT

<i>Voltage Range</i>	90 ÷ 264VAC
<i>Frequency Range</i>	47 ÷ 63Hz
<i>Efficiency (typ.)</i>	83.16%
<i>AC Current (typ.)</i>	0.26A / 115VAC, 0.14A / 230VAC
<i>No load Power Consumption (max.)</i>	0.075W

PROTECTIONS

<i>Overload</i>	Range: 140-180%
	Type: fold forward mode(current rises, voltage drops) to 3V next hiccup mode, auto-recovery.
<i>Short Circuit</i>	Type: hiccup mode, auto-recovery.
<i>Over Temperature</i>	140°C ± 10°C (detect on main control IC)
	Type: shut off output voltage, auto-recovery.

WORKING ENVIRONMENT

Working Temperature	0°C ÷ 40°C
Working Humidity	10 ÷ 90% RH non-condensing
Storage Temperature and Humidity	-20°C ÷ 85°C, 5 ÷ 90% RH non-condensing

SAFETY and EMC REGULATIONS


Safety Standards	Compliance to EN 62368
Withstand Voltage	IN/OUT: 3.6kVAC
Isolation Resistance	IN/OUT: 50MΩ/500VDC/25°C/70%
EMC Emission	Compliance to EN55032
EMC Immunity	Compliance to EN61000-4-2, -3, -4, -5
Harmonic Current	Compliance to EN61000-3-3; EN61000-3-2

OTHERS


DC wire and plug	Wire: 20AWG*2C, length = 120mm ±50mm	Plug: 2.5/5.5, positive inside
Dimensions	67 x 38 x 74mm (L x W x H)	
Net Weight	80g	

1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1µF i 47µF parallel capacitor.
3. Tolerance includes set up tolerance, line regulation and load regulation.
4. Setup and rise time is measured from 0 to 90% rated output voltage.
5. Power supply is considered as component not intended to apply by end-user. Power supply meets safety and EMC standards however the final equipment with power supply must be re-quality to comply with EMC Directives.

MECHANICAL SPECIFICATION

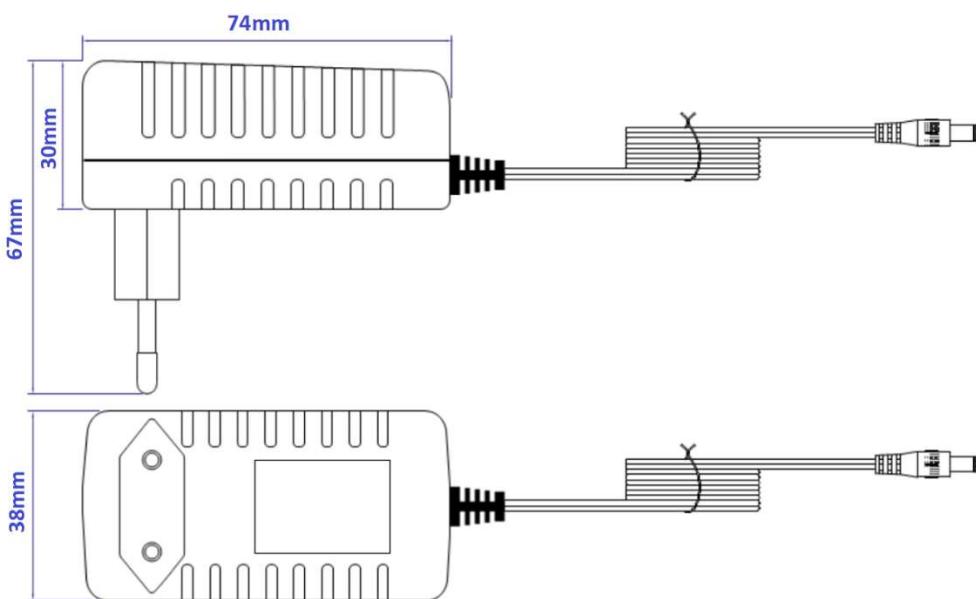

MECHANICAL SPECIFICATION of wire

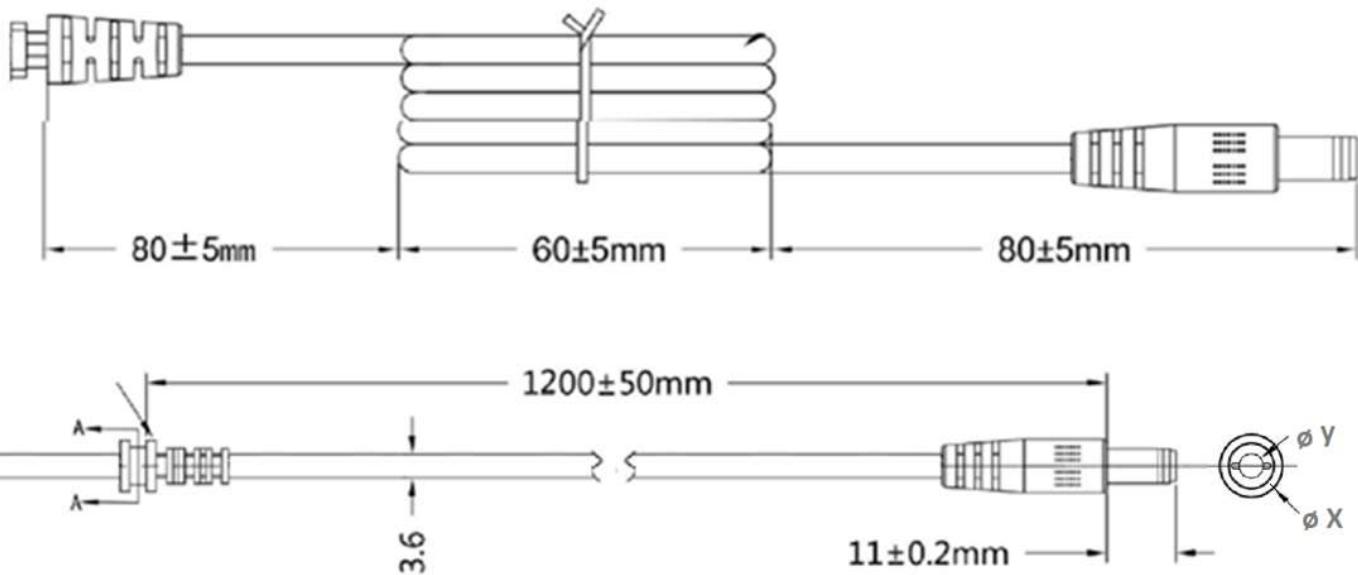

*MODEL	DC PLUG	X [mm]	Y [mm]	Polarity
CLW- 1005-W2E-EB	5.5x2.1mm	5.5	2.1	center positive
CLW- 1005-W2E-EB25	5.5x2.5mm	5.5	2.5	center positive
CLW- 1005-W2E-EB13	3.5x1.3mm	3.5	1.3	center positive
CLW- 1005-W2E-EB40	4.0x1.7mm	4.0	1.7	center positive
CLW- 1005-W2E-EB48	4.8x1.7mm	4.8	1.7	center positive
CLW- 1005-W2E-EB-CN	5.5x2.1mm	5.5	2.1	center negative
CLW- 1005-W2E-EB25-CN	5.5x2.5mm	5.5	2.5	center negative
CLW- 1005-W2E-EB13-CN	3.5x1.3mm	3.5	1.3	center negative
CLW- 1005-W2E-EB40-CN	4.0x1.7mm	4.0	1.7	center negative
CLW- 1005-W2E-EB48-CN	4.8x1.7mm	4.8	1.7	center negative

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Cellevia](#) manufacturer:

Other Similar products are found below :

[ACCU-600/3NI-MH/CL](#) [AC/DC-CL-DT12/3](#) [CABLE-1/CL](#) [CABLE-2/CL](#) [CABLE-3/CL](#) [CL12.6VDC-1.5A](#) [CL12.6VDC-2.5A](#)
[CL12.6VDC-4.76A](#) [CL14.4VDC-0.4A](#) [CL14.4VDC-0.7A](#) [CL14.4VDC-1.2A](#) [CL7.2VDC-0.4A](#) [CL7.2VDC-0.7A](#) [CL7.2VDC-1.2A](#)
[CL8.4VDC-1.2A](#) [CL8.4VDC-2.5A](#) [CL8.4VDC-5A](#) [CLD-10012-T2-E](#) [CLD-10012-T2-E25](#) [CLD-12012-T2-EB](#) [CLD-1212-INT-EB](#) [CLD-1212-INT-EB25](#) [CLD-2412-INT-EB25](#) [CLD-2412-T2-E](#) [CLD-2412-T2-E25](#) [CLD-3612-INT-EB25](#) [CLD-3612-T2](#) [CLD-3612-T2-2555L](#)
[CLD-3612-T2-E](#) [CLD-3612-T2-E25](#) [CLD-3612-T2-EB](#) [CLD-3612-T2-ER](#) [CLD-3612-T2-L](#) [CLD-4012-T2-E](#) [CLD-4012-T2-E25](#) [CLD-6012-INT-EB25](#) [CLD-6012-T2](#) [CLD-6012-T2-E](#) [CLD-6012-T2-E25](#) [CLD-6012-T2-EB](#) [CLD-6012-T2-ER](#) [CLD-6012-T2-ER25](#) [CLD-6012-T3-EA](#)
[CLD-6524-L-T3-ER](#) [CLD-6524-T3-ER](#) [CLD-6524-T3-ER25](#) [CLD-7012-T2-E](#) [CLD-7012-T2-E25](#) [CLD-8012-T3](#) [CLD-9012-T2-E](#)