

CDMS24783-120

**SILICON CARBIDE  
N-CHANNEL MOSFET**



**TO-247 CASE**



[www.centrasemi.com](http://www.centrasemi.com)

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR CDMS24783-120 is an N-channel silicon carbide MOSFET designed for high speed switching and fast reverse recovery applications.

**MARKING: CDMS247  
83-120**

**MAXIMUM RATINGS:** ( $T_J=25^{\circ}\text{C}$ )

Drain-Source Voltage  
Gate-Source Voltage  
Continuous Drain Current  
Pulsed Drain Current  
Operating and Storage Junction Temperature  
Power Dissipation

SYMBOL		UNITS
$V_{DS}$	1200	V
$V_{GS}$	20	V
$I_D$	18	A
$I_{DM}$	20	A
$T_J, T_{stg}$	-55 to +175	$^{\circ}\text{C}$
$P_D$	28	W


**ELECTRICAL CHARACTERISTICS:** ( $T_J=25^{\circ}\text{C}$ )

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
$BV_{DSS}$	$V_{GS}=0\text{V}, I_D=250\mu\text{A}$	1200			V
$I_{DSS}$	$V_{DS}=1200\text{V}, V_{GS}=0\text{V}$		4.5	100	nA
$I_{GSS}$	$V_{GS}=18\text{V}, V_{DS}=0\text{V}$		45	500	pA
$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=2.5\text{mA}$	1.0	2.4	4.0	V
$r_{DS(ON)}$	$V_{GS}=18\text{V}, I_D=18\text{A}$		83	150	m $\Omega$
$C_{iss}$	$V_{DS}=200\text{V}, V_{GS}=0, f=1.0\text{MHz}$		1365		pF
$C_{oss}$	$V_{DS}=800\text{V}, V_{GS}=0, f=1.0\text{MHz}$		78		pF
$C_{rss}$	$V_{DS}=800\text{V}, V_{GS}=0, f=1.0\text{MHz}$		11		pF
$t_{d(on)}$	$V_{DS}=1000\text{V}, V_{GS}=-5.0$ to 15V, $I_D=10\text{A}$		10		ns
$t_r$	$V_{DS}=1000\text{V}, V_{GS}=-5.0$ to 15V, $I_D=10\text{A}$		35		ns
$t_{d(off)}$	$V_{DS}=1000\text{V}, V_{GS}=-5.0$ to 15V, $I_D=10\text{A}$		31		ns
$t_f$	$V_{DS}=1000\text{V}, V_{GS}=-5.0$ to 15V, $I_D=10\text{A}$		52		ns
$Q_g(\text{tot})$	$V_{DS}=800\text{V}, V_{GS}=-5.0$ to 15V, $I_D=10\text{A}$		55		nC
$V_{SD}$	$V_{GS}=0\text{V}, I_S=5.0\text{A}$			5.0	V


CDMS24783-120  
 SILICON CARBIDE  
 N-CHANNEL MOSFET



TO-247 CASE - MECHANICAL OUTLINE

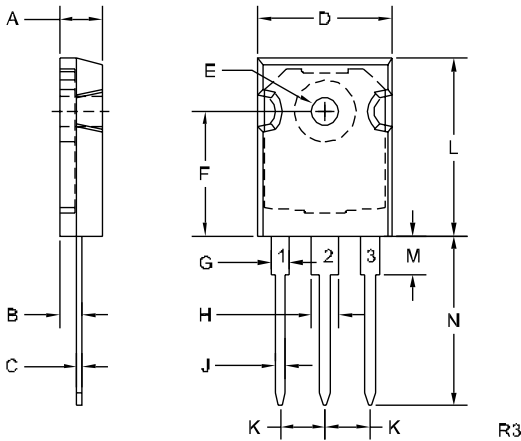

R3

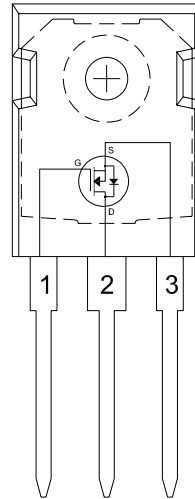

**LEAD CODE:**

- 1) Gate
- 2) Drain
- 3) Source

**MARKING:**

**CDMS247**

**83-120**

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.184	0.211	4.68	5.36
B	0.087	0.110	2.20	2.80
C	0.019	0.028	0.48	0.70
D	0.606	0.638	15.38	16.20
E (DIA)	0.128	0.144	3.25	3.65
F	0.583	0.607	14.81	15.42
G	0.072	0.097	1.82	2.46
H	0.115	0.127	2.92	3.23
J	0.035	0.060	0.89	1.53
K	0.207	0.223	5.26	5.66
L	0.812	0.881	20.63	22.38
M	0.145	0.177	3.68	4.50
N	0.728	0.846	18.50	21.50

TO-247 (REV: R3)


R4 (30-July 2024)

CDMS24783-120  
 SILICON CARBIDE  
 N-CHANNEL MOSFET




TYPICAL ELECTRICAL CHARACTERISTICS


Typical Output Characteristics

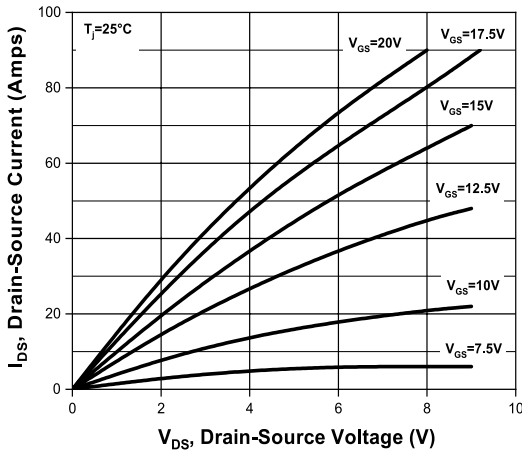


Typical Output Characteristics

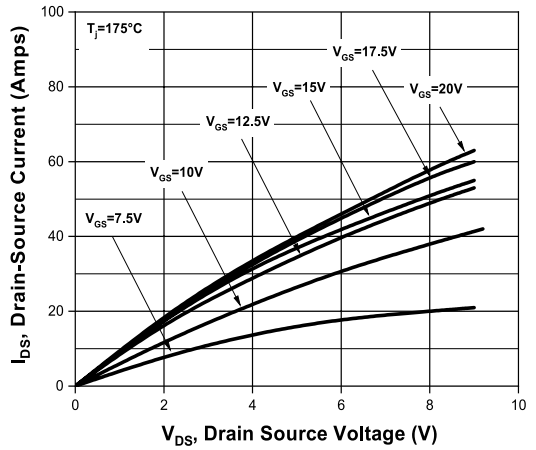

Drain Source On Resistance

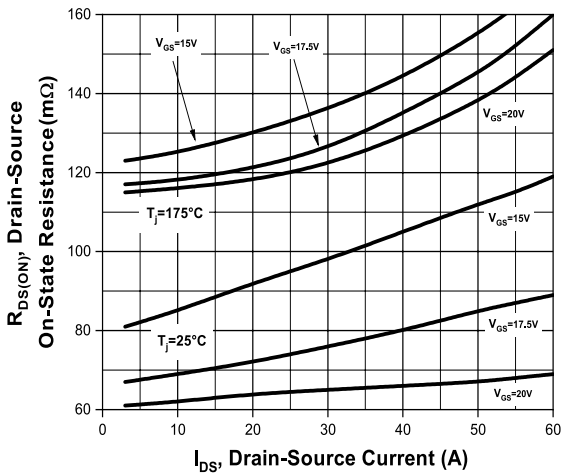

Transfer Characteristics

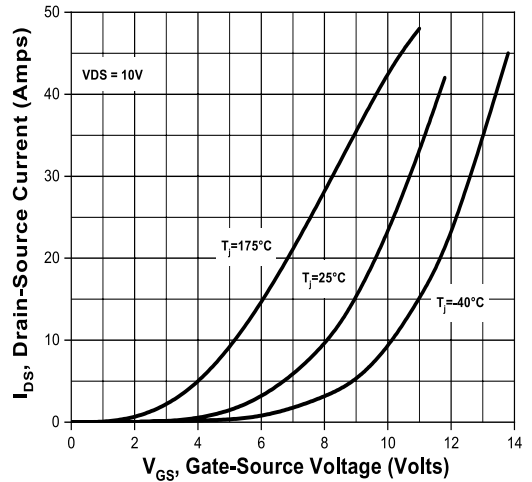


R4 (30-July 2024)

CDMS24783-120  
 SILICON CARBIDE  
 N-CHANNEL MOSFET




TYPICAL ELECTRICAL CHARACTERISTICS


Gate Capacitance Charge

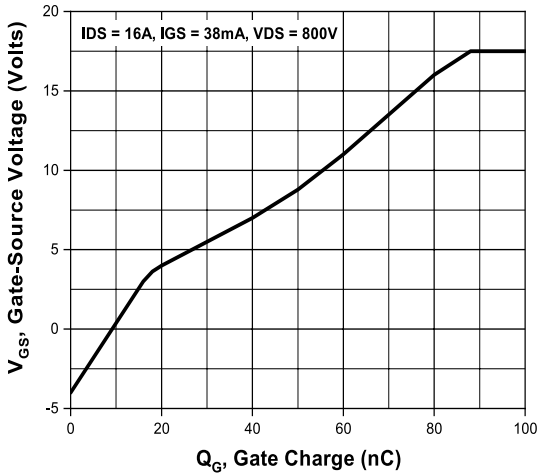


Output Capacitor Stored Energy

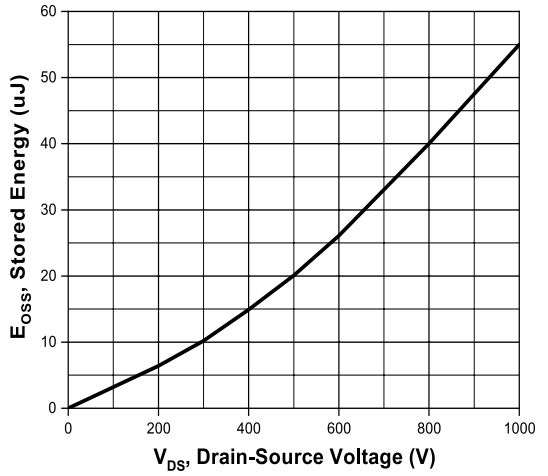

Capacitance

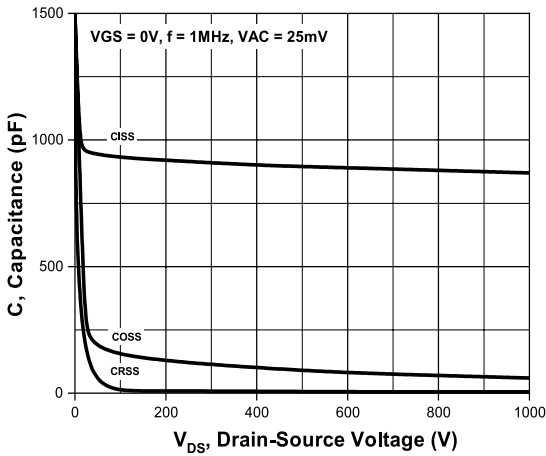

Capacitance

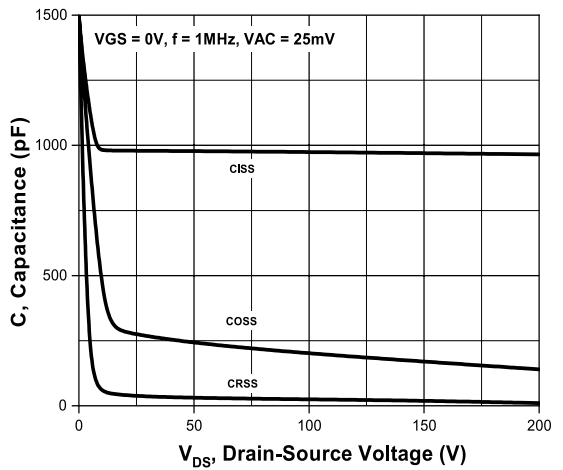


CDMS24783-120

SILICON CARBIDE  
N-CHANNEL MOSFET




### TYPICAL ELECTRICAL CHARACTERISTICS


Power Derating

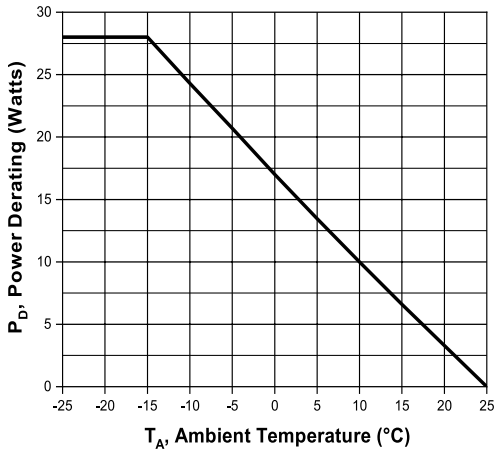

Clamped Inductive Switching Energy

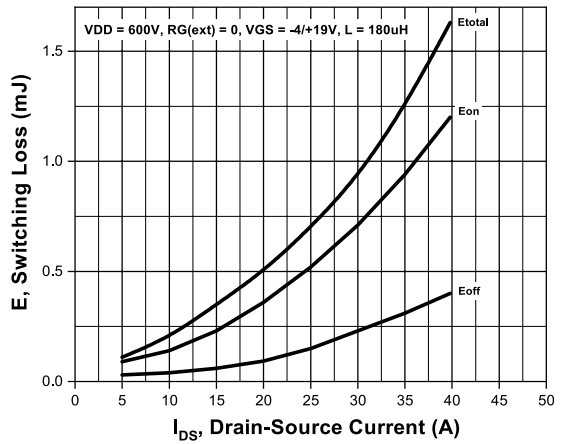

Switching Times

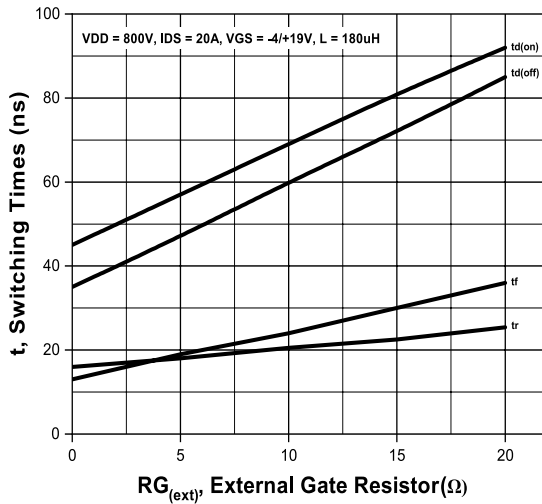

## OUTSTANDING SUPPORT AND SUPERIOR SERVICES



---

### PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

---

### DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

---

### REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

---

### CONTACT US

#### Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.  
145 Adams Avenue  
Hauppauge, NY 11788 USA  
Main Tel: (631) 435-1110  
Main Fax: (631) 435-1824  
Support Team Fax: (631) 435-3388  
[www.centrasemi.com](http://www.centrasemi.com)

**Worldwide Field Representatives:**  
[www.centrasemi.com/wwreps](http://www.centrasemi.com/wwreps)

**Worldwide Distributors:**  
[www.centrasemi.com/wwdistributors](http://www.centrasemi.com/wwdistributors)

---

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: [www.centrasemi.com/terms](http://www.centrasemi.com/terms)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [SiC MOSFETs](#) category:*

*Click to view products by [Central Semiconductor](#) manufacturer:*

Other Similar products are found below :

[SCT055W65G3-4AG](#) [SCT040W120G3-4AG](#) [SCT027W65G3-4AG](#) [SCTWA40N120G2V-4](#) [ADR065N028AH](#) [SCT4036KRC15](#)  
[CI72N170SM](#) [HC1M40120J](#) [SCT2160KEGC11](#) [IMZ120R090M1H](#) [HC1M320120D](#) [HC2M0045170P](#) [HC3M0021120D](#) [HC1M30065D](#)  
[HC1M60120D](#) [HC2M0650170D](#) [HC1M40120D](#) [YJD212080NCTG1](#) [YJD212040NCFG2](#) [HC1M15120S](#) [LSIC1MO170E0750](#)  
[SCT3080ALGC11](#) [C3M0120100K](#) [C2M1000170J](#) [C3M0120090J](#) [C3M0065090J](#) [C3M0280090J](#) [SCT2750NYTB](#) [CDMS24783-120 SL](#)  
[C3M0016120K](#) [C3M0045065D](#) [C3M0045065K](#) [E3M0120090J](#) [C3M0120100J](#) [C3M0075120J](#) [DMWS120H100SM4](#) [DMWSH120H28SM4](#)  
[DMWSH120H90SM4](#) [DMWSH120H90SM4Q](#) [DMWSH120H28SM4Q](#) [DMWSH120H90SCT7](#) [DMWSH120H90SCT7Q](#)  
[DMWSH120H28SM3](#) [DMWSH120H90SM3](#) [DMWSH120H28SM3Q](#) [DMWSH120H90SM3Q](#) [DIF065SIC020](#) [DIF120SIC022-AQ](#)  
[DIF065SIC030](#) [DIF120SIC022](#)