

2.0mm Mini Jumper

MATERIAL

Insulator : Polyester

Contact Pin : Phosphor Bronze

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 1000MΩMin.

Contact Resistance : 30mΩMax.


Operation Temperature : -55°C to +125°C



Detail Dimensions


200-72-PBGB00

B Type Open H=3.5mm

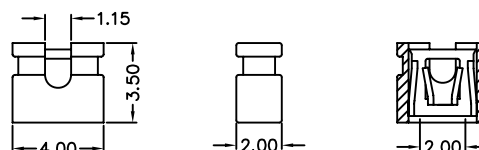


200-72-PCGB01

C Type Close H=5.0mm

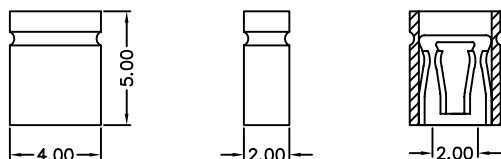


200-72-PDGB01

D Type Open H=4.5mm

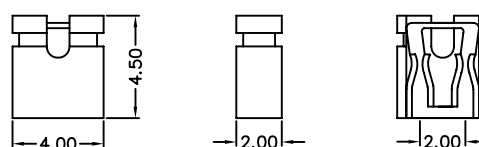


200-72-PEGB01

E Type with handle H=9.5mm

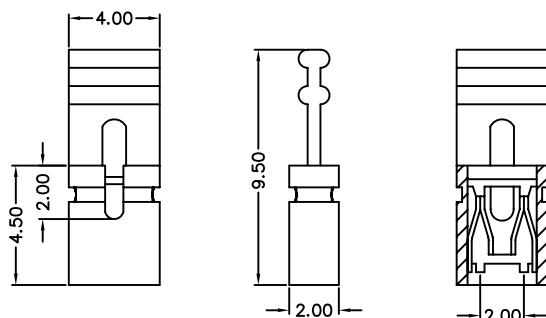

200-72-PFGB01

F Type with handle H=11.0mm

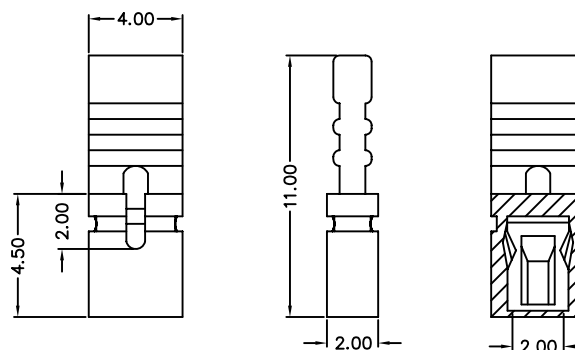

Order Information

200-7 2 - P x G B xx
1 2 3 4

1. 7: Green Product
2. B: Open Type H=3.5mm
C: Close Type H=5.0mm
D: Open Type H=4.5mm
E: With Handle H=9.5mm
F: With Handle H=11.0mm

3. G: Gold Flash
T: Tin Plating
4. Pinrex internal code

Standard Parts

200-72-PBGB00
200-72-PCGB01
200-72-PDGB01
200-72-PEGB01
200-72-PFGB01

Unit: mm