



Datasheet revision 1.0

www.Proto-Advantage.com

SOT-23, 3 mm, 4 mm to SIP Adapter High Density Circuits - 6 pin

Product Highlights

Immersion Gold Finish
Double Sided
RoHS 3 and REACH Compliant


Specifications

Dimensions:	0.7" x 0.7" x 0.0625"
PCB construction:	FR-4 UL94V-0
PCB operating temperature range:	-40°C to +130°C
PCB reflow maximum temperature:	+260°C

Description

Single-in-line package carrier. Fits 3-terminal (SOT-23, and 3mm and 4mm inductors) as well as 0805, 1206, and 1210 surface mount components. For High Density Applications. This board uses our through-hole male right angle headers, Proto-Advantage part number: HDR100IMP40M-G-RA-TH, which are included.

Drawing

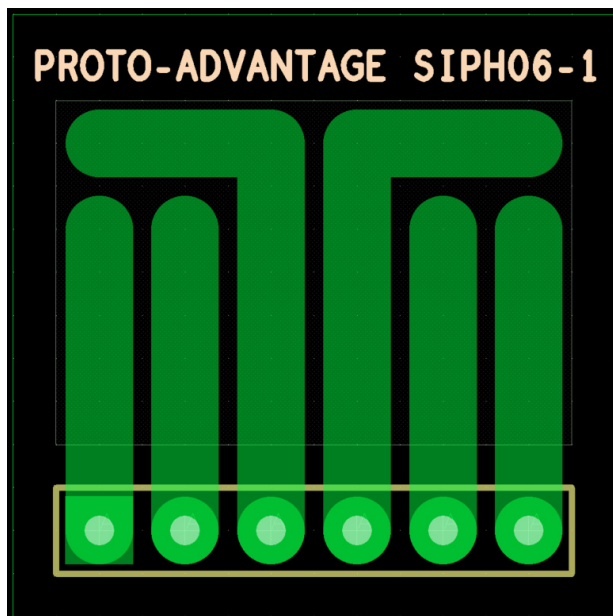

Shown with 1.27mm grid. Traces are 2.00mm width. Air gap between traces is 0.54mm.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Sockets & Adapters](#) ***category:***

Click to view products by [Chip Quik](#) ***manufacturer:***

Other Similar products are found below :

[6508-0-00-01-00-00-33-0](#) [AC164348](#) [22827](#) [AC164353](#) [TDGL015](#) [70-0036](#) [SM132CQ-ACTEL](#) [LFVBBOK77CW1A](#) [LFBGARBW1AO](#)
[LFDBGVCALS50R](#) [LFDBGVCALS50](#) [AC164403](#) [DX1011](#) [DX3021](#) [AC31S18A](#) [MIKROE-4552](#) [MIKROE-4553](#) [BH-ADP-60e_MIPI-](#)
[60t_TI](#) [MIKROE-425](#) [110-83-632-41-605101](#) [110-83-640-41-605101](#) [110-83-628-41-605101](#) [SLG46116V-SKT](#) [SLG46120V-SKT](#)
[SLG46170V-SKT](#) [SLG46533V-SKT](#) [SLG46535V-SKT](#) [SLG46537M-SKT](#) [SLG46537V-SKT](#) [SLG46621V-SKT](#) [SLG46722V-SKT](#) [PA0003](#)
[PA0007](#) [PA0009](#) [PA0035](#) [PA0085](#) [PA0096](#) [KITPF0100SKTEVBE](#) [AC164307](#) [IPC0079](#) [ATARDADPT-XPRO](#) [ATARD-DBGADPT](#) [80-](#)
[000286](#) [ATSTK600-RC22](#) [ATSTK600-RC91](#) [ATSTK600-SC06](#) [SPC560PADPT64S](#) [AC164340](#) [966927-1](#) [PA0089](#)