



EC3AE SERIES

3 WATT

DC-DC CONVERTERS



FEATURES

- * 3W Isolated Output
- * DIP-24/SMD Package
- * Efficiency to 61%
- * Regulated Outputs
- * LC Input Filter
- * Low Ripple and Noise



MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	INPUT CURRENT		% EFF.	CASE
				NO LOAD	FULL LOAD		
EC3AE01M	5 VDC	5 VDC	600 mA	120 mA	984 mA	61	DIP-24
EC3AE02M	5 VDC	12 VDC	250 mA	120 mA	984 mA	61	DIP-24
EC3AE03M	5 VDC	15 VDC	200 mA	120 mA	984 mA	61	DIP-24
EC3AE04M	5 VDC	±12 VDC	±125 mA	120 mA	984 mA	61	DIP-24
EC3AE05M	5 VDC	±15 VDC	±100 mA	120 mA	984 mA	61	DIP-24
EC3AE11M	12 VDC	5 VDC	600 mA	60 mA	410 mA	61	DIP-24
EC3AE12M	12 VDC	12 VDC	250 mA	60 mA	410 mA	61	DIP-24
EC3AE13M	12 VDC	15 VDC	200 mA	60 mA	410 mA	61	DIP-24
EC3AE14M	12 VDC	±12 VDC	±125 mA	60 mA	410 mA	61	DIP-24
EC3AE15M	12 VDC	±15 VDC	±100 mA	60 mA	410 mA	61	DIP-24
EC3AE21M	24 VDC	5 VDC	600 mA	40 mA	205 mA	61	DIP-24
EC3AE22M	24 VDC	12 VDC	250 mA	40 mA	205 mA	61	DIP-24
EC3AE23M	24 VDC	15 VDC	200 mA	40 mA	205 mA	61	DIP-24
EC3AE24M	24 VDC	±12 VDC	±125 mA	40 mA	205 mA	61	DIP-24
EC3AE25M	24 VDC	±15 VDC	±100 mA	40 mA	205 mA	61	DIP-24
EC3AE31M	28 VDC	5 VDC	600 mA	35 mA	176 mA	61	DIP-24
EC3AE32M	28 VDC	12 VDC	250 mA	35 mA	176 mA	61	DIP-24
EC3AE33M	28 VDC	15 VDC	200 mA	35 mA	176 mA	61	DIP-24
EC3AE34M	28 VDC	±12 VDC	±125 mA	35 mA	176 mA	61	DIP-24
EC3AE35M	28 VDC	±15 VDC	±100 mA	35 mA	176 mA	61	DIP-24
EC3AE41M	48 VDC	5 VDC	600 mA	20 mA	102 mA	61	DIP-24
EC3AE42M	48 VDC	12 VDC	250 mA	20 mA	102 mA	61	DIP-24
EC3AE43M	48 VDC	15 VDC	200 mA	20 mA	102 mA	61	DIP-24
EC3AE44M	48 VDC	±12 VDC	±125 mA	20 mA	102 mA	61	DIP-24
EC3AE45M	48 VDC	±15 VDC	±100 mA	20 mA	102 mA	61	DIP-24

SPECIFICATIONS

All Specifications Typical At Nominal Line, Full Load, and 25°C Unless Otherwise Noted

INPUT SPECIFICATIONS:

Input Voltage Range	±10%
Input Filter	LC Type

OUTPUT SPECIFICATIONS:

Voltage Accuracy	±3.0% max.
Temperature Coefficient	±0.02%/°C
Ripple & Noise, 20MHz BW	50mV pk-pk max.
Short Circuit Protection	Indefinite & Current Limit
Line Regulation (note 1)	±0.3% max.
Load Regulation (note 2) Single	±0.5% max.
Dual	±1.0% max.

GENERAL SPECIFICATIONS:

Efficiency	See Table
Isolation Capacitance	150pF typ.
Isolation Resistance	10 ⁹ ohm min.
Switching Frequency	80KHz typ.
Operating Ambient Temperature Range	-25°C to +71°C
De-rating, Above 71°C	Linearly to Zero power at 100°C
Case Temperature (note 4)	100°C max.
Cooling	Natural Convection
Storage Temperature Range	-40°C to +100°C
Dimensions	DIP	1.25x0.80x0.40 inches(31.8x20.3x10.2 mm)
	SMD	1.25x0.80x0.45 inches(31.8x20.3x11.4 mm)
Weight	17.2g

Case A Dimensions:


NOTE: Pin Size is 0.02±0.002 Inch (0.5±0.05 mm) DIA

All Dimensions In Inches (mm)

Tolerances Inches: X.XX= ±0.02 , X.XXX= ±0.010

Millimeters: X.X= ±0.5 , X.XX=±0.25

CASE AS

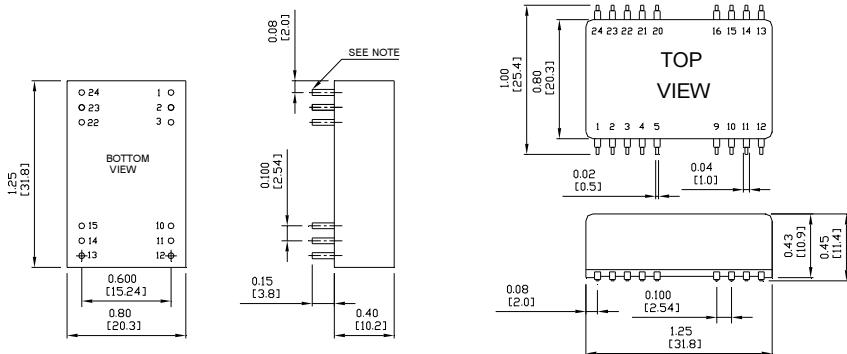

ISOLATION VOLTAGE:

500 VDC min.	Standard Models
--------------	-------	-----------------


CASE MATERIAL:

Standard Models Black Coated Copper with Non-conductive Base

NOTE:

1. Measured from high line to low line.
2. Measured from full load to 10% load.
3. Suffix "S" to the model number with SMD packages.
4. Maximum case temperature under any operating condition should not be exceeded 100°C.

Typical Derating curve for Natural Convection

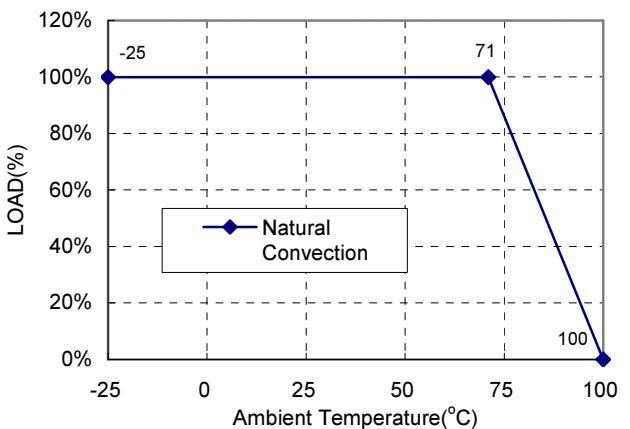

PIN CONNECTION				
500 VDC				
Pin	Single Output		Dual Output	
	DIP	SMD	DIP	SMD
1,24	+V Input		+V Input	
2,23	NC		-V Output	
3,22	NC		Common	
4,5	NP	NC	NP	NC
9	NP	NC	NP	NC
10,15	-V Output		Common	
11,14	+V Output		+V Output	
12,13	-V Input		-V Input	
16	NP	NC	NP	NC
20,21	NP	NC	NP	NC

* NC-NO CONNECTION WITH PIN

* NP-No PIN

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters](#) category:

Click to view products by [Cincon manufacturer:](#)

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [Q48T30020-NBB0](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#)
[CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [RDS180245](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-2415](#) [XKS-1215](#) [06322](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [L-DA20](#) [DCG40-5G](#) [QME48T40033-PGB0](#) [XKS-2415](#) [XKS-2412](#) [XKS-1212](#) [XKS-1205](#) [XKS-0515](#) [XKS-0505](#) [XGS-2405](#) [XGS-1215](#) [XGS-0515](#) [PS9Z-6RM4](#) [73-551-5038I](#) [AK1601-9RT](#) [VI-N61-CM](#) [VI-R5022-EXWW](#) [PSC128-7iR](#) [RPS8-350ATX-XE](#) [DAS1004812](#) [PQA30-D24-S24-DH](#) [VI-M5F-CQ](#) [VI-LN2-EW](#) [VI-PJW01-CZY](#)