



EC4SAW SERIES

5-6 WATT WIDE INPUT

DC-DC CONVERTERS



FEATURE

- * 5-6W Isolated Output
- * Compact SIP-8 Package
- * Efficiency up to 89%
- * 4:1 Input Range
- * Regulated Outputs
- * Remote On/Off Control
- * 1500VDC Isolation
- * Continuous Short Circuit Protection
- * Safety Meets IEC/EN/UL 62368-1



MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT		INPUT CURRENT		%EFF.		CAPACITOR LOAD MAX.
			MIN.	MAX.	NO LOAD	FULL LOAD	(3)	(2)	
EC4SAW-24S33N	9-36 VDC	3.3 VDC	0 mA	1500 mA	4 mA	252 mA	82	82	4700uF
EC4SAW-24S05N	9-36 VDC	5 VDC	0 mA	1200 mA	4 mA	291 mA	86	86	2200uF
EC4SAW-24S12N	9-36 VDC	12 VDC	0 mA	500 mA	5 mA	284 mA	88	88	1100uF
EC4SAW-24S15N	9-36 VDC	15 VDC	0 mA	400 mA	5 mA	284 mA	89	88	470uF
EC4SAW-24D05N	9-36 VDC	±5 VDC	0 mA	±600 mA	4 mA	291 mA	86	86	1400uF
EC4SAW-24D12N	9-36 VDC	±12 VDC	0 mA	±250 mA	6 mA	284 mA	88	88	660uF
EC4SAW-24D15N	9-36 VDC	±15 VDC	0 mA	±200 mA	6 mA	284 mA	88	88	220uF
EC4SAW-48S33N	18-75 VDC	3.3 VDC	0 mA	1500 mA	3 mA	126 mA	82	82	4700uF
EC4SAW-48S05N	18-75 VDC	5 VDC	0 mA	1200 mA	3 mA	147 mA	85	85	2200uF
EC4SAW-48S12N	18-75 VDC	12 VDC	0 mA	500 mA	3 mA	140 mA	88	89	1100uF
EC4SAW-48S15N	18-75 VDC	15 VDC	0 mA	400 mA	3 mA	142 mA	89	88	470uF
EC4SAW-48D05N	18-75 VDC	±5 VDC	0 mA	±600 mA	4 mA	147 mA	85	85	1400uF
EC4SAW-48D12N	18-75 VDC	±12 VDC	0 mA	±250 mA	3 mA	140 mA	88	89	660uF
EC4SAW-48D15N	18-75 VDC	±15 VDC	0 mA	±200 mA	3 mA	140 mA	88	89	220uF

NOTE:

1. Nominal Input Voltage 24 or 48 VDC
2. Measured at Nominal Input Voltage
3. Measured at 12VDC for 24V_{in}, 24VDC for 48V_{in}

SPECIFICATIONS

All Specifications Typical at Nominal Line, Full Load, and 25°C Unless Otherwise Noted

INPUT SPECIFICATIONS:

Input Voltage Range	24V	9-36V
	48V	18-75V
Input Surge Voltage (100 ms max.)	24V	50VDC max.
	48V	100VDC max.
Input Filter	Capacitive	
Remote On/Off Control:		
Module On	Short, Open or High Impedance	
Module Off	2mA to 4mA	
Module Off (Input Idle Current)	2.5mA max.	

OUTPUT SPECIFICATIONS:

Voltage Accuracy	±1.5% max.	
Voltage Balance (Dual)	±1.0% max	
Transient Response: 25% Step Load Change		
Error Band	±5% Vout Nominal, Recovery Time	< 250µs
Ripple & Noise, 20MHz BW	100mV pk-pk max.	
Temperature Coefficient	±0.03%/°C	
Short Circuit Protection	Continuous	
Line Regulation (note1)	±0.2% max.	
Load Regulation (note2)	Single	±0.5% max.
	Dual	±1.0% max.
Cross Regulation (Dual note3)	Asymmetrical Load 25%/100%	±5.0% max.
Current Limit	180% typ.	
Start up Time	15ms typ.	

GENERAL SPECIFICATIONS:

Efficiency	See Table	
Isolation Voltage	1500VDC min.	
Isolation Resistance	10 ⁹ ohm min.	
Isolation Capacitance	50pF max.	
Switching Frequency	580KHz typ.	
Operating Ambient Temperature	-40°C to +85°C	
De-rating, Above 61°C	3.3V/5V	Linearly to Zero Power at 105°C
De-rating, Above 65°C	12V/15V	Linearly to Zero Power at 105°C
Case Temperature (note4)	105°C max.	
Cooling	Natural Convection	
Storage Temperature	-55°C to +125°C	
Humidity	95% RH max. Non Condensing	
MTBF	MIL-HDBK-217F, GB, 25°C, Full Load	1850Khrs typ.
Dimensions	0.86x0.36x0.44 inches(21.8x9.2x11.1 mm)	
Case Material	Non-Conductive Black Plastic	
Weight	4.8g	

NOTE:

1. Measured from high line to low line.
2. Measured from full load to no load.
3. For asymmetric loading, both channels must be at 25% load or more.
4. Maximum case temperature under any operating condition should not be exceeded 105°C.



CASE SIP-8 DIMENSIONS:

All Dimensions In Inches(mm)

Tolerances : Inches millimeters

X.XX±0.02 X.X±0.5

Pin ±0.002 ±0.05

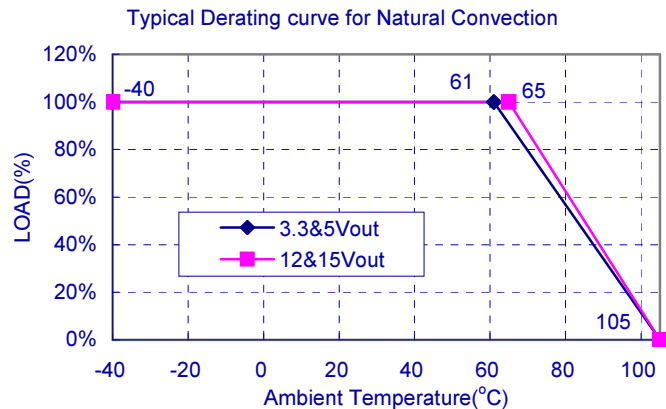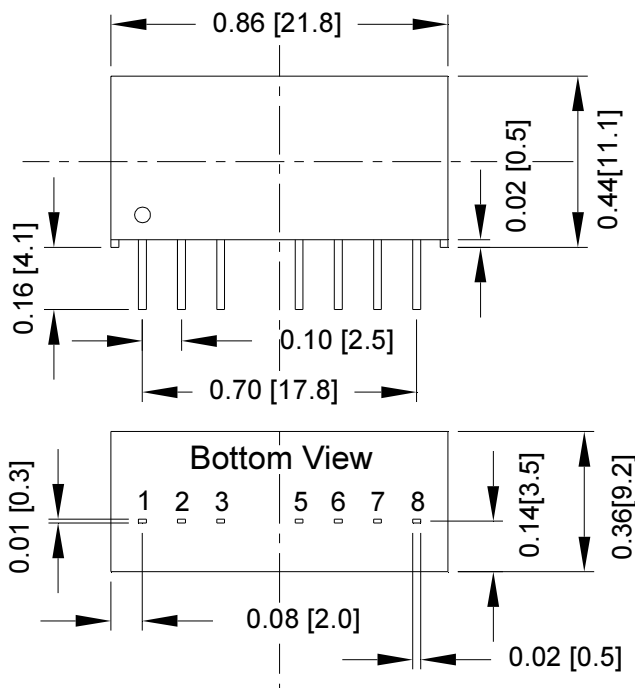

PIN CONNECTION		
Pin	Single	Dual
1	-V Input	-V Input
2	+V Input	+V Input
3	On/Off	On/Off
5	NC	NC
6	+V Output	+V Output
7	-V Output	Common
8	NC	-V Output

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters - Through Hole](#) **category:**

Click to view products by [Cincon](#) **manufacturer:**

Other Similar products are found below :

[F0505XT-2WR2](#) [F1515XT-2WR3](#) [WRF0505S-3WR2](#) [K7815M-1000R3](#) [B1215S-3WR2](#) [R-78E3.3-0.5](#) [K7812M-1000R3](#) [B0509XT-1WR3](#)
[B0524XT-1WR3](#) [B1203XT-1WR3](#) [B1524S-3WR2](#) [B2424S-3WR2](#) [F0524D-2WR2](#) [B1212S-1W](#) [A1215S-2WR3](#) [F1205XT-1WR3](#) [F0303XT-1WR3](#) [F0505D-1WR2](#) [K7805-500](#) [B0305S-1W](#) [F0509XT-1WR3](#) [F2424XT-1WR3](#) [K7812-500R3](#) [G2415S-2WR3](#) [B2424LS-1WR3](#) [F1212S-3WR2](#) [R-78E12-0.5](#) [K7805M-1000R3](#) [B1224XT-1WR3](#) [H1205S-2WR2](#) [K7812-1000R3](#) [B1515S-2WR3](#) [B0505XT-2WR3](#) [F2424XT-2WR3](#)
[B0505S-1WL](#) [F0505D-1WR3](#) [F1224D-2WR3](#) [B1205S-2W](#) [A2405S-1WR3](#) [B2415S-3WR2](#) [R-78E5.0-0.5](#) [R-78E9.0-0.5](#) [B1515S-3WR2](#)
[F1205XT-2WR3](#) [B2424XT-1WR3](#) [B0503XT-2WR2](#) [B1505S-3WR2](#) [B1212XT-1WR3](#) [PXD60-48WD24](#) [PXD40-48WS3P3](#)