


1. Compatible with various 10/100 Base-TX transceiver requiring 1:1 transmit and receive turns ratio
2. Compliant with IEEE 802.3at standard including baseline wander compensation specification of 350 μ H OCL when Biased at 8mA
3. Designed to comply with the following requirements as defined by IEC60950-1: Reinforced insulation at a working volatage of 250Vrms.
4. Designed to comply with 10mm min.creepage and 7mm min. clearance as defined by IEC60601-1;2006
5. Operating Temperature range: -40 $^{\circ}$ C TO +85 $^{\circ}$ C
6. Storage temperature range: -40 $^{\circ}$ C TO +125 $^{\circ}$ C



DIMENSIONS & SCHEMATICS

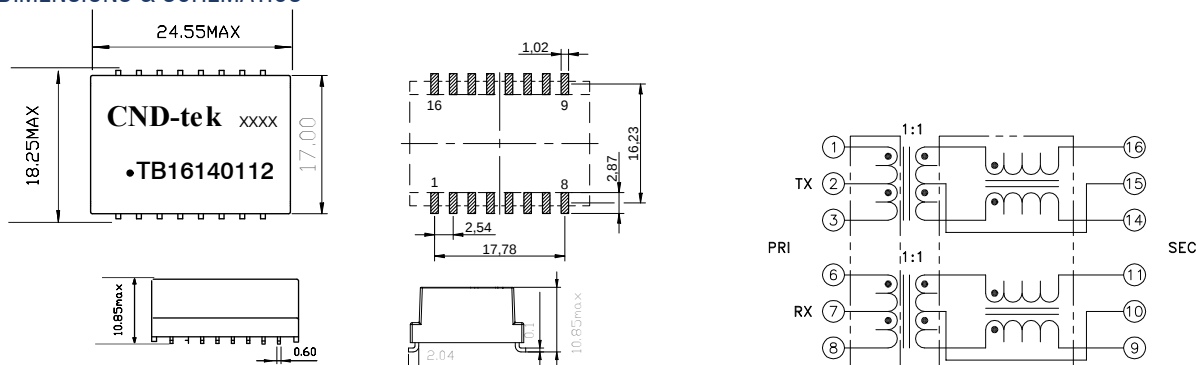


All 16 terminals must lie on a plane within .004mm of surface a after lead tinning

TECHNICAL SPECIFICATIONS

Inductance :	350 μ H Min. @ 100 KHz, 100mV with 8mA DC Bias Lp(16-14)
	350 μ H Min. @ 100 KHz, 100mV with 8mA DC Bias Lp(11-9)
Turns Ratio($\pm 2\%$):	1CT:1CT,(1-3):(16-14)
	1CT:1CT,(6-8):(11-9)
Insertion Loss:	-1.5dB Max. @ 0.1M-100MHz
Return Loss:	-18dB Min. @ 0.5M-30MHz
	-15 dB Min. @ 30-45 MHz
	-13 dB Min.@ 45-60 MHz
	-10dB Min.@ 60-80 MHz
Cross Talk:	-40 dB Min.@ 1-100 MHz
Isolation HI-POT:	6000Vrms 1mA 60Second,7200Vrms 1mA 3Second

PACKING SPECIFICATION

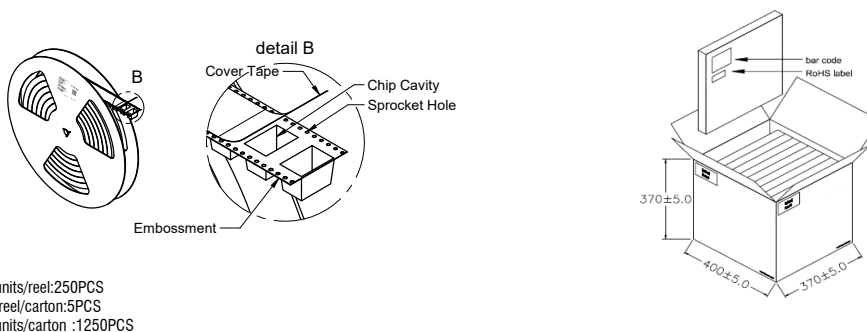

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [CND-tek](#) manufacturer:

Other Similar products are found below :

[10306230004](#) [103062300040](#) [103062300055](#) [10306230033H](#) [10306230038H](#) [10306230041H](#) [10306230046DH](#) [10306230047](#)
[10306230049H](#) [10306230056](#) [10306230069](#) [10306230083H](#) [10306230154H](#) [10306230178](#) [10306230181](#) [10306230223DH](#) [10306230241D](#)
[10306230242DH](#) [10306230353](#) [103064000045](#) [10306400046](#) [10306400053H](#) [10306400058](#) [10CLD106415MH](#) [10CLD106520MH](#)
[20306230262](#) [303062300049](#) [30306230035D](#) [A102N3200200N](#) [AE71A2000010](#) [AE71A4100010](#) [AE71K4000010](#) [AE90A2104405](#)
[AE90A4004105](#) [AE90K1104000](#) [AE90K2104005](#) [AE90K4104105](#) [B1201D](#) [B1202D](#) [B1203D](#) [B16011S](#) [B1601S](#) [B1603S](#) [B1605S](#) [B1608S](#)
[B1617S](#) [B2009D](#) [B2018D](#) [B4001S](#) [B4004S](#)