


CPDE5V0U-HF

RoHS Device
Halogen Free




Features

- Uni-directional ESD protection of one line.
- Fast response time.
- Low reverse clamping voltage.
- Low leakage current.

Mechanical data

- Case: SOD-723, molded plastic.
- Terminals: Tin plated, solderable per MIL-STD-750, method 2026.
- Polarity: Indicated by cathode band.
- Mounting position: Any

Circuit Diagram

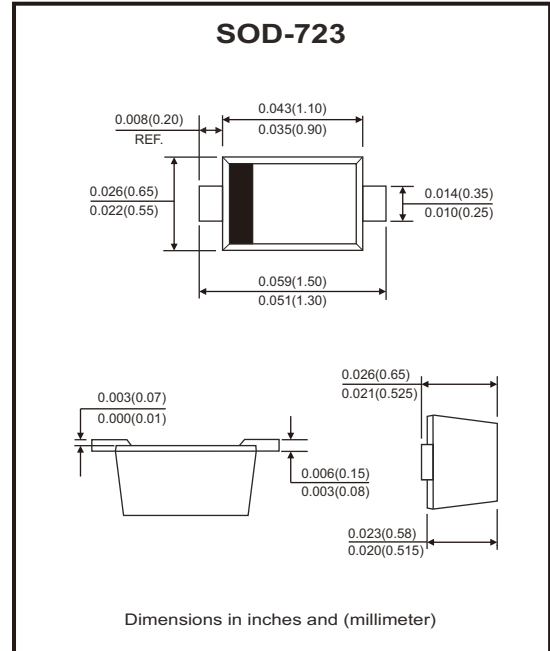

Maximum Rating (at TA=25°C unless otherwise noted)

Parameter	Conditions	Symbol	Value	Unit
Peak pulse power (Note 2)	$T_P = 8/20\mu s$	P_{PP}	169	W
Peak pulse current (Note 2)	$T_P = 8/20\mu s$	I_{PP}	13	A
ESD capability (Note 1)	IEC 61000-4-2(air) IEC 61000-4-2(contact)	ESD	±25	kV
JESD22-A114-B ESD voltage (Note 1)	Per human body model (HBM)		±16	
ESD voltage (Note 1)	Machine model (MM)		±0.4	
Lead solder temperature - Maximum (10second duration)		T_L	260	°C
Operation junction and storage temperature range		T_J, T_{STG}	-55 to +150	°C

Notes: 1. Device stressed with ten non-repetitive ESD pulses.

2. Non-repetitive current pulse 8/20μs exponential decay waveform according to IEC 61000-4-5.

Electrical Characteristics (at TA=25°C unless otherwise noted)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Reverse stand off voltage (Note 1)		V_{RWM}			5	V
Reverse leakage current	$V_{RWM} = 5V$	I_R			1	μA
Breakdown voltage	$I_T = 1mA$	V_{BR}	6.2		7.3	V
Clamping voltage (Note 2)	$I_{PP} = 13A, T_P = 8/20\mu s$	V_C			13	V
Forward voltage	$I_F = 10mA$	V_F			0.9	V
Junction capacitance	$V_R = 0V, f = 1MHz$	C_J		95		pF

Notes: 1. Other voltage available upon request.

2. Non-repetitive current pulse 8/20μs exponential decay waveform according to IEC 61000-4-5.

Typical Rating and Characteristic Curves (CPDE5V0U-HF)

Fig.1 - Forward Characteristic

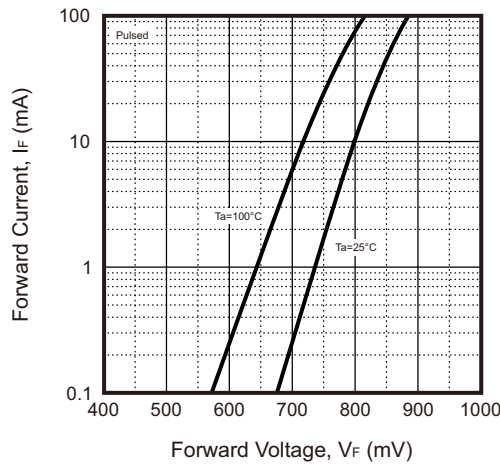


Fig.2 - Reverse Characteristic

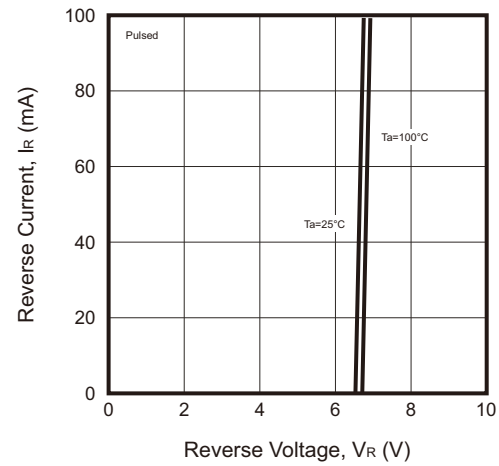


Fig.3 - V_C — I_{PP}



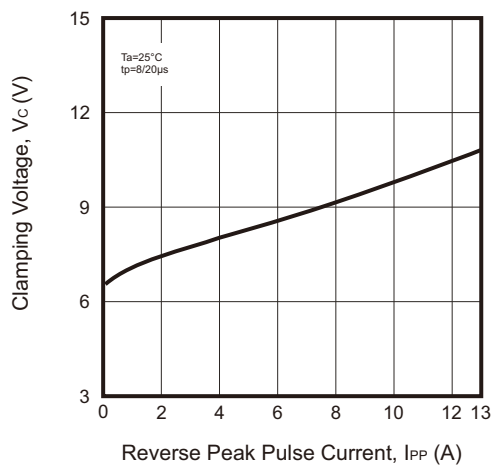


Fig.4 - Capacitance Characteristics

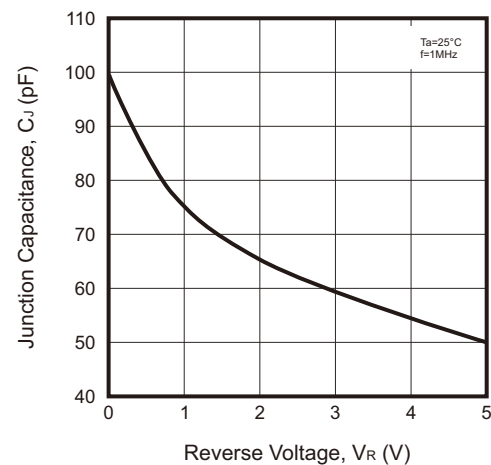

Reel Taping Specification

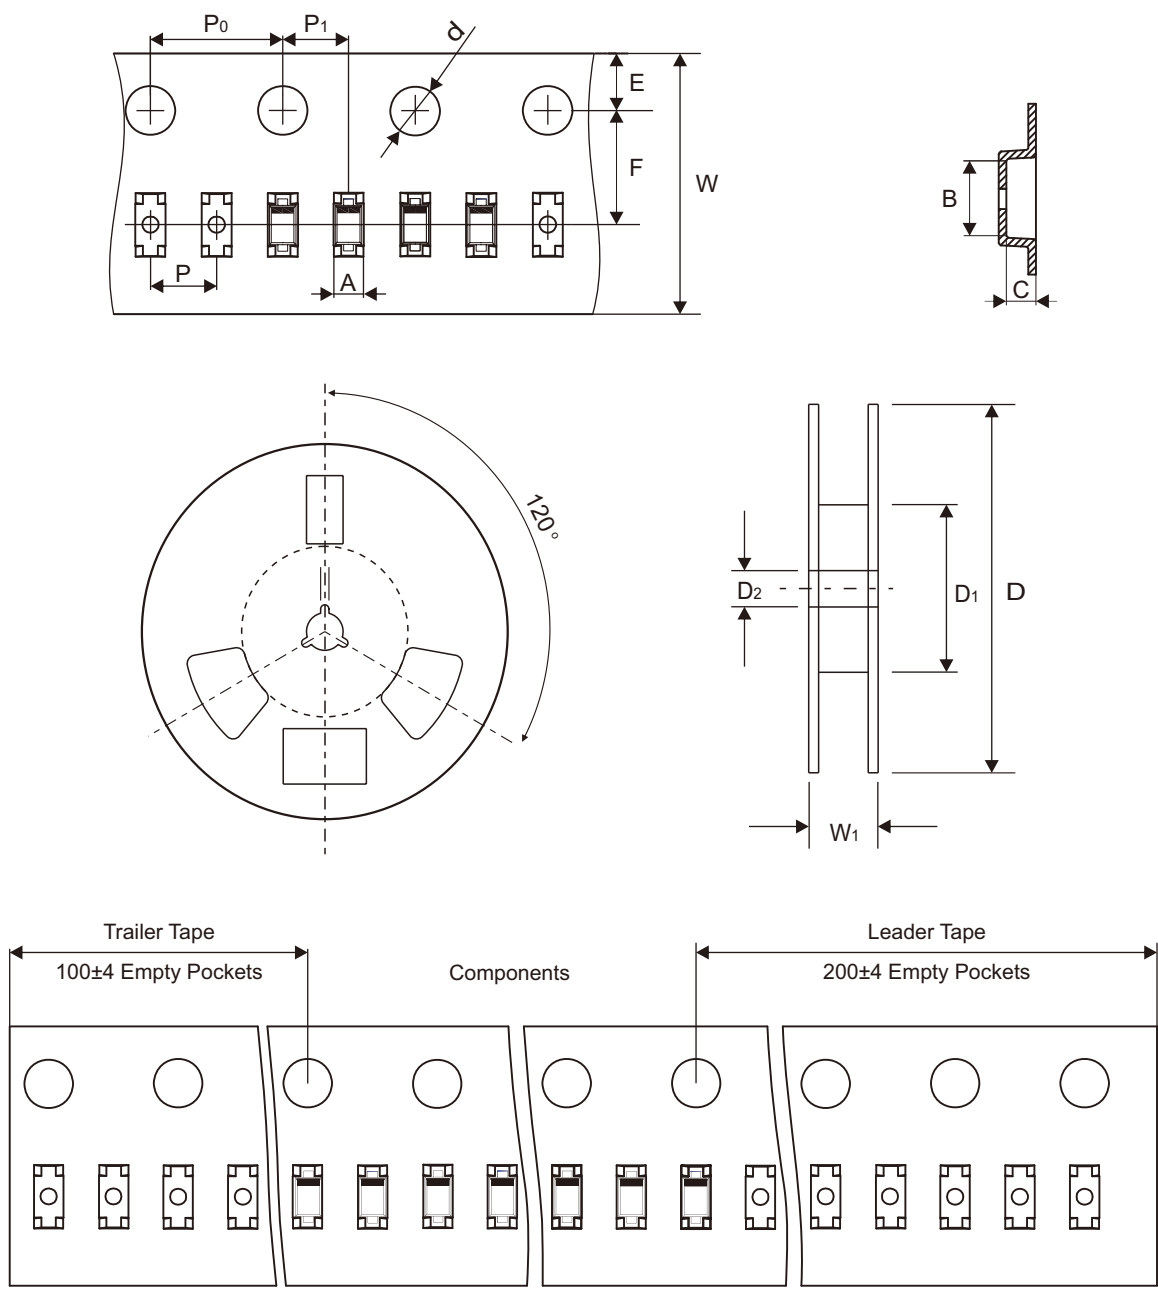

SOD-723	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	0.73 ± 0.05	1.71 ± 0.05	0.62 ± 0.05	1.50 + 0.10 - 0.00	178.00 ± 1.00	54.40 ± 0.40	13.00 ± 0.20
	(inch)	0.029 ± 0.002	0.067 ± 0.002	0.024 ± 0.002	0.059 + 0.004 - 0.000	7.008 ± 0.039	2.142 ± 0.016	0.512 ± 0.008

SOD-723	SYMBOL	E	F	P	P0	P1	W	W1
	(mm)	1.75 ± 0.10	3.50 ± 0.05	2.00 ± 0.05	4.00 ± 0.10	2.00 ± 0.05	8.00 + 0.20 - 0.10	12.30 ± 1.00
	(inch)	0.069 ± 0.004	0.138 ± 0.002	0.079 ± 0.002	0.157 ± 0.004	0.079 ± 0.002	0.315 + 0.008 - 0.004	0.484 ± 0.039

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Protection Diodes / TVS Diodes](#) ***category:***

Click to view products by [Comchip](#) ***manufacturer:***

Other Similar products are found below :

[60KS200C](#) [D5V0F4U5P5-7](#) [P4KE27CA](#) [P6KE11CA](#) [JAN1N6461](#) [P6KE8.2A](#) [JANTX1N6475](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#)
[SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD112-B1-02EL E6327](#) [CPDT-5V0USP-HF](#) [HSPC16701B02TP](#) [JANTX1N6052A](#)
[D3V3Q1B2DLP3-7](#) [SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [CEN955 W/DATA](#) [ESD101-B1-02EL E6327](#) [5KP48A](#) [5KP90A](#)
[15KPA36A-LF](#) [P4KE56CA](#) [P4KE68A](#) [P6KE13CA](#) [P6KE43CA](#) [P6SMBJ20CA](#) [JANTX1N6072A](#) [SR2835ESKG](#) [SA90CA](#) [SA8.5A](#) [SA18A](#)
[SA11CA](#) [SMCJ78CA](#) [SMBJ51CA](#) [JANTX1N5650A](#) [SMDA05LC-LF](#) [30KPA48A-LF](#) [GPZ1275](#) [P4KE6.8A](#) [CPDQC12VE-HF](#)
[GRPADATAJANTX1N6041A](#) [DSILC6-4SC6](#) [5KP45A-TP](#) [SMLJ26A-TP](#) [D5V0Q1B2CSP-7](#) [NSPM3042MXT5G](#)