

# General Purpose Transistor

**Comchip**  
SMD Diode Specialist

## MMBT3904-HF (NPN)



RoHS Device

Halogen Free



### Features

- Epitaxial planar die construction
- As complementary type, the PNP transistor MMBT3904-HF is recommended

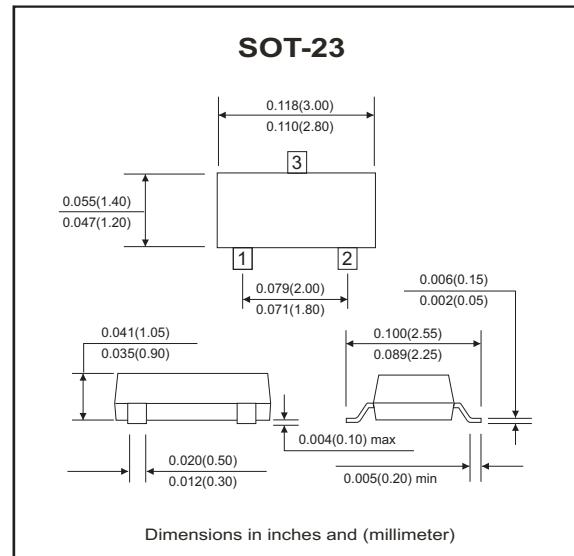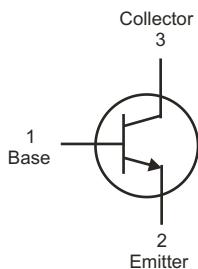

### Maximum Ratings (at TA=25°C unless otherwise noted)

Parameter	Symbol	Min	Typ	Max	Unit
Collector-Base voltage	V <sub>CBO</sub>			60	V
Collector-Emitter voltage	V <sub>CEO</sub>			40	V
Emitter-Base voltage	V <sub>EBO</sub>			6	V
Collector current-Continuous	I <sub>c</sub>			0.2	A
Collector dissipation	P <sub>c</sub>			0.2	W
Thermal resistance, junction to ambient	R <sub>θJA</sub>			625	°C/W
Storage temperature and junction temperature	T <sub>TSG, TJ</sub>	-55		+150	°C

### Electrical Characteristics (at TA=25°C unless otherwise noted)

Parameter	Conditions	Symbol	Min	Max	Unit
Collector-Base breakdown voltage	I <sub>c</sub> =100μA , I <sub>E</sub> =0	V <sub>(BR)CBO</sub>	60		V
Collector-Emitter breakdown voltage	I <sub>c</sub> =1mA , I <sub>B</sub> =0	V <sub>(BR)CEO</sub>	40		V
Emitter-Base breakdown voltage	I <sub>E</sub> =100μA , I <sub>c</sub> =0	V <sub>(BR)EBO</sub>	6		V
Collector cut-off current	V <sub>CB</sub> =60V , I <sub>E</sub> =0	I <sub>cbo</sub>		0.1	μA
Collector cut-off current	V <sub>CE</sub> =30V , V <sub>BE(off)</sub> =3V	I <sub>cex</sub>		50	nA
Emitter cut-off current	V <sub>EB</sub> =5V , I <sub>c</sub> =0	I <sub>ebo</sub>		0.1	μA
DC current gain	V <sub>CE</sub> =1V , I <sub>c</sub> =10mA	h <sub>FE(1)</sub>	100	400	
	V <sub>CE</sub> =1V , I <sub>c</sub> =50mA	h <sub>FE(2)</sub>	60		
Collector-Emitter saturation voltage	I <sub>c</sub> =50mA , I <sub>b</sub> =5mA	V <sub>ce(sat)</sub>		0.3	V
Base-Emitter saturation voltage	I <sub>c</sub> =50mA , I <sub>b</sub> =5mA	V <sub>be(sat)</sub>		0.95	V
Transition frequency	V <sub>CE</sub> =20V , I <sub>c</sub> =10mA f=100MHz	f <sub>T</sub>	300		Mhz
Delay time	V <sub>CC</sub> =3.0V , V <sub>BE</sub> =-0.5V	t <sub>d</sub>		35	nS
Rise time	I <sub>c</sub> =10mA , I <sub>b1</sub> =1.0mA	t <sub>r</sub>		35	nS
Storage time	V <sub>CC</sub> =3.0V , I <sub>c</sub> =10mA	t <sub>s</sub>		200	nS
Fall time	I <sub>b1</sub> =I <sub>b2</sub> =1.0mA	t <sub>f</sub>		50	nS

REV:A

# General Purpose Transistor

## RATING AND CHARACTERISTIC CURVES (MMBT3904-HF)

Fig.1 Typical pulsed current gain  
V.S. Collector current

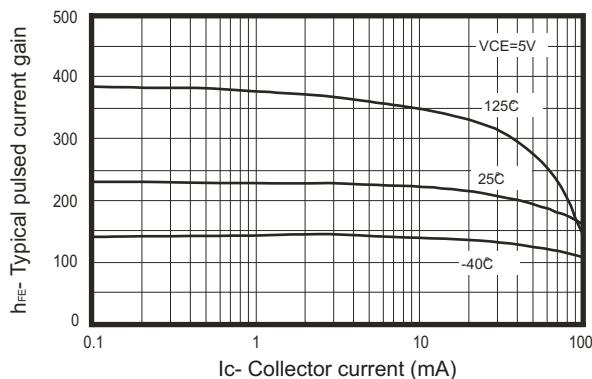


Fig.2 Collector-Emitter saturation voltage V.S. Collector current

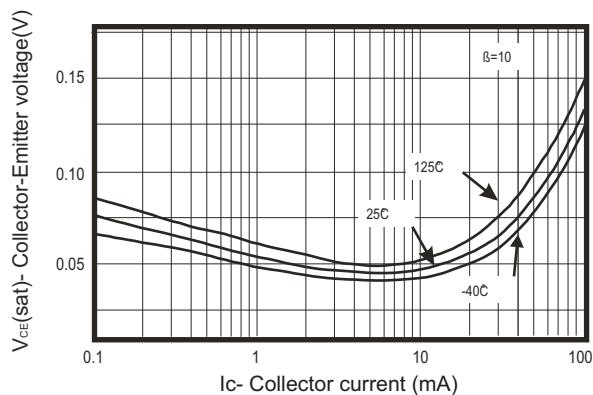


Fig.3 Base-Emitter saturation voltage V.S. Collector current

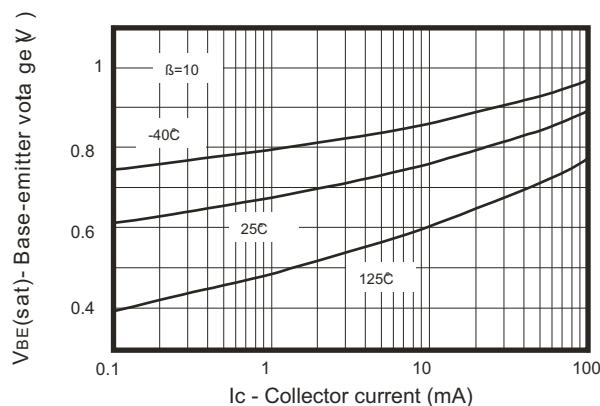


Fig.4 Base-Emitter ON voltage V.S. Collector current

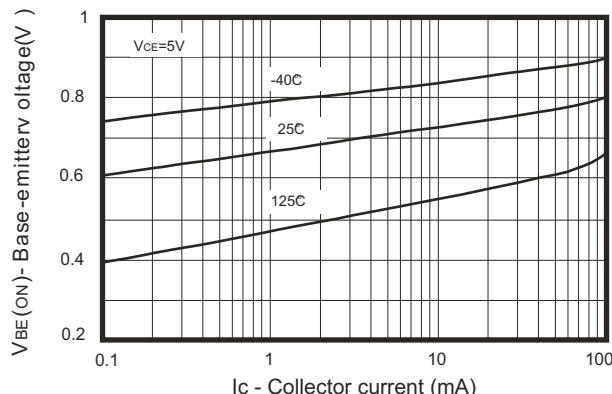


Fig.5 Collector-cutoff current V.S. Ambient temperature



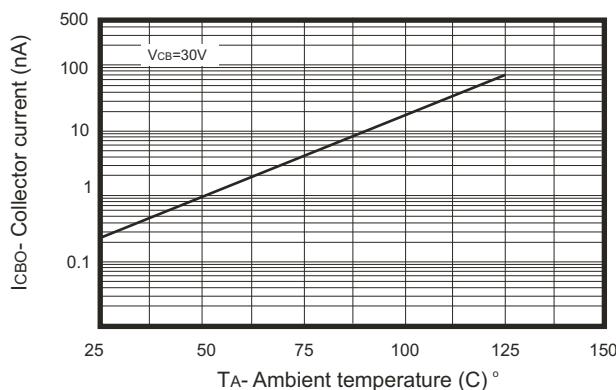


Fig.6 Capacitance V.S. Reverse bias voltage

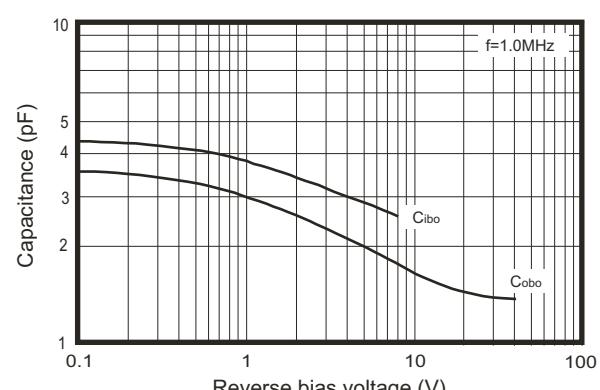

## Reel Taping Specification

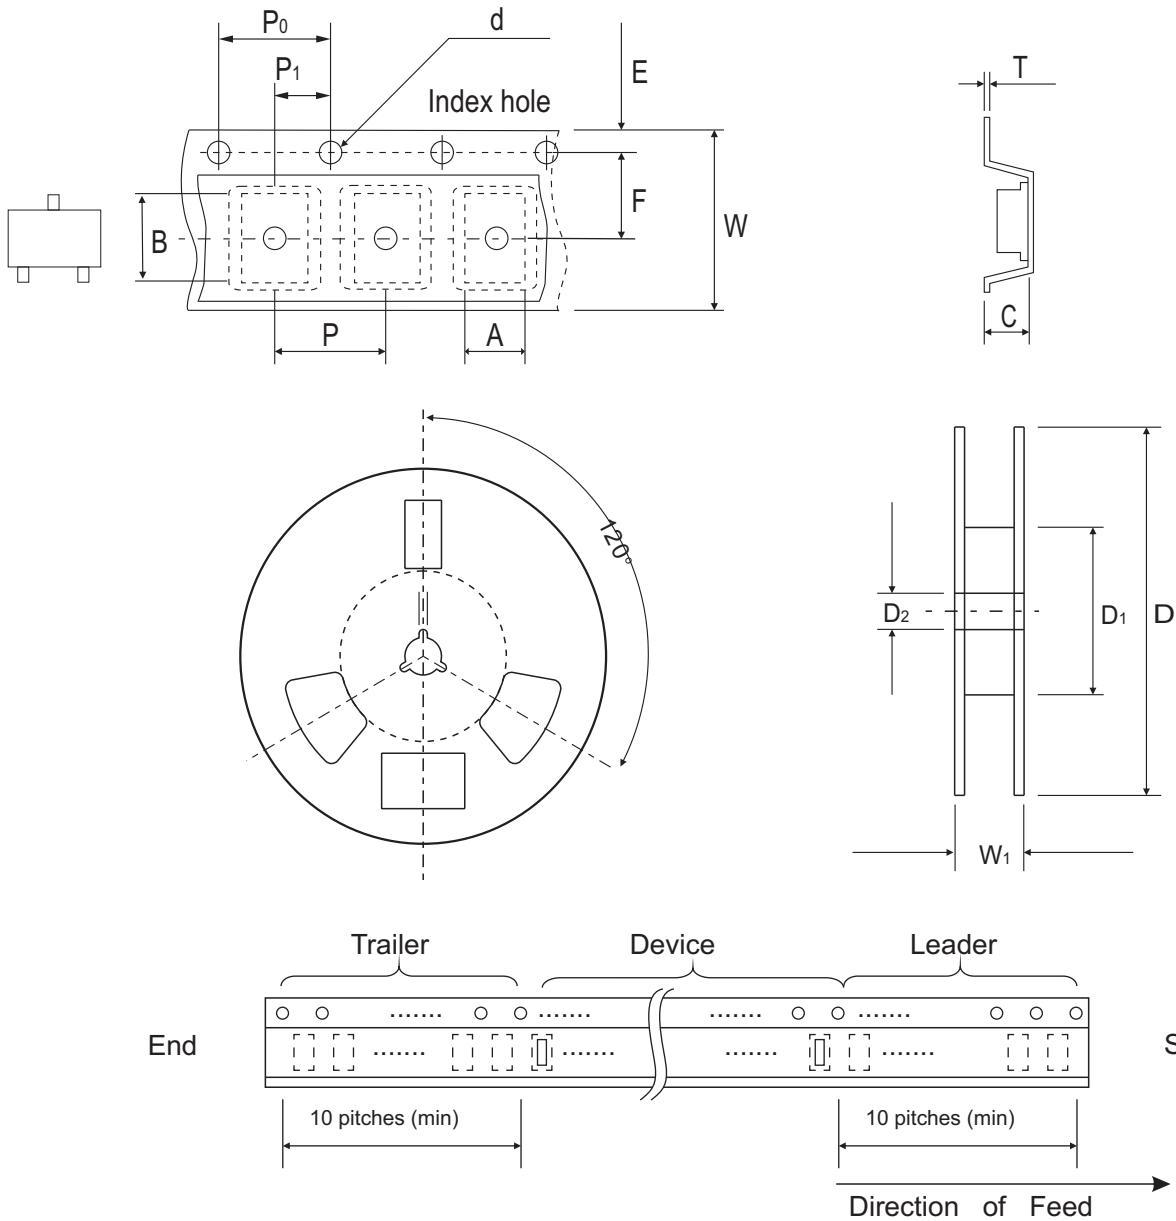

SOT-23	SYMBOL	A	B	C	d	D	D <sub>1</sub>	D <sub>2</sub>
	(mm)	3.10 ± 0.10	2.85 ± 0.10	1.40 ± 0.10	1.55 ± 0.10	178 ± 1	50.0 MIN.	13.0 ± 0.20
	(inch)	0.122 ± 0.004	0.112 ± 0.004	0.055 ± 0.004	0.061 ± 0.004	7.008 ± 0.04	1.969 MIN.	0.512 ± 0.008

SOT-23	SYMBOL	E	F	P	P <sub>0</sub>	P <sub>1</sub>	W	W <sub>1</sub>
	(mm)	1.75 ± 0.10	3.50 ± 0.05	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	8.00 ± 0.30	14.4 MAX.
	(inch)	0.069 ± 0.004	0.138 ± 0.002	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.004	0.315 ± 0.008	0.567 MAX.


## Marking Code

Park Number	Marking Code
MMBT3904-HF	1AM



## Suggested PAD Layout

SIZE	SOT-23	
	(mm)	(inch)
A	0.80	0.031
B	0.95	0.037
C	0.95	0.037
D	2.02	0.080
E	3.03	0.120

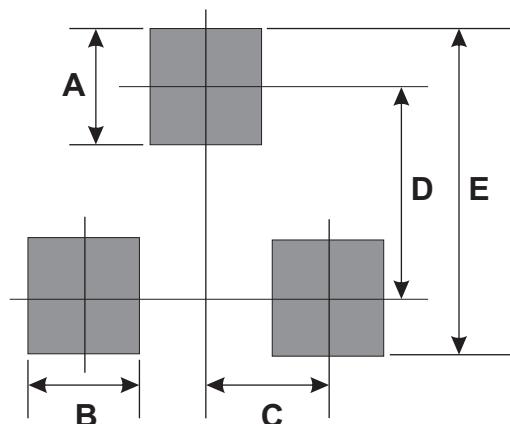

## Standard Packaging

Case Type	Qty per Reel	Reel Size
	(Pcs)	(inch)
SOT-23	3000	7

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Bipolar Transistors - BJT category:***

***Click to view products by Comchip manufacturer:***

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [BC546/116](#) [BC557/116](#) [BSW67A](#) [NTE158](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE63](#) [C4460](#)  
[2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [2SD2150T100R](#) [SP000011176](#) [FMMTA92QTA](#) [2N2369ADCSM](#)  
[2N5769](#) [2SC2412KT146S](#) [2SC5490A-TL-H](#) [2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#)  
[US6T6TR](#) [NJL0281DG](#) [732314D](#) [CMXT3906 TR](#) [CPH3121-TL-E](#) [CPH6021-TL-H](#) [873787E](#) [IMZ2AT108](#) [UMX21NTR](#) [MCH6102-TL-E](#)  
[NJL0302DG](#) [2N3583](#) [2SA1434-TB-E](#) [2SC3143-4-TB-E](#) [2SD1621S-TD-E](#) [NTE103](#) [30A02MH-TL-E](#) [NSV40301MZ4T1G](#) [NTE101](#) [NTE13](#)  
[NTE15](#) [NTE16001](#)