



CT453

XtremeSense® TMR Contactless Current Sensor with Common Mode Field Rejection, 1 MHz Bandwidth and <1% Total Error over Full Operating Temperature Range

Features

- Integrated Contactless Current/Field Sensing Ranges:
 - 0 mT to +6 mT
 - -6 mT to +6 mT
 - 0 mT to +12 mT
 - -12 mT to +12 mT
 - 0 mT to +24 mT
 - -24 mT to +24 mT
- Linear Analog Output Voltage
- Common Mode Field Rejection: -50 dB
- Total Error Output $\leq \pm 1.0\%$, -40°C to $+125^{\circ}\text{C}$
- 1 MHz Bandwidth
- Response Time < 300 ns
- $V_{\text{OUT}} - V_{\text{REF}}$ Error < 1.0% FS (Max.)
- High Signal-to-Noise Ratio (SNR): >65 dB
- Supply Voltage: 3.0 V to 3.6 V
- Filter Pin to Reduce Noise on Output
- AEC-Q100 Grade 1
- Package Options:
 - 8-lead SOIC
 - 8-lead TSSOP

Applications

- Solar/Power Inverters
- PFC Systems
- Battery Management Systems
- Smart Fuse Over-Current Detection
- Industrial Equipment
- Power Utility Meters
- Power Conditioner
- DC/DC Converters/Power Supplies

Product Description

The CT453 is a high bandwidth and low noise integrated zero-loss contactless current sensor that uses Crocus Technology's patented XtremeSense TMR technology to enable high accuracy current measurements for many consumer, enterprise, and industrial applications. It supports six (6) field ranges where the CT453 senses and translates the magnetic field into a linear analog output voltage. It achieves a total error output of less than $\pm 1.0\%$ over voltage and temperature.

This coreless current sensor is not only small in size and simple to design but it also provides effective common mode rejection of more than -50 dB. This enables the CT453 to have greater than 90% immunity to stray magnetic fields thus having almost no impact on the accuracy of the current measurement.

It has less than 300 ns output response time while the current consumption is about 6.0 mA. The CT453 is equipped with a filter function to reduce the noise on the output pin.

The CT453 is assembled in an industry standard 8-lead SOIC package and a very low profile, 8-lead TSSOP package that are both "green" and RoHS compliant.

Part Ordering Information

Part Number	Auto Grade	Field Range	Operating Temperature Range	Package	Packing Method
CT453-H06DRSN08	-	0 mT to +6 mT	-40°C to +125°C	8-lead SOIC 4.89 x 6.00 x 1.62 mm	Tape & Reel
CT453-A06DRSN08	Grade 1				
CT453-H06DRTS08	-			8-lead TSSOP 3.00 x 6.40 x 1.10 mm	
CT453-A06DRTS08	Grade 1				
CT453-H06MRSN08	-	-6 mT to +6 mT		8-lead SOIC 4.89 x 6.00 x 1.62 mm	
CT453-A06MRSN08	Grade 1				
CT453-H06MRTS08	-			8-lead TSSOP 3.00 x 6.40 x 1.10 mm	
CT453-A06MRTS08	Grade 1				
CT453-H12DRSN08	-	0 mT to +12 mT		8-lead SOIC 4.89 x 6.00 x 1.62 mm	
CT453-A12DRSN08	Grade 1				
CT453-H12DRTS08	-			8-lead TSSOP 3.00 x 6.40 x 1.10 mm	
CT453-A12DRTS08	Grade 1				
CT453-H12MRSN08	-	-12 mT to +12 mT		8-lead SOIC 4.89 x 6.00 x 1.62 mm	
CT453-A12MRSN08	Grade 1				
CT453-H12MRTS08	-			8-lead TSSOP 3.00 x 6.40 x 1.10 mm	
CT453-A12MRTS08	Grade 1				
CT453-H24DRSN08	-	0 mT to +24 mT	8-lead SOIC 4.89 x 6.00 x 1.62 mm		
CT453-A24DRSN08	Grade 1				
CT453-H24DRTS08	-		8-lead TSSOP 3.00 x 6.40 x 1.10 mm		
CT453-A24DRTS08	Grade 1				
CT453-H24MRSN08	-	-24 mT to +24 mT	8-lead SOIC 4.89 x 6.00 x 1.62 mm		
CT453-A24MRSN08	Grade 1				
CT453-H24MRTS08	-		8-lead TSSOP 3.00 x 6.40 x 1.10 mm		
CT453-A24MRTS08	Grade 1				

Evaluation Board Ordering Information

Part Number	Current Carrying Conductor	Magnetic Field Range	Operating Temperature Range	Package
CTD453-06U	Busbar	0 mT to +6 mT	-40°C to +125°C	8-lead SOIC 4.89 x 6.00 x 1.62 mm
CTD453-06B	Busbar	-6 mT to +6 mT		
CTD453-12U	Busbar	0 mT to +12 mT		
CTD453-12B	Busbar	-12 mT to +12 mT		
CTD453-24U	Busbar	0 mT to +24 mT		
CTD453-24B	Busbar	-24 mT to +24 mT		

Part Number	Current Carrying Conductor	Magnetic Field Range	Operating Temperature Range	Package
CTD453T-06U	PCB Trace	0 mT to +6 mT	-40°C to +125°C	8-lead SOIC 4.89 x 6.00 x 1.62 mm
CTD453T-06B	PCB Trace	-6 mT to +6 mT		
CTD453T-12U	PCB Trace	0 mT to +12 mT		
CTD453T-12B	PCB Trace	-12 mT to +12 mT		
CTD453T-24U	PCB Trace	0 mT to +24 mT		
CTD453T-24B	PCB Trace	-24 mT to +24 mT		

CT453 Block Diagrams

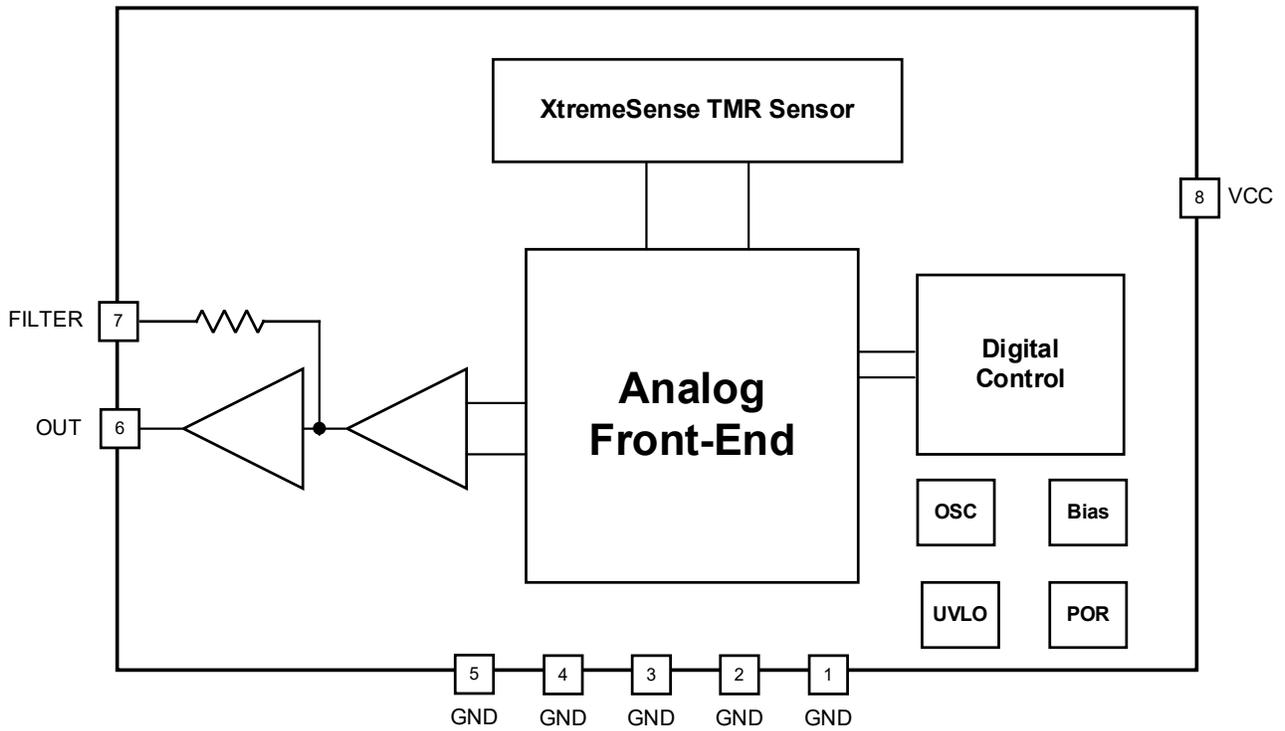


Figure 1. CT453 Functional Block Diagram for SOIC-8

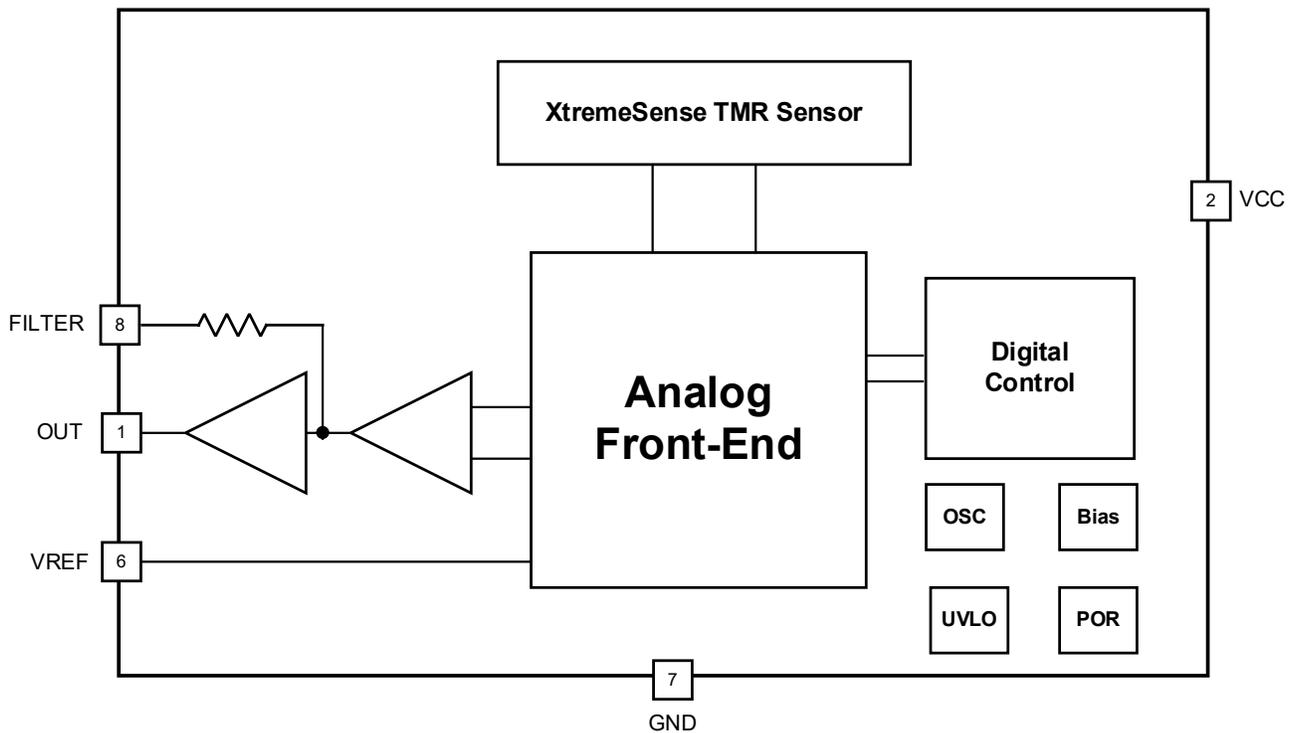


Figure 2. CT453 Functional Block Diagram for TSSOP-8

CT453 Application Diagram

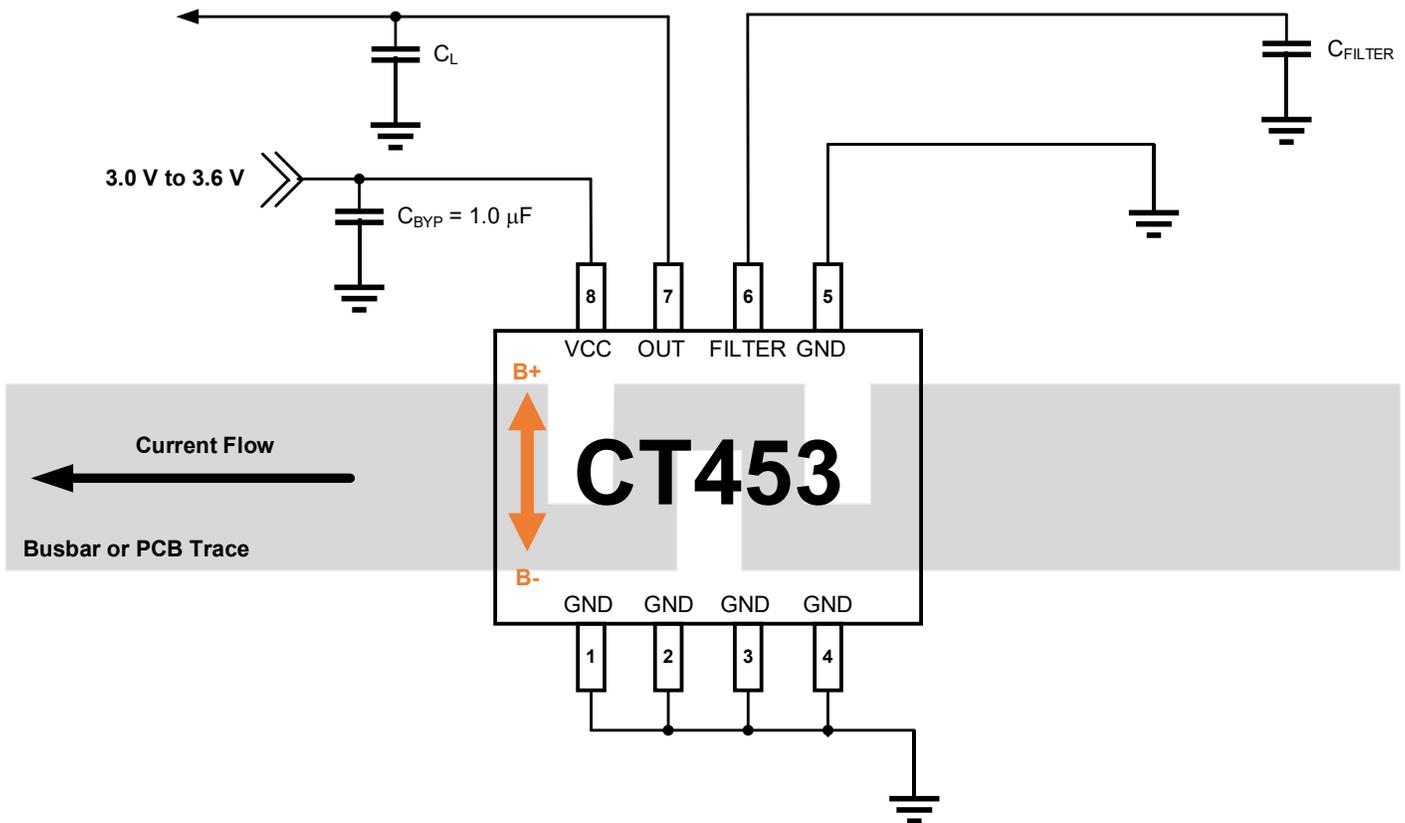


Figure 3. CT453 Application Diagram for SOIC-8

Table 1. Recommended External Components

Component	Description	Vendor & Part Number	Parameter	Min.	Typ.	Max.	Unit
C_{BYP}	1.0 μF , X5R or Better	Murata GRM155C81A105KA12	C1		1.0		μF
C_{FILTER}	Various, X5R or Better	Murata	C2		Table 3		pF

CT453 Application Diagram

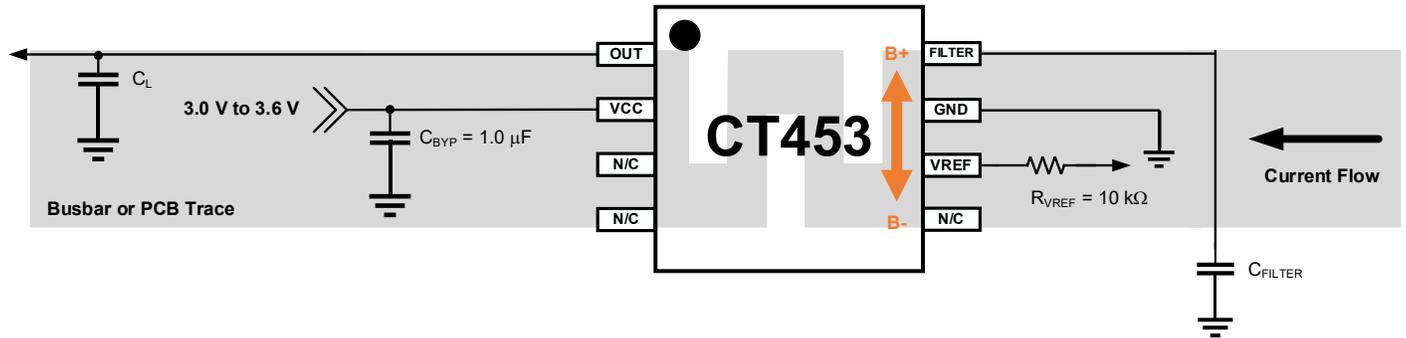


Figure 4. CT453 Application Diagram for TSSOP-8

Table 2. Recommended External Components

Component	Description	Vendor & Part Number	Parameter	Min.	Typ.	Max.	Unit
C _{BYP}	1.0 μF, X5R or Better	Murata GRM155C81A105KA12	C1		1.0		μF
C _{FILTER}	Various, X5R or Better	Murata	C2		Table 3		pF
R _{VREF}	10 kΩ Resistor	Various	R2		10		kΩ

CT453 SOIC-8 Pin Configuration

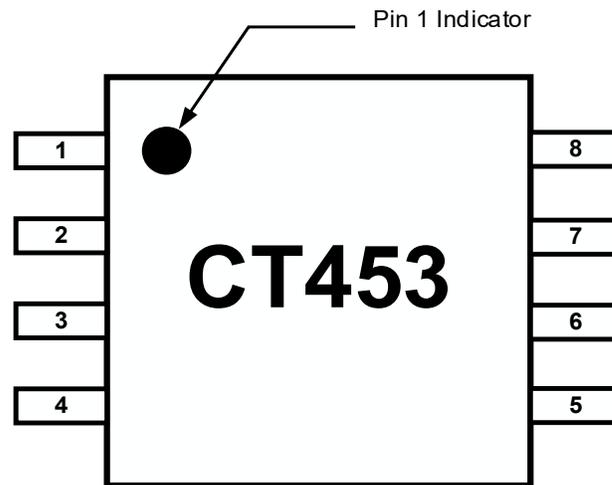


Figure 5. CT453 Pin-out Diagram for 8-lead SOIC Package (Top-Down View)

Pin Definition

Pin #	Pin Name	Pin Description
1	GND	Ground.
2		
3		
4		
5		
6	FILTER	Filter pin to improve noise performance by connecting an external capacitor to set the cut-off frequency. No connect if the FILTER pin is not used.
7	OUT	Analog output voltage that represents the measured current/field.
8	VCC	Supply voltage.

CT453 TSSOP-8 Pin Configuration

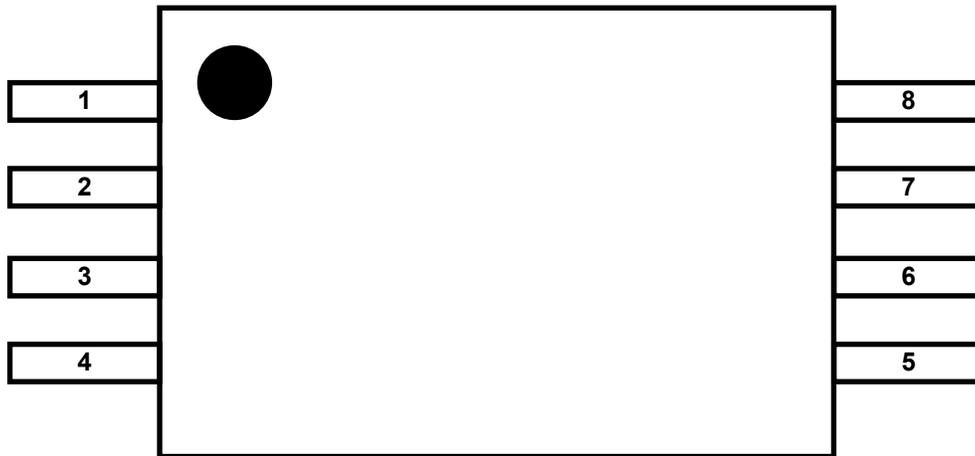


Figure 6. CT453 Pin-out Diagram for 8-lead TSSOP Package (Top-Down View)

Pin Definition

Pin #	Pin Name	Pin Description
1	OUT	Analog output voltage that represents the measured current/field.
2	VCC	Supply voltage.
3	N/C	No connect (Do Not Use).
4		
5		
6	VREF	Reference voltage output. If not used, then do not connect.
7	GND	Ground.
8	FILTER	Filter pin to improve noise performance by connecting an external capacitor to set the cut-off frequency. No connect if the FILTER pin is not used.

Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the CT453 and may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

Symbol	Parameter	Min.	Max.	Unit
V_{CC}	Supply Voltage	-0.3	6.0	V
$V_{I/O}$	Analog Input/Output Pins Maximum Voltage	-0.3	$V_{CC} + 0.3^*$	V
ESD	Electrostatic Discharge Protection Level	Human Body Model (HBM) per JESD22-A114	± 2.0	kV
		Charged Device Model (CDM) per JESD22-C101	± 0.5	
T_J	Junction Temperature	-40	+150	$^{\circ}\text{C}$
T_{STG}	Storage Temperature	-65	+155	$^{\circ}\text{C}$
T_L	Lead Soldering Temperature, 10 Seconds		+260	$^{\circ}\text{C}$

*The lower of $V_{CC} + 0.3\text{ V}$ or 6.0 V .

Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual operation of the CT453. Recommended operating conditions are specified to ensure optimal performance to the specifications. Crocus Technology does not recommend exceeding them or designing to absolute maximum ratings.

Symbol	Parameter	Min.	Typ.	Max.	Unit
V_{CC}	Supply Voltage Range	3.0	3.3	3.6	V
V_{OUT}	OUT Voltage Range	0		V_{CC}	V
I_{OUT}	OUT Current			± 1.0	mA
T_A	Operating Ambient Temperature	-40	+25	+125	$^{\circ}\text{C}$

Electrical Specifications

General Parameters

Unless otherwise specified: $V_{CC} = 3.0\text{ V to }3.6\text{ V}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$, $C_{BYP} = 1.0\ \mu\text{F}$. Typical values are $V_{CC} = 3.3\text{ V}$ and $T_A = +25^\circ\text{C}$.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
Power Supplies						
I_{CC}	Supply Current	$f_{BW} = 1\text{ MHz}$ No load, $B_{OP} = 0\text{ mT}$		6.0	9.0	mA
I_{OUT}	OUT Maximum Drive Capability	OUT covers 10% to 90% of V_{CC} span.	-1.0		+1.0	mA
C_{L_OUT}	OUT Capacitive Load				100	pF
R_{L_OUT}	OUT Resistive Load			100		k Ω
R_{FILTER}	Internal Filter Resistance ⁽¹⁾			15		k Ω
I_{VREF}	VREF Maximum Drive Capability (TSSOP-8 only)		-50		+50	μA
C_{L_VREF}	VREF Capacitive Load (TSSOP-8 only)				10	pF
R_{L_VREF}	VREF Resistive Load (TSSOP-8 only)			100		k Ω
PSRR	Power Supply Rejection Ratio ⁽¹⁾			35		dB
SPSRR	Sensitivity Power Supply (PS) Rejection Ratio ⁽¹⁾			35		dB
OPSRR	Offset PS Rejection Ratio ⁽¹⁾			40		dB
Analog Output (OUT)						
V_{OUT}	OUT Voltage Linear Range, Typical	$V_{SIG_AC} = \pm 1.00\text{ V}$ $V_{SIG_DC} = +2.00\text{ V}$	0.65		2.65	V
V_{OUT_SAT}	Output High Saturation Voltage	V_{OUT} , $T_A = +25^\circ\text{C}$	$V_{CC} - 0.30$	$V_{CC} - 0.25$		V
CMFRR	Common Mode Field Rejection Ratio ⁽¹⁾	CMFR Mode		-50		dB
Reference Voltage (VREF) for TSSOP-8 Only						
V_{REF}	Reference Voltage	Unipolar Field		0.65		V
		Bipolar Field		1.65		
Timings						
t_{ON}	Power-On Time	$V_{CC} \geq 4.0\text{ V}$		100	200	μs
t_{RISE}	Rise Time ⁽¹⁾	$B_{OP} = B_{OP(MAX)}$, $T_A = +25^\circ\text{C}$, $C_L = 100\text{ pF}$		200		ns
$t_{RESPONSE}$	Response Time ⁽¹⁾			300		ns
t_{DELAY}	Propagation Delay ⁽¹⁾			250		ns
Protection						
V_{UVLO}	Under-Voltage Lockout	Rising V_{CC}		2.50		V
		Falling V_{CC}		2.45		V
V_{UV_HYS}	UVLO Hysteresis			50		mV

(1) Guaranteed by design and characterization; not tested in production.

Electrical Characteristics

$V_{CC} = 3.3\text{ V}$ and $T_A = +25^\circ\text{C}$ and $C_{BYP} = 1.0\ \mu\text{F}$ (unless otherwise specified)

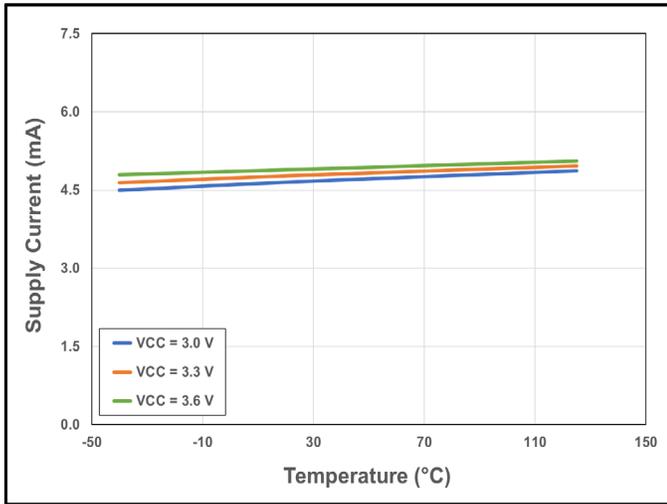


Figure 7. CT453 Supply Current vs. Temperature vs. Supply Voltage

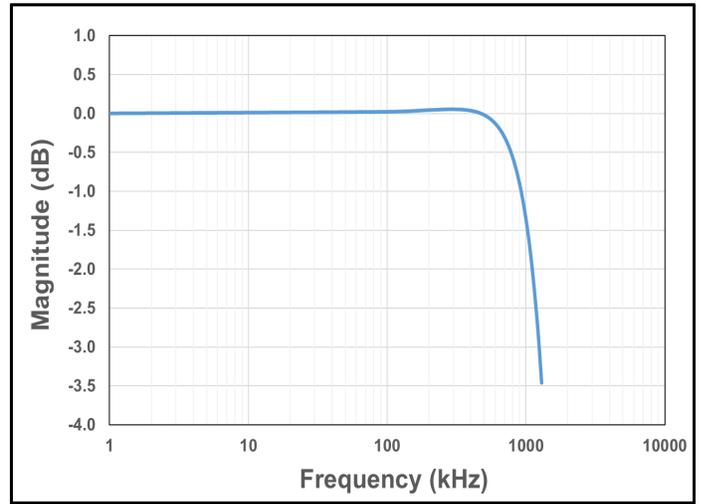


Figure 8. CT453 Bandwidth with $C_{FILTER} = 1.0\ \text{pF}$

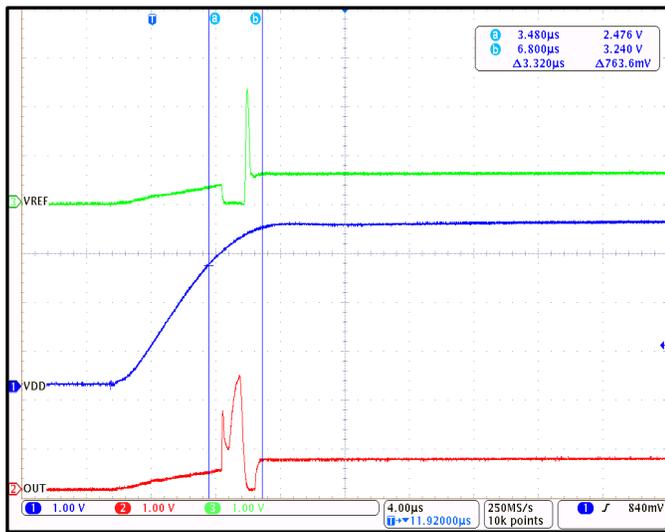


Figure 9. CT453 Startup Waveforms for $V_{OQ} = 0.65\ \text{V}$ (Unipolar Field)

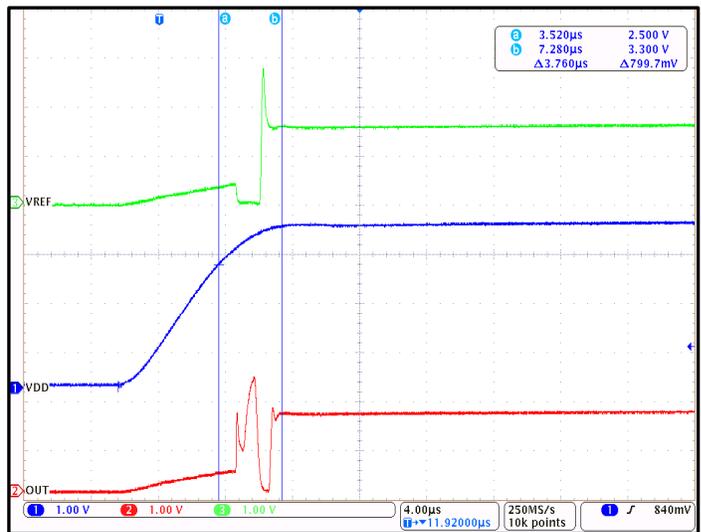


Figure 10. CT453 Startup Waveforms for $V_{OQ} = 1.65\ \text{V}$ (Bipolar Field)

CT453-x06DR: 0 mT to +6 mT

Unless otherwise specified: $V_{CC} = 3.0\text{ V to }3.6\text{ V}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$, $C_{BYP} = 1.0\ \mu\text{F}$. Typical values are $V_{CC} = 3.3\text{ V}$ and $T_A = +25^\circ\text{C}$.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
B_{RNG}	Magnetic Field Range		0		+6	mT
V_{OQ}	Voltage Output Quiescent	$T_A = +25^\circ\text{C}$, $B_{OP} = 0\text{ mT}$	0.645	0.650	0.655	V
S	Sensitivity	$B_{RNG(MIN)} < B_{OP} < B_{RNG(MAX)}$		333.3		mV/mT
f_{BW}	Bandwidth ⁽¹⁾	Small Signal = -3 dB		1.0		MHz
e_N	Noise ⁽¹⁾	$T_A = +25^\circ\text{C}$, $f_{BW} = 100\text{ kHz}$		0.81		mV _{RMS}
				2.42		μT_{RMS}
OUT Accuracy Performance						
E_{OUT}	Total Output Error	$B_{OP} = B_{RNG(MAX)}$		± 0.7	± 1.0	% FS
E_{LIN}	Non-Linearity Error ⁽¹⁾	$B_{OP} = B_{RNG(MAX)}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$		± 0.2		% FS
E_{SENS}	Sensitivity Error ⁽¹⁾	$B_{OP} = B_{RNG(MAX)}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$		± 0.2		% FS
V_{OFFSET}	Offset Voltage ⁽¹⁾	$B_{OP} = 0\text{ mT}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$		± 8.0		mV
				± 0.4		% FS
$V_{OUT} - V_{REF}$ Accuracy Performance (TSSOP-8 only)						
$E_{OUT-VREF}$	$V_{OUT} - V_{REF}$ Error	$B_{OP} = B_{RNG(MAX)}$, $V_{CC} = 5.0\text{ V}$ $T_A = -40^\circ\text{C to }+125^\circ\text{C}$			± 1.0	% FS
$V_{OUT} - V_{REF}$	OUT – VREF Offset Voltage	$V_{CC} = 5.0\text{ V}$ $T_A = -40^\circ\text{C to }+125^\circ\text{C}$		± 5.0		mV
Lifetime Drift						
E_{TOT_DRIFT}	Total Output Error Lifetime Drift ⁽¹⁾	$B_{OP} = B_{OP(MAX)}$		± 1.0		% FS

(1) Guaranteed by design and characterization; not tested in production.

Electrical Characteristics for CT453-x06DR

$V_{CC} = 3.3\text{ V}$ and $T_A = +25^\circ\text{C}$ and $C_{BYP} = 1.0\ \mu\text{F}$ (unless otherwise specified)

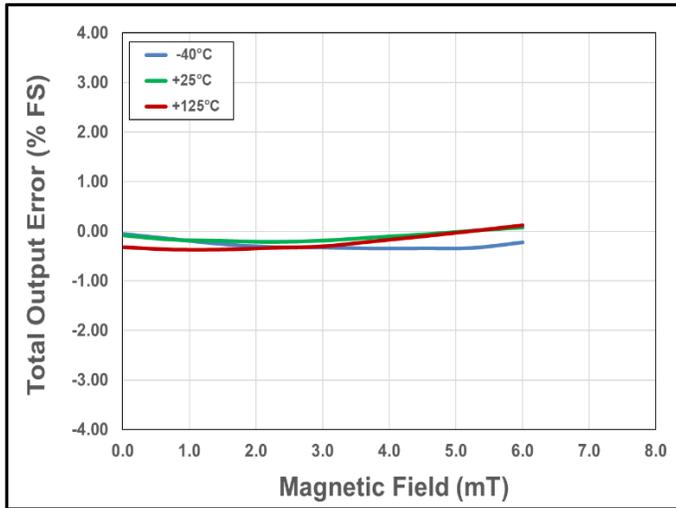


Figure 11. Total Output Error vs. Current vs. Temperature

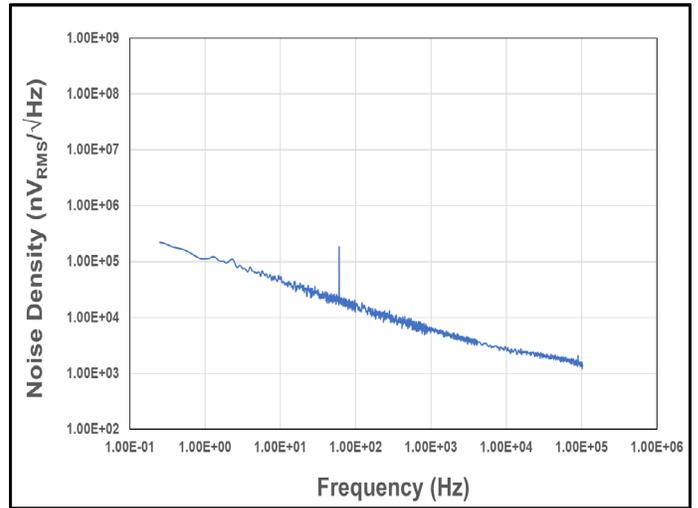


Figure 12. Noise Density vs. Frequency

CT453-x06MR: -6 mT to +6 mT

Unless otherwise specified: $V_{CC} = 3.0\text{ V to }3.6\text{ V}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$, $C_{BYP} = 1.0\ \mu\text{F}$. Typical values are $V_{CC} = 3.3\text{ V}$ and $T_A = +25^\circ\text{C}$.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
B_{RNG}	Magnetic Field Range		-6		+6	mT
V_{OQ}	Voltage Output Quiescent	$T_A = +25^\circ\text{C}$, $B_{OP} = 0\text{ mT}$	1.645	1.650	1.655	V
S	Sensitivity	$B_{RNG(MIN)} < B_{OP} < B_{RNG(MAX)}$		166.7		mV/mT
f_{BW}	Bandwidth ⁽¹⁾	Small Signal = -3 dB		1.0		MHz
e_N	Noise ⁽¹⁾	$T_A = +25^\circ\text{C}$, $f_{BW} = 100\text{ kHz}$		0.45		mV _{RMS}
				2.69		μT_{RMS}
OUT Accuracy Performance						
E_{OUT}	Total Output Error	$B_{OP} = B_{RNG(MAX)}$		± 0.7	± 1.0	% FS
E_{LIN}	Non-Linearity Error ⁽¹⁾	$B_{OP} = B_{RNG(MAX)}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$		± 0.1		% FS
E_{SENS}	Sensitivity Error ⁽¹⁾	$B_{OP} = B_{RNG(MAX)}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$		± 0.2		% FS
V_{OFFSET}	Offset Voltage ⁽¹⁾	$B_{OP} = 0\text{ mT}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$		± 7.0		mV
				± 0.4		% FS
$V_{OUT} - V_{REF}$ Accuracy Performance (TSSOP-8 only)						
$E_{OUT-VREF}$	$V_{OUT} - V_{REF}$ Error	$B_{OP} = B_{RNG(MAX)}$, $V_{CC} = 5.0\text{ V}$ $T_A = -40^\circ\text{C to }+125^\circ\text{C}$			± 1.0	% FS
$V_{OUT-VREF}$	OUT – VREF Offset Voltage	$V_{CC} = 5.0\text{ V}$ $T_A = -40^\circ\text{C to }+125^\circ\text{C}$		5.0		mV
Lifetime Drift						
E_{TOT_DRIFT}	Total Output Error Lifetime Drift ⁽¹⁾	$B_{OP} = B_{OP(MAX)}$		± 1.0		% FS

(1) Guaranteed by design and characterization; not tested in production.

Electrical Characteristics for CT453-x06MR

$V_{CC} = 3.3\text{ V}$ and $T_A = +25^\circ\text{C}$ and $C_{BYP} = 1.0\ \mu\text{F}$ (unless otherwise specified)

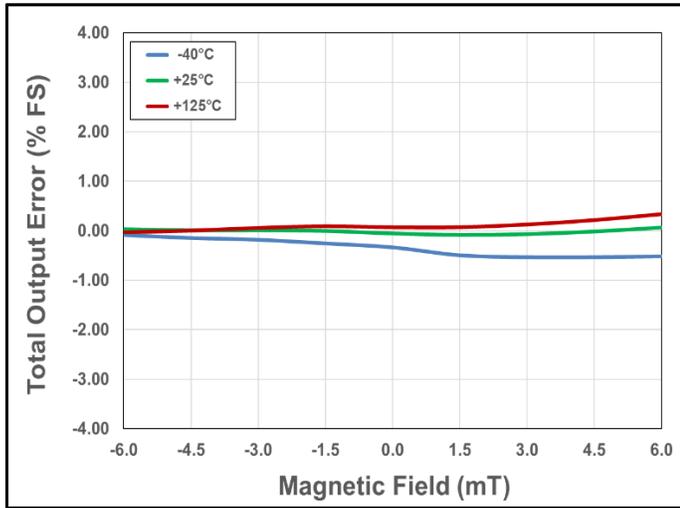


Figure 13. Total Output Error vs. Current vs. Temperature

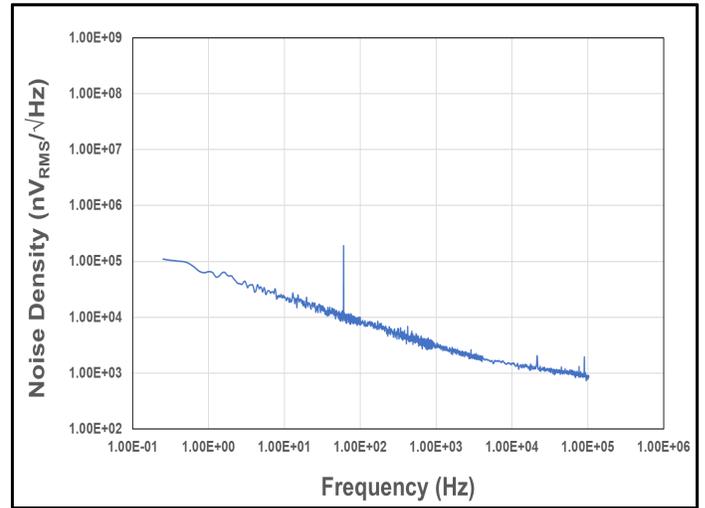


Figure 14. Noise Density vs. Frequency

CT453-x12DR: 0 mT to +12 mT

Unless otherwise specified: $V_{CC} = 3.0\text{ V to }3.6\text{ V}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$, $C_{BYP} = 1.0\ \mu\text{F}$. Typical values are $V_{CC} = 3.3\text{ V}$ and $T_A = +25^\circ\text{C}$.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
B_{RNG}	Magnetic Field Range		0		+12	mT
V_{OQ}	Voltage Output Quiescent	$T_A = +25^\circ\text{C}$, $B_{OP} = 0\text{ mT}$	0.645	0.650	0.655	V
S	Sensitivity	$B_{RNG(MIN)} < B_{OP} < B_{RNG(MAX)}$		166.7		mV/mT
f_{BW}	Bandwidth ⁽¹⁾	Small Signal = -3 dB		1.0		MHz
e_N	Noise ⁽¹⁾	$T_A = +25^\circ\text{C}$, $f_{BW} = 100\text{ kHz}$		0.44		mV _{RMS}
				2.64		μT_{RMS}
OUT Accuracy Performance						
E_{OUT}	Total Output Error	$B_{OP} = B_{RNG(MAX)}$		± 0.7	± 1.0	% FS
E_{LIN}	Non-Linearity Error ⁽¹⁾	$B_{OP} = B_{RNG(MAX)}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$		± 0.3		% FS
E_{SENS}	Sensitivity Error ⁽¹⁾	$B_{OP} = B_{RNG(MAX)}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$		± 0.3		% FS
V_{OFFSET}	Offset Voltage ⁽¹⁾	$B_{OP} = 0\text{ mT}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$		± 6.0		mV
				± 0.3		% FS
$V_{OUT} - V_{REF}$ Accuracy Performance (TSSOP-8 only)						
$E_{OUT-VREF}$	$V_{OUT} - V_{REF}$ Error	$B_{OP} = B_{RNG(MAX)}$, $V_{CC} = 5.0\text{ V}$ $T_A = -40^\circ\text{C to }+125^\circ\text{C}$			± 1.0	% FS
$V_{OUT-VREF}$	OUT – VREF Offset Voltage	$V_{CC} = 5.0\text{ V}$ $T_A = -40^\circ\text{C to }+125^\circ\text{C}$		5.0		mV
Lifetime Drift						
E_{TOT_DRIFT}	Total Output Error Lifetime Drift ⁽¹⁾	$B_{OP} = B_{OP(MAX)}$		± 1.0		% FS

(1) Guaranteed by design and characterization; not tested in production.

Electrical Characteristics for CT453-x12MR

$V_{CC} = 3.3\text{ V}$ and $T_A = +25^\circ\text{C}$ and $C_{BYP} = 1.0\ \mu\text{F}$ (unless otherwise specified)

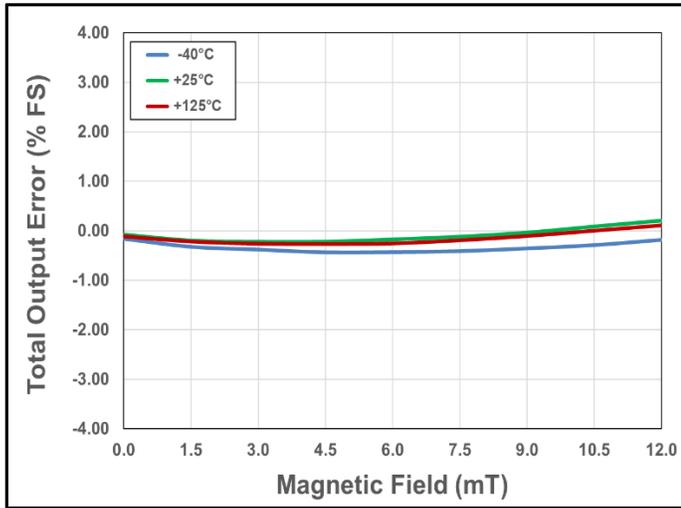


Figure 15. Total Output Error vs. Current vs. Temperature

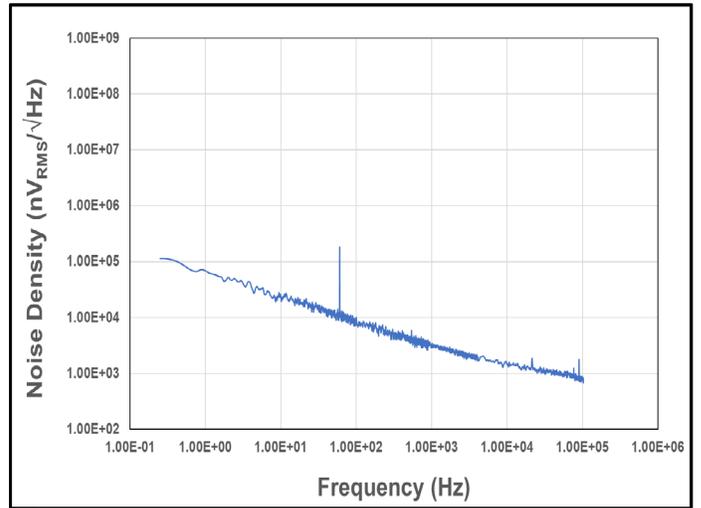


Figure 16. Noise Density vs. Frequency

CT453-x12MR: -12 mT to +12 mT

Unless otherwise specified: $V_{CC} = 3.0\text{ V to }3.6\text{ V}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$, $C_{BYP} = 1.0\ \mu\text{F}$. Typical values are $V_{CC} = 3.3\text{ V}$ and $T_A = +25^\circ\text{C}$.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
B_{RNG}	Magnetic Field Range		-12		+12	mT
V_{OQ}	Voltage Output Quiescent	$T_A = +25^\circ\text{C}$, $B_{OP} = 0\text{ mT}$	1.645	1.650	1.655	V
S	Sensitivity	$B_{RNG(MIN)} < B_{OP} < B_{RNG(MAX)}$		83.3		mV/mT
f_{BW}	Bandwidth ⁽¹⁾	Small Signal = -3 dB		1.0		MHz
e_N	Noise ⁽¹⁾	$T_A = +25^\circ\text{C}$, $f_{BW} = 100\text{ kHz}$		0.32		mV _{RMS}
				3.81		μT_{RMS}
OUT Accuracy Performance						
E_{OUT}	Total Output Error	$B_{OP} = B_{RNG(MAX)}$		± 0.7	± 1.0	% FS
E_{LIN}	Non-Linearity Error ⁽¹⁾	$B_{OP} = B_{RNG(MAX)}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$		± 0.2		% FS
E_{SENS}	Sensitivity Error ⁽¹⁾	$B_{OP} = B_{RNG(MAX)}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$		± 0.3		% FS
V_{OFFSET}	Offset Voltage ⁽¹⁾	$B_{OP} = 0\text{ mT}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$		± 6.0		mV
				± 0.3		% FS
$V_{OUT} - V_{REF}$ Accuracy Performance (TSSOP-8 only)						
$E_{OUT-VREF}$	$V_{OUT} - V_{REF}$ Error	$B_{OP} = B_{RNG(MAX)}$, $V_{CC} = 5.0\text{ V}$ $T_A = -40^\circ\text{C to }+125^\circ\text{C}$			± 1.0	% FS
$V_{OUT-VREF}$	OUT – VREF Offset Voltage	$V_{CC} = 5.0\text{ V}$ $T_A = -40^\circ\text{C to }+125^\circ\text{C}$		5.0		mV
Lifetime Drift						
E_{TOT_DRIFT}	Total Output Error Lifetime Drift ⁽¹⁾	$B_{OP} = B_{OP(MAX)}$		± 1.0		% FS

(1) Guaranteed by design and characterization; not tested in production.

Electrical Characteristics for CT453-x12MR

$V_{CC} = 3.3\text{ V}$ and $T_A = +25^\circ\text{C}$ and $C_{BYP} = 1.0\ \mu\text{F}$ (unless otherwise specified)

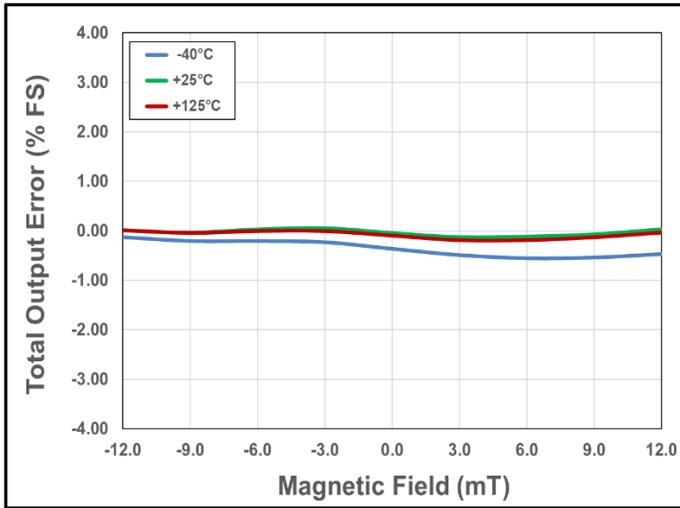


Figure 17. Total Output Error vs. Current vs. Temperature

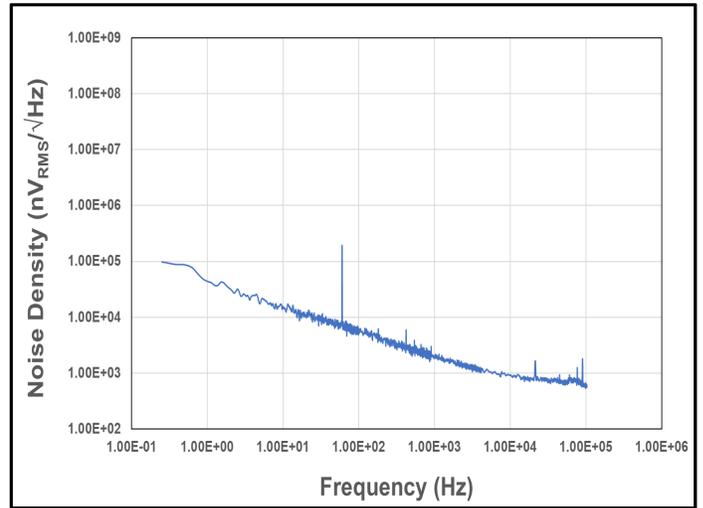


Figure 18. Noise Density vs. Frequency

CT453-x24DR: 0 mT to +24 mT

Unless otherwise specified: $V_{CC} = 3.0\text{ V to }3.6\text{ V}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$, $C_{BYP} = 1.0\ \mu\text{F}$. Typical values are $V_{CC} = 3.3\text{ V}$ and $T_A = +25^\circ\text{C}$.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
B_{RNG}	Magnetic Field Range		0		+24	mT
V_{OQ}	Voltage Output Quiescent	$T_A = +25^\circ\text{C}$, $B_{OP} = 0\text{ mT}$	0.645	0.650	0.655	V
S	Sensitivity	$B_{RNG(MIN)} < B_{OP} < B_{RNG(MAX)}$		83.3		mV/mT
f_{BW}	Bandwidth ⁽¹⁾	Small Signal = -3 dB		1.0		MHz
e_N	Noise ⁽¹⁾	$T_A = +25^\circ\text{C}$, $f_{BW} = 100\text{ kHz}$		0.29		mV _{RMS}
				3.47		μT_{RMS}
OUT Accuracy Performance						
E_{OUT}	Total Output Error	$B_{OP} = B_{RNG(MAX)}$		± 0.7	± 1.5	% FS
E_{LIN}	Non-Linearity Error ⁽¹⁾	$B_{OP} = B_{RNG(MAX)}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$		± 0.3		% FS
E_{SENS}	Sensitivity Error ⁽¹⁾	$B_{OP} = B_{RNG(MAX)}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$		± 0.4		% FS
V_{OFFSET}	Offset Voltage ⁽¹⁾	$B_{OP} = 0\text{ mT}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$		± 5.0		mV
				± 0.3		% FS
$V_{OUT} - V_{REF}$ Accuracy Performance (TSSOP-8 only)						
$E_{OUT-VREF}$	$V_{OUT} - V_{REF}$ Error	$B_{OP} = B_{RNG(MAX)}$, $V_{CC} = 5.0\text{ V}$ $T_A = -40^\circ\text{C to }+125^\circ\text{C}$			± 1.0	% FS
$V_{OUT} - V_{REF}$	OUT – VREF Offset Voltage	$V_{CC} = 5.0\text{ V}$ $T_A = -40^\circ\text{C to }+125^\circ\text{C}$		5.0		mV
Lifetime Drift						
E_{TOT_DRIFT}	Total Output Error Lifetime Drift ⁽¹⁾	$B_{OP} = B_{OP(MAX)}$		± 1.0		% FS

(1) Guaranteed by design and characterization; not tested in production.

Electrical Characteristics for CT453-x24DR

$V_{CC} = 3.3\text{ V}$ and $T_A = +25^\circ\text{C}$ and $C_{BYP} = 1.0\ \mu\text{F}$ (unless otherwise specified)

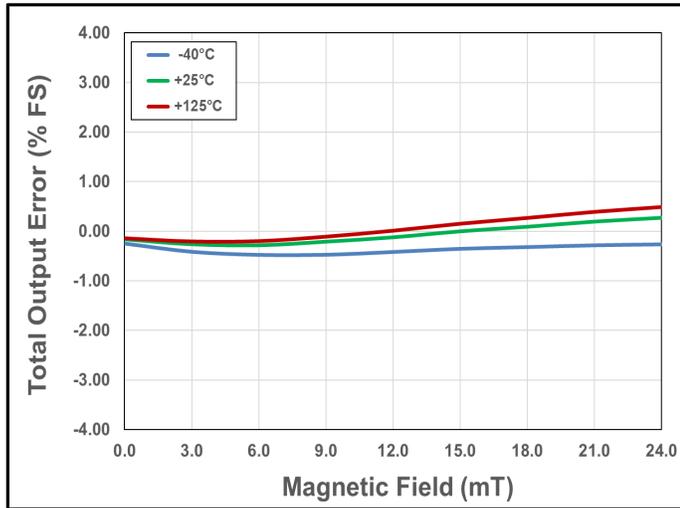


Figure 19. Total Output Error vs. Current vs. Temperature

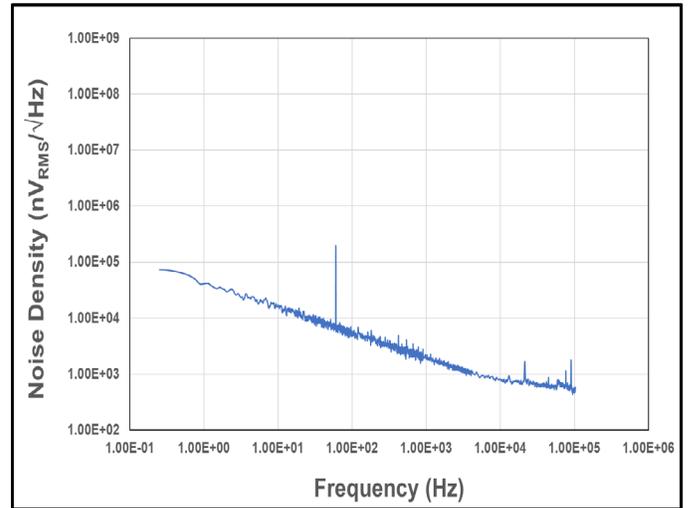


Figure 20. Noise Density vs. Frequency

CT453-x24MR: -24 mT to +24 mT

Unless otherwise specified: $V_{CC} = 3.0\text{ V to }3.6\text{ V}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$, $C_{BYP} = 1.0\ \mu\text{F}$. Typical values are $V_{CC} = 3.3\text{ V}$ and $T_A = +25^\circ\text{C}$.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
B_{RNG}	Magnetic Field Range		-24		+24	mT
V_{OQ}	Voltage Output Quiescent	$T_A = +25^\circ\text{C}$, $B_{OP} = 0\text{ mT}$	1.645	1.650	1.655	V
S	Sensitivity	$B_{RNG(MIN)} < B_{OP} < B_{RNG(MAX)}$		41.7		mV/mT
f_{BW}	Bandwidth ⁽¹⁾	Small Signal = -3 dB		1.0		MHz
e_N	Noise ⁽¹⁾	$T_A = +25^\circ\text{C}$, $f_{BW} = 100\text{ kHz}$		0.27		mV _{RMS}
				6.44		μT_{RMS}
OUT Accuracy Performance						
E_{OUT}	Total Output Error	$B_{OP} = B_{RNG(MAX)}$		± 0.5	± 1.0	% FS
E_{LIN}	Non-Linearity Error ⁽¹⁾	$B_{OP} = B_{RNG(MAX)}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$		± 0.2		% FS
E_{SENS}	Sensitivity Error ⁽¹⁾	$B_{OP} = B_{RNG(MAX)}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$		± 0.3		% FS
V_{OFFSET}	Offset Voltage ⁽¹⁾	$B_{OP} = 0\text{ mT}$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$		± 5.0		mV
				± 0.3		% FS
$V_{OUT} - V_{REF}$ Accuracy Performance (TSSOP-8 only)						
$E_{OUT-VREF}$	$V_{OUT} - V_{REF}$ Error	$B_{OP} = B_{RNG(MAX)}$, $V_{CC} = 5.0\text{ V}$ $T_A = -40^\circ\text{C to }+125^\circ\text{C}$			± 1.0	% FS
$V_{OUT-VREF}$	OUT – VREF Offset Voltage	$V_{CC} = 5.0\text{ V}$ $T_A = -40^\circ\text{C to }+125^\circ\text{C}$		5.0		mV
Lifetime Drift						
E_{TOT_DRIFT}	Total Output Error Lifetime Drift ⁽¹⁾	$B_{OP} = B_{OP(MAX)}$		± 1.0		% FS

(1) Guaranteed by design and characterization; not tested in production.

Electrical Characteristics for CT453-x24MR

$V_{CC} = 3.3\text{ V}$ and $T_A = +25^\circ\text{C}$ and $C_{BYP} = 1.0\ \mu\text{F}$ (unless otherwise specified)

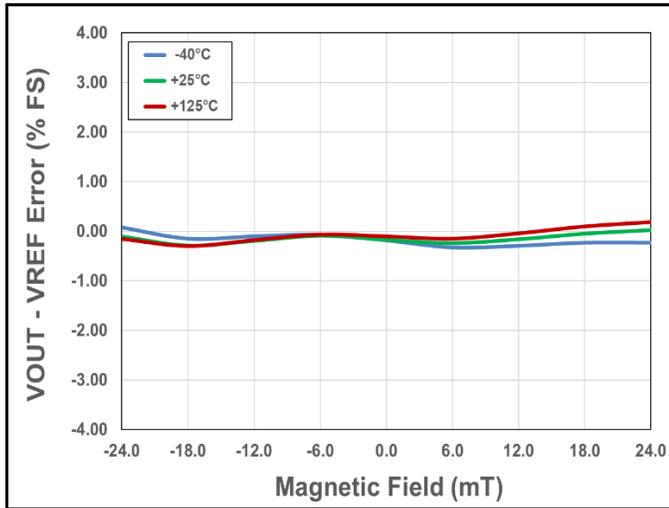


Figure 21. Total Output Error vs. Current vs. Temperature

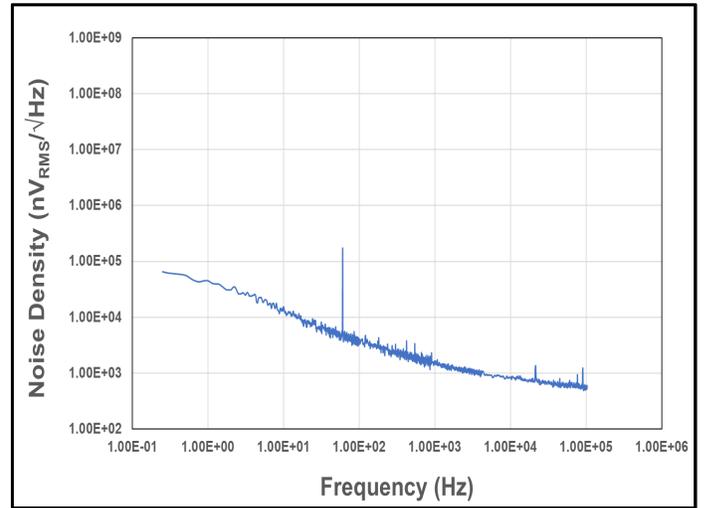


Figure 22. Noise Density vs. Frequency

Circuit Description

Overview

The CT453 is a very high accuracy contactless current sensor that can sense magnetic fields from 6 mT to 24 mT. It has very high sensitivity and a wide dynamic range with excellent accuracy (very low total output error) across temperature. This current sensor supports six (6) field ranges:

- 0 mT to +6 mT
- -6 mT to +6 mT
- 0 mT to +12 mT
- -12 mT to +12 mT
- 0 mT to 24 mT
- -24 mT to +24 mT

When current is flowing through a busbar above or below the CT453, the XtremeSense TMR sensors inside the chip senses the field which in turn generates differential voltage signals that then goes through the Analog Front-End (AFE) to output a current measurement as low as $\pm 1.0\%$ Full-Scale (FS) total output error (E_{OUT}).

The chip is designed to enable a very fast response time of 300 ns for the current measurement from the OUT pin as the bandwidth for the CT453 is 1.0 MHz. Even with a high bandwidth, the chip consumes a minimal amount of power.

Linear Output Magnetic Field Measurement

The CT453 provides a continuous linear analog output voltage which represents the magnetic field generated by the current flowing through the busbar. The output voltage range of OUT is from 0.65 V to 2.65 V with a V_{OQ} of 0.65 V and 1.65 V for unidirectional and bidirectional fields, respectively. Figure 23 illustrates the output voltage range of the OUT pin as a function of the measured field.

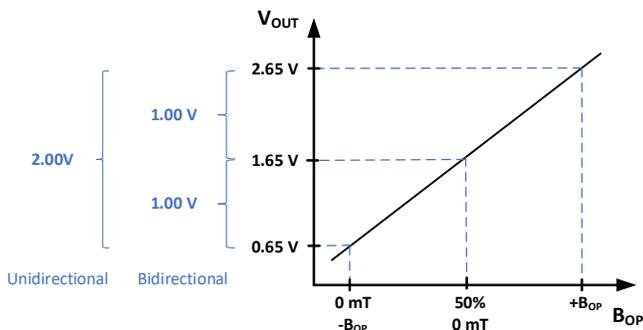


Figure 23. Linear Output Voltage Range (OUT) vs. Measured Magnetic Field (B_{OP})

Common Mode Field Rejection (CMFR) Mode

The CT453 has a built-in CMFR mode that combines the design ease of contactless current sensing with excellent common mode field rejection. This is achieved by placing notches in the current carrying busbar or PCB trace to generate a differential magnetic field in the vicinity of the CT453 sensor. The current sensor utilizes two full-bridge XtremeSense TMR sensors to achieve differential magnetic sensing capability, which allows the CT453 to greatly attenuate external magnetic fields and only capture the magnetic field generated by the current flowing in the busbar. Using this technique achieves better than -50 dB of CMFR without compromising the accuracy or the Signal-to-Noise Ratio (SNR) of the CT453.

Figure 24 (and Figure 25) shows an example of a 2-layer Printed Circuit Board (PCB) where the CT453 is placed on the top layer of the PCB and the bottom layer is designed to generate differential magnetic fields as the current flows through this trace. The “snake like” shape of the PCB trace produces the differential magnetic fields that almost completely eliminates the effects of stray magnetic fields to the CT453. This ensures that the CT453 outputs an accurate output voltage/current measurement to the host system.

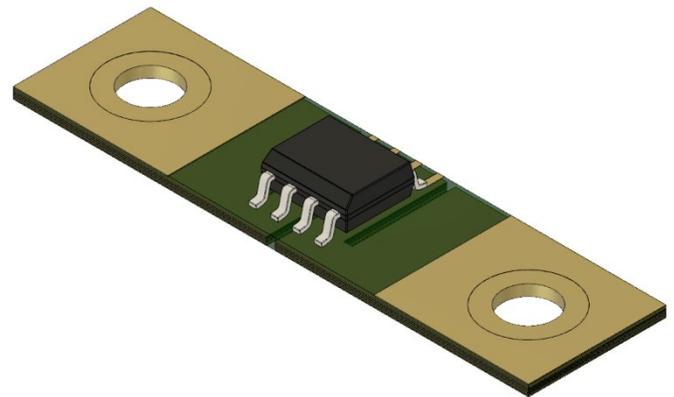


Figure 24. 3D View of CT453 and PCB Trace Design



Figure 25. PCB Trace Design to Generate Differential Magnetic Field for CT453 to Measure

An exploded view of the differential magnetic field generated by the PCB trace is illustrated in Figure 26. It demonstrates the IP+ current generating a clockwise field and goes around the bend or corner of the trace and coming out is IP- with a counter-clockwise field.

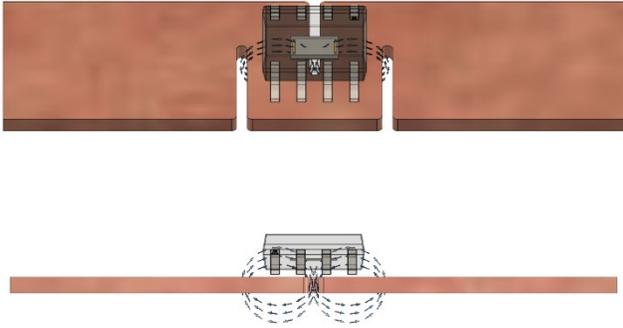


Figure 26. Differential Magnetic Fields Generated Current Through the Busbar (or PCB Trace) and Measured by the CT453

This concept is not restricted to PCB layers and can be extended to busbars carrying current in the hundreds to thousands of Amperes. Figure 27 shows a graphic of the CT453 placed over a busbar that generates differential magnetic fields when 300 A or greater steady-state current through it which will also give CMFR ratio of -50 dB or greater than 90% immunity.

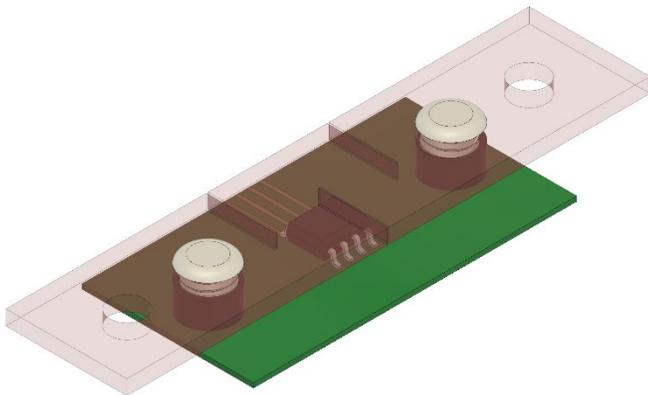


Figure 27. CT453 for Contactless Current Sensing Using Busbar

For more information on how to design the PCB trace and busbar to achieve this CMFR performance, please see the application note AN134, The CT452/CT453 Reference Design Guide for Contactless Current Sensing.

Voltage Reference Function (VREF)

The CT453 in the TSSOP-8 package has a reference voltage (VREF) pin that may be used as an output voltage

reference for bipolar or unipolar field/AC or DC current measurements. The VREF pin should be connected to a buffer circuit. This is a stable output that provides an error of the difference between the output voltage (V_{OUT}) and the reference voltage (V_{REF}) less than ±1.0% FS over temperature

If the VREF is not used, then it should be left unconnected.

Filter Function (FILTER)

The CT453 has a pin for the FILTER function which will enable it to improve the noise performance by changing the cut-off frequency. The bandwidth of the CT453 is 1.0 MHz, however by adding a capacitor to the FILTER pin which, will be in series with an internal resistance of approximately 15 kΩ, will set the cut-off frequency to reduce the noise. Table 3 shows the capacitor values required to achieve four (4) cut-off frequencies.

Table 3. R-C Filter Options for FILTER Pin

Cut-off Frequency	C _{FILTER} (pF)	Capacitor Part Number
100 kHz	91	GRM0225C1C910JA02
250 kHz	33	GRM0225C1C330JA02
500 kHz	16	GRM0225C1C160JA03
1.0 MHz	5	GRM0225C1C5R0CA03

If the FILTER pin is not used, then it should be left unconnected (No Connect).

Total Output Error

The Total Output Error is the difference between the magnetic field measured by CT453 and the actual field, relative to the actual field. It is equivalent to the ratio between the difference of the ideal and actual voltage to the ideal sensitivity multiplied by the magnetic field due to current flowing through the busbar. The equation below defines the Total Output Error (E_{OUT}) for the CT453:

$$E_{OUT} = \frac{V_{OUT_IDEAL}(B_{OP}) - V_{OUT}(B_{OP})}{S_{IDEAL}(B_{OP}) \times B_{OP}}$$

The E_{OUT} incorporates all sources of error and is a function of the sensed magnetic field (B_{OP}) from CT453. At high field levels, the E_{OUT} will be dominated by the sensitivity error whereas at low fields, the dominant characteristic is the offset voltage. Figure 28 shows the behavior of E_{OUT} versus B_{OP}. When B_{OP} goes 0 from both directions, the curves exhibit asymptotic behavior i.e., E_{OUT} approaches infinity.

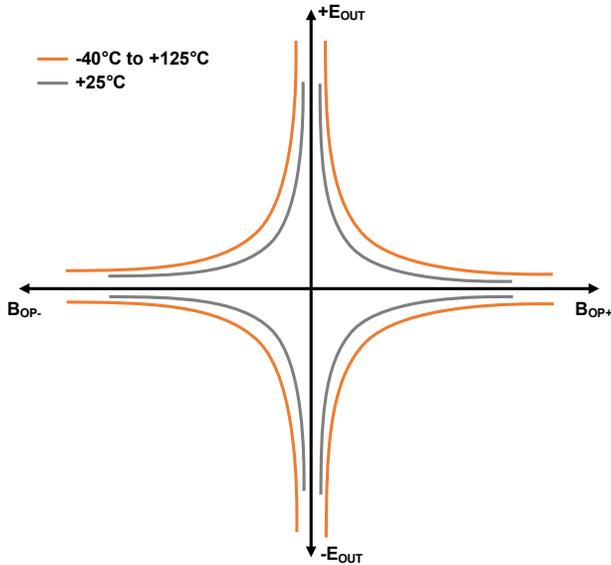


Figure 28. Total Output Error (E_{OUT}) vs. Field (B_{OP})

The CT453 achieves a total output error (E_{OUT}) that is less than $\pm 1.0\%$ of Full-Scale (FS) over supply voltage and temperature. It is designed with innovative and proprietary TMR sensors and circuit blocks to provide very accurate magnetic field measurements regardless of the operating conditions.

Sensitivity Error

The sensitivity error (E_{SENS}) is the sensitivity temperature drift error for unipolar field or DC current. It is calculated using the equation below:

$$E_{SENS} = \left(\frac{S_{MEASURED}}{S} - 1 \right) \times 100\%$$

For bipolar field or AC current, the E_{SENS} is calculated by dividing the equation by 2.

Power-On Time (t_{ON})

The Power-On Time (t_{ON}) of 100 μs is the amount of time required by CT453 to start up, fully power the chip and becoming fully operational from the moment the supply voltage is greater than the UVLO voltage. This time includes the ramp up time and the settling time (within 10% of steady-state voltage under an applied magnetic field) after the power supply have reach the minimum V_{CC} .

Response Time ($t_{RESPONSE}$)

The Response Time ($t_{RESPONSE}$) of 300 ns for the CT453 is the time interval between the following terms:

1. When the primary field/current signal reaches 90% of its final value,
2. When the chip reaches 90% of its output corresponding to the applied field/current.

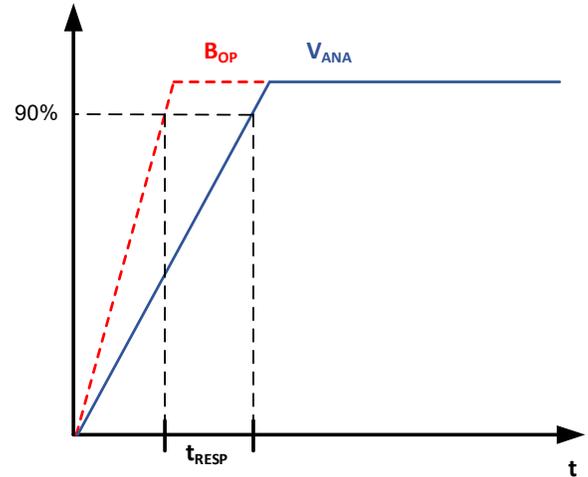


Figure 29. CT453 Response Time Curve

Rise Time (t_{RISE})

The CT453’s rise time, t_{RISE} , is the time interval of when it reaches 10% and 90% of the full-scale output voltage. The t_{RISE} of the CT453 is 200 ns.

Propagation Delay (t_{DELAY})

The Propagation Delay (t_{DELAY}) is the time difference between these two events:

1. When the primary current reaches 20% of its final value
2. When the chip reaches 20% of its output corresponding to the applied field/current.

The CT453 has a propagation delay of 250 ns.

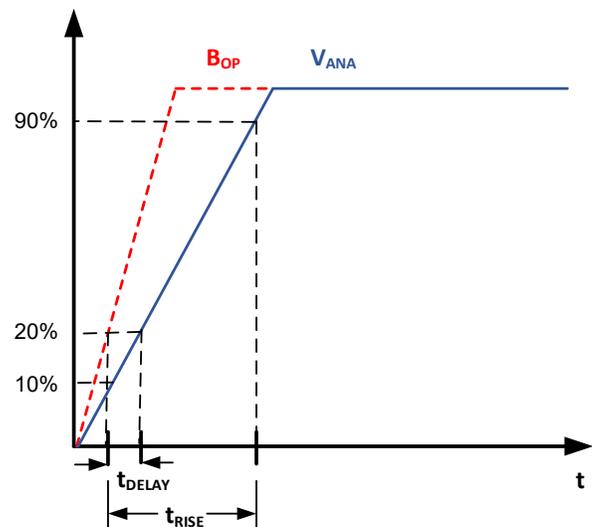


Figure 30. CT453 Propagation Delay and Rise Time Curve

Under-Voltage Lockout (UVLO)

The Under-Voltage Lock-out protection circuitry of the CT453 is activated when the supply voltage (V_{CC}) falls below 2.45 V. The CT453 remains in a low quiescent state until V_{CC} rises above the UVLO threshold (2.50 V). In this condition where the V_{CC} is less than 2.45 V and UVLO is triggered, the output from the CT453 is not valid and the FLT pin will go LOW. Once the V_{CC} rises above 4.0 V then the UVLO is cleared, and the \overline{FLT} pin will be HIGH.

CT453 Calibration Guide

Introduction

All current sensors, no matter how expensive they are, or what materials they use, or even if they were factory calibrated, are susceptible to deviations from their Ideal Transfer Line.

To extract the absolute best performance from any current sensing system, calibration is required.

Ideal Transfer Line

Ideally, the sensor output follows a straight line, has a fixed slope, and crosses a fixed offset point. This allows the user to apply a straightforward linear equation to extract the “physical” value being measured. In the case of a current sensor:

$$Current = \frac{Voltage - b}{a}$$

where a: slope and b: offset of the ideal curve. In a perfect sensor, both a and b coefficients can be simply looked up on the datasheet.

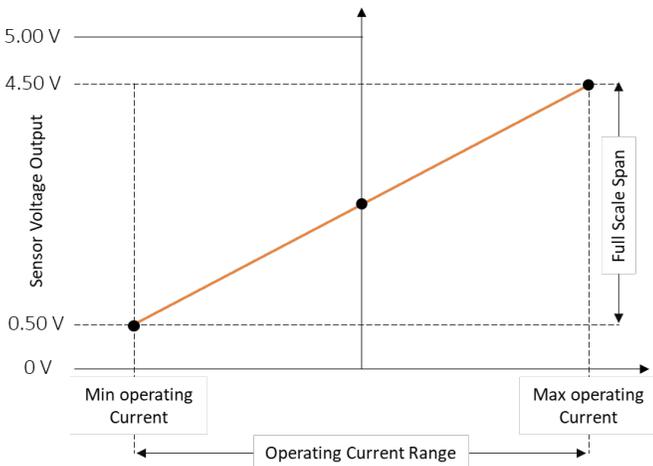


Figure 31. Ideal Transfer Line

Any deviation from this Ideal Line are considered sensor errors. More specifically Accuracy Errors as they related in the case of Crocus Technology’s sensors to Gain and Offset errors.

Offset Error

Based on the Ideal Transfer Line, when no current is applied, the voltage output of the sensor should be equal to 2.50 V. On the datasheet, the user can find the spread (i.e., min-max) values of offsets of Crocus Technology’s products.

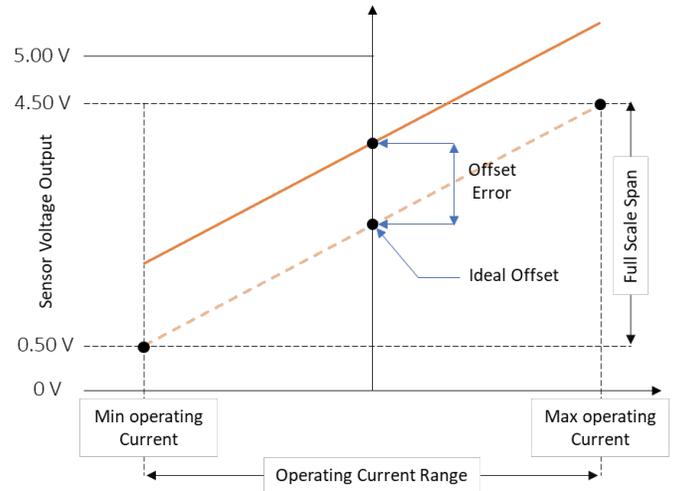


Figure 32. Exaggerated Offset Error

Gain Error

The Ideal Transfer Line shows a line that reaches 4.50 V at the maximum operating current and 0.50 V at the minimum. The datasheet also shows the spread of the gain found on the sensors.

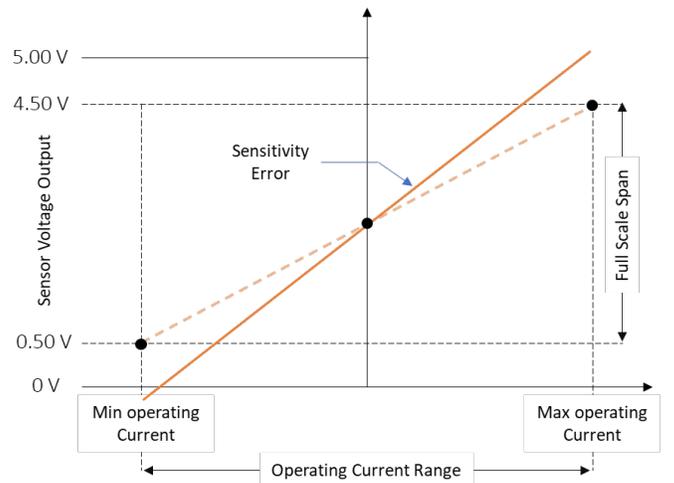


Figure 33. Exaggerated Gain Error

Calibration

Different methods can be applied for offset and/or gain correction. The complexity of these methods lead to different calibration results. The higher the complexity the better the error correction is.

Simple Offset Correction

Offset calibration is achieved simply by storing the voltage output of the sensor at zero flowing current.

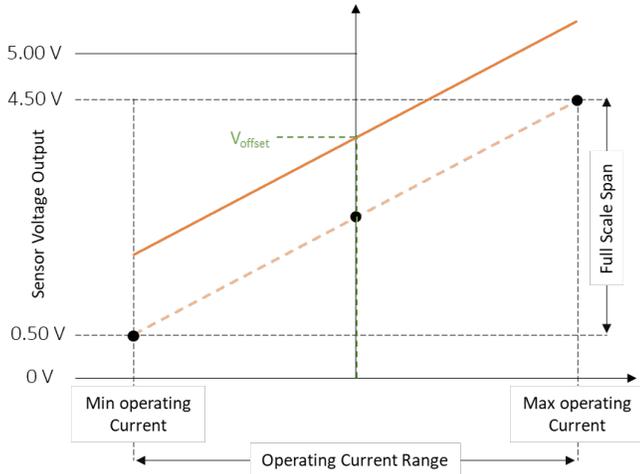


Figure 34. Simple Offset Calibration

This stored value V_{OFFSET} becomes the coefficient “b” in the linear transfer function:

$$Current = \frac{Voltage - b}{a}$$

Simple Gain Correction

Basic Gain calibration can be achieved by applying a known current value (A_1) and measure the sensor output voltage value (V_1)

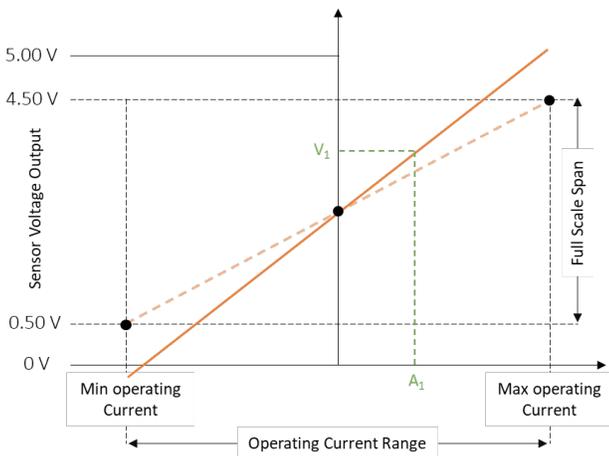


Figure 35. Simple Gain Calibration

The following equation is used to calculate the slope coefficient “a”:

$$a = \frac{V_1 - V_{OFFSET}}{A_1}$$

Recommended Offset and Gain Correction

For bi-directional current applications, the steps below are recommended for users trying to perform the best error correction of gain and offset.

1. Apply a known current value (A_1) and measure voltage output (V_1)
2. Apply a “second current value” (A_2) and measure the voltage output (V_2)
3. Calculate the slope using the following equation.

It is recommended that the applied currents A_1 and A_2 are the absolute maximum and minimum operating current the sensor will see during its normal operations.

Also, $A_1 = -A_2$ for bi-directional current sensing.

$$a = \frac{V_1 - V_2}{A_1 - A_2} \qquad b = \frac{V_1 + V_2}{2}$$

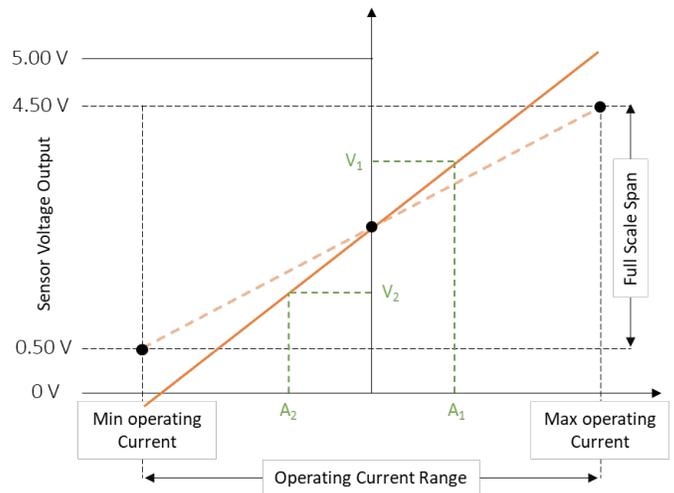


Figure 36. Gain Calibration

Both calculated coefficients “a” and “b” are then used to calculate the current:

$$Current = \frac{Voltage - b}{a}$$

Applications Information

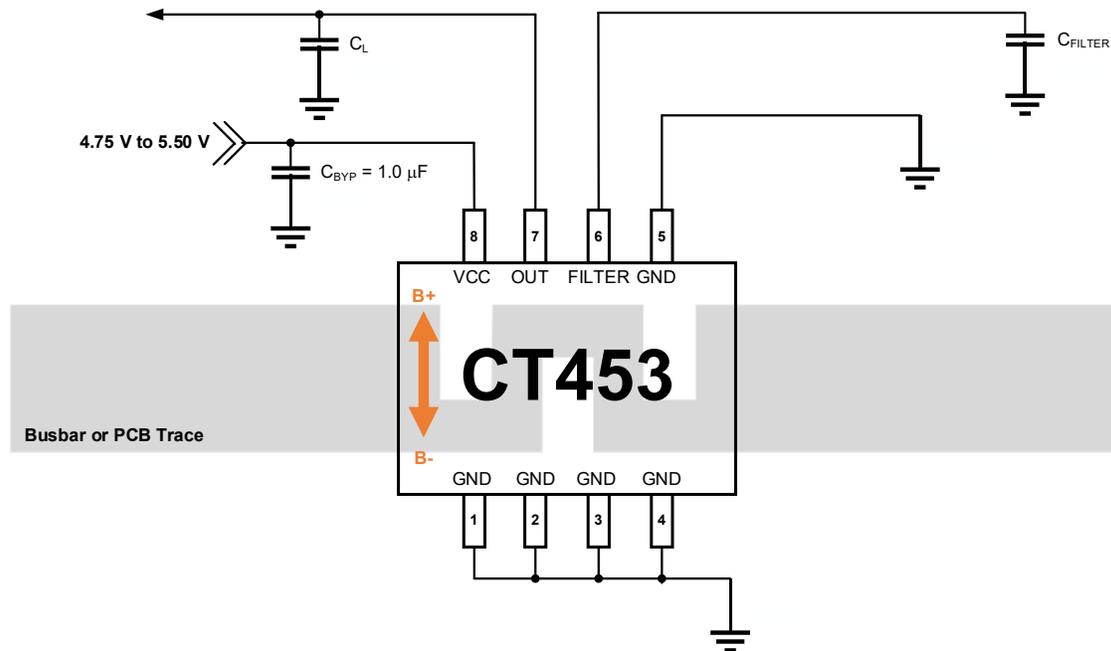


Figure 37. Application Diagram of CT453 Sensing Current of Busbar or PCB Trace Underneath It

Application

The CT453 is an integrated contactless current sensor that can be used in many applications from measuring current in solar inverters and other high-current applications. The chip outputs to a microcontroller a simple linear analog output voltage which corresponds to a magnetic field (current) measurement value. A second output called FLT# alerts the host system to any fault event that may occur in the CT453. Figure 37 is an application diagram of how CT453 would be implemented in a system.

It is designed to support an operating voltage range of 4.75 V to 5.50 V, but it is ideal to use a 5.00 V power supply where the output tolerance is less than $\pm 5\%$.

Current Sensing

The CT453 can sense and therefore measure the current by either placing a current-carrying busbar above or under the device. The busbar should be placed across the package for the CT453 to measure the current. The chip is also sensitive enough to measure the current from a PCB trace that is routed underneath it.

Bypass Capacitor

A single 1.0 μF capacitor is needed for the VCC pin to reduce the noise from the power supply and other circuits. This capacitor should be placed as close as possible to

the CT453 to minimize inductance and resistance between the two devices.

VREF Resistors (TSSOP-8)

In designs where the VREF pin of the CT453 in TSSOP-8 is used, a 10 k Ω resistor must be connected as close to the pin as possible in series with a load.

If the VREF pin is not needed in the application, then this pin should not be connected and be left floating.

Recommended PCB Trace Design

The CT453 requires a different PCB trace or busbar design than the standard current trace or busbar to enable common mode field rejection. Figure 37 and Figure 39 show the shape and design of a PCB trace or busbar.

Other considerations in the PCB layout include the thickness of the trace and the amount of copper to support the current. Also placing the PCB trace on the bottom layer of the board will increase the isolation voltage. The greater distance between the CT453 and the current trace will result in a higher isolation voltage.

For more information on how to design the current-carrying busbar or PCB trace, please see the AN135 application note.

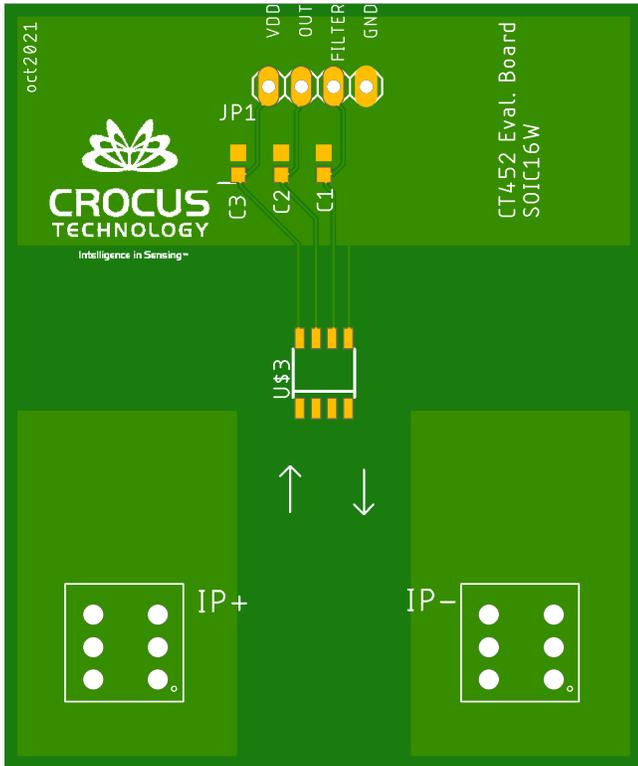


Figure 38. Recommended PCB Layout (Top Layer) for CT453

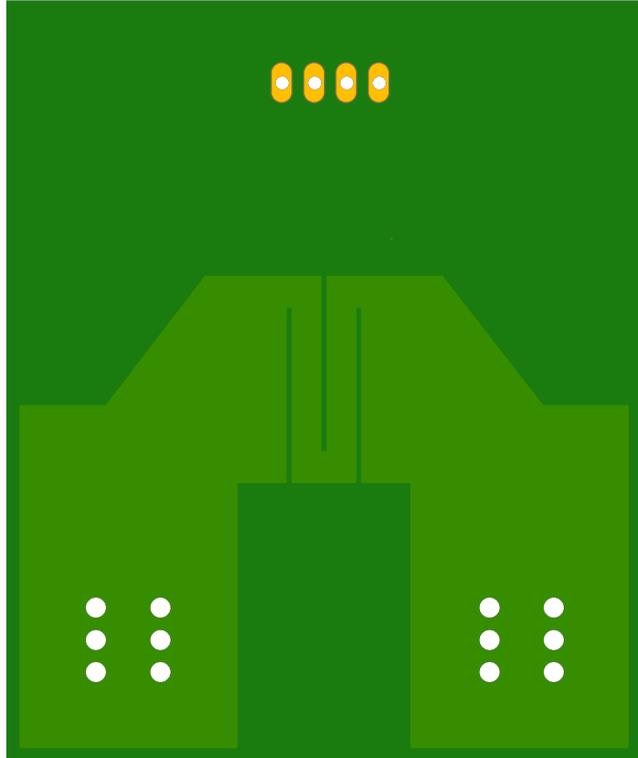


Figure 39. Recommended PCB Layout (Bottom Layer) for CT453

XtremeSense TMR Current Sensor Location

The XtremeSense TMR current sensor location of the CT453 for the x and y dimensions are shown in Figure 40 and z dimension in Figure 41 for the SOIC-8 package.

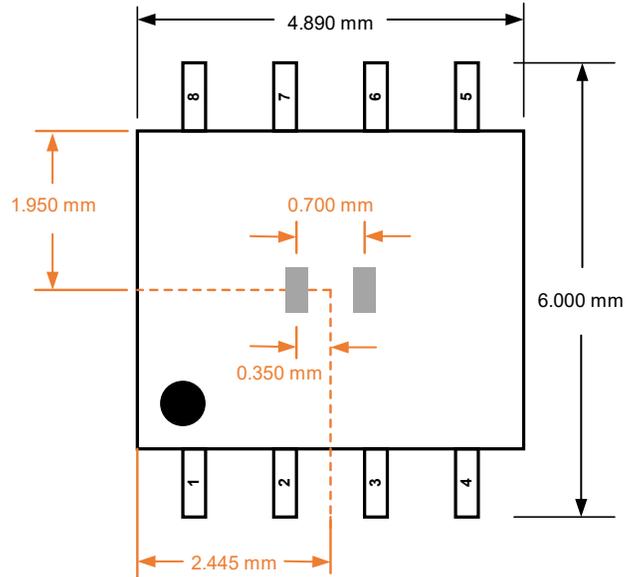


Figure 40. XtremeSense TMR Current Sensor Location in x-y Plane for CT453 in SOIC-8 Package

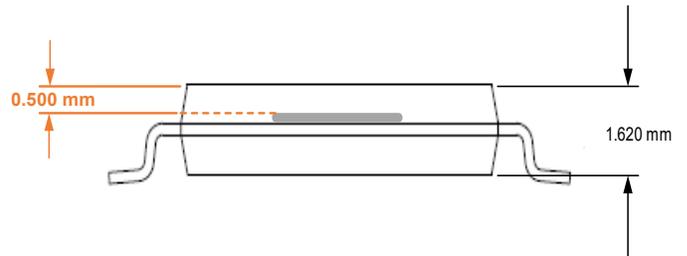


Figure 41. XtremeSense TMR Current Sensor Location in z Dimension for CT453 in SOIC-8 Package

Similarly, Figure 42 and Figure 43 for the TSSOP-8 package. All dimensions in the figures below are nominal.

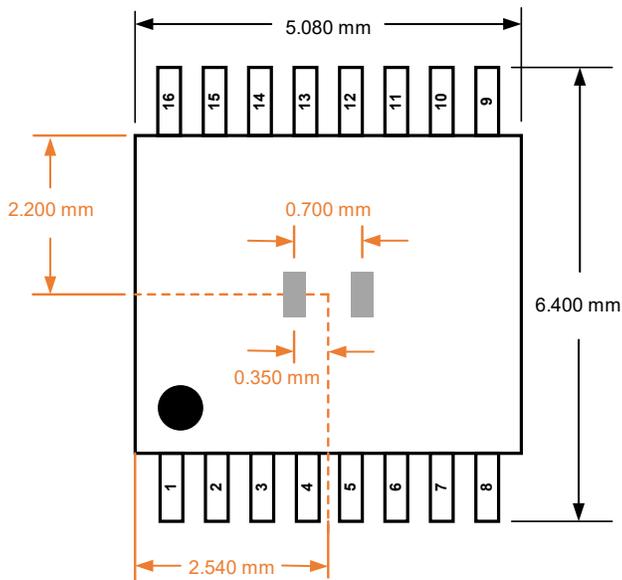


Figure 42. XtremeSense TMR Current Sensor Location in x-y Plane for CT453 in TSSOP-8 Package


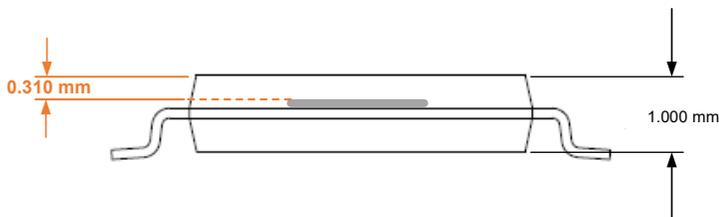


Figure 43. XtremeSense TMR Current Sensor Location in z Dimension for CT453 in TSSOP-8 Package

SOIC-8 Package Drawing and Dimensions

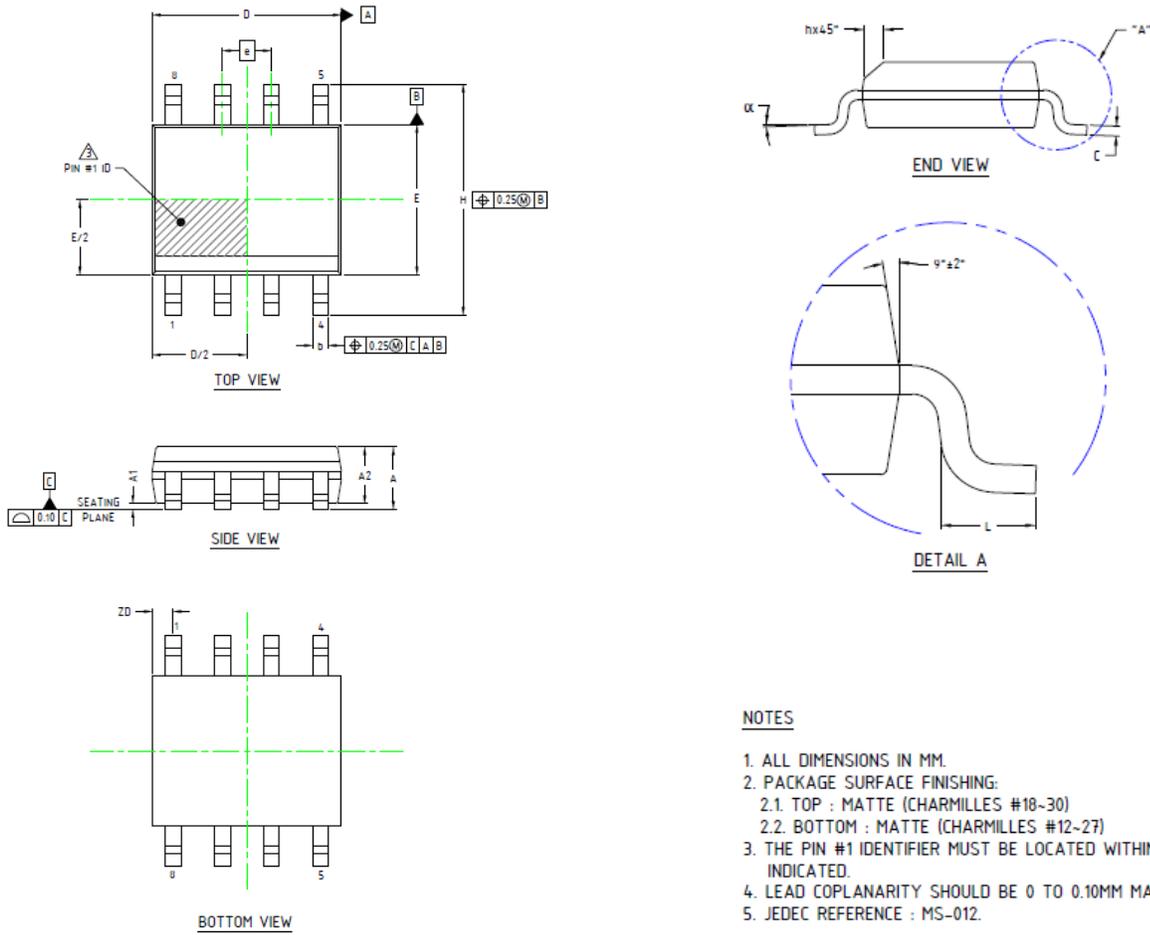

NOTES

1. ALL DIMENSIONS IN MM.
2. PACKAGE SURFACE FINISHING:
 - 2.1. TOP : MATTE (CHARMILLES #18-30)
 - 2.2. BOTTOM : MATTE (CHARMILLES #12-27)
3. THE PIN #1 IDENTIFIER MUST BE LOCATED WITHIN THE ZONE INDICATED.
4. LEAD COPLANARITY SHOULD BE 0 TO 0.10MM MAX.
5. JEDEC REFERENCE : MS-012.

Figure 44. SOIC-8 Package Drawing

Table 4. CT453 SOIC-8 Package Dimensions

Symbol	Dimensions in Millimeters (mm)		
	Min.	Typ.	Max.
A1	0.10	0.18	0.25
b	0.36	0.41	0.46
C	0.19	0.22	0.25
D	4.80	4.89	4.98
E	3.81	3.90	3.99
e	1.27 BSC		
H	5.80	6.00	6.20
h	0.25	0.37	0.50
L	0.41	-	1.27
A	1.52	1.62	1.72
α	0°	-	8°
ZD	0.53 REF		
A2	1.37	1.47	1.57

Crocus Technology provides package drawings as a service to customers considering or planning to use Crocus products in their designs. Drawings may change without notice. Please note the revision and date of the data sheet and contact a Crocus Technology representative to verify or obtain the most recent version. The package specifications do not expand the terms of Crocus Technology's worldwide terms and conditions, specifically the warranty therein, which covers Crocus Technology's products.

SOIC-8 Tape & Pocket Drawing and Dimensions

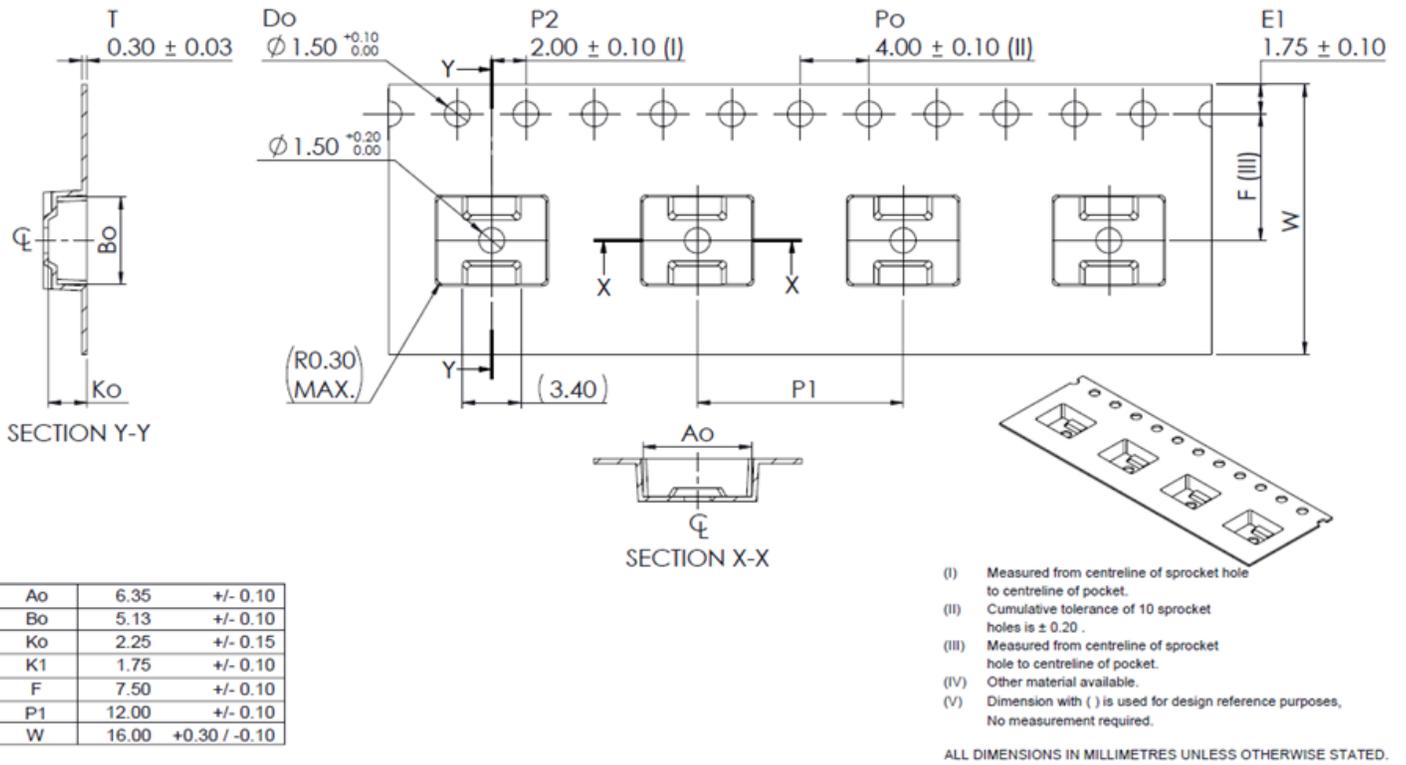


Figure 45. SOIC-8 Package Drawing

TSSOP-8 Package Drawing and Dimensions

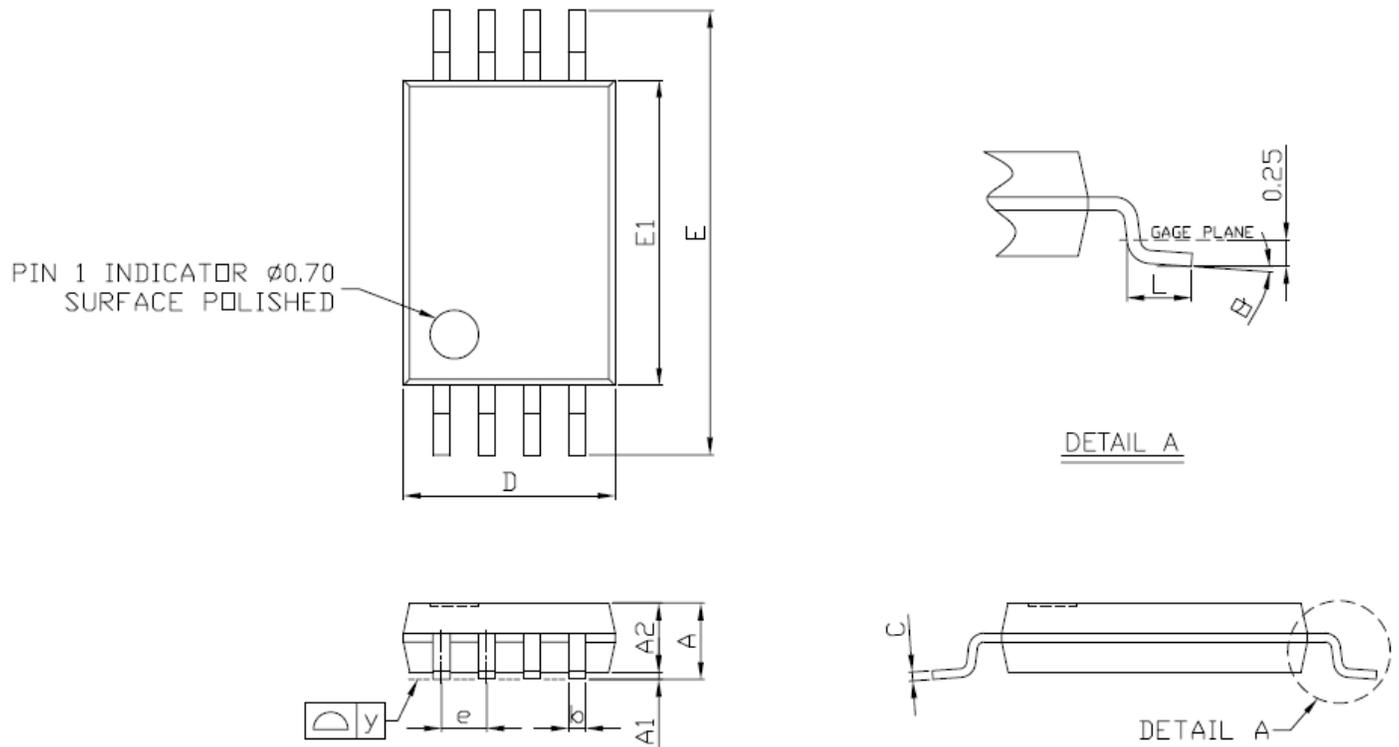



Figure 46. TSSOP-8 Package Drawing

Table 5. CT453 TSSOP-8 Package Dimensions

Symbol	Dimensions in Millimeters (mm)		
	Min.	Typ.	Max.
A	1.05	1.10	1.20
A1	0.05	0.10	0.15
A2	-	1.00	1.05
b	0.25	-	0.30
C	-	0.127	-
D	2.90	3.05	3.10
E	6.20	6.40	6.60
E1	4.30	4.40	4.50
e	-	0.65	-
L	0.50	0.60	0.70
y	-	-	0.076
θ	0°	4°	8°

Crocus Technology provides package drawings as a service to customers considering or planning to use Crocus products in their designs. Drawings may change without notice. Please note the revision and date of the data sheet and contact a Crocus Technology representative to verify or obtain the most recent version. The package specifications do not expand the terms of Crocus Technology's worldwide terms and conditions, specifically the warranty therein, which covers Crocus Technology's products.

TSSOP-8 Tape & Pocket Drawing and Dimensions

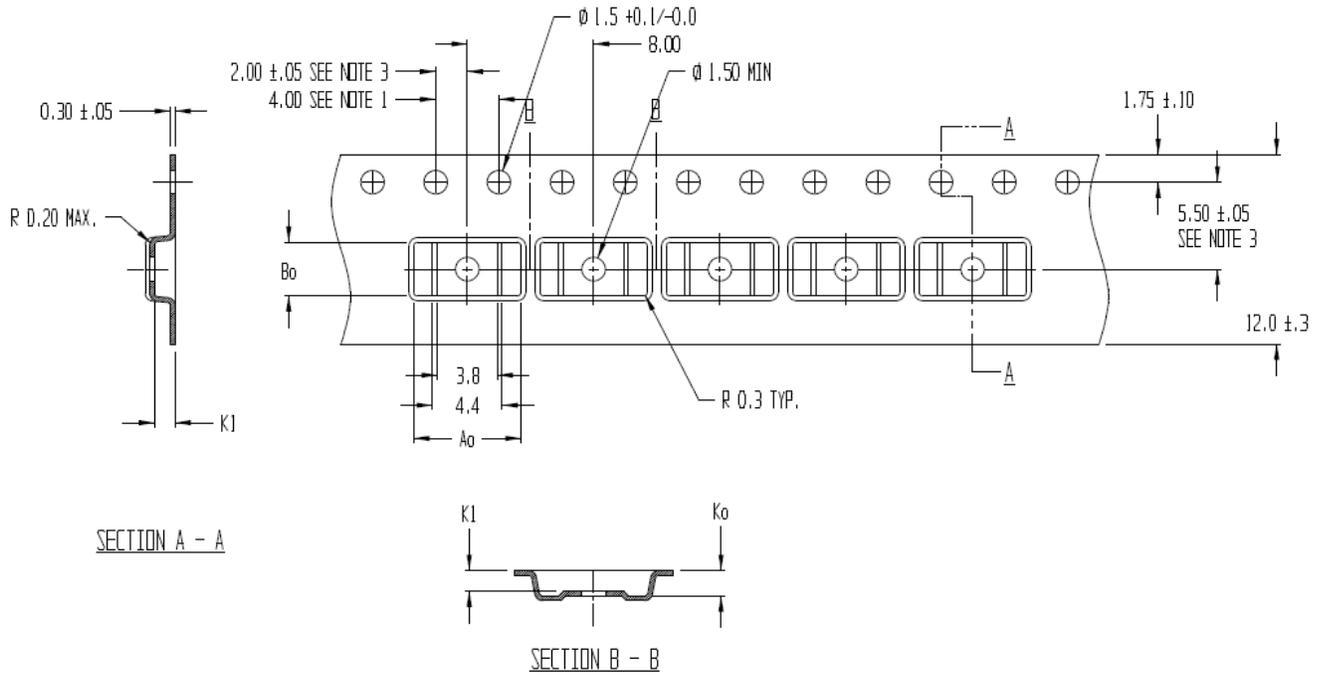

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ±0.2
2. CAMBER IN COMPLIANCE WITH EIA 481
3. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE

Ao = 6.80
 Bo = 3.40
 Ko = 1.60
 K1 = 1.30

Figure 47. TSSOP-8 Tape and Pocket Drawings

Package Information

Table 6. CT453 Package Information

Part Number	Package Type	# of Leads	Quantity per Reel	Lead Finish	MSL Rating ⁽²⁾	Operating Temperature ⁽³⁾	Device Marking ⁽⁴⁾
CT453-H06DRSN08	SOIC	8	3,000	Sn	3	-40°C to +125°C	CT453 06DR YYWWLL
CT453-A06DRSN08	SOIC	8	3,000	Sn	3	-40°C to +125°C	CT453 A06DR YYWWLL
CT453-H06DRTS08	TSSOP	8	3,000	Sn	1	-40°C to +125°C	CT453-06DR YYWWLL
CT453-A06DRTS08	TSSOP	8	3,000	Sn	1	-40°C to +125°C	CT453-A06DR YYWWLL
CT453-H06MRSN08	SOIC	8	3,000	Sn	3	-40°C to +125°C	CT453 06MR YYWWLL
CT453-A06MRSN08	SOIC	8	3,000	Sn	3	-40°C to +125°C	CT453 A06MR YYWWLL
CT453-H06MRTS08	TSSOP	8	3,000	Sn	1	-40°C to +125°C	CT453-06MR YYWWLL
CT453-A06MRTS08	TSSOP	8	3,000	Sn	1	-40°C to +125°C	CT453-A06MR YYWWLL
CT453-H12DRSN08	SOIC	8	3,000	Sn	3	-40°C to +125°C	CT453 12DR YYWWLL
CT453-A12DRSN08	SOIC	8	3,000	Sn	3	-40°C to +125°C	CT453 A12DR YYWWLL
CT453-H12DRTS08	TSSOP	8	3,000	Sn	1	-40°C to +125°C	CT453-12DR YYWWLL
CT453-A12DRTS08	TSSOP	8	3,000	Sn	1	-40°C to +125°C	CT453-A12DR YYWWLL
CT453-H12MRSN08	SOIC	8	3,000	Sn	3	-40°C to +125°C	CT453 12MR YYWWLL
CT453-A12MRSN08	SOIC	8	3,000	Sn	3	-40°C to +125°C	CT453 A12MR YYWWLL
CT453-H12MRTS08	TSSOP	8	3,000	Sn	1	-40°C to +125°C	CT453-12MR YYWWLL
CT453-A12MRTS08	TSSOP	8	3,000	Sn	1	-40°C to +125°C	CT453-A12MR YYWWLL
CT453-H24DRSN08	SOIC	8	3,000	Sn	3	-40°C to +125°C	CT453 24DR YYWWLL
CT453-A24DRSN08	SOIC	8	3,000	Sn	3	-40°C to +125°C	CT453 A24DR YYWWLL

Part Number	Package Type	# of Leads	Quantity per Reel	Lead Finish	MSL Rating ⁽²⁾	Operating Temperature ⁽³⁾	Device Marking ⁽⁴⁾
CT453-H24DRTS08	TSSOP	8	3,000	Sn	1	-40°C to +125°C	CT453-24DR YYWWLL
CT453-A24DRTS08	TSSOP	8	3,000	Sn	1	-40°C to +125°C	CT453-A24DR YYWWLL
CT453-H24MRSN08	SOIC	8	3,000	Sn	3	-40°C to +125°C	CT453 24MR YYWWLL
CT453-A24MRSN08	SOIC	8	3,000	Sn	3	-40°C to +125°C	CT453 A24MR YYWWLL
CT453-H24MRTS08	TSSOP	8	3,000	Sn	1	-40°C to +125°C	CT453-24MR YYWWLL
CT453-A24MRTS08	TSSOP	8	3,000	Sn	1	-40°C to +125°C	CT453-A24MR YYWWLL

- (1) RoHS is defined as semiconductor products that are compliant to the current EU RoHS requirements. It also will meet the requirement that RoHS substances do not exceed 0.1% by weight in homogeneous materials. Green is defined as the content of Chlorine (Cl), Bromine (Br) and Antimony Trioxide based flame retardants satisfy JS709B low halogen requirements of $\leq 1,000$ ppm.
- (2) MSL Rating = Moisture Sensitivity Level Rating as defined by JEDEC standard classifications.
- (3) Package will withstand ambient temperature range of -40°C to +125°C and storage temperature range of -65°C to +150°C.
- (4) Device Marking for CT453 in SOIC-8 is defined as CT453 xxZR YYWWLL where the first 2 lines = part number, and third line is YY = year, WW = work week and LL = lot code. In TSSOP-8 is defined as CT453 xxZR YYWWLL where the first line = part number, and second line is YY = year, WW = work week and LL = lot code.

Device Marking

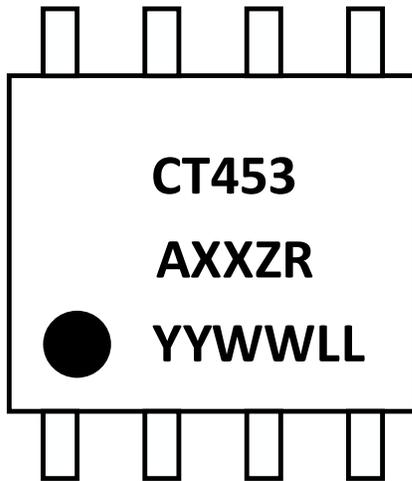


Figure 48. CT453 Device Marking for 8-lead SOIC Package

Row No.	Code	Definition
3	•	Pin 1 Indicator
1	CT453	Crocus Part Number
2	A	Automotive Identifier
2	XX	Maximum Field Rating
2	ZR	Polarity
3	YY	Calendar Year
3	WW	Work Week
3	LL	Lot Code

Table 7. CT453 Device Marking Definition for 8-lead SOIC Package


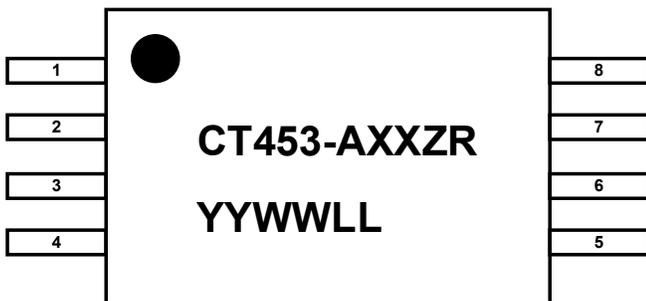


Figure 49. CT453 Device Marking for 8-lead TSSOP Package

Row No.	Code	Definition
1	•	Pin 1 Indicator
2	CT453	Crocus Part Number
2	A	Automotive Identifier
2	XX	Maximum Magnetic Field Rating
2	ZR	Magnetic Field Range
3	YY	Calendar Year
3	WW	Work Week
3	LL	Lot Code

Table 8. CT453 Device Marking Definition for 8-lead TSSOP Package

Part Ordering Number Legend

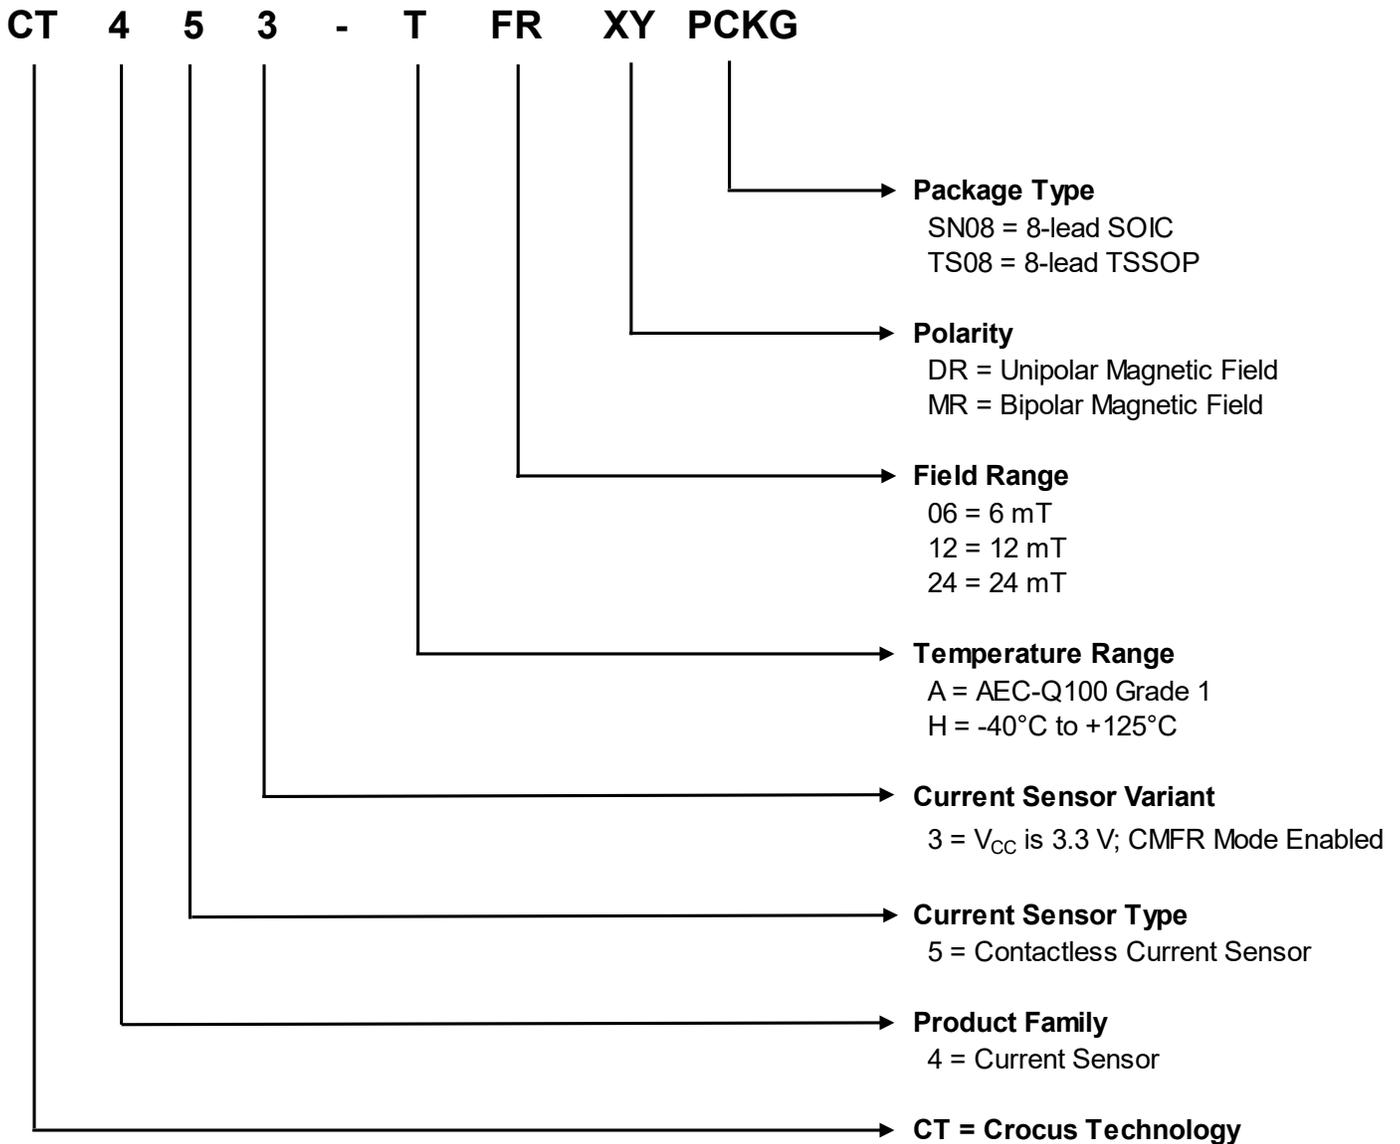

Disclaimer: The contents of this document are provided for informational purposes only. CROCUS TECHNOLOGY, INC. AND CROCUS TECHNOLOGY SA (COLLECTIVELY “CROCUS”) MAKE NO REPRESENTATIONS OR WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH RESPECT TO THE ACCURACY OR COMPLETENESS OF THE CONTENTS HEREIN, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Crocus reserves the right to make changes to the specifications and product descriptions, and/or to discontinue or make changes to its products at any time without notice. Crocus’s products have not been designed, tested, or manufactured for use and should not be used in applications where the failure, malfunction or inaccuracy of the Products carries a risk of death or serious bodily injury or damage to tangible property, including, but not limited to, life support systems, nuclear facilities, military, aircraft navigation or communication, emergency systems, harsh environments, or other applications with a similar degree of potential hazard.