





SCHEMATIC





P. C. B LAYOUT

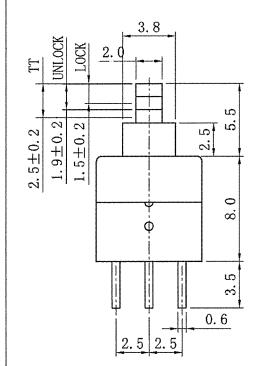

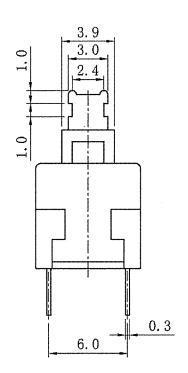

Rated Voltage	DC30V 0.1A
Withstand Voltage	AC250V 1 minute
Contact Resistance	\leqslant 50 m Ω
Operating Force	160 ± 80gf
Insulation Resistance	≥ 100 MΩ DC250V
Soldering Process	Hand Soldering
Mechanical Life	100,000 cycles
Electrical Life	10,000 cycles
Travel (PT)	1.5 ± 0.2 mm
Total Travel (TT)	2.5 ± 0.2 mm
Operating Temp,	-25 ℃ ~ + 65 ℃
Ambient Humidity Used	< 85%RH

NOTE: TOLERANCES UNLESS OTHERWISE SPECIFIED: ± 0.3(mm).

RoHS Compliant

INDUSTRIES
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

Date Drawn: 3-21-12

Rev. 1

Unit: mm

CW P/N:

Checked G. Guld

1 Added Button to title & Operating Temp. was Operating Temper in chart. 11-12-12.

Title:

PUSH BUTTON SWITCH

GPBS800L

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Pushbutton Switches category:

Click to view products by CW Industries manufacturer:

Other Similar products are found below:

8940K2012 LW1L-M1C10V-A LW1L-M1C70-A LW2L-A1C20M-GD LW2L-M1C20M-A 60324L M22-D-R-GB0/K11 M7E-HRN2
67021K512 67081K512X 701PB580 7199K101 810K12910 810KSV30B MML21EA2ADK MML21KA3ABK MML23KA3AC05K-001
MML23KW3AA01W 8418K2 8442K3 8450K1 860K11911T01A 861901 861K11911T01A07 861K13810T00A14 861K13911
8646AB6X718UL 8646ABUL 9001KXRK 907AYY100 PMHD155A1 9533CD4+U574+U4922 95-414.000 99-450.837 99-453.837
PV3H2B0NN-341 1203MRA A22NZBGANGA A22NZBNANGA A22NZMPATRA A2PMA1X03EC56 A3A-5123-02 A3A-7140 A3A-7310 A3A-7340 A3U-TMW-A2C-5M A595 12037A2ULCSA ABD122N-B 1211390004