

Drum Core Surface Mount Unshielded Power Inductors

◆ Features

1. Excellent solderability and high heat resistance.
2. Excellent terminal strength construction.
3. Packed in embossed carrier tape and can be used by automatic mounting machine.




◆ Applications

Power supply for VCR,OA equipment ,LCD television set notebook, DC to DC converters, DC to AC inverters etc.



◆ Shape & Dimensions

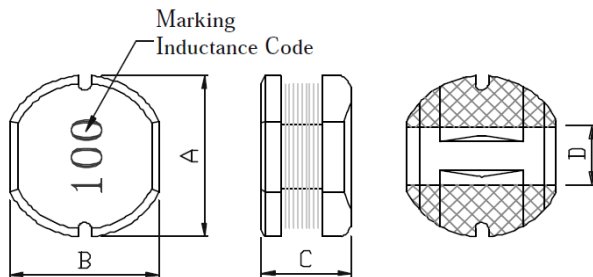

◆ Lead Free Part Numbering

CMLF 0403 - 100 M T T


(1) (2) (3) (4) (5) (6)

- (1) Series Type
- (2) Dimension: A X C
- (3) Inductance: 2R2=2.2 μ H ;
100=10 μ H; 101=100 μ H
- (4) Inductance Tolerance: K=±10%, M=±20%
- (5) Company Code
- (6) Packaging : packed in embossed carrier tape

Series	A (mm)	B (mm)	C (mm)	D (mm)
CMLF0403	4.5±0.3	4.0±0.3	3.2±0.3	1.2 Typ.

◆ Material

Item	Material
a. Core	Ferrite DR Core
b. Wire	Enamelled Copper wire
c. Terminal	Ag+Sn+SnPb

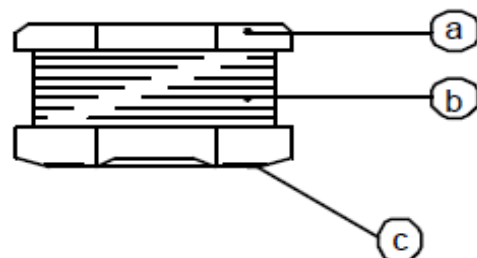

◆ Specification

Part Number	Inductance (μ H)	DCR (Ω) max.	IDC (A) max.
CMLF0403 Series:			
CMLF0403-1R0MTT	1.00 $\pm$ 20%	0.033	3.80
CMLF0403-1R8MTT	1.80 $\pm$ 20%	0.042	2.91
CMLF0403-2R2MTT	2.20 $\pm$ 20%	0.047	2.60
CMLF0403-3R3MTT	3.30 $\pm$ 20%	0.058	2.15
CMLF0403-3R9MTT	3.90 $\pm$ 20%	0.076	1.98
CMLF0403-4R7MTT	4.70 $\pm$ 20%	0.094	1.70
CMLF0403-5R6MTT	5.60 $\pm$ 20%	0.101	1.60
CMLF0403-6R8MTT	6.80 $\pm$ 20%	0.117	1.41
CMLF0403-8R2MTT	8.20 $\pm$ 20%	0.132	1.26
CMLF0403-100MTT	10.0 $\pm$ 20%	0.182	1.15
CMLF0403-120MTT	12.0 $\pm$ 20%	0.210	1.05
CMLF0403-150MTT	15.0 $\pm$ 20%	0.235	0.92
CMLF0403-220MTT	22.0 $\pm$ 20%	0.378	0.76
CMLF0403-330MTT	33.0 $\pm$ 20%	0.540	0.64
CMLF0403-390MTT	39.0 $\pm$ 20%	0.587	0.59
CMLF0403-470MTT	47.0 $\pm$ 20%	0.844	0.54
CMLF0403-560MTT	56.0 $\pm$ 20%	0.937	0.50
CMLF0403-680MTT	68.0 $\pm$ 20%	1.117	0.46
CMLF0403-820MTT	82.0 $\pm$ 20%	1.345	0.45
CMLF0403-101KTT	100.0 $\pm$ 10%	1.520	0.44
CMLF0403-121KTT	120.0 $\pm$ 10%	1.800	0.43
CMLF0403-151KTT	150.0 $\pm$ 10%	2.000	0.42
CMLF0403-181KTT	180.0 $\pm$ 10%	3.200	0.38
CMLF0403-221KTT	220.0 $\pm$ 10%	3.400	0.36
CMLF0403-271KTT	270.0 $\pm$ 10%	3.900	0.34
CMLF0403-331KTT	330.0 $\pm$ 10%	5.300	0.28
CMLF0403-391KTT	390.0 $\pm$ 10%	5.900	0.24
CMLF0403-471KTT	470.0 $\pm$ 10%	6.800	0.21
CMLF0403-561KTT	560.0 $\pm$ 10%	8.500	0.20
CMLF0403-681KTT	680.0 $\pm$ 10%	10.000	0.18
CMLF0403-821KTT	820.0 $\pm$ 10%	13.400	0.15

◆ **Note**

- (1) Inductance is measured by LCR-meter 4284A/4286A (HP) or equivalent.
- (2) Inductance test condition: CMLF0504: 1.0 μ H~8.2H:7.96MTTHz/0.5V,
10.0 μ H~82.0 μ H:2.52MTTHz/0.5V, More than 100.0 μ H at 1.0KTTHz/1.0V.
- (3) DC Resistance is measured by HP4338B Milliohms Meter or equivalent.
- (4) Rated current is measured by LCR-meter 3260B (WK) & DC Bias 3265B(WK) at 1.0KTTHz/1.0V.
- (5) Maximum allowable DC current is that which causes a 10% inductance reduction from the initial value, or coil temperature to rise by 40°C, whichever is smaller. (Reference ambient temperature 20°C).
- (6) Operating temperature -55°C ~ +125°C.
- (7) All test data is referenced to 25°C ambient.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Cybermax](#) manufacturer:

Other Similar products are found below :

[CR32NP-151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#) [CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#)