

承認書

SPECIFICATION FOR APPROVAL

Customer Name: 2144

Description Part No.:

Customer Part No.:

Sample No.:

DDY Part No.: SFE6028A-

DRAWING		
MADE	CHECKED	APPROVED
王海玲	赵万虎	肖中华
DATE: 2023年5月21日		

CUSTOMER APPROVE



惠州市德立电子有限公司
HUI ZHOU DE LI ELECTRONICS CO., LTD

廣東省博羅縣洲際工業園梅園三路
NO.3 MEI YUAN ROAD,ZHOU JI INDUSTRIAL AREA,BOLUO COUNTY
GUANGDONG

電話：15970768093 13640935893

傳真：0752-6207969

郵編：516100

Http: www.ddycoils.com

2



1. Scope

This specification applies to the SFE6028 Series of wire wound SMD power inductor.

2.PRODUCT IDENTIFICATION

SFE 6028 □ - 1R5 □ - □

(1) (2) (3) (4) (5) (6) (7)

(1) .Series name (产品品名)

(2) .Dimensions (产品尺寸)

(3) .Appearance shape (产品形状)

(4) .Inductance value (电感值)

A: dodecagon (十二边形) : B: octagon (八边形)

1R5: 1.5 μ H 221: 220 μ H

(5) Tolerance (误差值)

(6) .Identification code (标识码)

M: $\pm 20\%$; N: $\pm 30\%$

(7) .Environmental status (环保状态)

LF- Lead free; HF-Halogen free; FP-Free red phosphor.


3. Electrical Characteristics

Please refer to Item 5.

- 1). Operating temperature range (individual chip without packing): $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$.
- 2). Storage temperature range (packaging conditions): $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$ and RH 70% (Max.).
- 3). Rating DC current: Temperature rise(ΔT) is 40°C approximately at Irms.
- 4). Saturation DC current: Inductance drop approximately 30% of L_0 at Isat.

4. Shape and Dimensions (Unit:mm)

shape: A

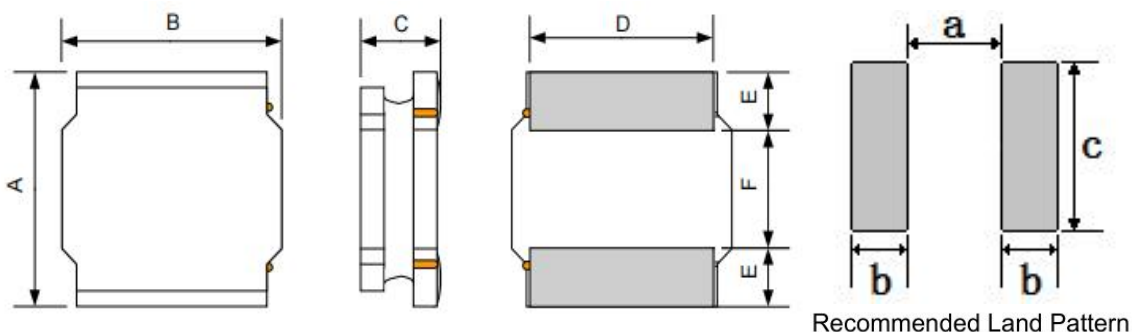

Series	A	B	C	D	E	F	a Typ.	b Typ.	c Typ.
SFE6028A	6.0 $\pm$ 0.3	6.0 $\pm$ 0.3	2.8 Max.	4.9 $\pm$ 0.3	1.9 Typ.	2.2 Typ	2.0	2.1	5.1




5. Electrical Characteristics

NO.	DDY CODE	Part Number	Inductance	DC Resistance		Isat(A)		Irms(A)		Marking
			100KHz/1.0V	Max.	Typ.	Max.	Typ.	Max.	Typ.	
		Units	(uH)	Ω	Ω	A	A	A	A	
1		☐ SFE6028A-1R0N-F-HF	1.0±30%	0.016	0.012	7.00	8.00	5.20	5.70	1R0
2		☐ SFE6028A-1R2N-F-HF	1.2±30%	0.017	0.015	6.40	7.50	4.58	5.00	1R2
3		☐ SFE6028A-1R5N-F-HF	1.5±30%	0.017	0.015	6.00	6.60	4.58	5.00	1R5
4		☐ SFE6028A-2R2M-F-HF	2.2±20%	0.026	0.020	5.10	5.60	4.00	4.10	2R2
5		☐ SFE6028A-2R7M-F-HF	2.7±20%	0.033	0.028	4.15	4.15	3.75	4.10	2R7
6		☐ SFE6028A-3R3M-F-HF	3.3±20%	0.033	0.028	4.15	4.50	3.50	3.80	3R3
7		☐ SFE6028A-4R7M-F-HF	4.7±20%	0.039	0.032	3.00	3.30	3.08	3.40	4R7
8		☐ SFE6028A-5R6M-F-HF	5.6±20%	0.061	0.051	3.20	3.50	2.60	2.80	5R6
9		☐ SFE6028A-6R8M-F-HF	6.8±20%	0.061	0.051	2.60	3.00	2.40	2.60	6R8
10		☐ SFE6028A-8R2M-F-HF	8.2±20%	0.072	0.062	2.30	2.70	2.25	2.50	8R2
11		☐ SFE6028A-100M-F-HF	10.0±20%	0.094	0.073	2.20	2.40	2.00	2.40	100
12		☐ SFE6028A-150M-F-HF	15.0±20%	0.163	0.130	1.75	1.90	1.45	1.60	150
13		☐ SFE6028A-180M-F-HF	18.0±20%	0.172	0.141	1.52	0.80	1.45	1.60	180
14		☐ SFE6028A-220M-F-HF	22.0±20%	0.182	0.153	1.45	1.80	1.40	1.60	220
15		☐ SFE6028A-330M-F-HF	33.0±20%	0.241	0.220	1.35	1.50	1.22	1.30	330
16		☐ SFE6028A-470M-F-HF	47.0±20%	0.410	0.310	1.15	1.30	1.06	1.10	470
17		☐ SFE6028A-560M-F-HF	56.0±20%	0.449	0.378	1.05	1.20	0.90	1.05	560
18		☐ SFE6028A-680M-F-HF	68.0±20%	0.468	0.425	0.80	0.95	0.86	0.95	680
19		☐ SFE6028A-101M-F-HF	100.0±20%	0.810	0.680	0.65	0.71	0.70	0.77	101
20		☐ SFE6028A-121M-F-HF	120.0±20%	1.150	0.960	0.55	0.60	0.60	0.65	121
21		☐ SFE6028A-221M-F-HF	220.0±20%	1.560	1.370	0.38	0.40	0.40	0.45	221
22		☐ SFE6028A-331M-F-HF	330.0±20%	2.850	2.250	0.35	0.40	0.40	0.44	331
23		☐ SFE6028A-471M-F-HF	470.0±20%	3.580	3.110	0.32	0.37	0.35	0.40	471
24		☐ SFE6028A-102M-F-HF	1000.0±20%	7.540	5.980	0.18	0.22	0.22	0.23	102
25										



6. Structure (The structure of product.)



NO	Components	Material
①	Core	Ni-Zn Ferrite
②	Wire	Polyurethane system enameled copper wire
③	Magnetic Glue	Epoxy resin and magnetic powder
④	Plating	AgNiSn or FeNiCu + Sn Alloy

7. PACKAGING(unit: mm)

1.包装类型：编带装


2.包装尺寸：




13" 盘




7" 盘

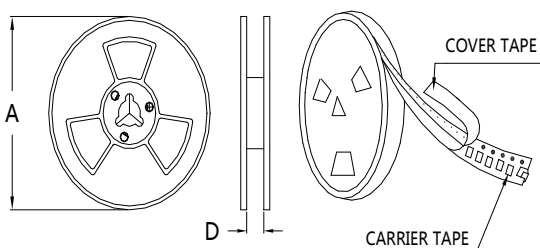

	13" 盘	7" 盘
A	$\Phi 330 \pm 2.0$	$\Phi 178 \pm 2.0$
D	12.5/16.5	

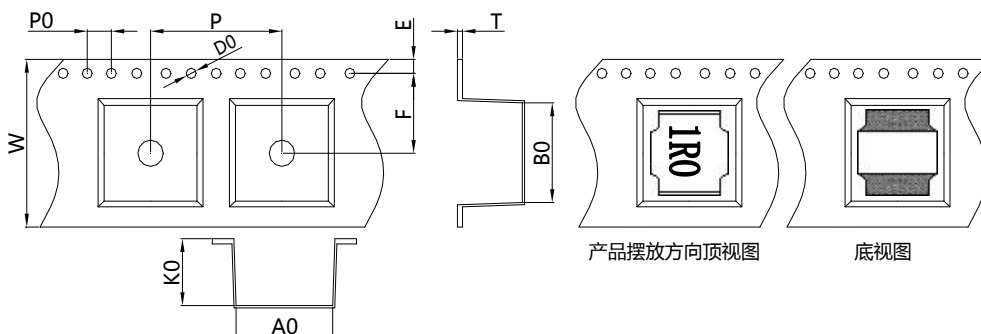

Size	Item	W	A0	B0	K0	P	T	E	F	D0	P0
√	6028 (mm)	12.0±0.3	6.5±0.15	6.5±0.15	3.0±0.2	8.0±0.3	0.4±0.1	1.75±0.1	5.5±0.1	1.5±0.1	4.0±0.1
	6028 (mm)	16.0±0.3	6.5±0.15	6.5±0.15	3.0±0.2	8.0±0.3	0.4±0.1	1.75±0.1	7.5±0.1	1.5±0.1	4.0±0.1




每卷	2000	Pcs
----	------	-----

每盒	4卷,共	8000	Pcs
----	------	------	-----

每箱	3盒,共	24000	Pcs
----	------	-------	-----



8. RELIABILITY TEST

No.	TEST ITEM	SPECIFICATION	TEST CONDITION
1	High temperature Storage test	1. No significant defects in appearance. 2. $\Delta L/L \leq 10\%$ 3. $\Delta DCR/DCR \leq 10\%$	Temperature: $125^{\circ}\text{C} \pm 5^{\circ}\text{C}$ (N: Follow the product specification for the setting.) Time : 96 ± 2 hours Place the samples for one hour at room temperature and test them within two hours
2	Low temperature Storage test	1. No significant defects in appearance. 2. $\Delta L/L \leq 10\%$ 3. $\Delta DCR/DCR \leq 10\%$	Temperature: $-40^{\circ}\text{C} \pm 5^{\circ}\text{C}$ (M: Follow the product specification for the setting) Time : 96 ± 2 hours Place the samples for one hour at room temperature and test them within two hours.
3	Humidity test	1. No significant defects in appearance. 2. $\Delta L/L \leq 10\%$ 3. $\Delta DCR/DCR \leq 10\%$	Temperature: $40 \pm 2^{\circ}\text{C}$, Humidity: $93 \pm 3\% \text{RH}$ Time : 96 ± 2 hours Place the samples for one hour at room temperature and test them within two hours
4	Solderability test	Terminals must have 95% minimum solder coverage	1. Dip pads in flux then dip in solder pot at $245 \pm 5^{\circ}\text{C}$ for 5 second. 2. Solder: lead free 3. Flux: rosin flux
5	Heat endurance of flow soldering	1. No significant defects in appearance. 2. $\Delta L/L \leq 10\%$ 3. $\Delta DCR/DCR \leq 10\%$	1. Refer to the above reflow curve and go through the reflow for twice. 2. The peak temperature : $260 \pm 0/-5^{\circ}\text{C}$
6	Vibration test	1. No significant defects in appearance. 2. No short and no open.	Apply frequency 10~55~10Hz and amplitude 1.5mm, 1 min/cycle in X Y and Z direction for 2 hours each. (total 6 hours)
7	Terminal strength push test	1. Applied force: 10N Duration: 10sec 2. Solder paste thickness: 0.12mm 3. Meet the above requirements without any loose termina	Solder the test samples to the PCB through 245°C reflow, apply a standard force on the side of the test samples for 10 seconds. 


9. SOLDERING CONDITIONS

Applicable soldering process to the products is refl.

9.1 Soldering Materials

- (2) Flux: Use rosin-based flux, but not strongly acidic flux (with chlorine exceeding 0.2wt%). Do not use water-soluble flux.

9.2 Reflow Soldering Profile

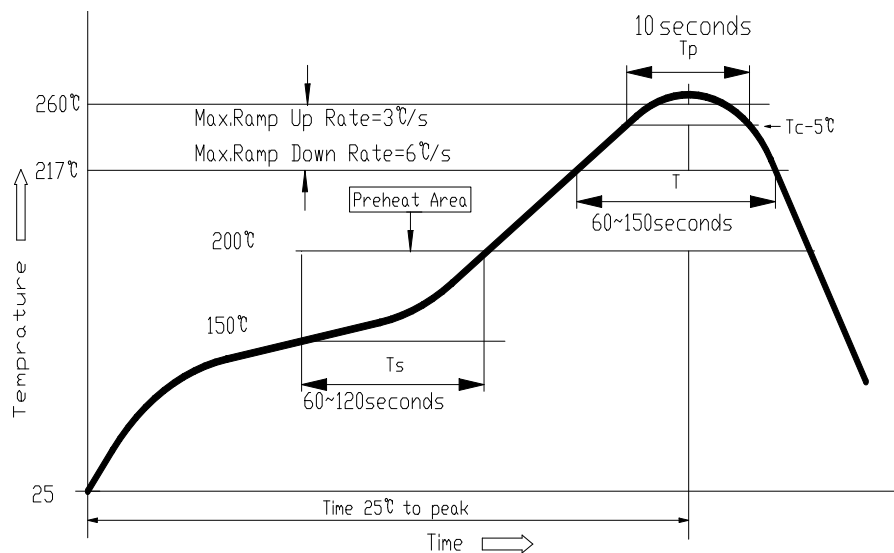

9.3 Soldering Iron

Reworking with electric soldering iron must preheating at 150°C for 1 minute is required, and do not directly touch the core with the tip of the soldering iron. The reworking soldering conditions are as follows.

- ① Temperature of soldering iron tip: 350°C ;
- ② Soldering iron power output: $\leq 30\text{W}$;
- ③ Diameter of soldering iron end: $\leq 1.0\text{mm}$;
- ④ Soldering time: $< 3\text{ s}$



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [DDY](#) manufacturer:

Other Similar products are found below :

[CR32NP-100KC](#) [70F224AI](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#)
[PE-53601NL](#) [PE-53602NL](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-R47-R](#) [HC8-1R2-R](#)
[HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-4R7M](#) [RCP1317NP-391L](#) [DH2280-4R7M](#) [DS1608C-106](#) [B10TJ](#) [B82498B3101J000](#) [ELJ-](#)
[RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#)
[1812LS-224XJ](#) [1812LS-563XJ](#) [1812LS-683XJ](#) [1812LS-824XJ](#) [NIN-FB101JTR110F](#) [NIN-FB471JTR62F](#) [NIN-FC1R5JTR220F](#) [NIN-](#)
[HCR15JTRF](#) [NIN-HCR33JTRF](#) [NIN-HDR22JTRF](#) [NIN-HDR82JTRF](#) [NIN-HK2N7STRF](#) [NIN-PA150KTR370F](#) [NIN-PB100KTR550F](#)