

#### • OFFERING THE BEST

# PPE SOLUTION AT THE BEST PRICE

From the most technical need to the most standard, Delta Plus offers PPE solutions offering the best adaptation to the work area.



LISTEN TO THE USER









**EVALUATE RISKS** AND NEEDS

THE CUSTOMISED PPE SOLUTION

#### To easily find the best PPE solution: There are 3 lines of research needed



ANTISTATIC



NOISE





SHOCK



FALL





CUTTING/ PERFORATION

COLD/

WEATHER







CHEMICAL











UV/IR

ELECTRICAL

HIGH VIS



AGRICULTURE/GREEN AREAS

Farmers - Woodcutters - Gardeners ..



CONSTRUCTION/ **CIVIL ENGINEERING** 

Structural work - Construction



SECOND WORK/CRAFTSMAN

Electricians - Plumbers - Heating specialists - Painters ...



**HEAVY INDUSTRY** 

Metal construction - Petrochemical ...



LIGHT INDUSTRY

Automotive - Aerospace - Industrial Subcontracting ...



SERVICES/LOGISTICS

Logistics - Transportation - Airport - Distribution ...



HYGIENE ENVIRONMENT

Food industry - Pharmacy - Hospitals - Restaurants Communities ..



OIL/GAS

Petrochemical industry - Refinery - Off shore - Exploration



MINING Mines (exploration, extraction ...) - Stone-pit

WIND ENERGY

#### PREMIUM

High Tech products for specialised uses

#### **EVOLUTION**

Powerful multi-purpose products

#### **ESSENTIAL**

Standard multi-purpose products

# SUMMARY THE GLOBAL OFFER

001 • HEAD PROTECTION	
<b>066</b> • HAND PROTECTION	
140 • DISPOSABLE WEAR	
160 • WORK WEAR	
204 • OUTDOOR WEAR	
244 • TECHNICAL WEAR	
268 • FOOT PROTECTION	
308 • FALL PROTECTION	
374 • PACKAGING	
376 • MERCHANDISING	
380 • ALPIC - DPG TRAINING	




**381 • TECHNICAL INFORMATION** 

409 • GLOSSARY


**423 • INDEX** 

# DELTA PLUS A DYNAMIC HISTORY


Delta Plus's mission is to protect the man at work. To achieve it, the **Delta Plus team** has mobilized its know-how, its imagination, adaptability and pioneering spirit for over 40 years.

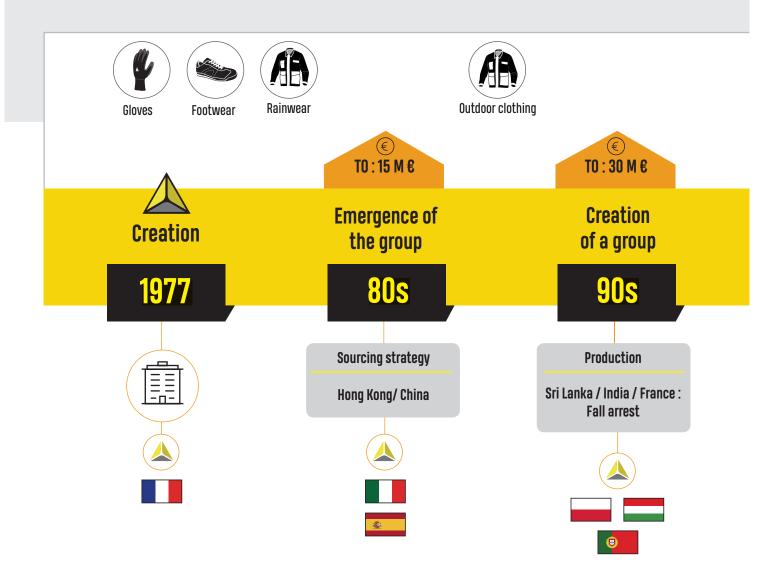

### Head to toe for all: 5 families of products

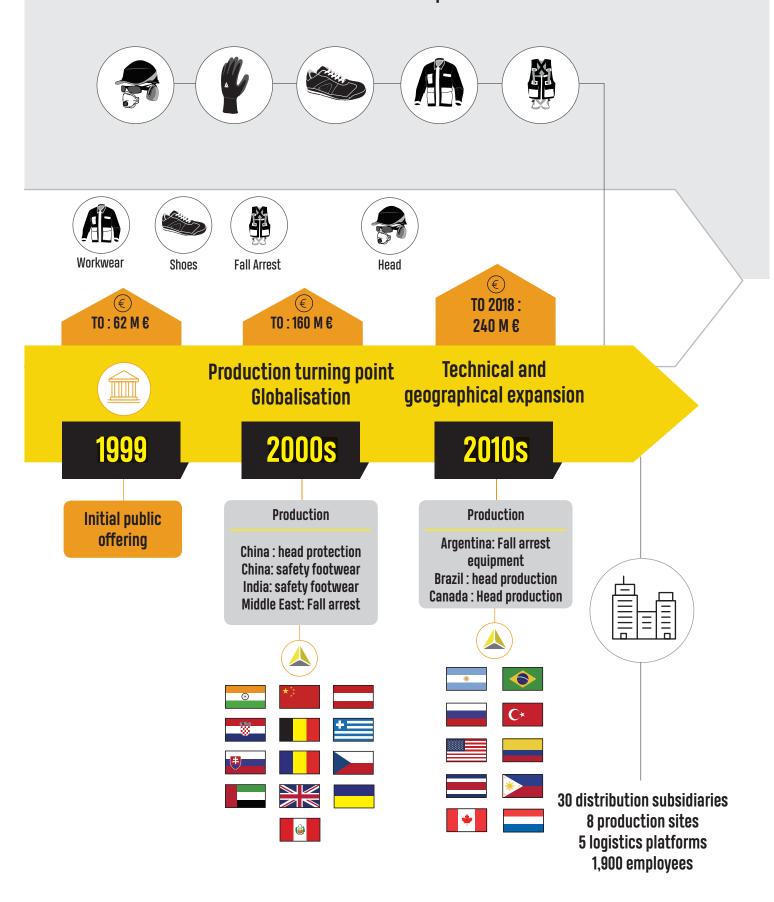

# DELTA PLUS THE MISSION

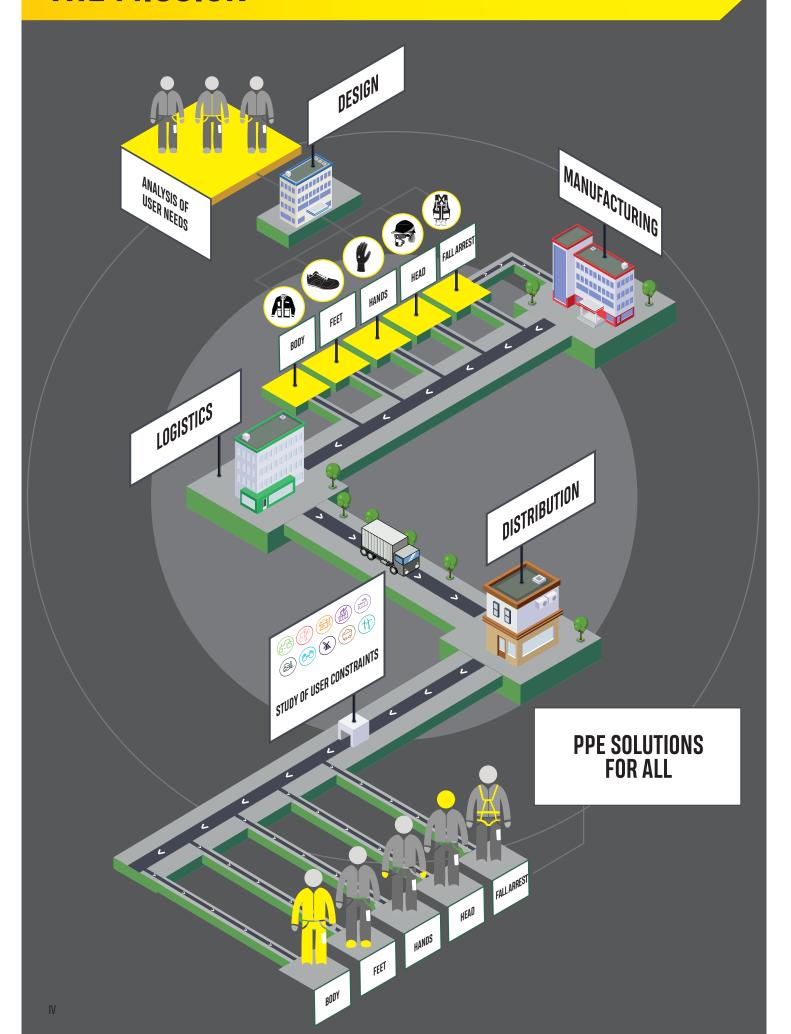

# THE MULTI-SPECIALIST BRAND -

SUPPLY

A UNIQUE DIFFERENTIATED OFFERING AROUND THE CONCEPTS "VALUE PRODUCTS" AND **GLOBAL OFFER** 

**SERVICE** 

A SERVICE THAT SETS A STANDARD IN THE PROFESSION




**PROXIMITY** 

**CUSTOMER PROXIMITY WITH THE DAILY SUPPORT OF DISTRIBUTORS** AND USERS THROUGH OUR EXPERTS.

# - DELTA PLUS THE CSR APPROACH

Building on 10 years of commitment, we are intensifying our efforts to improve our impact on society and the environment. In addition, we obtained ISO14001 certification level 1 in 2018.

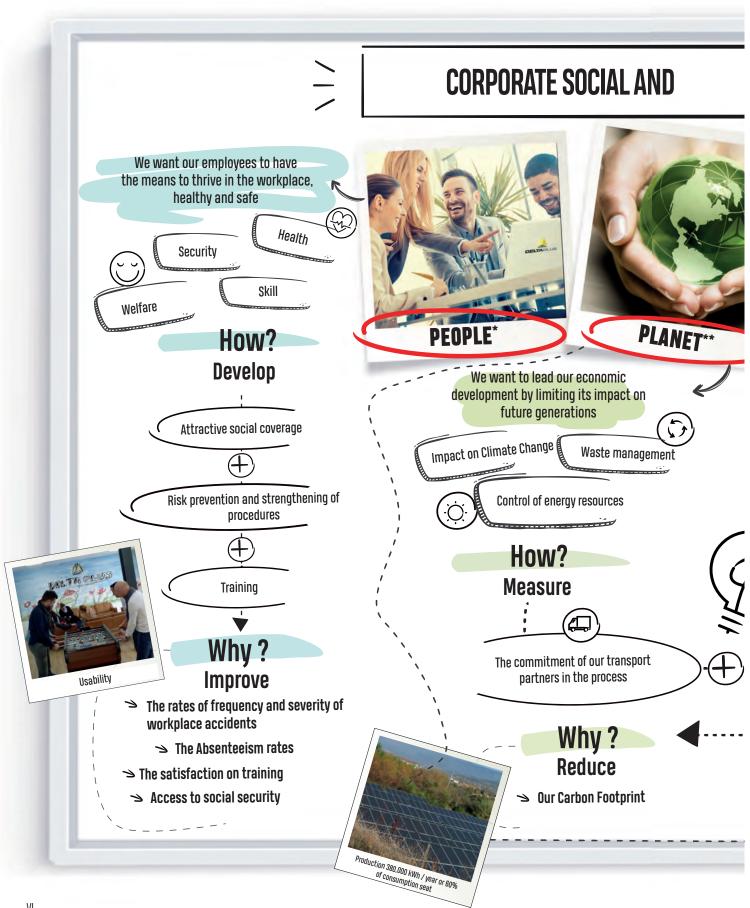



# DELTA PLUS NEAR YOU









**TRAINING** 

**HOTLINES** 

**JOINT VISITS** 

TECHNICAL CONSULTATION



# A GLOBAL DISTRIBUTION NETWORK: THE DELTA PLUS OFFER ACCESSIBLE ANYWHERE



30 distribution subsidiaries




Our Products are in more than 140 countries



# DELTA PLUS THE WEBSITE



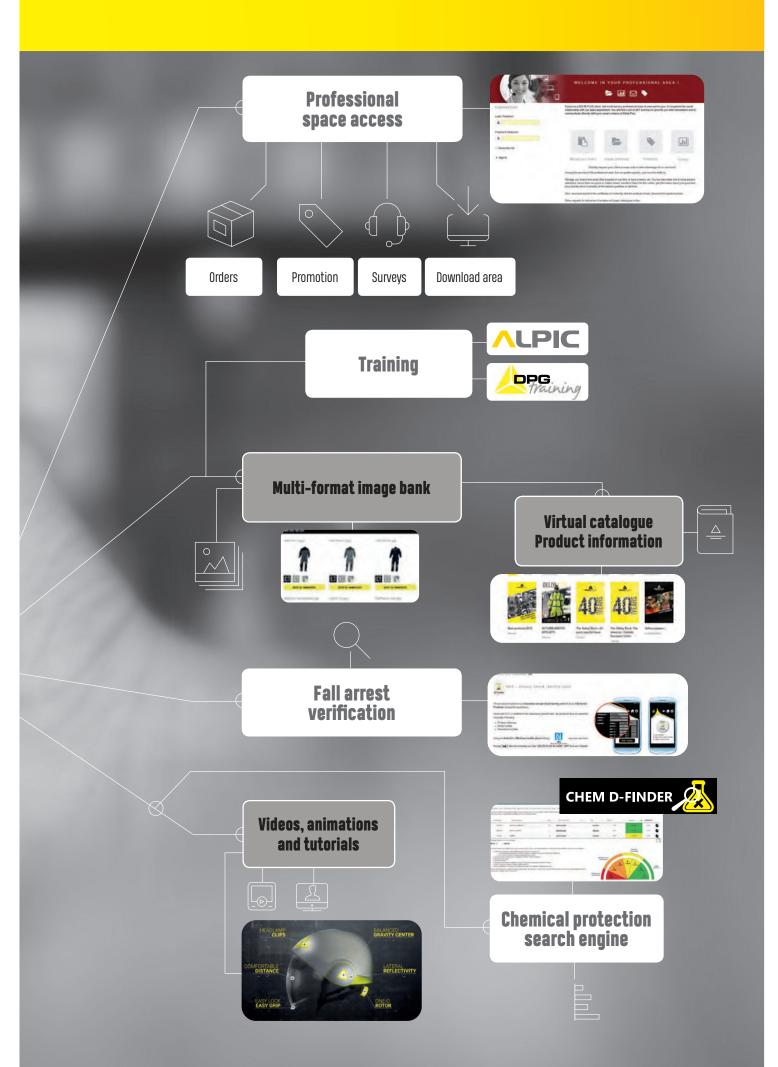

# DELTA PLUS AN INNOVATIVE OFFERING

Delta Plus offers **PPE solutions that provide the best fit** for the workplace, from the most technical to the most standard requirements












Listening to the customer


Estimating his risks and needs

The right PPE solution

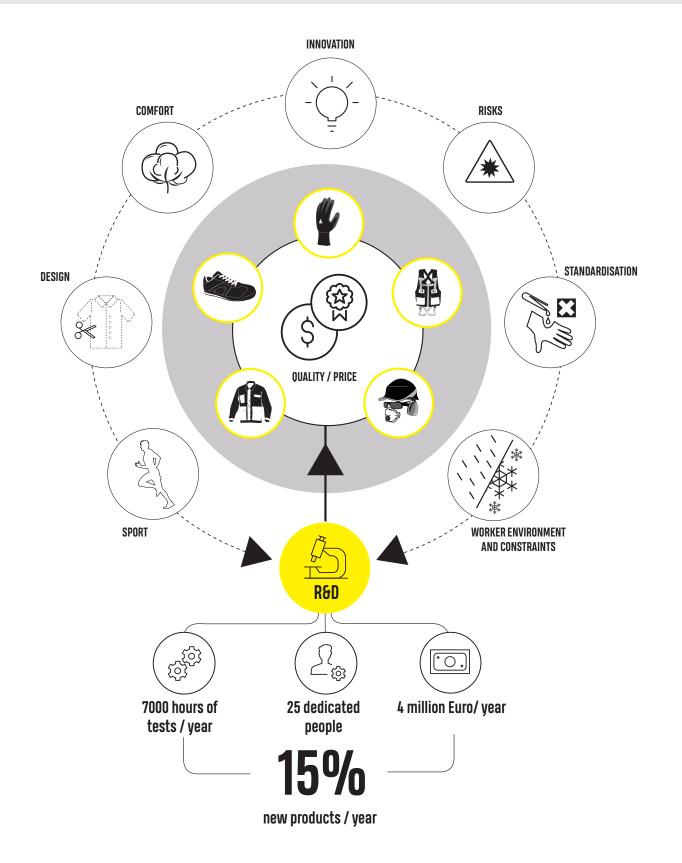

# A SUCCESSFULLY INTEGRATED SUPPLY CHAIN

Through this organisation, **DELTA PLUS offers you access to its range wherever you are in the world** with the most efficient service level on the worldwide PPE market.

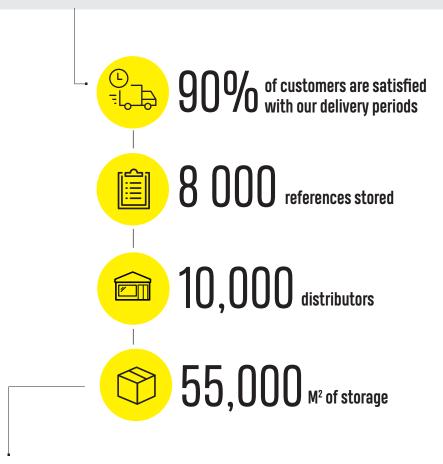

# **EUROPE** 30,000 M<sup>2</sup>



#### 3 logistics platforms

- France (Apt)
- Poland (Siemianowice Śląskie)
- United Kingdom (Manchester)

#### 2 intermediate warehouses

- Croatia (Zagreb)
- Greece (Markopoulo Attica)

#### OUTSIDE EUROPE 10.000 M<sup>2</sup>



#### 12 intermediate warehouses

- Argentina (Buenos Aires)
- Brazil (Sao Paulo)
- Canada (Toronto)
- Colombia (Bogota)
- Peru (Lima)
- Costa Rica (San José)
- USA (Shelton CT)
- Philipines (Manila)
- United Arab Emirates (Dubai)
- Russia (Moscow)
- Ukraine (Kiev)
- Turkey (Istanbul)

#### ASIA 15.000 M<sup>2</sup>



#### 2 logistics platforms

- China (Wujiang)
- India (Calcutta)
- Deliveries on the 2 local markets
- Intermediate storage of production
- Optimisation of lead times for European platforms
- Direct shipments of complete multi-product containers worldwide

# MADE IN DELTA PLUS

Delta Plus's organisation enables it to develop its ranges by optimising its industrial strategy, between its **8 production sites** and its partner's factories.



# **QUALITY AND INTEGRATED OR CONTROLLED PRODUCTION**

**Delta Plus ensures the quality and manufacturing control of its products** whether in their own factories or their partners' by imposing:


- Compliance with their common manufacturing charter
- The constraints of their technical specifications
- A series of ongoing tests and the end of production (our internal laboratories have a fleet of almost 200 machines and test equipment)

All the group production sites operate under the certified quality system ISO 9001.

All the concerned sites are certified according to the module D of the European Regulation 2016/425 (PPE Category III disabling or fatal risks).

## An increasingly integrated manufacture:
















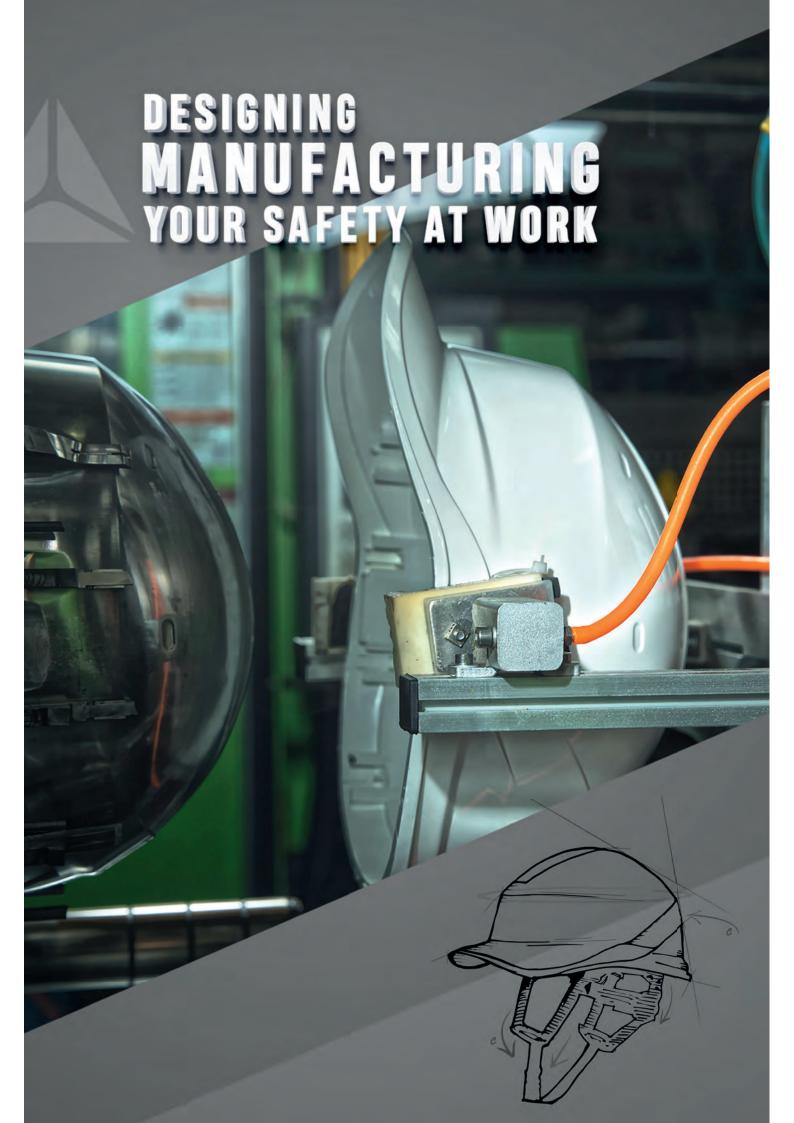

# **HEAD PROTECTION**



#### EYEWEAR PROTECTION

- 004 Safety glasses Help with choice
- 005 Safety glasses
- 020 Safety goggles
- 022 Welding Help with choice
- 023 Welding
- 026 Safety visors- Help with choice
- 027 Safety visors

#### SKULL PROTECTION

- 032 Safety helmets Help with choice
- 033 Safety helmets
- 041 Helmets accessories Marking
- 042 Bump cap

#### **HEARING PROTECTION**

- 044 Ear defenders Help with choice
- 045 Ear defenders
- 049 Reusable earplugs
- 050 Disposable earplugs

#### RESPIRATORY PROTECTION

- 052 Help with choice
- 054 Disposable respiratory
- 061 Reusable respiratory


#### 382 • TECHNICAL INFORMATION





SAFETY VISORS

# **HELP WITH CHOICE**

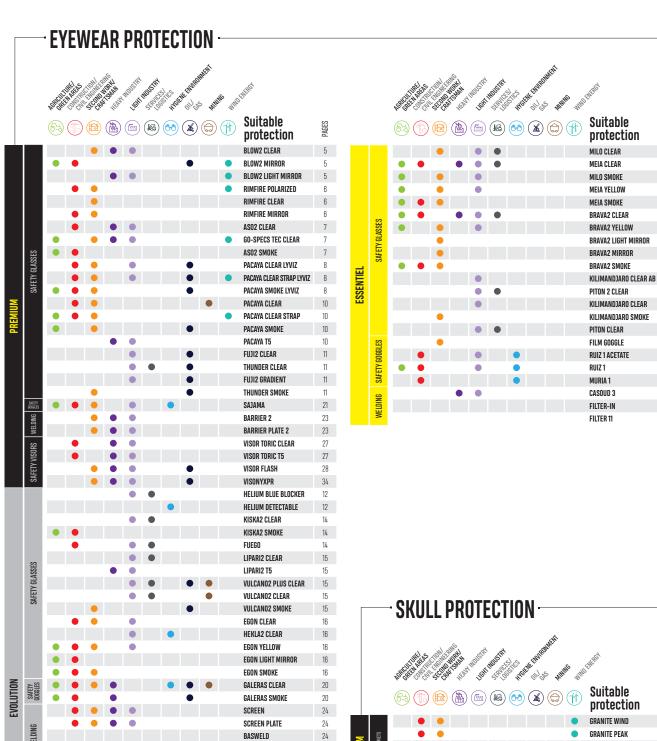

		SKU	LL PRO	OTEC					
		ERGEL A		MUSTR' MUST	SIRY HIGES ILES	EN CHILDRENGE WE	Me White	the contract of the contract o	
		6-3 <b>(T</b> )			$\sim$		1	Suitable protection	PAGES
		•	•				•	GRANITE WIND	33
≖	METS	•	•				•	GRANITE PEAK	33
	SAFETY HELMETS		•			•		ONYX	34
PREMI	SAR	•	•			•		BASEBALL DIAMOND V	36
-		•	•			•		BASEBALL DIAMOND V UP	36
	BUMP CAP	•		•				KAIZIO	42
3	METS	•						QUARTZ UP IV	38
EVOLUTION	SAFETY HELMETS	•						QUARTZ UP III	38
9	SAFI	•	•					SUPER QUARTZ	39
ш	BUMP CAP			• •				AIR COLTAN	43
	ço							FORESTIER 3	39
핕	SAFETY HELMETS	• •						QUARTZ I	40
ESSENTIEL	SAFETY	•						ZIRCON 1	40
ESS	- 0,	•						WINTER CAP	40
	BUMP CAP			•				COLTAN	43

CASOUD2HE

TOBA 3 T5

VISORPC

VISORG

BALBI 2 VISOR-H

PICO 2

VISOR-U Visor-Hold Mini

VISOR T-GUARD


VISORPC MINI

VISORG MINI


VISOR HOLDER





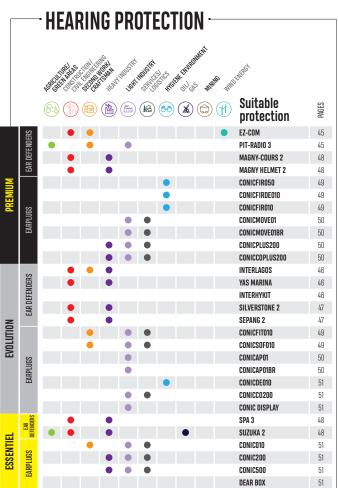



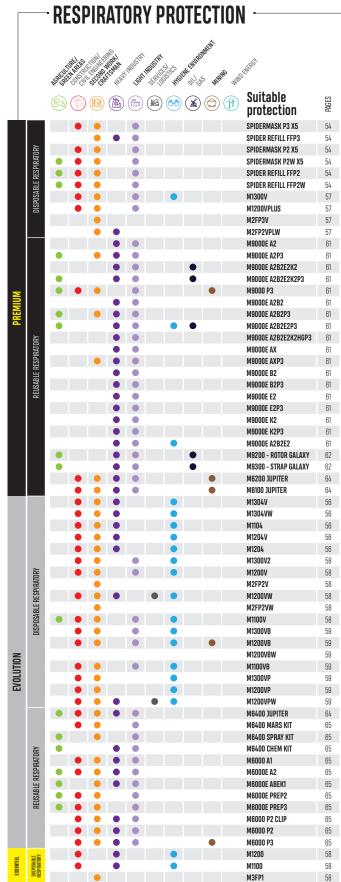

#### EYEWEAR PROTECTION

# **HELP WITH CHOICE**



— Glasses

- INDOOR OUTDOOR OUTDOOR / INDOOR

					PREMIUM						<b>≜</b> UU1U	UUR / INDUUR
	BLOW2 CLEAR	BLOW2 MIRROR	BLOW2 LIGHT MIRROR	RIMFIRE CLEAR	RIMFIRE POLARIZED	RIMFIRE MIRROR	ASO2 CLEAR	ASO2 SMOKE	GO-SPECS TEC CLEAR	PACAYA CLEAR LYVIZ	PACAYA CLEAR STRAP LYVIZ	PACAYA SMOKE LYVIZ
	0					5	K.					
EN170												
EN172		*			*	*		*				*
ANSI Z87.1				+	+	+	+	+	+	+	+	+
				PREMIUM						EVOLUTION		
	PACAYA CLEAR	PACAYA CLEAR STRAP	PACAYA SMOKE	FUJI2 CLEAR	FUJI2 GRADIENT	THUNDER CLEAR	THUNDER SMOKE	HELIUM Blue Blocker	HELIUM DETECTABLE	KISKA2 CLEAR	KISKA2 SMOKE	FUEG0
						(1)						
EN170												
EN172			*		**		*				*	
ANSI Z87.1	+	+	+	+	+			+	+			
l 1					EVOLUTION						ESSENTIAL	
	EGON CLEAR	EGON LIGHT MIRROR	EGON SMOKE	EGON YELLOW	LIPARI2 CLEAR	HEKLA2 CLEAR	VULCANO2 PLUS CLEAR	VULCANO2 CLEAR	VULCANO2 SMOKE	MILO CLEAR	MILO SMOKE	MEIA CLEAR
					~			1				
EN170												
EN172			*						*		*	
ANSI Z87.1	+	+	+	+	+		+	+	+			
						ESSE	NTIAL					
	MEIA SMOKE	MEIA YELLOW	BRAVA2 CLEAR	BRAVA2 YELLOW	BRAVA2 LIGHT MIRROR	BRAVA2 MIRROR	BRAVA2 SMOKE	KILIMANDJARO CLEAR	KILIMANDJARO CLEAR AB	KILIMANDJARO SMOKE	PITON2 CLEAR	PITON CLEAR
EN170				•	•						<b></b>	
	*					*	*			*		
EN172	莱									<u> </u>		

#### — Goggles

	PREMIUM		EVOLUTION			ESSENTIAL	
	SAJAMA	GALERAS CLEAR	GALERAS SMOKE	TACANA SPORT	RUIZ1 ACETATE	RUIZ1	MURIA1
EN166							
	*4	**	*	**	**	**	*4
ANSI Z87.1		+	+				

All our polycarbonate glasses filter 99.9% of UV A, B or C (130 - 300 nm). Our UV400 glasses filter up to 400 nm.



# **SAFETY GLASSES**





	æ	o <sup>c</sup>	<b>S</b>		<u></u>	
BLOW2 CLEAR	Clear			<b>EN170</b> UV 2C-1.2		
BLOW2 MIRROR	N.	2 in 1 polycarbonate glasses - Interchangeable arms/Elastic. Twin material curved arms. Removable foam. Wide field of vision.	C € EN166 1FT/FT	<b>EN172</b> UV 5-3.1	38 g	x 100
BLOW2 LIGHT MIRROR	Mirror			<b>EN170</b> UV 2C-1.7	•	

### **BLOW2 CLEAR**

















Ventilation →Minimises fogging



Tilting arms

→Perfect fit to the shape of the face





Removable foam protection →Very good sealing in dusty environments

⇒Increased comfort in case of shock



Interchangeable attachment :

Arms/Elastic

⇒Suitable solution for any type of work environment

#### **BLOW2 LIGHT MIRROR**



#### **BLOW2 MIRROR**

















#### - EYEWEAR PROTECTION

# SAFETY GLASSES

	<b>₽</b>	o <sup>©</sup>			$\checkmark$			4	
RIMFIRE POLARIZED	Polarized				<b>EN172</b> 5-3.1		<b>ANSI Z87.1</b> Z87+ U6 L3		
RIMFIRE MIRROR	Mirror	Polycarbonate glasses. Sport design. Polycarbonate frame with matt finish for better comfort and durability.	C€	<b>EN166</b> 1 F / F	<b>EN172</b> 5-3.1	ANSI	207+ UU L3	28 g	x 100
RIMFIRE CLEAR	Clear	Social Social Caracteristics.			<b>EN170</b> 2C-1.2	•	<b>ANSI Z87.1</b> Z87+ U6		0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0

#### RIMFIRE POLARIZED





















FlexGrip™ nasal bridge

Optimised comfort

Perfect fit for all body types



Polycarbonate frame with matte finish

⇒Better comfort and reinforced strength









Without polarised lenses

Polarised glasses

Reduction of glare and reflections from reflective surfaces (road, water, snow...)

## RIMFIRE MIRROR


















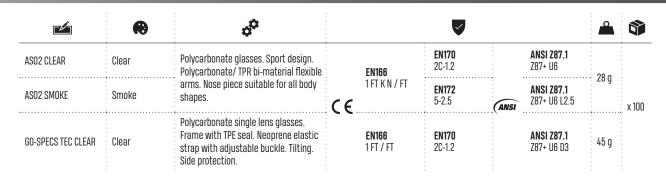

# ASO2 SMOKE **ASO2 CLEAR** D-PAD technology Optimised comfort Perfect fit for all body types Curved eyepiece →Maximum protection Bi-material sports section light and ightharpoons Extended field of view comfortable ightharpoonsIncreased comfort ⇒Very good hold on the head (or on a helmet)

#### **GO-SPECS TEC CLEAR**


























Flexible TPE seal ➡Protects against solid or liquid projections





Indirect ventilation →Minimises the appearance of mist



→Perfect fit to the shape of the face

Neoprene strap

→ Resistance to chemical projections

**⇒**Washable

UV filtration A, B and C at 99.9% (130-380 nm) Reinforced impact resistance

# SAFETY GLASSES







	•	o <sup>©</sup>		$\checkmark$		<u></u>	<b>*</b>
PACAYA CLEAR LYVIZ			:	EN170	0 0	36 g	:
PACAYA CLEAR STRAP LYVIZ	Clear	Polycarbonate single lens glasses. Integrated polycarbonate nose piece. Adjustable nylon	C € EN166 1FT/FT	UV 2C-1.2	ANSI 287.1 Z87+	41 g	x 100
PACAYA SMOKE LYVIZ	Smoke	arms. Side protection.		<b>EN172</b> UV 5-3.1		36 g	

#### PACAYA CLEAR STRAP LYVIZ





















#### PACAYA SMOKE LYVIZ























Removable foam protection Very good sealing in dusty environments

⇒Increased comfort in case of shock



Tilting arms
→Perfect fit to the shape of the face



https://www.youtube.com/watch?v=-q64s0LI9I4





### The safety spectacles are always clean thanks to the LyViz™ treatment!

#### **PACAYA CLEAR LYVIZ**























## Coating Ole<mark>opho</mark>bic Hydrophobic by Delta Plus



LyViz treatment : hydrophobic and oleophobic coating

⇒Clean eyes guaranteed for longer

- → Reinforced anti-scratch treatment

### Helps workers see their task clearly to ensure their safety at work.



Highly oleophobic & hydrophobic the contact angle remains greater than 105°



More resistance to abrasion 20%> regular test



Ultra-low vapour effect less than 0.11% increase in fog after abrasion



Dirty protective eyewear risks becoming unworn protective eyewear and thus expose the user to a risk. We have developed an innovative LyViz™ treatment that keeps the eyepiece cleaner longer and makes it easier to clean.

Marie Pourcher, Head Protection Product Expert



#### **EYEWEAR PROTECTION**

# SAFETY GLASSES

	•	o'c		<b>Y</b>		_	
PACAYA CLEAR	Cloor			EN170		36 g	
PACAYA CLEAR STRAP	- Clear	Polycarbonate single lens glasses. Integrated		UV 2C-1.2	ANSI Z87.1	41 g	
PACAYA SMOKE	Smoke	polycarbonate single lens glasses. Integrated polycarbonate nose piece. Adjustable nylon arms. Side protection.	C € EN166 1FT/FT	<b>EN172</b> UV 5-3.1	201*	36 g	x 100
PACAYA T5	Shade 5			<b>EN169</b> UV 5		32 g	

### **PACAYA CLEAR**















### PACAYA CLEAR STRAP























- ⇒Very good sealing in dusty environments
- ⇒Increased comfort in case of shock



Tilting arms
→Perfect fit to the shape of the face

## PACAYA T5















## PACAYA SMOKE





















#### **FUJI2 CLEAR**

#### **FUJI2 GRADIENT**



























Non-slip rubber sections

- ⇒Increased comfort
- ►Very good hold on the head (or on a helmet)



Without mount in lower part ⇒No visual discomfort



Extra flexible TPE nose bridge

- ⇒Optimised comfort
- ⇒Perfect fit for all body types





#### THUNDER CLEAR





















Extra comfort soft

- ⇒Increased comfort
- →Very good hold on the head (or on a helmet)



Nasal bridge TPE soft extra comfort

- →Optimised comfort
   →Perfect fit for all body types




























# - EYEWEAR PROTECTION SAFETY GLASSES

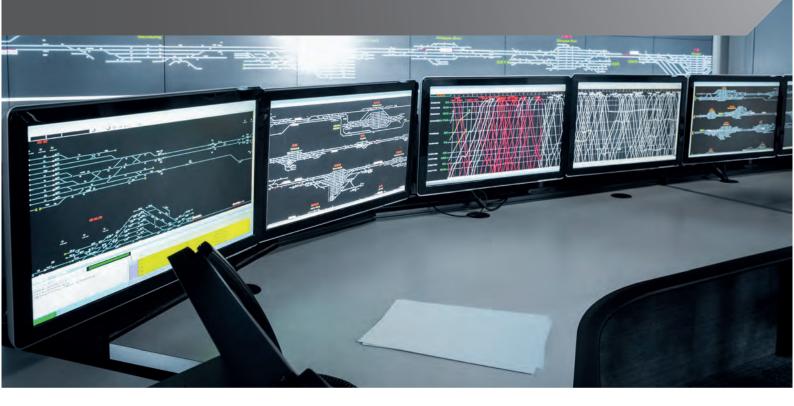

	•	o <sup>c</sup>		$\checkmark$			
HELIUM BLUE BLOCKER	Brown	Ultra light polycarbonate single lens glasses. Extra fine frame. Suitable for long duration	C C EN166	<b>EN170</b> 2C-1.4	<b>ANSI Z87.1</b> Z87+ U6 L1.5		v 100
HELIUM DETECTABLE	Blue	extra fine frame. Sultable for long duration wear.	C € EN166 1FT/FT	<b>EN170</b> UV 2C-1.2		15 Y	x 100

### **HELIUM DETECTABLE**

















Metallically charged blue frame visually detectable by X-ray and magnetism

→ Suitable for the food industry

Blue tint with excellent transmission factor

**⇒**Comfortable for indoor use





Extra fine frame

**⇒**Compatibility with noise cancelling headphones Eyepiece that filters 65% of blue light to protect the eyes from the harmful radiation from screens —Reduction of eye strain

Ultra-light : 15 g





## Ideal for demanding workers who do not like to wear heavy and bulky PPE.

#### **HELIUM BLUE BLOCKER**
























Ergofit ultra-flat sections feature particles with magnetic properties that are detectable and compatible with the simultaneous wearing of hearing protectors and other

The blue-violet light (between 380 and 465 nm) present in the solar spectrum and emitted by screens or LEDs to which we are more and more exposed, generates harmful effects on the retina and the macula. The shade of these glasses is designed to filter 65% of the blue light while transmitting more than 65% of the visible light and is an excellent compromise for your protection and your eyes.

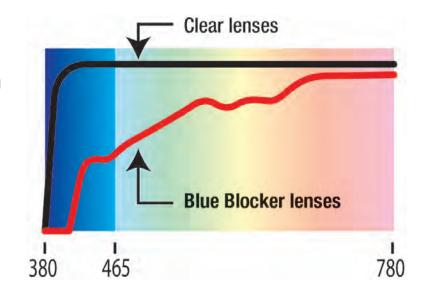



Lightness and ergonomics are two axes of product development that are used more and more by users. PPE must allow itself to be forgotten to be worn all day without any discomfort. The Helium with its enveloping design and weight of 15g can be forgotten. We chose to make it even more efficient with two innovative functions on the market: blue light filtration and detection.

Marie Pourcher, Head Protection Product Expert

#### EYEWEAR PROTECTION

# SAFETY GLASSES

	•	o <sup>©</sup>	•	ightleftarrow		<u></u>	
KISKA2 CLEAR	Clear	Ultra light one-piece polycarbonate glasses. Extra fine rimless frame and	0		<b>EN170</b> UV 2C-1.2		
KISKA2 SMOKE	Smoke	extra soft polycarbonate nose bridge. Suitable for long duration wear.	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		<b>EN172</b> UV 5-3.1	- 20 g	•
FUEGO	Clear	Clear polycarbonate single lens glasses to use as an accessory for safety helmet. Wraparound design for maximum protection. Folding system in the helmet when it is not used, for intermittent use. Very convenient. Branches foldable for easy positioning in the helmet. Suitable for our range of safety helmet.	C€	<b>EN166</b> 1 FT / FT	<b>EN170</b> UV 2C-1.2	34 g	x 100

## KISKA2 CLEAR

















Non metallic hinge



Extra soft nose bridge

# KISKA2 SMOKE















Extra fine metal free frame Ultra lightweight frame Ultra-light : 20 g

### **FUEGO**





















	•	o <sup>©</sup>			lacksquare				
LIPARI2 CLEAR	Clear			EN166	<b>EN170</b> UV 2C-1.2			01	•
LIPARI2 T5	Shade 5		0 0 0 0 0	1FT / FT	<b>EN169</b> UV 5			34 g	•
VULCANO2 PLUS CLEAR	Cloor	Polycarbonate single lens glasses. Adjustable and tilting nylon arms. Spatula tips. Integrated TPE nose piece. Side protection.	CE	<b>EN166</b> 1 FT K N / FT	<b>EN170</b> UV 2.C-1.2	ANSI	<b>ANSI Z87.1</b> Z87+		x 100
VULCANO2 CLEAR	Clear	n E nose piece. side protection.		EN166	<b>EN170</b> UV 2C-1.2			26 g	•
VULCANO2 SMOKE	Smoke			1FT/FT	<b>EN172</b> UV 5-3.1			•	

#### **LIPARI2 CLEAR**













#### LIPARI2 T5













## **VULCANO2 PLUS CLEAR**





















#### **VULCANO2 CLEAR**



















## **VULCANO2 SMOKE**

















#### - EYEWEAR PROTECTION

# SAFETY GLASSES

	•	o <sup>©</sup>	•		<b>V</b>		<u></u>	<b>\$</b>
EGON CLEAR	Clear				EN170			
EGON YELLOW	Yellow	Ergonomic glasses. Polycarbonate lens. Sport	•		UV 2C-1.2	ANSI Z87.1		•
EGON LIGHT MIRROR	Mirror	look. Twin material arms. Extra comfort soft TPE nose piece.	CE	EN166	<b>EN170</b> UV 2C-1.7	787+	32 n	v 100
EGON SMOKE	Smoke			1FT / FT	<b>EN172</b> UV 5-3.1		02 g	X 100
HEKLA2 CLEAR	Clear	Single lens polycarbonate over glasses. Side shields. Integrated polycarbonate nose piece. Flexible polycarbonate arms. Suitable for all types of prescription glasses.			<b>EN170</b> UV 2C-1.2			

#### **EGON CLEAR**

















Side shields



Extra supple sections



Nasal bridge TPE soft extra comfort

#### **EGON YELLOW**

















## EGON LIGHT MIRROR















## **HEKLA2 CLEAR**















### **EGON SMOKE**

















	æ	o <sup>o</sup>	•	$\checkmark$		<u></u>	
MILO CLEAR	Clear	Single lens polycarbonate glasses. Integrated polycarbonate nose piece.			<b>EN170</b> UV 2.C-1.2	10 ~	
MILO SMOKE	Smoke	Polycarbonate arms. Metal free: dielectric. Ultra light: 18 g. Ultra flexible.			<b>EN172</b> UV 5-3.1	· - 18 g	 x 100
MEIA CLEAR	Clear	Single lens polycarbonate glasses. Integrated polycarbonate nose piece. Polycarbonate arms. Non-slip PVC tips.		<b>EN166</b> 1 FT / FT	<b>EN170</b> UV 2.C-1.2	22 g	
MEIA YELLOW	Yellow						
MEIA SMOKE	Smoke				<b>EN172</b> UV 5-3.1		

### **MILO CLEAR**

















### MILO SMOKE















## **MEIA CLEAR**



















## MEIA YELLOW

















## **MEIA SMOKE**















#### - EYEWEAR PROTECTION

# **SAFETY GLASSES**

	æ	o <sup>c</sup>	✓				<u></u>	
BRAVA2 CLEAR	Clear	Polycarbonate single lens glasses. Soft flat spatula type arms. Integrated polycarbonate nose piece. Easy to use with safety helmet and ear defenders. Side protection.		<b>EN170</b> UV 2C-1.2	ANSI Z87.1 Z87+			
BRAVA2 YELLOW	Yellow							0 0 0 0
BRAVA2 LIGHT MIRROR	Mirror		C € EN166 1FT/FT	<b>EN170</b> UV 2C-1.7		25 g	x100	
BRAVA2 MIRROR				<b>EN172</b> UV 5-2.5				
BRAVA2 SMOKE	Smoke			<b>EN172</b> UV 5-3.1				

### **BRAVA2 CLEAR**





















## **BRAVA2 SMOKE**















### **BRAVA2 YELLOW**

















## **BRAVA2 LIGHT MIRROR**













#### **BRAVA2 MIRROR**















	æ	o <sup>©</sup>		<b>&gt;</b>			<u></u>	
KILIMANDJARO CLEAR AB	Clear			EN170				
KILIMANDJARO CLEAR		Polycarbonate single lens glasses. Adjustable nylon arms. Side protection.	EMICO	UV 2C-1.2	ANSI	<b>ANSI Z87.1</b> Z87+	32 g	
KILIMANDJARO SMOKE	Smoke			<b>EN172</b> UV 5-3.1				o
PITON 2 CLEAR	Clear	Polycarbonate single lens glasses. Modern and sport design. Side protection. Open arms for ateral ventilation. Hole in arms for neck cord.	CE EN166 1FT/FT	<b>EN170</b> UV 2C-1.2			30 g	x 100
PITON CLEAR		Clear polycarbonate single lens glasses. Direct side ventilation. Side protection. Hole in arms for neck cord.			ANSI	<b>ANSI Z87.1</b> Z87+	44 g	eo

#### KILIMANDJARO CLEAR AB

#### KILIMANDJARO CLEAR























#### KILIMANDJARO SMOKE













#### **PITON 2 CLEAR**















### **PITON CLEAR**











#### - EYEWEAR PROTECTION

# SAFETY GOGGLES

	€	o <sup>©</sup>	•	Y	7		<u></u>	
GALERAS CLEAR	Clear	Palyagrhanata gaggles, Indirect ventilation, Flavible DVC and		<b>EN166</b> 1 BT / 34 BT				
GALERAS SMOKE	Smoke	Polycarbonate goggles. Indirect ventilation. Flexible PVC and nylon frame. Panoramic screen. Adapted to wear with glasses and disposable respiratory half-masks. Wide elastic strap.		<b>EN166</b> 1 BT / 34 BT <b>EN172</b> UV 5-3.1	ANSI	<b>ANSI Z87.1</b> Z87+	104 g	x 60
FILM GOGGLE	Clear	Box of 10 sets of protective film to protect screens of goggles. Each set is made of 3 layers of films.			0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		56 g	x 10

#### **GALERAS CLEAR**

























⇒Very good support

#### **GALERAS SMOKE**





















#### Marking (EN166)

- 1 = the best optical class
- B = resistance to medium energy impacts
- T = impact resistance at extreme temperatures
- 3 = resistance to liquid splashes
- 4 = resistance to large dust particles

# FILM GOGGLE











	•	o <sub>D</sub>		·			<u></u>	
SAJAMA		Clear polycarbonate goggles, indirect ventilation. TPE flexible frame for long-lasting comfort. Wide elastic strap.		<b>EN166</b> 1 BT / 3 BT	ANSI	<b>ANSI Z87.1</b> Z87+	92 g	
RUIZ 1 ACETATE	Clear	Clear acetate goggles. Flexible PVC frame. Indirect ventilation with 4 ventilators. Textile elastic strap. Resistant to chemical products splashes.	C€	<b>EN166</b> 1 FT / 3 FT	8		86 g	x 60
RUIZ1		Clear polycarbonate goggles. Flexible PVC frame. Indirect ventilation with 4 ventilators. Textile elastic strap.		<b>EN166</b> 1 B / 3 B	(ANSI	ANSI Z87.1	oug	
MURIA 1		Clear polycarbonate goggles. Flexible PVC frame. Direct ventilation. Textile elastic strap.		<b>EN166</b> 1 B / B	Allor	Z87	60 g	**************************************

### SAJAMA



























Soft frame made of TPE →Prolonged comfort of use



#### **RUIZ 1**













### MURIA 1











# - EYEWEAR PROTECTION **HELP WITH CHOICE**

#### — Welding

	PREMIUM	EVO	LUTION	ESSENTIAL			EVOLUTION	
	BARRIER2	SCREEN	CASOUD2HE	CASOUD3	A -	TOBA3 T5	LIPARI2 T5	PACAYA T5
EN169			•	•		•	•	•
EN175		•	•	•		•		
EN379		•						
ANSI Z87.1	+	+						

All our polycarbonate glasses filter 99.9% of UV A, B or C (130 - 300 nm). Our UV400 glasses filter up to 400 nm.


Welding	ММА	MIG	MAG	TIG	Torch	Plasma	Laser
Process		Electric arc + Electrode		Electric arc + Electrode Tunsten	Torch flame	Electric arc + Electrode	Laser ray
Gas supply	No	Inert protective gas (Argon or Helium)  Active prote (Argon/CO <sub>2</sub> 0xyg		Neutral gas (Argon)	Fuel gas (acetylene, propane, butane or methane) + Combustion gas (oxygen - hydrogen or natural gas)	Argon (principal) + Hydrogen or Helium (annular)	No
<u>=</u>		3,500°C to 7,000°C		3,500°C	3,150°C	15,000°C to 25,000°C	
Metal supply	Yes (melting electrode)			Yes (Filler metal rod)	Yes	No	No
Example of jobs using these process	Craftsmen, locksmiths, metal workers, coachbuilders		rmaking, metalwork / nd naval construction	Boilermaking, metalwork / ironworks	Plumbers, heating engineers, cold storage, locksmiths	Aeronautics, light and pharmaceutical Industry	Light and pharmaceutical Industry
Materials	Steel, stainless steel, cast iron, aluminum	Pure steel or weakly alloyed*	Stainless steel and copper alloy*	All type of metals (except light aluminum alloy*)	Copper, tin, brass, aluminum, zinc	Steels, stainless steel, aluminum and alloy*	Metals and plastics
Thickness	2 mm to 10 mm	t	0,5 mm to 10 mm		Less than 2 mm	Micro plasma : 0,01 to 1 mm Plasma : 1 to 3 mm Unblocking spray plasma: 3 mm to 8 mm	2 mm to 8 mm
Features	Economical and good quality welding	High speed, regular and ç	good quality welding bead	"Clean" welding, very high quality, slow process	Easy to settle, stand alone device. Easy to learn but average aspect.	Quality welding (fine and precise). Possibility of automatic process but rather slow.  + Possibility to cut pieces	"Clean" and very high quality but expensive welding process + Cut of pieces in large series

An alloy is the combination of a metallic element with one or several other chemical elements by melting, with the aim of modifying the mechanical properties of the basic metal.

All alloys to the commination of a metalline tearners with order it seve Examples of known alloys: - Cast iron: iron + carbon (between 2.1 and 6,7 % in carbon mass) - Steet: iron + carbon (less than 2,1 % in carbon mass) - Brass: Copper + Zinc - Bronze: Copper + tin

# WELDING



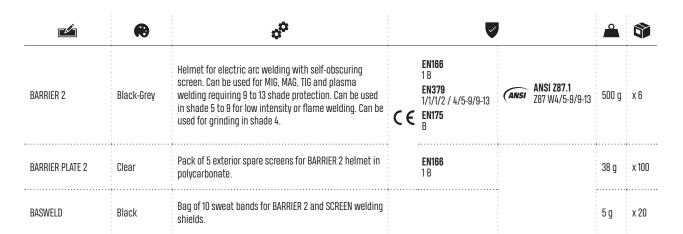

#### **BARRIER 2**















High performance optical class →Less visual fatigue



Replaceable exterior protection screen

⇒Easy replacement of damaged screens



Field of view 100 x 67 mm ⇒Guaranteed maximum visual



selection, switching time ⇒Guaranteed user comfort for all types of welding

Grinding/soldering mode ⇒2 applications for a single product



4 independent sensors

→Increased product reactivity in all positions and in confined spaces















#### **BASWELD**



# - EYEWEAR PROTECTION WELDING

	<b>€</b>	o <sup>©</sup>	$\checkmark$			<u></u>	
SCREEN	Black	Helmet for electric arc welding with self-obscuring screen. Can be used for MIG, MAG, TIG and plasma welding requiring DIN9 to DIN13 shade protection.	CE	EN166 1 F EN379 1/1/1/2 / 4/9-13 EN175 F	<b>ANSI Z87.1</b> Z87 W4/9-13	474 g	х 6
SCREEN PLATE	Clear	Pack of 5 exterior spare screens for SCREEN helmet in polycarbonate.		<b>EN166</b> 1 F		14 g	x 150
BASWELD	Black	Bag of 10 sweat bands for BARRIER 2 and SCREEN welding shields.		•••••		5 g	x 20

#### **SCREEN**



















High performance optical class



External adjustment of the shade

One-handed adjustment with or without gloves



#### **SCREEN PLATE**

















#### **BASWELD**






	€	o <sup>o</sup>	<b>LIGHT</b>		<b>V</b>	•	
CASOUD2HE	Black	Polypropylene welding face shield, to be used on safety helmets. For all types of welding that requires shade 11 protection. Sold ready to use: fixed screen equipped with one clear polycarbonate filter (FILTER-IN), flip-up screen equipped with one shade 11 filter (FILTER-IN), protected by one clear polycarbonate filter (FILTER-IN). Dimensions of the filters: 108 x 51 mm.	Adjustable	C€	EN166 1F / S EN169 11 EN175 S	304 g	x 10
CASOUD 3	Black	Helmet for all types of welding that requires shade DIN11 protection. Headband. Sold ready to use: fixed screen equipped with one clear polycarbonate filter (FILTER-IN), flipup screen equipped with one DIN11 filter (FILTER-IT), protected by one clear polycarbonate filter (FILTER-IN). Dimensions of the filters: 108 x 51 mm.	Adjustable	C€	EN166 1F / F EN169 11 EN175 F	415 g	х6
FILTER-IN	Clear	Pack of 5 clear polycarbonate filter, 108 x 51 mm. to be fitted on CASOUD3 welding helmet and CASOUD2HE welding shield. Thickness: 1,8 mm.		CE	<b>EN166</b> 1F / F	140 g	x 20
FILTER 11	Green	Pack of 5 shade 11 mineral filter, 108 x 51 mm. to be fitted on CASOUD3 welding helmet and CASOUD2HE welding shield. Thickness: 3 mm.		C€	EN166 1 EN169 11	240 g	x 20
TOBA 3 T5	Red	Welding goggles. Flip-up screen. Flexible PVC frame. Indirect ventilation. Elastic strap. Clear polycarbonate inside lens. Shade 5 polycarbonate upper lens with clear polycarbonate reinforcement lens.	Adjustable	C€	EN166 1FT / FT EN169 5 EN175 FT	132 g	x 60
PACAYA T5	Shade 5	Polycarbonate single lens glasses. Integrated polycarbonate nose piece. Adjustable nylon arms. Side protection.		C€	EN166 1 FT / FT EN169 UV 5	32 g	x 100
LIPARI2 T5	Shade 5	Polycarbonate single lens glasses. Adjustable and tilting nylon arms. Spatula tips. Integrated TPE nose piece. Side protection.		(ANSI	EN166 1 FT / FT EN169 UV 5 ANSI Z87.1 Z87+	34 g	x 100

# **HELP WITH CHOICE**

#### — Visor

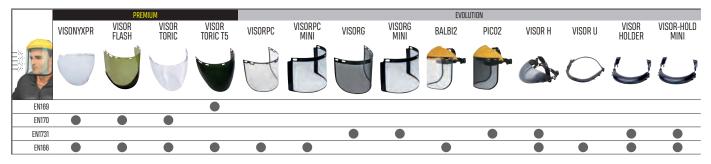

All our polycarbonate glasses filter 99.9% of UV A, B or C (130 - 300 nm). Our UV400 glasses filter up to 400 nm.



# **SAFETY VISORS**





	•	o <sup>©</sup>	•	$\triangleleft$	_	
VISOR TORIC CLEAR	Clear	Polycarbonate injected visor. Thickness 1,9/2,0 mm. Electric Arc protection.  Injurisal fixing Suitable for faceshield holder VISOR HOLDER VISOR-H VISOR-H	( (	EN166 1AT 89 EN170 UV 2C-1.2	100 a	
VISOR TORIC T5	Green shade 5	niversal fixing. Suitable for faceshield holder VISOR HOLDER, VISOR-H, VISOR-U. 9 x 20 cm.		<b>EN166</b> 1 AT 9 <b>EN169</b> 5	······ 162 g	x 20
VISOR T-GUARD	Clear	Polycarbonate chin protection to be fixed on VISOR TORIC visor.			46 g	•0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0

#### **VISOR TORIC CLEAR**



















- 1 = the best optical class
- A = the highest impact resistance T = impact resistance at extreme temperatures
- 8 = short-circuit electrical arc resistance
- 9 = resistance to the projection of molten metals

Marking (EN170) 2C-1,2 = UV resistance

# **VISOR TORIC T5**



















#### Marking (EN166)

- 1 = the best optical class
- A = the highest impact resistance
- T = impact resistance at extreme temperatures
- 9 = resistance to the projection of molten metals

#### Marking (EN169)

5 = UV and IR resistance



#### Anti-scratch

⇒Increased lifespan

#### Spherical visor

⇒Extra large field of vision

#### Injected polycarbonate

→Maximum impact resistance

#### **VISOR T-GUARD**













# **EYEWEAR PROTECTION** SAFETY VISORS



0 Y **EN166** 1FT 8 **ASTM F 2178-12** 14 cal/cm<sup>2</sup> **EN170** UV 2C-1.7 Polycarbonate injected visor, against electric arc and VISOR FLASH Green 230 g 🗄 x 25 thermal risk. Green shade for better transmission of light. **GS-ET 29** VISOR-U 8-2-1 (ANSI Z87.1 Z87+ U6 L1.7 VISOR-HOLDER 8-1-1

#### **VISOR FLASH**























Curved chin protector ➡No discomfort in the user's movements



Injected polycarbonate

- ⇒2 to 2.3 mm thick
- →Maximum resistance to impact and radiant heat

Protection: 14cal/cm² (ASTM)

→ Maximum protection from electric arcs

UV filtration A, B and C at 99.9% (130-380 nm) ⇒Guaranteed protection from ultraviolet light



#### Protecting the face against the risk of electric arcs adapted to DELTA PLUS safety helmets (except Granite range)



#### What is an Arc Flash?

It is a short circuit that bursts from a live conductor exposed to another or to the ground, resulting in a large electrical discharge driven by the ambient air. The phenomenon ionises the air. which becomes almost as conductive as metal. This sudden and massive energy release is like an explosion, generating temperatures that can reach 20,000°C locally. That is 4 times hotter than the surface of the sun. This immense energy can melt and vaporise metals and other materials almost instantly. blowing them with hot gases in the immediate vicinity, destroying the electrical equipment involved and causing injuries to people working nearby.

#### Who may be exposed?

Industrial electricians and technicians in distribution or electrical maintenance.

#### What are the effects?


Rapid release of energy and heat: a fireball exploding toward the outside that can cause irreversible burns.

Blinding light.

Shockwave: a blast that strikes violently in a frontal way. Sound wave: hearing disorders and acoustic trauma. Sudden spraying of molten metals and incandescent shrapnel in all directions.

#### What causes a Arc Flash?

Usually limited to electrical systems larger than 480 volts, an Arc Flash may be caused by improper handling or by components such as switches, terminating conductors, fuses, circuit breakers, relay contacts, bus-bars or other defective components. Particularly due to poor maintenance, humidity, dust and corrosion for example. Where to start? It is important to systematically conduct a risk analysis of the equipment and the workstation before any operation! This analysis must be carried out by a qualified person and makes it possible to evaluate the level of risk and the equipment necessary for the intervention, in particular the choice of Personal Protective Equipment.

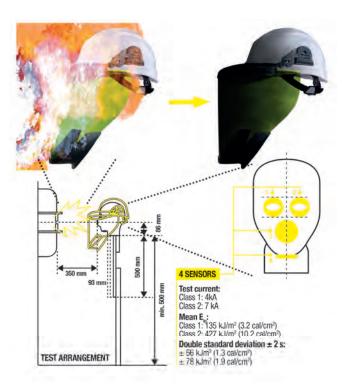





The visors on the market were very cumbersome with imposing chin protectors that bothered workers. The VISOR FLASH has been designed for ease of use. An essential point was the mobility of the user during his tasks. The chin protector has been modified three times until we got the best combination of protection and freedom of movement of the head. The curved design at the bottom of the chin guard helps deflect the arc explosion and rests comfortably on the torso during work. In addition, we have retained excellent lateral protection while reducing the overall weight of the visor. Simultaneously with VISOR FLASH, we created the VISOR-U Visor Holder, moving the pivot point further back on the worker's safety helmet. This lightweight combination makes VISOR FLASH more acceptable and makes it easier to use in an already challenging work environment.

Rick Rustello, Arc Flash Specialist

# EYEWEAR PROTECTION SAFETY VISORS

	€	o <sup>o</sup>		$\checkmark$		
VISORPC	Clear	Pack of 2 clear polycarbonate visors with plastic edge. Universal fixing. Suitable for BALBI2, PICO2, VISOR-H and VISOR HOLDER faceshield holder. 39 x 20 cm.		<b>EN166</b> 1BT	100 a	
VISORG	Black	Pack of 2 gauze visors with plastic edge. Universal fixing. Suitable for BALBI2, PICO2, VISOR-H and VISOR HOLDER faceshield holder. 39 x 20 cm.	<i>.</i>	<b>EN1731</b> F	· 100 g	00
VISORPC MINI	Clear	Pack of 2 clear polycarbonate visors with plastic edge. Universal fixing. Suitable for VISOR-HOLD MINI. 36 x 17 cm.	6	<b>EN166</b> 1BT	84 g	X ZU
VISORG MINI	Black	Pack of 2 gauze visors with plastic edge. Universal fixing. Suitable for VISOR-HOLD MINI. 36 x 17 cm.	•	<b>EN1731</b> S	94 g	

# **VISORPC**













# **VISORG**







### **VISORPC MINI**







# **VISORG MINI**









	•	o <sup>©</sup>	•	lacksquare	-	
BALBI 2	Yellow	Faceshield with front protection + VISORPC visor: clear polycarbonate visor with plastic edge. 39 x 20 cm.		<b>EN166</b> 1BT / 3BT	260 g	v 20
PICO 2	Yellow-Black	Faceshield with front protection + VISORG visor: gauze visor with plastic edge. 39 x 20 cm.		<b>EN1731</b> F / F	262 g	x 20
VISOR-H	Grey	Faceshield with front protection. Innovative adjustable ROTOR system: head sizes 53 to 63 cm.		EN166 EN1731	180 g	x 25
VISOR-U		Dielectric faceshield holder suitable for safety helmets and visors.	CE	EN166		x 100
VISOR HOLDER	Black	Faceshield holder suitable for ZIRCON, QUARTZ and BASEBALL DIAMOND safety helmets. To combine with VISORPC, VISORG, VISOR-TORIC and VISOR FLASH visors, universal fixing.		EN1731 GS-ET 29	86 g	x 20
VISOR-HOLD MINI		Faceshield holder suitable for GRANITE WIND and GRANITE PEAK safety helmets. To combine with VISORPCMINI and VISORGMINI.		EN166 EN1731	74 g	

#### **BALBI 2**











### PICO 2









### VISOR-H









### VISOR-U















### **VISOR HOLDER**













### **VISOR-HOLD MINI**










Compatible with earmuffs

#### **SKULL PROTECTION**

### **HELP WITH CHOICE**

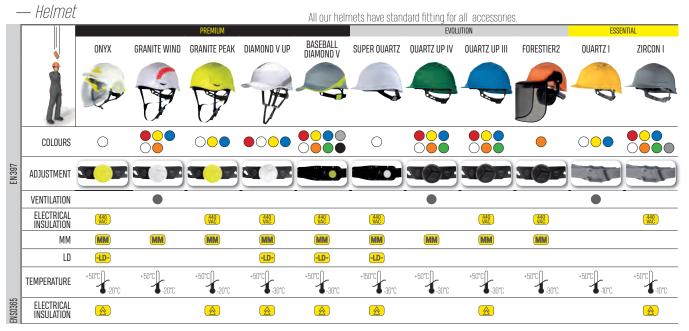

#### Bump cap

		PREMIUM	EVOLUTION	ESSENTIAL
		KAIZI0	AIR COLTAN	COLTAN
EN812				
	COLOURS			
	VISOR LENGTH (CM)	5	3/5/7 5/7 3/7 7	3/5/7

#### Customize your safety helmets!

- → The logo sent must be in vectorized format (.eps, .ai, or .pdf) and must not have a different colour background to the chosen helmet.
- → For logos in colours, please indicate the pantone reference for each colour.
- → Warning: the colours of the logos can be slighty changed according to the colour of helmets. To have the same colour as your logo, we recommend that you choose white helmets.
- → It is impossible to do gradient colours in pad printing.
- → Minimum of order: 40 pieces per colour for all orders in Europe.
- → Maximum number of colours: 4
- The space to put the logo may not exceed dimensions shown on the table below:





#### BADGEH

Badge holder for BASEBALL DIAMOND and BASEBALL DIAMOND UP

→ Minimum of order: 20 pieces per colour for all orders in Europe



# SAFETY HELMETS





	æ	o <sup>©</sup>			<u> </u>	
GRANITE WIND	White Blue Yellow Orange Red	Ventilated ABS safety helmet. Mountain helmet style: without visor for the best vertical vision. Less encumbrance. Light. Polyamide cradle: 3 textile bands with 8 fixing points. Thermoformed sweat band. Innovative adjustable ROTOR system : head sizes 53 to 63 cm. Sold with 3 point chin strap.	<b>EN39</b> ' MM -20°C		368 g	
GRANITE PEAK	White Blue Yellow	ABS safety helmet. Mountain helmet style: without visor for the best vertical vision. Less encumbrance. Light. Polyamide cradle: 3 textile bands with 8 fixing points. Thermoformed sweat band. Innovative adjustable ROTOR system: head sizes 53 to 63 cm. Sold with 3 point chin strap. Specially designed for working at height. Electrical insulation up to 1000 V.A.C. or 1500 V.D.C.	EN39' MM -20°C 440VA EN50: CLASS	+50°C \C <b>365</b>	350 g	x 10
BASGAMMA	Dlock	Bag of 5 thermoformed sweat bands. Suitable for QUARTZ UP, SUPER QUARTZ, BASEBALL DIAMOND and GRANITE safety helmets.			4 g	v 00
JUGGAMMA		Bag of 5 chin straps with 3 fixing points. Safety-breaking system. Suitable for GRANITE PEAK and GRANITE WIND safety helmets.			19 g	x 20

#### **GRANITE WIND**













Fins system ⇒Optimised ventilation with increased protection from projections



One-D Rotor ergonomic clamping

→One-handed adjustment with or without gloves



Chin Strap 3 removable attachment points




















Replaceable thermoformed sweat band

- ⇒Increased comfort ⇒Good absorption of perspiration



with 8 attachment points












#### JUGGAMMA








# - SKULL PROTECTION **SAFETY HELMETS**

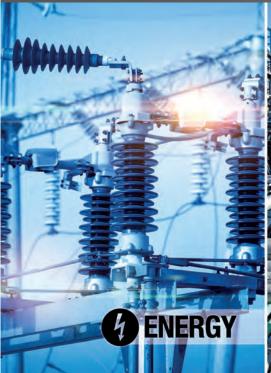

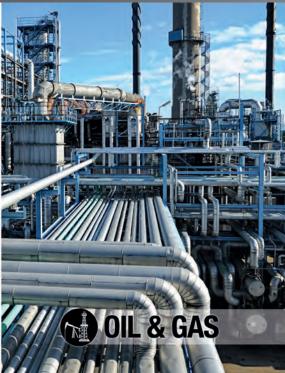



#### ONYX



















Polyamide cap: 3 textile headbands with 6 attachment points and adjustable headband in high or low position —Better weight distribution in the case of shock and guaranteed user comfort

Integrated visor

**⇒**Compact and combined solution



### HARNESS O



#### **VISONYXPR**























#### **DYNAMIC JUGBETA**








#### A modern design inspired by the world of sport offering dual protection for harsh work environments and electric hazards at a price accessible to all users.

	•	o <sup>©</sup>	0 0 0 0	<b>V</b>		
ONYX	White	ABS dual shell safety helmet with PC retractable visor. Sport and dynamic design. 3 textile straps with 6 fixing points. Foam sweat band. One-D Rotor clamping system: head size 53 to 63 cm. 2 possible positions of the headband (top/low) for a better comfort. Retro-reflective stickers. Electrical insulation up to 1000 V.A.C. or 1500 V.D.C, protection against arc fault Class 1 (GS-ET 29). Visor with anti-Fog N and anti-scratch K treatments and protection against electrical arcs, and molten metals or hot liquids projections.	C€	EN397 LD MM -20°C +50°C 440VAC EN50365 CLASS 0	EN166 1 AT 8 9 KN / 3 8 9 AT EN170 2C-1.2 GS-ET 29 8-1-0	x 6
HARNESS O	Black	Bag of 6 spare harnesses for ONYX safety helmet. Textile lining, foam sweat band, adjustement with One-D Rotor knob system.	0			x 10
VISONYXPR	Clear	Spare polycarbonate injected visor for double-shell ONYX helmet.	C€	EN166 1AT 8 9 KN / 3 8 9 AT EN170 2C-1.2	<b>GS-ET 29</b> 8-1-0	x 20
DYNAMIC JUGBETA	Black	Bag of 10 chin straps. 4 fixing points for work at height. Safety-breaking system. Suitable for ONYX safety helmet.				



Balanced centre of gravity ightharpoonup For a prolonged use ⇒Reduction of musculoskeletal

disorders (MSDs)



Comfortable distance between the visor and the user's face ⇒Good ventilation, prevents

⇒Compatible with glasses



Easy locking of the visor in two

→Optimum safety : The visor does not rise or fall unexpectedly



Optimised visor grip area ightharpoonupGuaranteed use and manoeuvrability with or without



Lateral reflectivity ⇒For more visible workers



One-D Rotor ergonomic clamping system

→One-handed adjustment with or without gloves



ABS double shell ⇒Improved robustness, resistance to lateral deformation: increased protection



Replaceable visor ⇒Easy replacement of damaged



Clips to hold a headlamp ⇒Designed to attach a headlamp with an elastic headband



Microfibre storage bag ⇒Easy storage for a longer product life

EUROPEAN STANDARD: EN166 - 8

Class 1: 4 kA - 155 kJ.m<sup>2</sup> (3.7 cal.cm<sup>2</sup>)




The challenge in the development of ONYX was to obtain a compact and easy to use product while keeping a comfortable distance between the face and the visor in low position. We managed this with an average of over 2 cm between the user's nose and the visor. The simplicity of use is at the meeting: no spring or complicated locking system for the kinematics of the visor.

Marie Pourcher, Head Protection Product Expert



#### SKULL PROTECTION

# **SAFETY HELMETS**

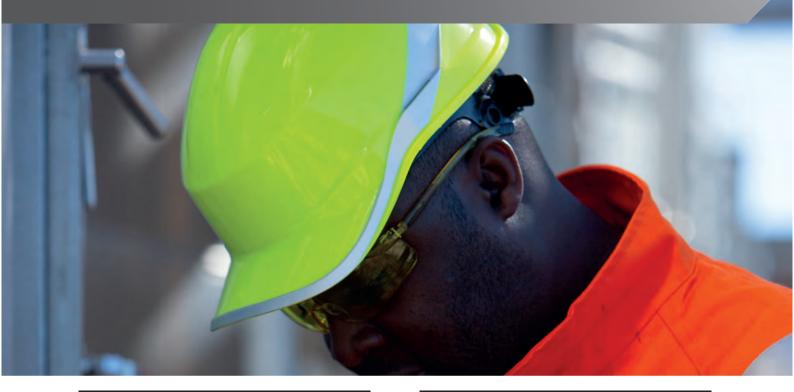

#### BASEBALL DIAMOND V











Button tightening

⇒Easy adjustment with a simple push BASEBALL DIAMOND V



Neon colours and silver band To be better seen at your workstation BASEBALL DIAMOND V BASEBALL DIAMOND V UP



Very curved visor

⇒Best field of view at height BASEBALL DIAMOND V BASEBALL DIAMOND V UP



Also certified for wearing backwards down → Maximum field of vision without visor BASEBALL DIAMOND V BASEBALL DIAMOND V UP

#### BASEBALL DIAMOND V UP

















One-D Rotor ergonomic clamping system

→One-handed adjustment with or without

gloves

BASEBALL DIAMOND V UP



Retro-reflective tapes

➡To be better seen at your workstation



Polyamide cradle : 3 fabric bands with 8

attachment points **⇒**Comfort of use guaranteed



#### HARNESS V










# The Iconic helmet in construction and industry with its unique design.

	æ	o <sup>c</sup>		<b>Y</b>	<u></u>	
BASEBALL DIAMOND V	White Blue Grey-Yellow Yellow Black Orange Red Green	ABS safety helmet. Innovative "baseball cap" shape to improve vision when looking up. Also tested for front back wearing, to reduce encumbrance. Polyamide cradle: 3 textile straps with 8 fixing points. Foam sweat band. Innovative button adjustment "colour to colour" for head size 53 to 63 cm. 2 possible positions of the headband (top/low) for a better comfort. Electrical insulation up to 1 000 V.A.C. or 1 500 V.D.C.  ABS safety helmet with innovative design. Tested in "reverse" position. Polyamide cradle: 3 fabric bands with 8 attachment points. Foam sweat band. Rotor clamping system: head size 53 to 63 cm. 2 possible positions around the head (high/low) for better comfort. Retro-reflective band. Electrical insulation 1000 VAC/1500 VDC. Sold with 4 points chinstrap.		EN397 MM LD -30°C +50°C	375 g	x 20
BASEBALL DIAMOND V UP	White Blue Yellow Orange Red Green			440 VAC EN50365 CLASS 0	400 g	
HARNESS V	Black	Bag of 10 spare harnesses for BASEBALL DIAMOND safety helmet. Textile lining, foam sweat band, adjustment with button.			7 g	x 10

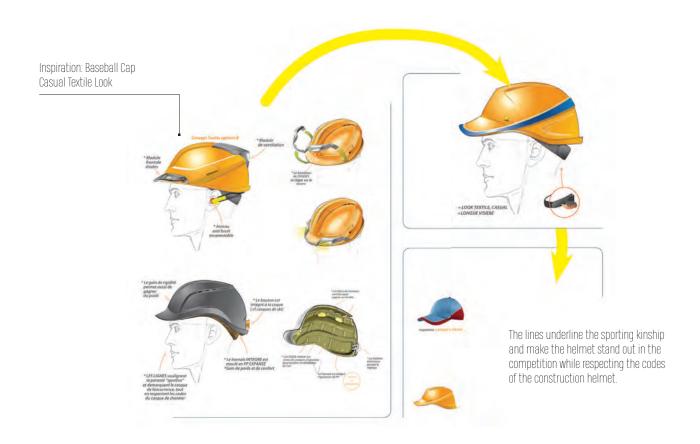



Users are sometimes bothered by the very classic look of the market's safety helmets. In 2009, we jostled an overly uniform market by launching our PREMIUM helmet: the BASEBALL DIAMOND with a shape inspired by baseball caps. To date, we remain the only players on the market to offer a headset with a contrast colour and a particular look while ensuring a maximum level of protection.

Marie Pourcher, Head Protection Product Expert

# - SKULL PROTECTION SAFETY HELMETS

	•	o <sup>o</sup>	0	$\checkmark$	<u></u>	
QUARTZ UP IV	White Blue Yellow	Ventilated UV-resistant high density polypropylene (PP) safety helmet. Polyamide cradle: 3 textile bands with 8 fixing points. Foam sweat band. Innovative adjustable ROTOR system: head sizes 53/63 cm. 2 possible positions of the headband (high/low) for better comfort.	<i></i>	<b>EN397</b> MM -30°C +50°C	350 g	/0
QUARTZ UP III	Orange Red Green	UV-resistant high density polypropylene (PP) safety helmet. Polyamide cradle: 3 textile bands with 8 fixing points. Foam sweat band. Innovative adjustable ROTOR system: head sizes 53/63 cm. 2 possible positions of the headband (high/low) for better comfort. Electrical Insulation up to 1000 V.A.C. or 1500 V.D.C.	Ce	EN397 MM -30°C +50°C 440VAC EN50365 CLASS 0	354 g	x 40

### **QUARTZ UP IV**



### **QUARTZ UP III**





Adjustable ventilation →Optimised ventilation QUARTZ UP IV



One-D Rotor ergonomic clamping

⇒One-handed adjustment with or without gloves















	•	o <sup>©</sup>		<b>V</b>		<u></u>	<b>\$</b>
FORESTIER 3	Orange	Forester's type helmet consisting of: ZIRCON safety helmet: UV-resistant high density polyethylene (HDPE) or polypropylene (PP). Sweat band. Low density (LDPE) polyethylene cradle with 8 fixing points. SUZUKA2 ear defenders. VISOR HOLDER faceshield holder. VISORG gauze visor. Cardboard packaging.	C€	EN397 -10°C +50°C 440VAC EN50365 CLASS 0 EN1731 F	<b>EN352-3</b> SNR 24 dB H 27 M 21 L 14 S/M/L	810 g	x 12
SUPER QUARTZ	White	ABS-PC safety helmet. Polyamide cradle: 3 textile bands with 8 fixing points. Foam sweat band. Innovative button adjustment "colour to colour" for head sizes 53/63 cm. 2 possible positions of the headband (high/low) for better comfort. Electrical Insulation up to 1 000 V.A.C. or 1 500 V.D.C.		EN397 MM LD -30°C +150°C 440VAC	<b>EN50365</b> CLASS 0	410 g	x 40

#### **FORESTIER 3**













#### **SUPER QUARTZ**



















Button tightening

Easy adjustment with a simple push



Tested on impact and penetration at extreme temperatures + 150°C/-30°C ⇒Especially for the steel industry trades



Shell in ABS-PC ⇒Resistance to extreme temperatures +150°C/-30°C

# SAFETY HELMETS

	•	o	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	$\checkmark$	<u></u>	
QUARTZ I	White Blue Yellow	Ventilated UV-resistant high density polypropylene (PP) safety helmet. Polyethylene cradle: 8 fixing points. Sweat band. Manual adjustment: head sizes 53/63 cm. 2 possible positions of the headband (high/low) for better comfort. Helmet with adjustable ventilation.	C€	<b>EN397</b> -10°C +50°C	322 g	x 40
ZIRCON 1	White Blue Grey Yellow Orange Red Green	UV-resistant high density polyethylene (HDPE) or polypropylene (PP) safety helmet. Low density (LDPE) polyethylene cradle with 8 fixing points. Sweat band. Manual adjustment: head sizes 53/63 cm. Electrical Insulation up to 1000 V.A.C. or 1500 V.D.C. Standard holes for accessories. Anchorage for chin straps with 2 or 4 points.	C€	EN397 -10°C+50°C 440VAC EN50365 CLASS 0	330 g	x 40
WINTER CAP	Black	Lining placed inside the helmet. Accessory for extreme cold protection, easy to remove. User instructions included. Suitable for our range of helmets. This is not PPE.			125 g	x 40
FUEGO	Clear	Clear polycarbonate single lens glasses to use as an accessory for safety helmet. Wraparound design for maximum protection. Folding system in the helmet when it is not used, for intermittent use. Very convenient. Branches foldable for easy positioning in the helmet. Suitable for our range of safety helmet.	C€	EN166 1 FT / FT EN170 UV 2C-1.2	34 g	x100

# HELMETS ACCESSORIES - MARKING





	•	o <sup>©</sup>	<b>LILLIA</b>	
JUGGAMMA	Black	Bag of 5 chin straps with 3 fixing points. Safety-breaking system. Suitable for GRANITE PEAK and GRANITE WIND safety helmets.	Adjustable	x 20
BASGAMMA	Black	Bag of 5 thermoformed sweat bands. Suitable for QUARTZ UP, SUPER QUARTZ, BASEBALL DIAMOND and GRANITE safety helmets.		x 20
DYNAMIC JUGBETA	Black	Bag of 10 chin straps. 4 fixing points for work at height. Safety-breaking system. Suitable for ONYX safety helmet.	Adjustable	x 20
DYNAMIC JUGALPHA	Black	Bag of 10 chin straps. 4 fixing points for work at height. Safety-breaking system. Suitable for ZIRCON, QUARTZ, QUARTZ UP, SUPER QUARTZ and BASEBALL DIAMOND safety helmets.	Adjustable	x 20
MENTALPHA	Black	Bag of 10 elastic chin straps with chin protector. Safety-breaking system. Suitable for ZIRCON, QUARTZ, QUARTZ UP, SUPER QUARTZ and BASEBALL DIAMOND safety helmets.	Adjustable	x 20
JUGALPHA	Black	Bag of 10 chin straps. Safety-breaking system. Suitable for ZIRCON, QUARTZ, QUARTZ UP, SUPER QUARTZ and BASEBALL DIAMOND safety helmets.	Adjustable	x 20
BASALPHA	Black	Bag of 10 foam sweat bands. Suitable for ZIRCON, QUARTZ, QUARTZ UP, SUPER QUARTZ, BASEBALL DIAMOND and GRANITE safety helmets and for BALBI2, PICO2 and VISOR-H faceshields.		x 20
NECKALPHA	Fluorescent orange	Bag of 2 neck protections adaptable on ZIRCON, OUARTZ, BASEBALL DIAMOND, GRANITE and ONYX safety helmets. High-visibility. Protects from the Sun's radiations and from dust.	Adjustable	
HESTICKER  3 1 1 1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	Metal grey Red	Bag of stickers for DELTA PLUS safety helmets.	One size	x 240

### **SKULL PROTECTION BUMP CAP**

#### A new generation protection cap: The protective shell and the absorbent foam are one!

	æ	o <sup>o</sup>		$\checkmark$	<u></u>	
KAIZIO	Grey-Black	Ergonomic bump cap suitable for all. Polyester / cotton fabric with ventilated mesh. Equipped with an inner shell in PP molded of a TPE cellular band for better shock absorption and longer lifespan.	C€	EN812	185 g	x 20

#### **KAIZIO**













TPE Multi-block over-moulding protection pad with 7 independent pads

→Limits the "helmet" effect by reducing contact with the skull and improves airflow



Triangles form small closed cells that allow the heat to not stay in contact with the skull

→More comfort when carrying



Over-moulding of the TPE foam on the PP shell ⇒Increased longevity : Zero risk of detachment on wear

Washahle



Perforated area under the mesh fabric forming air entrances and outlets allow the heat not to stay in contact with the skull

→ Reduction of perspiration



Our goal has been to design a "system" of pads for breathability while ensuring increased durability. So we opted for a pad in TPE (+ hygienic) and with good mechanical shock absorption - cf. curve) over moulded on the PP shell (better durability).

Marie Pourcher, Head Protection Product Expert



Retro-reflective tapes ➡To be better seen at your workstation



⇒Guaranteed visual comfort



Adjustable buckle with Velcro strap closure

⇒Easy adjustment with a simple



Universal fit ⇒One size for all



Matched to the MACH 5 clothing range

➡Total look



	•	o <sup>©</sup>	lacksquare	_	
AIR COLTAN	Navy blue- Orange Grey-Yellow Fluorescent yellow-Grey Black-Red	Impact resistant baseball style bump cap. Highly ventilated polyester/cotton with mesh fabric on top part for more comfort. Lined with polyethylene and comfortable EVA foam shell to absorb shocks. Adjustable size by buckle 55/62 cm.	C € EN812	176 g	x 20
COLTAN	Navy blue		0 0 0 0	150 g	

#### **AIR COLTAN**










Bi-material



Polyethylene shell with 18 holes →Ventilation



Ventilated Mesh fabric →Reduction of perspiration



Rear tightening ⇒Easy adjustment



Assorted colours available to match the MACH 2

CORPORATE clothing range - PANOSTYLE HV - DMACH



COLTAAIBMSH - 5 cm





COLTAAIGRMI - 3 cm



COLTAAIGR - 7 cm



COLTAAINOMI - 3 cm



COLTAAINOSH - 5 cm



COLTAAINOLG - 7 cm

#### **COLTAN**









COLTABMMI - 3 cm






COLTABMSH - 5 cm

# **HELP WITH CHOICE**

#### **EAR DEFENDERS AND EARPLUGS**



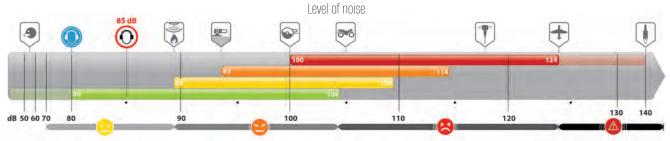





Attenuation values for noise



	The state of the s		M	101		9	30					
	CONICSOF	CONICAP	CONICFIRDE	CONICFIR	CONICMOVE	CONICFIT	CONICPLUS	CONICCOPLUS	CONICDE	CONICCO	CONIC	
100 - 124 dB									36 dB	36 dB	36 dB	
93 - 114 dB						32 dB	35 dB	35 dB				
89 - 109 dB	26 dB	28 dB	28 dB	29 dB	29 dB							
80 - 104 dB												
	H 25 M 23 L 22	H 29 M 24 L 22	H 27 M 25 L 23	H 29 M 27 L 24	H 31 M 25 L 23	H 32 M 29 L 28	H 35 M 33 L 30	H 35 M 33 L 30	H 34 M 34 L 31	H34 M 34 L 31	H34 M 34 L 31	
	Silicone	PU	TPR	TPR	PU	Silicone	PU	PU	PU	PU	PU	
	8-10 mm	8-18 mm	7 - 11 mm	7-11 mm	12-17 mm	8-12 mm	6-15 mm	6-15 mm	7-12 mm	7-12 mm	7-12 mm	
	Textile	Foldable headband	Textile	Textile	Ergonomic headband	Textile	-	Plastic	Plastic	Plastic	-	
	Reusable	Reusable	Reusable Detectable	Reusable	Reusable	Reusable	Disposable	Disposable	Disposable Detectable	Disposable	Disposable	
Packaging	x10 \ \ \ \ \ \ \	x1	x10 Q- x1		i x1	x10 (O) x1	x 200	x 200	x10 x1	x 200	x10 x200 x50	

# EAR DEFENDERS





	€	o <sup>©</sup>	V	1	<u></u>	<b>\$</b>
EZ-COM	Black-Grey	Bluetooth 3.0 hands-free kit. Adaptable for safety helmets and ear defenders. "EZ to EZ" peering for simultaneous conversation. Autonomy in use: 10 h. Mounting bracket for safety helmet and ear defender included. USB charging cable included.	2014/53/UE		71 g	x 10
PIT-RADIO 3	Black-Red	Electronic ear defender, equipped with a radio system. Allows you to listen to the radio in the FM band (87-108 MHz), while protecting hearing, in an efficient and enjoyable way. Requires 2 AA batteries not included.	EN352-1 SNR 27 dB H 31 M 24 L 16 S/M/L EN352-6 EN352-8	ANSI S3.19 NRR 22 dB	388 g	x 20

EZ-COM: Safely and easily communicate handsfree at work.

#### EZ-COM









Attachment kit on ear defender
Communicates while
remaining protected from harmful noises



Attachment kit on a safety helmet

**⇒**Communicates while remaining protected from shocks



#### $2 \ users \\$

ightharpoonsIntracom System : Autonomous communication system

➡Conversation with 2 in full duplex



Reduction of ambient noise by DSP

➡Keeps an audible conversation in any type of environment



Bluetooth

⇒Compatible with all Bluetooth communicating systems



Resistance to water and dust ⇒Use in aggressive environments



With Lithium battery

- ⇒USB cable included
- ⇒Battery rechargeable in 2 hours



Autonomy : 10 am in communication

⇒0ver a day of autonomous

#### PIT-RADIO 3















Operates with AA battery ➡Not included



AUX-IN jack ►MP3 connection



# EAR DEFENDERS

	•	o <sup>c</sup>	•	<b>Y</b>			
INTERLAGOS	Grey Fluorescent yellow	Ear defenders with ABS cups. Pads filled with synthetic foam. Double plastic headband (POM), adjustable in height, with soft reinforcement for a better comfort.		EN352-1 SNR 30 dB H 30 M 28 L 20 S/M/L	ANSI S3.19 NRR 28 dB	290 g	00
YAS MARINA	Grey-Orange	Foldable ear defenders with ABS cups. Pads filled with synthetic foam. Double plastic headband (POM), adjustable in height, with foam reinforcement for a better comfort.	CE	EN352-1 SNR 30 dB H 33 M 29 L 19 S/M/L		299 g	x 20
INTERHYKIT		5 Hygiene Kits (cushions + foam inserts) for INTERLAGOS, YAS-MARINA, SILVERSTONE2 and SEPANG2 earmuffs.				175 g	x 5

#### **INTERLAGOS**















Double headband ⇒Greater flexibility and comfort



Ear defender holder tool included on the belt

→Hearing protection always at your fingertips







HV colour ⇒To be better seen at your workstation

Colour identification ⇒Indicates the level of protection

#### YAS MARINA










Double headband ⇒Greater flexibility and comfort





# **INTERHYKIT**






Foldable hoop



Ear defender holder tool included on the belt ightharpoonup Hearing protection always at your fingertips



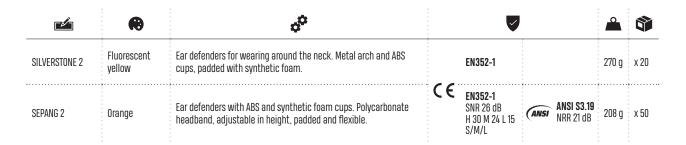

#### **SILVERSTONE 2**













#### **SEPANG 2**











# **EAR DEFENDERS**

	•	o <sup>©</sup>	<b>V</b>		<u>•</u>	
MAGNY-COURS 2		Ear defenders with ABS cups. Pads filled with synthetic foam. Metallic headgear: external in textile/internal in EVA/PVC material, adjustable in height, very comfortable. High performance level.	<b>EN352-1</b> SNR 33 dB H 34 M 32 L 25 S/M/L	ANSI S3.19 NRR 26 dB		
MAGNY HELMET 2	Black	Ear defenders for safety helmets. Adjustable in height. Metallic arms and ABS cups padded with synthetic foam. Can be used on their own or with VISOR HOLDER faceshield holder. Suitable for ZIRCON, QUARTZ, GRANITE and BASEBALL DIAMOND safety helmets.	<b>EN352-3</b> SNR 30 dB H 32 M 28 L 22 S/M/L	ANSI S3.19 NRR 25 dB		x 20
SPA 3	Blue-Black	Ear defenders with polystyrene (PS) and synthetic foam cups. ABS headband, adjustable in height. Low pressure pads.	EN352-1 SNR 23 dB H 24 M 20 L 13 S/M/L		154 g	x 50
SUZUKA 2	Fluorescent yellow Black	Ear defenders for safety helmets. Adjustable in height. High flexibility ABS arms and cups. Cups padded with synthetic foam. Can be used on their own or with «VISOR HOLDER» faceshield holder. Suitable for GRANITE, SUPER QUARTZ, QUARTZ, ZIRCON and BASEBALL DIAMOND safety helmets.	<b>EN352-3</b> SNR 24 dB H 27 M 21 L 14 S/M/L	ANSI S3.19 NRR 21 dB	254 g	x 20












### **MAGNY HELMET 2**





### SPA 3









### **SUZUKA 2**







# REUSABLE EARPLUGS





	•	o <sup>©</sup>	•	V			
CONICFIRO50	Yellow	Box of 50 pairs of reusable TPR earplugs with fabric cord.	C€	EN352-2 SNR 29 dB H 29 M 27 L 24 Ø 7-11 mm	ANSI	<b>ANSI S3.19</b> NRR 25 dB	x 20
CONICFIRO10		Bag of 10 pairs of reusable thermoplastic (TPR) earplugs with textile cord. Can be used with or without cord (9 pairs in bag + 1 pair in storage plastic box).					v.100
CONICFIRDEO10	Blue-Yellow	Bag of 10 pairs of detectable and reusable TPR earplugs with textile cord. Metal insert, suitable for food industry. Can be used with or without cord (9 pairs in bag + 1 pair in storage plastic box).		EN352-2 SNR 28 dB H 27 M 25 L 23 Ø 7-11 mm			
CONICFITO10	Orange	Bag of 10 pairs of reusable silicone earplugs with nylon cord. Can be used with or without cord (9 pairs in bag + 1 pair in storage plastic box).		EN352-2 SNR 32 dB H 32 M 29 L 28 Ø 8-12 mm	(ANSI	<b>ANSI S3.19</b> NRR 26 dB	x 100
CONICSOF010	Yellow	Bag of 10 pairs of reusable silicone earplugs with textile cord. Can be used with or without cord (9 pairs in bag + 1 pair in storage plastic box).		EN352-2 SNR 26 dB H 25 M 23 L 22 Ø 8-10 mm	(ANSI	<b>ANSI S3.19</b> NRR 22 dB	







Magnetically detectable product ⇒Suitable for the food industry

Profiled design with 3 fins: more material in contact with the ear canal

⇒Optimised sealing and noise attenuation

#### **CONICFIT010**















#### CONICSOF010

















# **DISPOSABLE EARPLUGS**

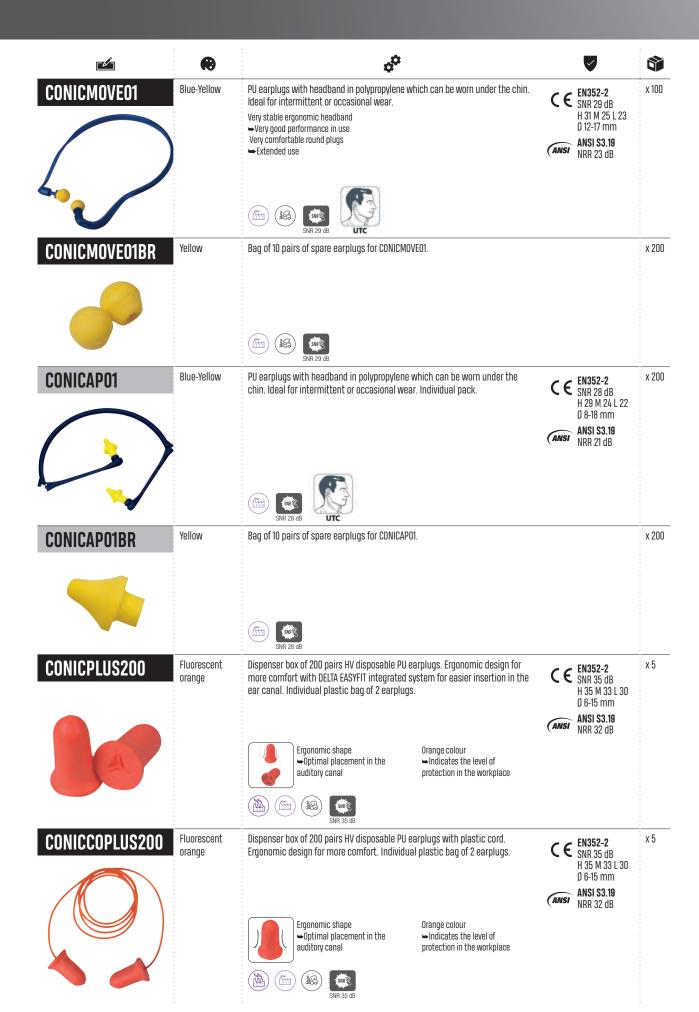



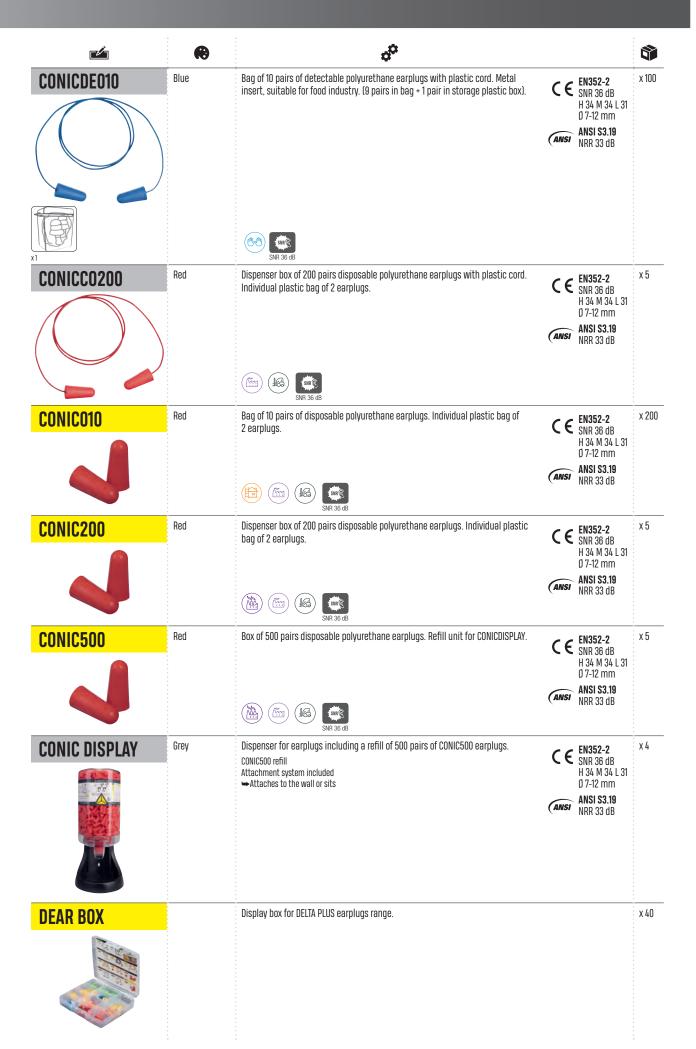




# **HELP WITH CHOICE**



http://respiratory.deltaplus.eu


0, OR NOT 0,?



AIR IS MAINLY COMPOSED OF:

78 % Nitrogen 21 % Oxygen

1% Other gas







0,?


- \*Except for :
- strong hazardous substance
- -[C] > 2000 x OEL
- no odor



STEP 2

STEP 1

#### **IDENTIFY THE TYPE OF RISK**

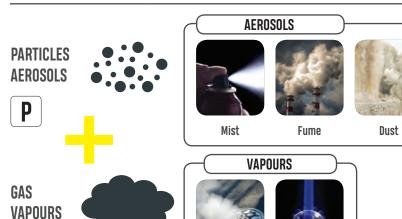



# TWA NORTH DAY

TIME WEIGHTED AVERAGE

Average exposure limit over an 8 hour time period

# STEL SHORT TERM EXPOSURE LIMIT


Should not be longer than 15 minutes

Should not occur more than 4 times per day with at least 60 minutes between exposures

= INSULATING SYSTEM



**Vapours** 

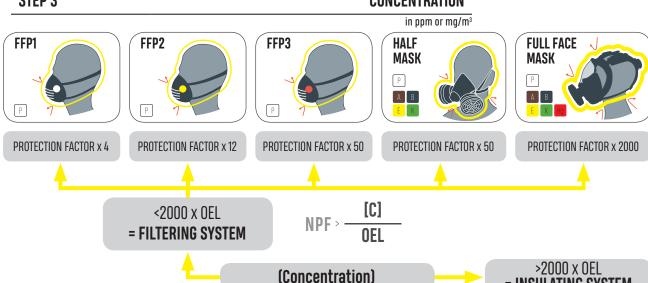


Gases

**NPF:** Nominal **P**rotection **F**actor means the level of protection tested in laboratory The Level of APF, Assigned Protection Factor, might be different according local regulations

FFP3

#### **DISPOSABLE RESPIRATORY PROTECTION**

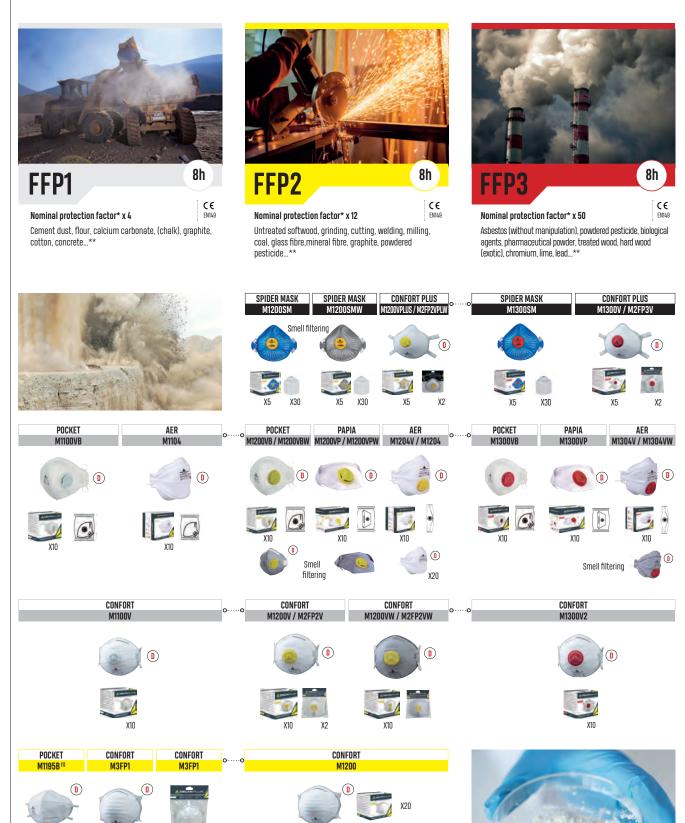

FFP1



FFP2

Optional test of EN149: 2001 standard for clogging of dolomite dust.
\*The Assigned Protection Factor, might be different according local regulations.
\* This list is indicative but not contractual and can not engage the responsibility of DELTA PLUS.

**RESPIRATORY PROTECTION** 

# **DISPOSABLE RESPIRATORY**

SPIDER MASK





#### SPIDERMASK P2 X5

#### SPIDERMASK P2W X5

























High performance exhalation valve ⇒Better evacuation of moisture and heat for extended comfort of use



Clip closure at the back with textile

⇒Easy to set-up and remove



Very soft and comfortable TPE shell

➡Even after crushing the mask systematically returns to its original shape for a perfect fit on the face

Screw system to change the filtering facepiece

ightharpoonup Economical and ecological solution with the replacement of filter media only

#### **SPIDER REFILL FFP3**













#### SPIDER REFILL FFP2



























### An economical and ecological solution while ensuring maximum user comfort.

	•	o <sup>©</sup>		<b>&gt;</b>	<b>\$</b>
SPIDERMASK P3 X5	Blue	Box of 5 reusable FFP3 dust mask. 5 Reusable moulded mask shells in TPE. Replaceable non woven synthetic fibre disposable filter (SPIDERREFILL FFP3). High performance valve which unscrews to allow the user to change the mask filter. Adjustable straps. Back fixing with clip.			
SPIDERMASK P2 X5	Diuc	Box of 5 reusable FFP2 dust mask. 5 Reusable moulded mask shells in TPE. Replaceable non woven synthetic fibre disposable filter (SPIDERREFILL FFP2). High performance valve which unscrews to allow the user to change the mask filter. Adjustable straps. Back fixing with clip.	C€	EN149	
SPIDERMASK P2W X5 Grey		Box of 5 reusable FFP2W dust mask. 5 Reusable moulded mask shells in TPE. Active carbon non woven synthetic fibre disposable masks for organic vapours (for concentration < VME). Protection against harmful odours (welding fumes for example). Replaceable. High performance valve which unscrews to allow the user to change the mask filter (SPIDERREFILL FFP2W). Adjustable straps. Back fastening with clip.			x 10
SPIDER REFILL FFP3	White	Box of 30 pieces of non woven synthetic fibre disposable masks FFP3 protection. Spare parts for SPIDER MASK.			
SPIDER REFILL FFP2	White	lite Box of 30 pieces of non woven synthetic fibre disposable masks FFP2 protection. Spare parts for SPIDER MASK.			
SPIDER REFILL FFP2W	Grey	Box of 30 pieces of active charcoal non woven synthetic fibre disposable masks FFP2W for organic vapours (for concentration < VME). Protection against harmful odours (welding fumes for example). Spare parts for SPIDER MASK.			







Less waste: Re-use of the valve, the elastics, and TPE shell. More economical: Replacing of the filter media without discarding the other components of the

Comfort superior to a classic disposable mask: Adjustment of the elastic via the rear clip.





Ecology a topic at the heart of the news. And at the heart of PPE? DELTA PLUS offers a green alternative to disposable masks: SPIDERMASK, a disposable mask with 70% of its components reusable for 1 month!

Marie Pourcher, Head Protection Product Expert

## DISPOSABLE RESPIRATORY AER

	•	o <sup>c</sup>	abla	
M1304V	White	Box of 10 non woven synthetic fibre disposable masks FFP3. Mask with 4 foldable parts suitable for all faces. Nose clip for adjustment. Foam edge under nose clip. High performance exhalation valve. Hygienic individual plastic bag. DOLOMIA optional test for longer continuous wear time.		
M1304VW	Grey	Box of 10 active charcoal non woven synthetic fibre disposable masks FFP3 for organic vapours (for concentration < VME). Protection against harmful odours (welding fumes for example). Mask with 4 foldable parts suitable for all faces. Nose clip for adjustment. Foam edge under nose clip. High performance exhalation valve. Hygienic individual plastic bag. DOLOMIA optional test for longer continuous wear time.		
M1204V		Box of 10 non woven synthetic fibre disposable masks FFP2. Mask with 4 foldable parts suitable for all faces. Nose clip for adjustment. Foam edge under nose clip. High performance exhalation valve. Hygienic individual plastic bag. DOLOMIA optional test for longer continuous wear time.	<b>C</b> € EN149	x 10
M1104	White	Box of 20 non woven synthetic fibre disposable masks FFP1. Mask with 4 foldable parts suitable for all faces. Nose clip for adjustment. Foam edge under nose clip. Hygienic individual plastic bag. DOLOMIA optional test for longer continuous wear time.		
M1204		Box of 20 non woven synthetic fibre disposable masks FFP2. Mask with 4 foldable parts suitable for all faces. Nose clip for adjustment. Foam edge under nose clip. Hygienic individual plastic bag. DOLOMIA optional test for longer continuous wear time.		























Without staples



High performance exhalation valve →Minimises moisture inside the mask



#### M1304VW















#### M1204V















#### M1104













#### M1204



















# DISPOSABLE RESPIRATORY CONFORT PLUS





	•	o <sup>©</sup>	lacksquare	
M1300V		Box of 5 non woven synthetic fibre disposable masks FFP3. Wide adjustable straps. Moulded mask. Nose clip for adjustment. Complete ultra-soft face joint ring. High performance exhalation valve.		x 10
M2FP3V	White	Pack of 2 non woven synthetic fibre disposable masks FFP3. Wide adjustable straps. Moulded mask. Nose clip for adjustment. Complete ultra-soft face joint ring. High performance exhalation valve. DOLOMIA optional test for longer continuous wear time.	C € EN149 NIOSH N99	x 36
M1200VPLUS		Box of 5 non woven synthetic fibre disposable masks FFP2. Wide adjustable straps. Moulded mask. Nose clip for adjustment. Complete ultra-soft face joint ring. High performance exhalation valve.		x 10
M2FP2VPLW		Pack of 2 active charcoal non woven synthetic fibre disposable masks FFP2 for organic vapours (for concentration < VME). Flame retardant. Wide adjustable straps. Moulded mask. Nose clip for adjustment. Foam edge under nose clip. High performance exhalation valve. DOLOMIA optional test for longer continuous wear time.	C EN149  NIOSH N95 OF N99	x 40

#### M1300V















Ultra-soft full facial seal ➡Increased comfort and optimal



Wide adjustable straps →Precise tightening and adjustment





High performance exhalation valve ➡Minimises moisture inside the mask

#### M2FP3V







#### M1200VPLUS











#### M2FP2VPLW











Flame retardant ⇒Ideal for nuisance odours or soldering

# DISPOSABLE RESPIRATORY CONFORT

<b>L</b>	•	o <sup>o</sup>	<b>V</b>	
M1300V2	White	Box of 10 non woven synthetic fibre disposable masks FFP3. Moulded mask. Nose clip for adjustment. EVA edge for extra comfort under nose clip. High performance exhalation valve. DOLOMIA optional test for longer continuous wear time.	<b>C</b> € EN149	x 10
M1200V	White	Box of 10 non woven synthetic fibre disposable masks FFP2. Moulded mask. Nose clip for adjustment. Foam edge under nose clip. High performance exhalation valve. DOLOMIA optional test for longer continuous wear time.	C EN149 NIOSH N95	x 10
			сеи	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
M2FP2V	White	Pack of 2 non woven synthetic fibre disposable masks FFP2. Moulded mask. Nose clip for adjustment. Reinforced foam edge under nose clip. High performance exhalation valve. DOLOMIA optional test for longer continuous wear time.	C E EN149  MOSH N95	x 36
				o o o o o o o o o o o o o o o o o o o
M1200VW	Grey	Box of 10 active charcoal non woven synthetic fibre disposable masks FFP2 for organic vapours (for concentration < VME). Protection against harmful odours (welding fumes for example).  Moulded mask. Nose clip for adjustment. Foam edge under nose clip. High performance exhalation valve. DOLOMIA optional test for longer continuous wear time.	C EN149  MIOSH N95	x 10
				•
M2FP2VW	White	Pack of 2 active charcoal non woven synthetic fibre disposable masks FFP2 for organic vapours (for concentration < VME). Protection against harmful odours (welding fumes for example). Moulded mask. Nose clip for adjustment. Foam edge under nose clip. High performance exhalation valve. Hygienic individual plastic bag. DOLOMIA optional test for longer continuous wear time.	C € EN149 MIOSH N95	x 36
***************************************			0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
M1100V	White	Box of 10 non woven synthetic fibre disposable masks FFP1. Moulded mask. Nose clip for adjustment. Foam edge under nose clip. High performance exhalation valve. DOLOMIA optional test for longer continuous wear time.	C € EN149	x 10
M1200	White	Box of 20 non woven synthetic fibre disposable masks FFP2. Moulded mask. Nose clip for adjustment. Foam edge under nose clip. DOLOMIA optional test for longer continuous wear time.	C € EN149 MIOSH N95	x 10
M1100	White	Box of 20 non woven synthetic fibre disposable masks FFP1. Moulded mask. Nose clip for adjustment. Foam edge under nose clip. DOLOMIA optional test for longer continuous wear time.	<b>C</b> € EN149	x 10
M3FP1	White	Pack of 3 non woven synthetic fibre disposable masks FFP1. Without valve. Moulded mask.  Nose clip for adjustment. Foam edge under nose clip. DOLOMIA optional test for longer continuous wear time.	<b>C</b> € EN149	x 36

# - RESPIRATORY PROTECTION DISPOSABLE RESPIRATORY POCKET - PAPIA





		lacksquare		
		Box of 10 non woven synthetic fibre disposable masks FFP3. Nose clip for adjustment. High performance exhalation valve. Hygienic individual plastic bag.	<b>C</b> € EN149	x 10
M1200VB	White	Box of 10 non woven synthetic fibre disposable masks FFP2. Nose clip for adjustment. High performance exhalation valve. Hygienic individual plastic bag. DOLOMIA optional test for longer continuous wear time.	C € EN149 ™IOSH N95	x 10
M1200VBW	Grey	Box of 10 active charcoal non woven synthetic fibre disposable masks FFP2 for organic vapours (for concentration < VME). Protection against harmful odours (welding fumes for example). Nose clip for adjustment. High performance exhalation valve. Hygienic individual plastic bag. DOLOMIA optional test for longer continuous wear time.	<b>C</b> € EN149	x 10
M1100VB	White	Box of 10 non woven synthetic fibre disposable masks FFP1. Nose clip for adjustment. High performance exhalation valve. Hygienic individual plastic bag. DOLOMIA optional test for longer continuous wear time.	C € EN149	x 10
MACCOUR	White	Box of 10 non woven synthetic fibre disposable masks FFP3. Nose clip for adjustment.		x 10
M1300VP	Wille	Complete foam face joint ring. High performance exhalation valve. Hygienic individual plastic bag. DOLOMIA optional test for longer continuous wear time.	<b>C</b> € EN149	XIU
M1200VP	White	Box of 10 non woven synthetic fibre disposable masks FFP2. Nose clip for adjustment. Foam edge under nose clip. High performance exhalation valve. Hygienic individual plastic bag. DOLOMIA optional test for longer continuous wear time.	C EN149 NIOSH N95	x 10
M1200VPW	Grey	Box of 10 active charcoal non woven synthetic fibre disposable masks FFP2 for organic vapours (for concentration < VME). Protection against harmful odours (welding fumes for example). Nose clip for adjustment. Foam edge under nose clip. High performance exhalation valve. Hygienic ndividual plastic bag. DOLOMIA optional test for longer continuous wear time.	C E EN149 NIOSH	x 10

### **HELP WITH CHOICE**

#### REUSABLE RESPIRATORY PROTECTION







Advice: Change the filter after each use, or quicker if the atmosphere is polluted, humid and the air flow (or breathing) is high.





# REUSABLE RESPIRATORY






		•	o <sup>©</sup>		$\overline{\checkmark}$	
	M9000E A2	Black	Box of 4 A2 filtering cartridges for M9200 ROTOR GALAXY and M9300 STRAP GALAXY full face masks.	C€	EN148-1 EN14387 A2	x 10
	M9000E A2P3	Black	Kit of 4 A2P3 filtering cartridges for M9200 ROTOR GALAXY and M9300 STRAP GALAXY full face masks.	C€	EN148-1 EN14387 A2P3R	x 10
	M9000E A2B2E2K2	Black	Box of 4 A2B2E2K2 filtering cartridges for M9200 ROTOR GALAXY and M9300 STRAP GALAXY full face masks.	C€	EN148-1 EN14387 A2B2E2K2	x 10
	M9000E A2B2E2K2P3	Black	Box of 4 A2B2E2K2P3 filtering cartridges for M9200 ROTOR GALAXY and M9300 STRAP GALAXY full face masks.	CE	EN148-1 EN14387 A2B2E2K2P3R	x 10
	M9000 P3	Black	Kit of 4 P3R filtering cartridges for M9200 ROTOR GALAXY, M9300 STRAP GALAXY full face masks.	CE	EN148-1 EN143 P3R	x 10
	M9000E A2B2	Black	Box of 4 A2B2 filtering cartridges for M9200 ROTOR GALAXY and M9300 STRAP GALAXY full face masks.	C€	EN148-1 EN14387 A2B2	x 10
	M9000E A2B2P3	Black	Box of 4 A2B2P3 filtering cartridges for M9200 ROTOR GALAXY and M9300 STRAP GALAXY full face masks.	CE	EN148-1 EN14387 A2B2P3	x 10
	M9000E A2B2E2P3	Black	Box of 4 A2B2E2P3 filtering cartridges for M9200 ROTOR GALAXY and M9300 STRAP GALAXY full face masks.	C€	EN148-1 EN14387 A2B2E2P3R	x 10
	M9000E A2B2E2K2HGP3	Black	Box of 4 A2B2E2K2HgP3 filtering cartridges for M9200 ROTOR GALAXY and M9300 STRAP GALAXY full face masks.	CE	EN148-1 EN14387 A2B2E2K2HgP3R	x 10
	M9000E AX	Black	Box of 4 AX filtering cartridges for M9200 ROTOR GALAXY and M9300 STRAP GALAXY full face masks.	C€	EN148-1 EN14387 AX	x 10
	M9000E AXP3	Black	Box of 4 AXP3 filtering cartridges for M9200 ROTOR GALAXY and M9300 STRAP GALAXY full face masks.	C€	EN148-1 EN14387 AXP3R	x 10
On request	M9000E B2	Black	Box of 4 B2 filtering cartridges for M9200 ROTOR GALAXY and M9300 STRAP GALAXY full face masks.	C€	EN148-1 EN14387 B2	x 10
ō	M9000E B2P3	Black	Box of 4 B2P3 filtering cartridges for M9200 ROTOR GALAXY and M9300 STRAP GALAXY full face masks.	CE	EN148-1 EN14387 B2P3	x 10
	M9000E E2	Black	Box of 4 E2 filtering cartridges for M9200 ROTOR GALAXY and M9300 STRAP GALAXY full face masks.	C€	EN148-1 EN14387 E2	x 10
	M9000E E2P3	Black	Kit of 4 E2P3 filtering cartridges for M9200 ROTOR GALAXY and M9300 STRAP GALAXY full face masks.	C€	EN148-1 EN14387 E2P3	x 10
	M9000E K2	Black	Box of 4 K2 filtering cartridges for M9200 ROTOR GALAXY and M9300 STRAP GALAXY full face masks.	CE	EN148-1 EN14387 K2	x 10
	M9000E K2P3	Black	Box of 4 K2P3 filtering cartridges for M9200 ROTOR GALAXY and M9300 STRAP GALAXY full face masks.	CE	EN148-1 EN14387 K2P3R	x 10
	M9000E A2B2E2	Black	Box of 4 A2B2E2 filtering cartridges for M9200 ROTOR GALAXY and M9300 STRAP GALAXY full face masks.	C€	EN148-1 EN14387 A2B2E2	x 10

#### - RESPIRATORY PROTECTION

## REUSABLE RESPIRATORY GALAXY

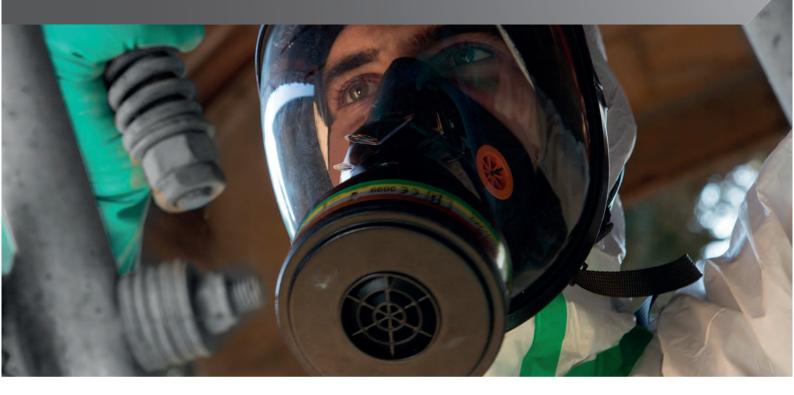









and flame ⇒Use in extreme conditions



Rotor® system (patented)

Registered design, registered ROTOR® brand, patented fastening system

Simple and quick adjustment with or without gloves



Adjustable size S/ M/ L ⇒Suitable for most types of faces



Extra large field of vision (210°) ⇒Guaranteed maximum visual comfort

#### M9300 - STRAP GALAXY















Tightening with silicone straps →Precise adjustment



Compatible with other PPE ⇒Can be used with a safety helmet





#### The first complete mask that can be set and adjusted with one hand!

	æ	o <sup>©</sup>	<b>J</b> JJJJ <b>S</b>			<u></u>	
M9200 - ROTOR Galaxy		Silicone full face mask with innovative ROTOR® system adjustment (patented), one-hand use even when wearing gloves. Wide polycarbonate screen (210°). Inside silicone half-mask to reduce mist and increased comfort (3 inhalation valves, an exhalation valve, phonic system). Adjustable sizes: S, M, L. Compatible with EN148-1 type cartridges as M9000 range, sold separately. Storage bag included.			EN136	682 g	
M9300 - STRAP GALAXY	Black-Orange	Silicone full face mask with strap adjustment. Wide polycarbonate screen (210°). Inside silicone half-mask to reduce mist and increased comfort (3 inhalation valves, an exhalation valve, phonic system). Adjustable size. Shoulder strap to hold the mask when not in use. Compatible with EN148-1 type cartridges M9000 range, sold separately. Storage bag included.	Adjustable	C€ ¦	EN148-1	616 g	х6





One of the key points to evaluate the performance of a complete respirator, and therefore the protection optimised for the user, is the adjustment. A good mask is in fact useless if the user adjusts it incorrectly on his face. Moreover, in some work situations, you have to work quickly and well. From this observation was born our idea to develop a complete mask that can adjust ultra quickly.

Marie Pourcher, Head Protection Product Expert

## REUSABLE RESPIRATORY

	æ	o <sup>o</sup>	<b>LIGHT</b>	<b>V</b>	
M6200 JUPITER		Comfort half mask in tri-material: Half mask body in Thermo-plastic Elastomer (TPE) - Support for cartridge anchorage in polyethylene HD (HDPE) - Valve protective housing in polypropylene (PP). Elastic straps. To be used with 2 filter cartridges, M6000 series, sold separately. Cardboard packaging.			
M6100 JUPITER	Black-Grey	Comfort half mask in tri-material: Half mask body in Thermo-plastic Elastomer (TPE) - Support for cartridge anchorage in polyethylene HD (HDPE) - Valve protective housing in polypropylene (PP). Elastic straps. To be used with 1 filter cartridges, M6000 P3, M6000 PREP3 or M6000 A1, sold separately. Cardboard packaging.	Adjustable	<b>C €</b> EN140	x 15
M6400 JUPITER		Comfort half mask bi-filter: Half mask body in polypropylene (PP) - Thermplastic (TPE) overmould. Elastic straps. To be used with 2 filter cartridges, M6000 series, sold separately. Shell packaging.	M/L		

#### M6200 JUPITER

















M6000 Bayonet anchor →Compatible with the M6000 cartridge range (gas and particles)



#### M6100 JUPITER

















M6000 Bayonet anchor **⇒**Compatible with the M6000 cartridge range (gas and particles)



#### M6400 JUPITER

















Thermoplastic over moulding (TPE) : Secured joints


- **⇒**Low breathing resistance
- ⇒Enhanced security





	æ	o <sup>©</sup>	<b>JULIA</b>	<b>V</b>	
M6400 MARS KIT	Black-Grey	Comfort half mask with bi filters: Half mask body in polypropylene (PP) - Thermoplastic molding (TPE). With 2 filter cartridges A2 and 2 prefilters P2. Elastic straps. Plastic shell packaging.	M/L	EN140 C € EN14387 A2 EN143 P2R	x10
M6400 SPRAY KIT	Black-Grey	Comfort half mask with bi filters: Half mask body in polypropylene (PP) - Thermoplastic molding (TPE). With 2 filter cartridges A2 and 2 prefilters P3. Elastic straps. Plastic shell packaging.	M/L	EN140 EN14387 A2 EN143 P3R	x 10
M6400 CHEM KIT	Black-Grey	Comfort half mask with bi filters: Half mask body in polypropylene (PP) - Thermoplastic molding (TPE). With 2 filter cartridges ABEK1 and 2 prefilters P3. Elastic straps. Plastic shell packaging.	M/L	EN140 EN14387 AIBIEIK1 EN143 P3R	x 10
M6000 A1	Grey	Pack of 2 A1 filtering cartridges for M6000 JUPITER serie half masks.		C € EN14387	x 30
M6000E A2	Grey Grey	Pack of 2 A2 filter cartridges for M6200 JUPITER half-mask and M6400-JUPITER half mask.	0 0 0 0 0 0 0 0 0 0 0 0	<b>C €</b> EN14387 A2	x 30
M6000E ABEK1	Grey	Pack of 2 A1B1E1K1 filter cartridges for M6200 JUPITER half-mask and M6400-JUPITER half mask.	0 0 0 0 0 0 0 0 0 0 0 0 0	<b>C € EN14387</b> A1B1E1K1	x 30
M6000E PREP2	Grey	Set of 6 P2 pre-filters and 2 adapters for M6000 JUPITER half-mask serie. To use with M6000E filters.		C € EN143 P2R	x 30
M6000E PREP3	Grey	Set of 2 P3 pre-filters and 2 adapters for M6000 JUPITER half-mask serie. To use with M6000E filters.		C € EN143 P3R	x 30
M6000 P2 CLIP	Grey	Set of 2 P2 filter cartridges for M6000 JUPITER serie half masks + 20 spare disposable filters.		C € EN143 P2NR	x 30
M6000 P2	Grey	Pack of 2 P2 filter cartridges for M6000 JUPITER serie half masks.	0 0 0 0 0 0 0 0 0 0	C € EN143 P2R	x 30
M6000 P3	Grey	Pack of 2 P3 filter cartridges for M6000 JUPITER serie half mask.		C € EN143 P3R	x 30



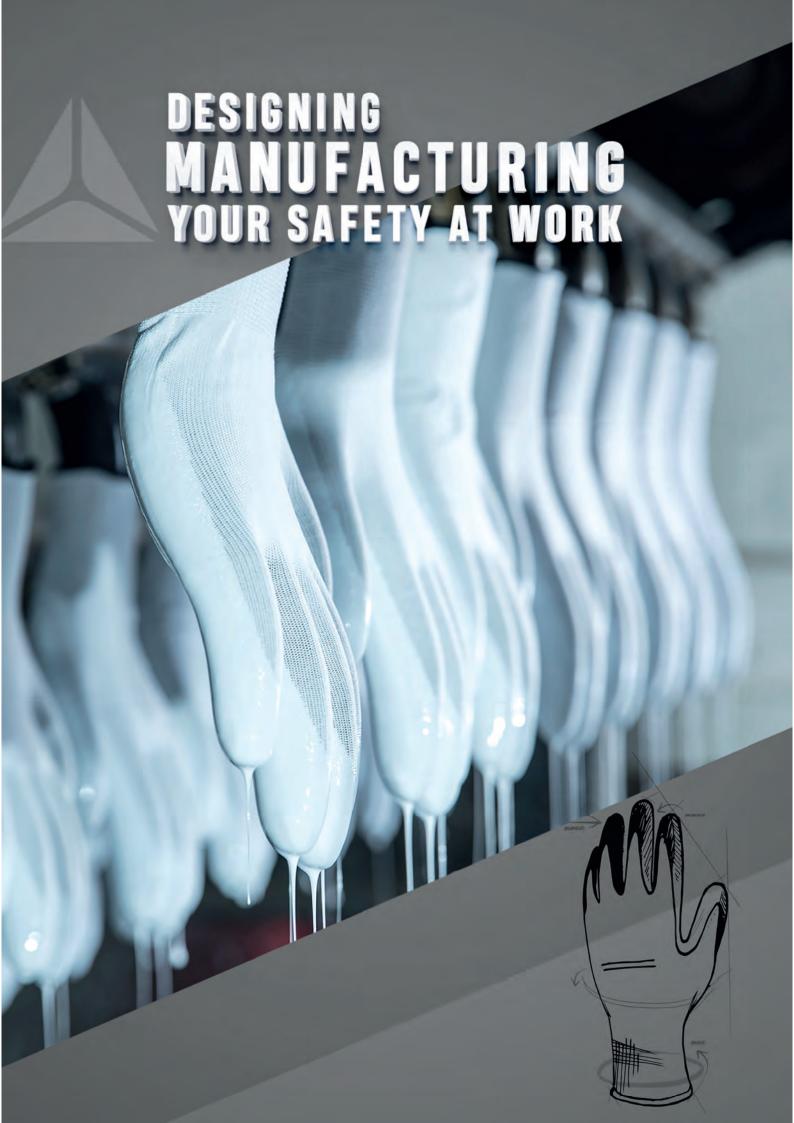

## HIGH-TECH GLOVES

- 070 help with choice
- 072 Handling of sharp-edged objects

HAND PROTECTION

- 084 Anti static works
- 086 Precision work
- 088 General handling
- 090 Handling in oily environment

#### SYNTHETIC GLOVES

- 104 Help with choice
- 106 Works in industry
- 108 Works requiring chemical resistance
- 120 Disposable

#### LEATHER GLOVES

- 124 Help with choice
- 125 Handling in cold environment
- 126 Handling in wet environment
- 128 General handling
- 132 Welders works
- 136 Handling in cold environment

#### KNITTED GLOVES

- 135 Handling requiring cut and heat resistance
- 137 Small handling


#### 393 • TECHNICAL INFORMATION






### **HELP WITH CHOICE**



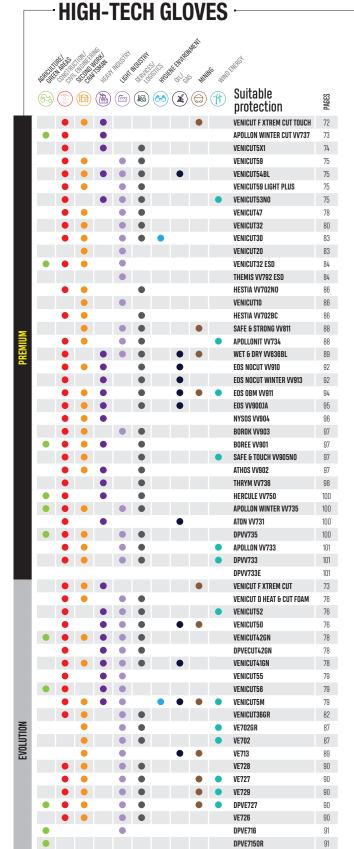

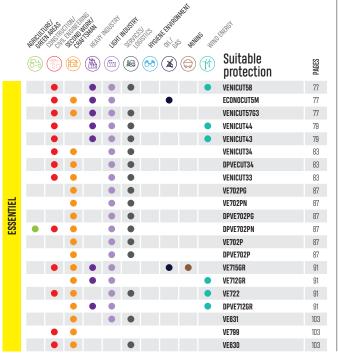



#### **HOW TO IDENTIFY SIZES?**

6	7	8	9	10	11	12
RED	YELLOW	BROWN	BLACK	BLUE	GREY	GREEN

IMPLEMENTATION OF A COLOUR-CODING SYSTEM FOR HIGH-TECHGLOVES AND SOME LEATHER GLOVES:

UNIFORM SIZES FOR EASY IDENTIFICATION. REFER TO PAGE 383 TO FIND THE CORRECT SIZE

102 102

102

102


VE733


VE7300R

DPVE730

DPVV831

•

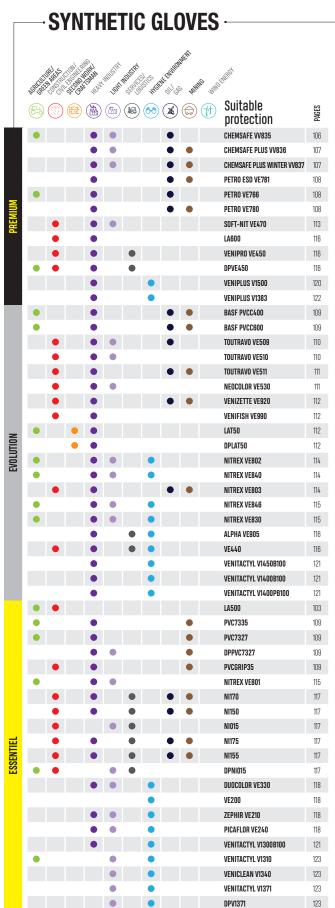

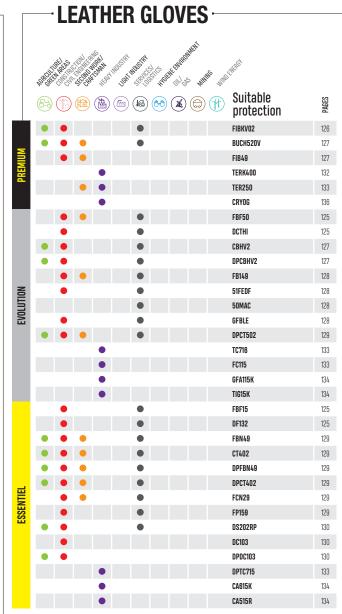







### **HELP WITH CHOICE**



#### **CUT RESISTANT GLOVES**

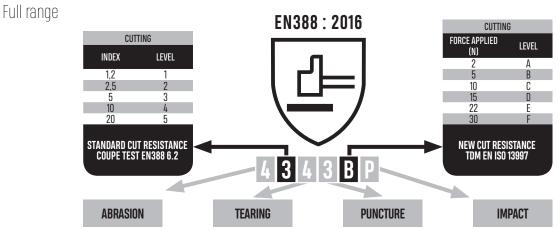


For gloves made of very resistant materials (materials that blunt the blade during the test), the Coupe Test is no longer relevant, a TDM test becomes mandatory. The TDM test is also more representative of work situations with high risk of cut.

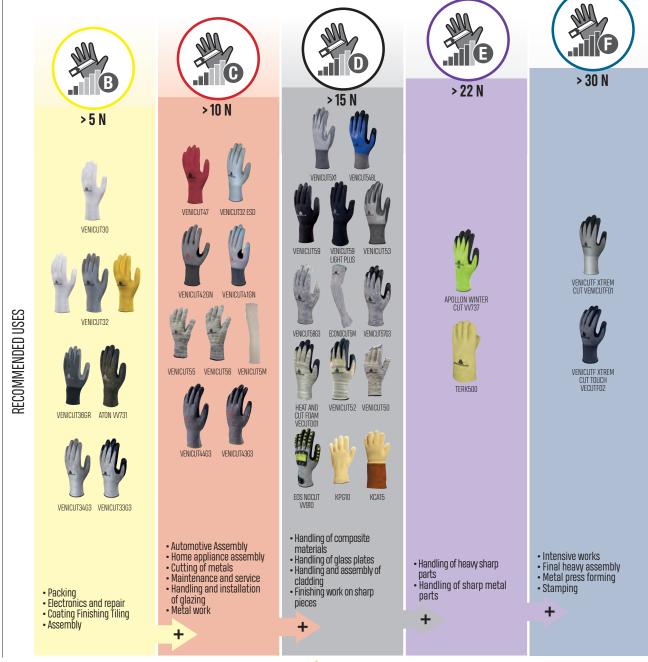

#### **CUT RESISTANT GLOVES**

The fibres

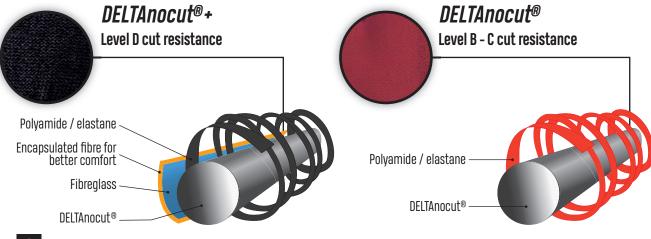

Mono-fibre polymer high resistance Maximum dexterity


**DMF free:** total material safety, protection of the handled objects.

Washable: hygienic, gloves can be re-used.


Reduced thickness: Fine touch and better breathability.

Soft touch: texture provides comfort and feeling of freshness all day.

Available in gauge 15 and 13




Maximum cut resistance. High level of abrasion resistance. Heat resistance up to 100°C (until 250°C for VENICUT50 and VENICUT52).



To combine safety and comfort

Excellent **cut** resistance Maximum abrasion performance Soft fibre: High level of **comfort** Available in gauge 15 and 18



### ECOnocut®

Level B - C - D cut resistance

ECOnocut® blend

To combine safety and attractive price

Different levels of cutting resistance **Good** abrasion performance Economical fibre: good price Gauge 13: high level of dexterity



## HANDLING OF SHARP-EDGED OBJECTS

#### The perfect combination of the thinnest gauge on the market (gauge 18) and the highest cut protection level (TDM F).

	€	o <sup>o</sup>	<b>LILLE</b>	♥		
VENICUT F XTREM CUT TOUCH	Navy blue-Black	Xtrem CUT® high performance fibre. Foam nitrile and TPU coating on palm and fingertips. Gauge 18.	06 / 07 / 08 / 09 10 / 11	<b>C € EN388</b> 4X43F <b>(</b>	ANSI-ISEA 105 A6	x 60

### **VENICUT F XTREM CUT TOUCH**





















Fibre Xtrem CUT®

- ➡The highest level of cut protection on the market
- **⇒**Comfort and flexibility for heavy work

- Nitrile/TPU foam blend

  ⇒Flexibility and dexterity

  ⇒Reduced transpiration thanks to its very good breathability





	•	o <sup>©</sup>	<b>LITTLE</b>	$\checkmark$	
VENICUT F XTREM CUT	Grey-Black	12riffy foam niffile coafing on naim and	06 / 07 / 08 09 / 10 / 11	EN388 4 X 4 3 F	
APOLLON WINTER CUT VV737	Fluorescent yellow-Black	Acrylic/high performance polyethylene fibre. Foam latex coating on palm and fingertips. Gauge 10.	08 / 09 / 10 / 11	EN388 3 X 4 3 E	x 60



#### **VENICUT F XTREM CUT**















- →The highest level of cut protection on the
- →Comfort and flexibility for heavy work





#### **APOLLON WINTER CUT VV737**



















Cut protection and brushed acrylic support

- ⇒Ideal in extreme environments
- → Maintains heat

  → Very good cut protection (level E)



Protection from the cold ightharpoonup Ideal in cold environments







⇒Increased breathability (feeling of freshness)

→Dexterity and comfort

## HANDLING OF SHARP-EDGED OBJECTS

Safety assured thanks to the combination of anti-cut and leather reinforcement threads. Great resistance for intensive work all day!



	•	o <sup>©</sup>	<b>LIFTE</b>	<b>V</b>	
VENICUT5X1	Grey	DELTAnocut®+ high performance fibre. Polyurethane coating and cowhide on palm and fingertips. Gauge 13.	09 / 10 / 11	C E EN388 ANSI-ISEA 105	x 60

#### **VENICUT5X1**















Polyurethane coating ⇒Very soft and breathable material bringing comfort and dexterity

⇒Good abrasion and tear resistance







Split leather →Reinforced abrasion

resistance ⇒Suitable for heavy work

We started from the need of operators in the automotive industry to combine strength, dexterity and finesse of touch. With a particularly complex technical challenge: to develop the shape of the piece of leather that must both fully respect the anatomy of the hand and the technicality of the fibre of a cut protection glove. Also, we are proud to present one of the most best current technical advances in the field of the protection glove.

Laetitia Guillerm, Hand Protection Product Expert



	•	o <sup>to</sup>	<b>JUL</b>	<b>&gt;</b>	
VENICUT59	Black	nuc mich un buitens anchtatiiving	07 / 08 / 09 10 / 11	EN388 ANSI-ISEA 105 4 X 4 2 D A4	
VENICUT59 LIGHT PLUS		DELTAnocut®+ high performance fibre. 12 cm cuff. Gauge 13.	06 / 07 / 08 09 / 10 / 11	EN388 ANSI-ISEA 105 A3	
VENICUT54BL	Royal blue- Black	DELTAnocut®+ high performance fibre. Double nitrile coating. Gauge 13.	08 / 09 / 10 / 11	EN388 4 X 4 3 D ANSI-ISEA 105	·- х 60
VENICUT53NO	Black	DELTAnocut®+ high performance fibre. Nitrile micro-foam coating on palm and fingertips. Gauge 15.	07 / 08 / 09 / 10	EN388 4 X 4 3 D	

#### **VENICUT59 VENICUT59 LIGHT PLUS** $(\mathbb{A})$ 163 ≤30°c DELTAnocut® fibre Washable 8 cm ⇒Very soft texture for great comfort ⇒Increased lifespan all day Polyurethane coating →Very soft and breathable material bringing DELTAnocut®+



comfort and dexterity ⇒Good abrasion and tear resistance

Double nitrile coating for

impermeable to oils

good adhesion

⇒1st smooth nitrile coating :

⇒2nd nitrile foam coating :

oily work



⇒Excellent cut resistance (level D)

⇒Unparalleled finesse of touch

High coating

⇒Very good protection of the hand

⇒Long life of the glove

## HANDLING OF SHARP-EDGED OBJECTS

	æ	o <sup>o</sup>	<b>Lift</b>	V		
VENICUT D HEAT & CUT FOAM	Yellow-Grey- Black	HEATnocut® high performance fibre. Gritty foam nitrile coating on palm and fingertips. Gauge 13.	07 / 08 / 09 / 10 / 11	EN388 4 X 4 2 D EN407 X 1 X X X X		
VENICUT52	Yellow-Black	HEATnocut® high performance polyethylene fibre. Latex coating on palm and fingertips. Gauge 10.	07 / 08 / 09 / 10	<b>C ∈</b> EN388  3 X 4 2 D  EN407  X 2 X  X X X	x 60	
VENICUT50	Yellow-Grey	HEATnocut® High performance polyethylene fibre. Cowhide on palm and fingertips. Gauge 10.	09 / 10	EN388 4 X 4 3 D EN407 X 1 X X X X		

#### **VENICUT D HEAT & CUT FOAM**















- Nitrile foam coating

  ⇒Excellent resistance to abrasion
- ⇒Rough finish for excellent grip on handled objects





HEATnocut® High Performance Polyethylene →Contact heat and cut resistance

#### **VENICUT52**



















Latex coating

- ⇒Good resistance to abrasion ⇒Rough finish for excellent
- grip on handled objects



#### **VENICUT50**







	æ	o <sup>©</sup>	<b>LIGHT</b>	$\checkmark$	
VENICUT58	Grey	ECONOCUT® high performance fibre. Polyurethane coating on palm and fingertips. Gauge 13. Bag of 3 pairs.	07 / 08 / 09 / 10	EN388 ANSI-ISEA 105 4 X 4 2 D A3	x 40
ECONOCUT5M	White-Black	ECONOCUT® high performance fibre. Knitted sleeve with thumbhole. Length 55 cm. Gauge 13. Bag of 1 pair.	One size	C E EN388 4 X 4 X D ANSI-ISEA 105 A2	x 60
VENICUT57G3	Grey-Black	ECONOCUT® high performance fibre. Nitrile coating on palm and fingertips. Gauge 13. Bag of 3 pairs.	07 / 08 / 09 / 10	EN388 ANSI-ISEA 105 4 X 4 3 D A3	x 40



#### **VENICUT58**























### ECONOCUT5M















#### VENICUT57G3





















## HANDLING OF SHARP-EDGED OBJECTS

	•	o <sup>to</sup>	<b>July</b>		
VENICUT47	Red	DELTAnocut® high performance fibre. Polyurethane coating on palm and fingertips. Gauge 13.	06 / 07 / 08 09 / 10 / 11	EN388 4 X 4 2 C	x 60
VENICUT42GN		SOFTnocut® high performance fibre. Polyurethane coating on palm and fingertips. Reinforcement between the	07 / 08 / 09 / 10 / 11	EN388 4 X 4 3 C ANSI-ISEA 105	
DPVECUT42GN	Grey	thumb and index finger. 10 cm cuff. Gauge 15.	09	4X43C ANSI ANSI-ISEA IUS	x 36
VENICUT41GN		SOFTnocut® high performance fibre. Nitrile coating on palm and fingertips. Reinforcement between the thumb and index finger. 10 cm cuff. Gauge 15.	07 / 08 / 09 / 10 / 11	EN388 4 X 4 4 C	x 60

#### **VENICUT47**





















- Polyurethane coating
  Very soft and breathable material bringing comfort and dexterity
  Good abrasion and tear resistance



- DELTAnocut® ⇒Good cut resistance (level C)
- ⇒Unparalleled finesse of touch (13 gauge)







Washable ⇒Increased lifespan

#### **VENICUT42GN**























Also available with header card ⇒DPVECUT42GN

10 cm





Reinforcement between the thumb and index finger

- ⇒Increased protection
- ⇒Increased lifespan

#### **VENICUT41GN**































Reinforcement between the thumb and index finger

- ⇒Increased protection ⇒Increased lifespan

	•	o <sup>c</sup>	<b>HILL</b>	₹	•
VENICUT55		HEATnocut® High performance polyethylene fibre. Gauge 10.	07 / 09 / 10	EN388 2 X 4 X C EN407 X 1 X X X X	v.100
VENICUT5M	Yellow-Grey	HEATnocut® High performance polyethylene fibre. Knitted sleeve with thumbhole. Length 45 cm. Gauge 13.	One size	ZÏ	x120
VENICUT56		HEATnocut <sup>®</sup> High performance polyethylene fibre. PVC dots on palm. Gauge 10.	07 / 09 / 10	S X 4 X C EN407 X1X XXX ANSI-ISEA 105	x 60
VENICUT44	Orev Pleak	ECONOCUT® high performance fibre. Polyurethane coating on palm and fingertips. Gauge 13. Bag of 3 pairs.	07 / 00 / 00 / 10	EN388 4 X 4 2 C	
VENICUT43	- Grey-Black	ECONOCUT® high performance fibre. Nitrile coating on palm and fingertips. Gauge 13. Bag of 3 pairs.	- 07 / 08 / 09 / 10	EN388 4 X 4 3 C	x 40

#### **VENICUT55**















HEATnocut® High Performance Polyethylene

- **⇒**Contact heat (100°C for 15 seconds), and cut resistant
- ⇒Very good level of abrasion resistance











#### **VENICUT56**















#### **VENICUT5M**



















#### **VENICUT44**



















#### **VENICUT43**

























HIGH-TECH GLOVES

## HANDLING OF SHARP-EDGED OBJECTS



#### VENICUT32



















Polyurethane coating

- → Very soft and breathable material bringing comfort and dexterity
- →Very good abrasion and tear resistance



Washable ⇒Increased lifespan














#### The choice of glove suited to the level of risk, ensured by the visual cue, guarantees work in secure conditions. A whole range dedicated to this approach.

Ď	æ	o <sup>c</sup>	<b>LIGHT</b>		$\overline{\mathbf{v}}$	
	Yellow	DELTAnocut® high performance fibre.				
VENICUT32	Grey	Polyurethane coating on palm and	06 / 07 / 08 09 / 10 / 11	<b>C E</b> EN388 4 X 4 2 B	ANSI-ISEA 1	105 x 60
	White	fingertips. Gauge 15.				

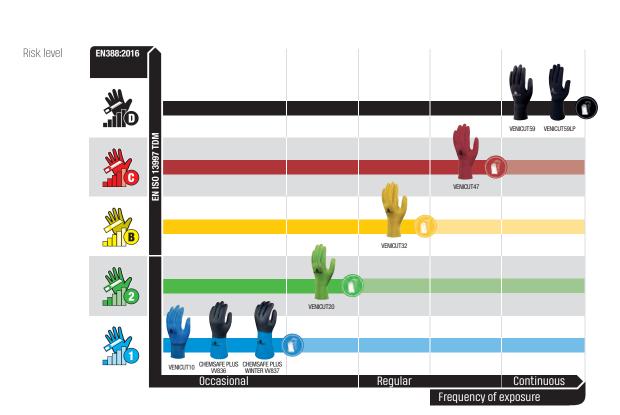

**Blue:** safe work without major risk (<5N) **Green:** working with low cut risk (micro-cuts) (5N) **Yellow:** working with moderate cut risks (6.5 N)

**Red:** working with high cut risks, requiring regular wear of the glove (14 N) **Black:** working with very high cut risks, requiring the daily wear of the glove (16 N)



Initiated by the INRS approach, our concept is available in 5 colours, each associated with a different level of danger. This concept helps safety engineers to verify the proper wearing of the glove corresponding to the identified risk.

Coloured tablets are also provided by our teams during the validation of the concept during the study of the position. This allows all stakeholders to see that the glove worn is suitable.

This represents a significant gain for a company (optimisation of purchase costs) but also guarantees carriers to always be well protected!

Laetitia Guillerm, Hand Protection Product Expert

## HANDLING OF SHARP-EDGED OBJECTS

#### Its design with an 18 gauge cut protection thread makes this model one of the thinnest gloves in the field of cut protection.

	•	o <sup>©</sup>	<b>LILLIA</b>	<b>V</b>	
VENICUT36GR	Grey	SOFTnocut® High performance fibre. Nitrile coating on palm and fingertips. Gauge 18.	06 / 07 / 08 / 09 / 10 / 11	C E EN388 ANSI-ISEA 105	x 120

#### **VENICUT36GR**



























Gauge 18 ⇒Very good dexterity and work finesse (Thin gauge of the market)





Launched 3 years ago, specifically for engineers in the aviation sector. The challenge was to develop an innovative glove that combines protection, dexterity, sense of touch with a level of adequate cut resistance, the VENICUT36 was created! The choice of its coating and its colour are not by chance either: the nitrile was necessary to quarantee working safely in an oily environment. The transparent colour is a real benefit for users in maintenance operation. Visual control remains crucial with this type of task.

Laetitia Guillerm, Hand Protection Product Expert



	æ	o <sup>©</sup>	<b>LIGHT</b>	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Y	l	
VENICUT30	White	DELTAnocut® high performance fibre. Gauge 15.	06 / 07 / 08 / 09 / 10	<u>,</u>	EN388 4 X 4 X B		x 60
VENICUT20	Green	Polyamide/Spandex. Polyurethane coating on palm and fingertips. Gauge 15.	06 / 07 / 08 /	Ĺ	EN388 4 2 4 2 B		
VENICUT34		ECONOCUT® high performance fibre. Polyurethane coating on palm and fingertips. Gauge 13. Bag of 3 pairs.	09 / 10 / 11	<b>(€</b>	EN388 3 X 4 2 B	ANSI-ISEA 105 A2	x 40
DPVECUT34	Grey	ECONOCUT® high performance polyethylene fibre. Polyurethane coating on palm and fingertips. Gauge 13.	07 / 09		<u>−</u> /3X42B		x 120
VENICUT33		ECONOCUT® high performance fibre. Nitrile coating on palm and fingertips. Gauge 13. Bag of 3 pairs.	06 / 07 / 08 / 09 / 10 / 11	Ţ.	EN388 3 X 4 3 B		x 40





## VENICUT20







Gauge 15 ⇒Very good dexterity and work finesse



Polyurethane coating →Very soft and breathable material bringing comfort and dexterity

⇒Good abrasion and tear resistance



#### **VENICUT34**



## **ANTI STATIC WORKS**

#### The range specially designed for Electrostatic Discharge (ESD) environments!

#### **VENICUT32 ESD**



















DELTAnocut® fibre ⇒Very soft texture and optimal fit for all-day comfort



Polyurethane coating

- ⇒Very soft and breathable material
- bringing comfort and dexterity ⇒Good abrasion and tear resistance





Carbon fibre

⇒High electrostatic dissipation to reduce the risk of explosion

#### THEMIS VV792 ESD


















Copper fibre →More efficient than carbon in electrostatic discharge







	æ	o <sup>©</sup>	<b>LIVE</b>	<b>V</b>	
VENICUT32 ESD	Grey	DELTAnocut® high performance fibre and carbon fibre. Polyurethane coating on palm and fingertips. Gauge 15.	06 / 07 / 08	EN388 4 X 4 2 C EN16350 ANSI-ISEA 105	x 60
THEMIS VV792 ESD	Rust-coloured-Grey	Copper polyamide. Polyurethane coating on fingertips. Gauge 15.	09 / 10 / 11	EN388 X13 X X EN16350	
PETRO ESD VE781	Black	Chemical PVC. PVC on cotton knitted lining gauge 13 with metal fiber. Rough- textured palm. Length: 30 cm. Thickness: 1.30 mm.	08 / 09 / 10 / 11	EN374-1 TYPE B 12 > 30 mn K6 > 480 mn L4 > 120 mn  EN374-5  EN16350	x 120

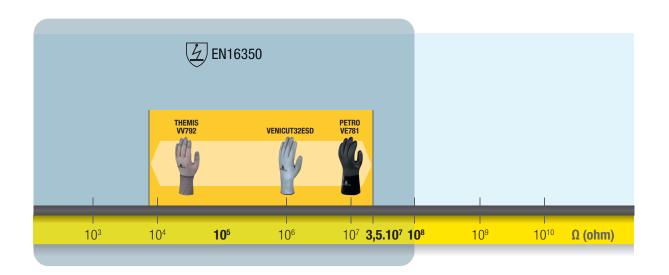

According to EN16350, electrostatic properties of protective gloves, the electrical resistance through a glove must be less than 10<sup>8</sup> Ω. These gloves help protect you from the risk of explosion by dissipating (as much as possible) the electro-static electricity naturally present in the human body. They must be used in conjunction with shoes and antistatic clothing. The user must also be grounded. The performance obtained on our gloves ensures a high level of efficiency.



Car industry stakeholders are always looking for productivity gains. For this, they are aimed at manufacturers who can develop, design and manufacture products that meet their expectations. Their major wish was to have a versatile glove, protecting both the risk of cutting (level B) but also allowing dissipation of the electrostatic charge : we have developed the VENICUT32 ESD for them ! Coming from a best-sellers market (VENICUT32GR), this new model completes a deep range and is suited to all needs!

Laetitia Guillerm, Hand Protection Product Expert

### **PRECISION WORK**

#### The quality and fineness of the weave makes this model one of the most comfortable gloves on the market.

	•	o <sup>o</sup>	<b>LIGHT</b>	<b>Ø</b>	
HESTIA VV702NO	Black		06 / 07 / 08	EN388	
HESTIA VV702BC	White	1000/ only wide Deleventhan and for the	09 / 10	4131X	
VENICUT10	Blue	100% polyamide. Polyurethane coating on palm and fingertips. Gauge 15.	06 / 07 / 08 09 / 10 / 11	C € ☐ EN388 4131X	x 120

#### **HESTIA VV702NO**











Gauge 15 ⇒Very good dexterity and work finesse



Double polyamide weave ⇒Very high density support for very good support and maximum dexterity







The HESTIA model has the distinction of having a double density polyamide knit. Our basic idea was to allow wearers to have a feeling of comfort and support until the end of the working day. Composed of an association between a high quality polyamide and a very flexible polyurethane coating, this glove is an ally of choice! A winning choice for workers!

Laetitia Guillerm, Hand Protection Product Expert

#### VENICUT10





























→Very soft and breathable material bringing comfort and dexterity

⇒Good abrasion and tear resistance



→Very good dexterity and work finesse

	•	o <sup>©</sup>	<b>July</b>	<b>V</b>	
VE702GR	Grey	: 100% polyamide. Polyurethane coating on palm and fingertips.			
VE702	White	Gauge 13.	06 / 07 / 08 09 / 10		x 240
VE702PG	Crov				
DPVE702PG	····· Grey		06 / 07 / 09		x 120
VE702P	White	ite 100% polyester. Polyurethane coating on palm and fingertips.	06 / 07 / 08 09 / 10	<b>C € EN388</b> 3121X	x 240
DPVE702P		Gauge 13.	07 / 09		x 120
VE702PN	Black		06 / 07 / 08 09 / 10 / 11		x 240
DPVE702PN			09 / 10		x 120

#### VE702GR



























Grey colour → Handling of soiled objects

#### **VE702**













#### VE702PG











Also available with header card →DPVE702PG















Also available with header card →DPVE702P



#### VE702PN











Also available with header card →DPVE702PN



## GENERAL HANDLING

	€	o <sup>©</sup>	, ijiji	<b>&gt;</b>	<b>**</b>
SAFE & STRONG VV811	Navy blue-Grey	, , , , , , , , , , , , , , , , , , , ,	06 / 07 / 08 / 09 10 / 11	EN388 4131X	v.100
APOLLONIT VV734	Fluorescent yellow-Black	Polyamide/Spandex. Foam nitrile and TPU coating on palm and fingertips. Gauge 15.	07 / 08 / 09 / 10	EN388 4121X	x 120

#### SAFE & STRONG VV811















Solvent-free coating

- ⇒Suitable for sensitive people
- ⇒Respectful of the environment
- →Ideal for the automotive industry →No traces on the objects handled
































**APOLLONIT VV734** 





Gauge 15 ⇒Finesse of touch



Nitrile/TPU foam blend ➡Flexibility and dexterity → Reduced transpiration thanks to its very good breathability









	<b>€</b>	o <sup>c</sup>	<b>LIGHT</b>	V	
WET & DRY VV636BL	Blue-Black	100% polyamide. Full nitrile coating of the hand. Second foam nitrile coating on palm and fingertips. Gauge 15.	- 07 / 08 / 09 / 10	EN388 4131X	x 120
VE713	Black	100% polyamide. Double nitrile coating on palm, fingers and half back. Gauge 13.		EN388 3121X	x 240

#### WET & DRY VV636BL















100% polyamide support →Very good comfort





#### ⇒2nd nitrile foam coating : good



**VE713** 





Nitrile coating

→Very good mechanical performance

⇒Good grip in oily/ greasy environment





⇒Very good protection of the hand

- Double coating →Increased lifespan →Very good resistance to abrasion







## HANDLING IN OILY ENVIRONMENT

	€	o <sup>o</sup>	<b>LITTE</b>	<b>V</b>	
VE728	Grey-Black	Polyester/ acrylic. Foam nitrile coating on palm and fingertips. Nitrile dots on palm. Gauge 13.	07 / 08 / 09 / 10	EN511 X 1 X	
VE727		Polyamide/Spandex. Nitrile/Polyurethane coating on palm and		<b>C €</b> □ EN388 3121X	
DPVE727		fingertips. Nitrile dots on palm. Gauge 15.	07 / 09	<b>C €</b> 3121X	x 120
VE729		Polyamide/Spandex. Nitrile/polyurethane coating on palm, fingertips and mid back. Nitrile dots on palm. Gauge 15.	07 / 08 / 09 / 10		•
VE726		Polyamide/Spandex. Nitrile/Polyurethane coating on palm and fingertips. Gauge 15.	07 / 08 / 09 / 10 / 11		

#### **VE728**























Non-slip dots ⇒Good grip of handled objects







Brushed acrylic interior →Maintains heat

#### **VE727**

























Gauge 15 →Very good dexterity and work finesse



Non-slip dots ⇒Good grip of handled objects VE727 - VE729



Also available with header card ⇒DPVE727







- ⇒Oil resistance ⇒Flexibility of work and increased comfort
- ⇒Very good mechanical performance VE727 - VE729 - VE726

#### **VE729**





















3/4 coating ►Very good protection of the back of the hand





















	•	o <sup>©</sup>	<b>LIGHT</b>		$\overline{\triangleright}$	
VE715GR	Black-Grev	100% polyester. Nitrile coating on palm, fingertips and half-back. Gauge 13.	07 / 08 / 09 / 10		FN388	x 120
VE712GR		100% polyester. Nitrile coating on palm and fingertips, Gauge 13.	07 / 08 / 09 / 10 / 11		EN388 3121X	x 240
DPVE712GR	Grey-Black	i oow polyester. Withie coating on paint and imgertips, badge is.	09			x 120
DPVE716	Orange	Foam nitrile on polyamide lining. Fully coated. Gauge 15.	07 / 09 / 10	CE	EN388 4121	x 60
DPVE715	White-orange	100% polyester. Nitrile coating on palm, fingertips and half-back. Gauge 13.	07 / 09		EN388 2121X	··· x 120
VE722	Grey-Black	100% polyester. Foam nitrile coating on palm and fingertips. Gauge 13.	07 / 08 / 09 / 10		<b>EN388</b> 4121X	X IZU

## VE715GR



















## VE712GR













Also available with header card ⇒DPVE712GR



Nitrile coating →Very good mechanical performance

⇒Good grip in oily/ greasy environment

## **DPVE716**









header card



Flexible Nitrile Foam Coating

## **DPVE715**







Available only with header card



## **VE722**


















# GENERAL HANDLING

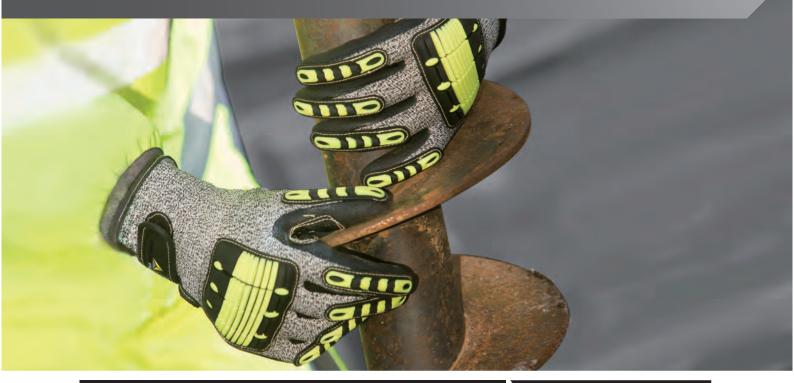

### **EOS NOCUT VV910**























Washable ⇒Increased lifespan



Double nitrile coating for oily work ⇒1st smooth nitrile coating :

impermeable to oils ⇒2nd nitrile foam coating : good



Available only with header card



Flexible reinforcements →Increased protection from impacts and pinches



Protection against impact in the metacarpal area. After an energy impact of 5J, the force transmitted to the back of the hand cannot exceed 4 kN.



Reinforcement between the thumb and index finger and on the palm. →Increased protection



## **EOS NOCUT WINTER VV913**



















⇒Excellent comfort all day long

→Maintains heat



Very good abrasion and cut resistance

ightharpoonupIncreased lifespan

Kevlar® thread stitching ⇒Increased lifespan

8 cm cuff with Velcro closure


ightharpoonupPerfect adjustment

→Reduced discomfort at the wrist, during prolonged use



## Safe, qualitative and very comfortable; the EOS NO CUT is surely one of the gloves with the most interest on the market!

	•	o <sup>©</sup>	<b>LILLE</b>	<b>V</b>		
EOS NOCUT VV910	Yellow-Grev-	High performance polyethylene support. Thermoplastic (TPR) reinforcement on back and fingertips. Smooth nitrile coating/foam nitrile on palm and fingertips. Embossed inside reinforcement on palm. Kevlar® thread on all the seams.		EN388 4 X 4 3 D P	ANSI-ISEA 105 A3	
EOS NOCUT WINTER VV913	Black	High performance polyethylene support. TPR reinforcement on back and fingertips. Double smooth nitrile coating/foam nitrile on palm and fingertips. Embossed inside reinforcement on palm. Inside acrylic lining. Kevlar® thread on all the seams.	- U8 / U9 / 1U / 11	EN388 4 X 4 4 D P EN511 1 3 X	ANSI-ISEA 105	x 6U

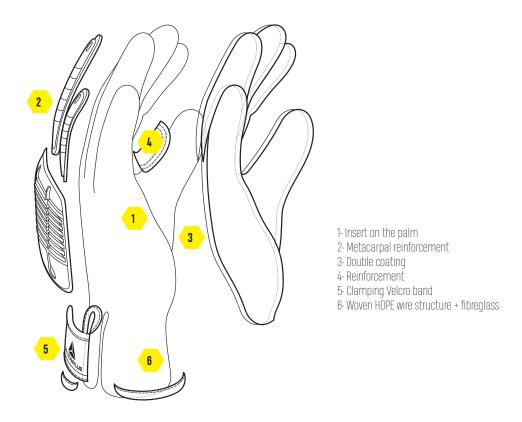




Initially, we developed this glove for targeted uses in the oil industry, but in the end, it has shown more usage possibilities! We have combined several materials and techniques to make this "multi-protection" glove: cut resistant thread, nitrile double coating, reinforcements to protect from pinching and shocks. This versatility makes EOS NOCUT a must-have on the market.

Laetitia Guillerm, Hand Protection Product Expert

#### HIGH-TECH GLOVES

# GENERAL HANDLING

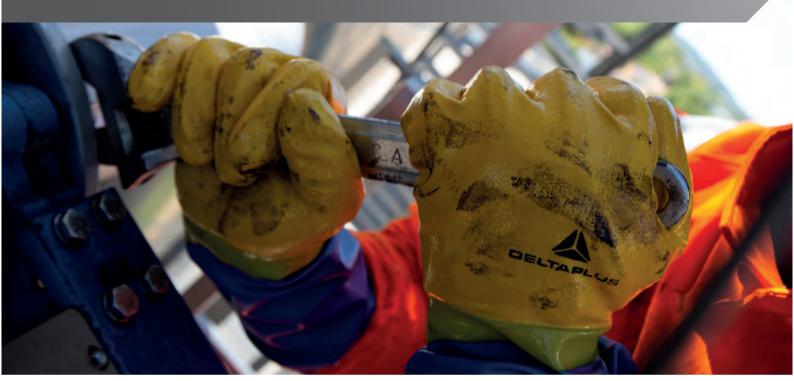

	•	o <sup>©</sup>	<b>LIGHT</b>	<b>V</b>	<b>*</b>
EOS OBM VV911	Blue-Yellow	Nitrile on cotton jersey lining. Double coating. Length: 40 cm.	08 / 09 / 10 / 11	EN374-1 TYPE C A 2 > 30 mn	x 60

#### **EOS OBM VV911**



















Protection of the metacarpals 5J ⇒Flexible reinforcements for better protection against impact and pinching.



Cut cotton interlock stitched 
→ Absorption of perspiration and moisture for improved comfort in everyday life



Available only with header card





Protection against impact in the metacarpal area. After an energy impact of 51, the force transmitted to the back of the hand cannot exceed 4 kN.

#### Nitrile

➡Versatile and powerful material from chemicals, fats and oils

Double coating **→**Increased lifespan

Length: 40 cm

**⇒**Complete arm protection



	•	o <sup>o</sup>	<b>Little</b>	₹	
EOS VV900JA	Yellow-Grey- Black	Polyester/polyurethane back. PVC reinforcements. Polyamide/polyurethane palm with PVC dots. Kevlar® seams. 8 cm cuff in neoprene.	08 / 09 / 10 / 11 / 12	CE EN388 ANSI-ISEA 105	x 60

### **EOS VV900JA**



























Double layer of polyamide/ polyurethane on palm with non-slip PVC dots

→Longer life due to its very good abrasion resistance →Good grip of handled objects









Reinforcement between the thumb and index finger and on the palm. ⇒Increased lifespan



Flexible reinforcements

→Increased protection from impacts and pinches



Identification badge ⇒Belt attachment







#### Yellow colour

⇒Easy visual identification at the workstation

#### Velcro closure

- ⇒Perfect adjustment
- ⇒Reduced discomfort at the wrist, during prolonged use

#### 8 cm cuff in neoprene

⇒Good glove retention for high security

Protection of the metacarpal area against low energy shocks <23

# GENERAL HANDLING

	æ	o <sup>©</sup>	<b>LIGHT</b>	<b>S</b>	
NYSOS VV904	Yellow-Black	100% Polyester. Palm and fingertips reinforced with rubber pads (0.8 cm thick). Thermoplastic (TPR) back reinforcement. Gauge 7.	10 / 11	C € EN 388 4 2 4 2 X P EN ISO10819	x 60

#### NYSOS VV904





















Available only with header card



Flexible reinforcements ⇒Increased protection from impacts and pinches





Protection of the metacarpals 53



Anti-vibration ightharpoonsReduction of musculoskeletal disorders





Polyester support


⇒Soft weave (seamless) for comfortable long wear

⇒Good dexterity and grip

Protection against impact in the metacarpal area. After an energy impact of 51, the force transmitted to the back of the hand cannot exceed 4 kN.



	€	o <sup>o</sup>	<b>AUU</b>	<b>&gt;</b>	<b>\$</b>
BOROK VV903	Grey-Black	Polyester back with polyurethane coating. Polyurethane/polyester palm. 3M Thinsulate™ lining. Neoprene wrist.	07 / 09 / 11	EN388 1221X EN511 1 1 0	
SAFE & TOUCH VV905NO	Black-Yellow	Polyester/elasthane back. Artificial leather palm. Cuff in neoprene.	07 / 08 / 09 / 10 / 11	<b>C €</b> EN388 2121X	x 60
BOREE VV901	Vollow Crov		07 / 09	□ FN388	
ATHOS VV902	Yellow-Grey- Black	Polyester/elasthane back. Polyamide palm. PVC reinforcements on back and palm. Cuff in mesh.	10 / 11	EN388 3131X	

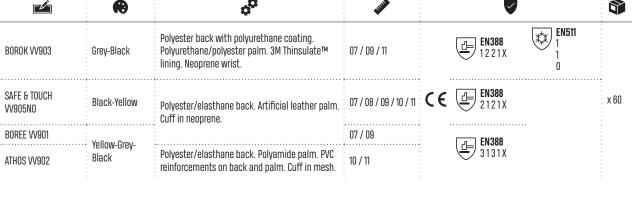





header card



- HIGH-TECH GLOVES

# GENERAL HANDLING COLD PROTECTION



## THRYM VV736















Double full latex coating

- →1st smooth latex coating : waterproof
- ⇒2nd foam latex coating : good  $\quad \text{adhesion} \quad$



Very good resistance to cold and

⇒Ideal in cold environments down to -30°C



Brushed acrylic support

- → Maintenance of warmth during outdoor work
- ⇒Great comfort of use







## The versatility of the protections make these gloves real assets in all climatic circumstances!

		æ	o <sup>o</sup>	<b>HILLS</b>	V	
THRYM	VV736	Light Blue	Inside: 100% acrylic gauge 10. Outside: 100% polyamide gauge 15. Full latex coating of the hand. Second foam latex coating on palm and fingertips.	09 / 10 / 11	EN388 2242X  EN511 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	x 60

Extremely cold conditions Very light activity levels or special applications requiring additional

Very cold conditions Light activity levels where the wearer generates little body heat through activity

Cool climate conditions when warmth is needed





THRYM VV736 Ideal in all climatic conditions.. possibly perfect glove!



APOLLON WINTER CUT W737 The glove for working in extreme conditions! A very high level of cut protection combined with protection from the cold!



ATON VV731 The multi-protection glove!



It is due to listening to our users, demanding gloves assuring several simultaneous protections, including that from the cold that we worked with the convergence of several standards. This ranges from a waterproof glove performing in a cold environment with contact heat resistance to versatile glove that includes touch function or glove combining thermal hazards and cut resistance (Level B or E). Our hybrid gloves become true allies for workers!

Laetitia Guillerm, Hand Protection Product Expert



# GENERAL HANDLING COLD PROTECTION

	•	o <sup>c</sup>	<b>tille</b>	<b>V</b>	
HERCULE VV750	Black	Inside: 100% acrylic gauge 7. Outside: 100% polyamide gauge 13. 3/4 foam nitrile coating on palm, fingers and half back.	09 / 10	EN388 3 2 3 3 X 2 X	
APOLLON WINTER VV735	Grey-Black Fluorescent yellow-Black	100% acrylic. Foam latex coating on palm and	0 0 0 0 0	EN388 X 1132X	3 1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
DPVV735	Fluorescent orange-Black	fingertips. Gauge 10.	09	<b>C</b> € ~ 1105 x 1	x 60
ATON VV731	Black	Polycotton/Para-aramide. Latex coating on palm and fingertips. Gauge 10.	08 / 09 / 10 / 11	EN388 3 3 4 2 B EN407 X 2 X X X X	

#### **HERCULE VV750**



















Protection from the cold ⇒ldeal in cold environments down to -15°C



High coating →Very good protection of the hand

### **ATON VV731**



















⇒Good resistance to abrasion ⇒Rough finish for excellent grip on handled objects















DPVV735



#### APOLLON WINTER VV735

















Available only with DPVV7350R





Combination of a double

support

→High comfort

→Heat preservation

(interior acrylic support)

→ High dexterity (outer

polyamide support)



Latex foam Increased breathability (feeling of freshness) Dexterity and comfort



Brushed acrylic support Maintenance of warmth during outdoor work Great comfort of use



#### - HIGH-TECH GLOVES

## GENERAL HANDLING LATEX COATING





## APOLLON VV733 DPVV733 DPVV733E White-Purple 04 **DPVV733 APOLLON VV733** 163)













Also available with header card DPVV7330R DPVV733JA DPVV733VL DPVV733E







#### DPVV733E





(feeling of freshness) **Dexterity** and comfort

Fluorescent support ⇒Easy visual identification at the workstation

# GENERAL HANDLING

	æ	o <sup>o</sup>	<b>J</b> JJJJ	<b>&gt;</b>		
VE733	Orange-Navy Blue	100% polyester. PURE® latex coating on palm and fingertips. Gauge 13.	07 / 08 / 09 / 10 / 11	EN388 2142A	EN407 X 2 X X X X	
VE7300R	Vollow orongo	Polycotton. Rough latex coating on palm and	08 / 09 / 10 / 11	CE		x 120
DPVE730	Yellow-orange	fingertips. Gauge 10.	08 / 10	EN388 2142X		
DPVV831	Green	Polycotton. High quality latex coating on palm, fingertips and mid back. Gauge 10.	07 / 08 / 09 / 10			

### **VE733**

















Embossing finish ⇒Good grip of handled objects

⇒Very good adhesion in wet or dry environments







- PURE® latex coating

  Material complies with the
  REACH regulations and respectful of the environment ►Minimises the risk of skin
- irritation

### **VE7300R**

















Also available with header card ⇒DPVE730











	•	o <sup>©</sup>	<b>LIGHT</b>	$\checkmark$	
VE631	Blue-Black	100% polyester. Foam latex coating on palm and fingertips. Gauge 13.	07 / 08 / 09 / 10	EN388 2131X	
VE630	Grey-Black	00% polyester. Latex coating on palm and fingertips. Gauge 13.			x 120
VE799	White	Polycotton. Transparent full coating in natural latex on full hand and laminated red latex on palm and fingertips. Gauge 10.	10	EN388 3132X	X IZU
LA500	Green	Latex rough-textured on cotton Interlock lining. Knitted wrist. Ventilated back.	07 / 08 / 09 / 10	EN388 2121X	



## **VE631**









## **VE630**











## **VE799**









## LA500












Cotton interlock support with ventilated back →Comfort →Increased breathability

Quality coating **Good grip** 

## **HELP WITH CHOICE**



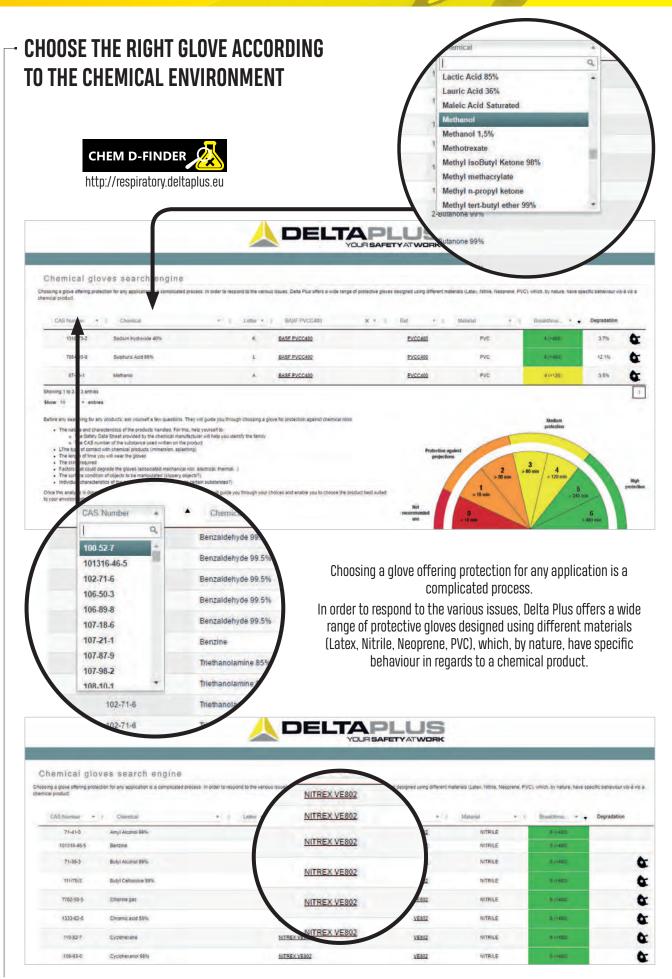

1

#### SUPPORTED OR NOT SUPPORTED?

#### SUPPORTED: WHAT TYPE OF SUPPORT?

• Cotton: Natural fibre

Exceptional comfort - Excellent capacity to absorb moisture - Insulating properties.

• Polyamide: Synthetic fibre, also called Nylon

Resistance to traction and abrasion - Elasticity and shape memory - Washable.

• Polyester: Synthetic fibre

Resistance to traction and abrasion - Possibility to blend with cotton to enhance comfort.

• Kevlar®: Para-aramid fibre

Heat and Cut Resistance - Carbonised between 425° and 475° - Self extinguishing - Softness and high dexterity - Washable.

#### NON-SUPPORTED:

The mould is dipped directly into the material bath. Thus, the glove is very supple and allows high dexterity.

#### Different types of non supported gloves:

- Flocked (finished with a deposit of cotton particles): Pleasant to the touch, limits transpiration and facilitates donning and removal.
- Chlorinated (finished by washing the glove in chlorinated water): Gives a velvety touch and limits the effects of latex protein allergies.

#### Different types of disposable glove:

- Powdered (finished with a deposit of powder): Pleasant to the touch, limits transpiration and facilitates donning and removal.
- Non powdered (finished by washing the glove in chlorinated water): Gives a velvety touch and limits the effects of latex protein allergies.

### **SYNTHETIC GLOVES**

-: NOT RECOMMENDED •: LOW ••: GOOD •••: VERY GOOD

	Polyurethane	Latex	Nitrile	Neoprene	PVC
Abrasion	•••	••	•••	••	•••
Cutting	••	••	••	••	••
Perforation	••	•••	•••	•	•
Tearing	•••	••	•••	•	••
Elasticity / Flexibility / Dexterity	•••	•••	•	••	•
Degradation (heat contact, UV,)	•••	•	••	•••	•••
Risks of allergy	•	•••	•	•	•
Cold environment	••	•••	• (-40°C)	•••	•••
Warm environment	••	•••	••	•••	• (>80°C)
Oily / greasy environment	•	•	•••	••	•••

		Latex	Nitrile	Neoprene	PVC
Acetates	Acetate of ethyl (I)	-	••		•
Acids	Sulfuric acid (L),	•••	••	•••	•••
Primary alcohol	Methanol (A)	•••	•••	•••	••
Aldehydes (Alcohols & Ketones)	Formaldehyde 37% (R),	••	•	•	•
Amine	Diethylamine (G),	-	•	-	-
Bases (Lime, Sodium hydroxide)	Caustic soda (K),	•••	••	•••	•••
Ketone and ketone solvents	Acetone (B)	•••	-	•	•
Ether	Tetrahydrofuran (H)	-	-	-	-
Hydrocarbons and derivatives	Acetonitrile (C), n-Heptane (J),	-	•••	•••	••
Aromatic solvents (styrene)	Toluene (F), Xylene	-	•••		•
Chlorinated solvents	Dichloromethane (D)	-	•••	•	-
Aqueous solutions		•••	•••	•••	•••

CHEMICAL PRODUCT FAMILY

## SYNTHETIC GLOVES

# WORKS IN INDUSTRY



	•	o <sup>c</sup>	<b>LIGHT</b>	$\overline{\mathbf{v}}$	
CHEMSAFE VV835	Green	Double nitrile coating on polyamide lining. Third rough foam nitrile coating on palm and fingertips. Length: 35 cm. Thickness: 1.15 mm on cuff - 1.30 mm on palm.	08 / 09 / 10 / 11	EN374-1 TYPE B AJKL A 2 > 30 mn J 3 > 60 mn K 5 > 240 mn L 2 > 30 mn	x 60

### **CHEMSAFE VV835**























Rough structure palm →Very good grip








100% polyamide support →Very good comfort

Triple nitrile coating →Good resistance to abrasion



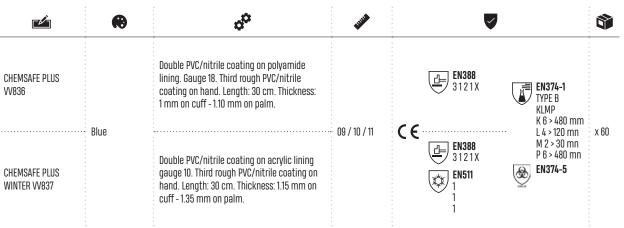











## **WORKS REQUIRING CHEMICAL RESISTANCE**

	€	o <sup>©</sup>	<b>J</b> JJJJ <b>J</b>	$\overline{\mathbf{v}}$	
PETRO ESD VE781	Black	Chemical PVC. PVC on cotton knitted lining gauge 13 with metal fiber. Rough-textured palm. Length: 30 cm. Thickness: 1.30 mm.	08 / 09 / 10 / 11	EN388 4121X EN374-5 EN16350 EN374-1 TYPE B	x 120
PETRO VE766	Blue	Chemical PVC. PVC on cotton knitted lining gauge 13. Rough-textured hand. Length: 62 cm. Thickness: 1.30 mm.	00 / 00 / 10	C € JKL J2 < 30 mn K6 < 480 mn L4 > 120 mn	x 60
PETRO VE780	DIUE	Chemical PVC. PVC on cotton knitted lining gauge 13. Rough-textured hand. Length: 30 cm. Thickness: 1.30 mm.	08 / 09 / 10	EN374-5	x 120

#### PETRO ESD VE781






























PVC


⇒Good resistance to abrasion →Material very resistant to oils, chemicals and petroleum

derivatives Metallic fibre

→ High electrostatic dissipation to reduce the risk of explosion

#### PETRO VE766 PETRO VE780 Textured structure ${\sf PVC}$ ⇒Good grip of handled objects ⇒Good resistance to 62 cm abrasion →Material very resistant to oils, chemicals and petroleum derivatives 30 cm Length: 62 cm ightharpoonupComplete arm protection



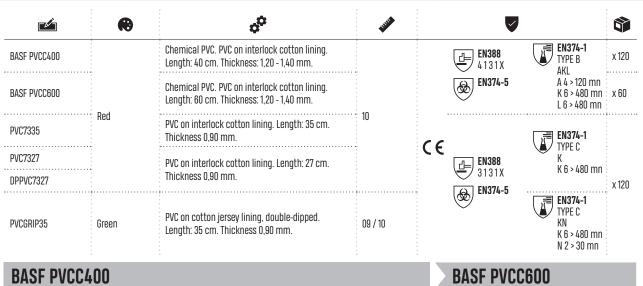

#### **BASF PVCC400**







**(** 











→Material very resistant to oils, chemicals and petroleum derivatives



Length: 40 cm ⇒Forearm protection





of the environment ⇒Reliable for all applications in contact with food



#### **PVC7335**













#### **PVC7327**





#### **PVCGRIP35**












Knit cotton jersey 10 gauge ➡Absorption of perspiration and moisture for improved comfort in everyday life





Textured structure ⇒Good grip of handled objects

## **WORKS REQUIRING CHEMICAL RESISTANCE**

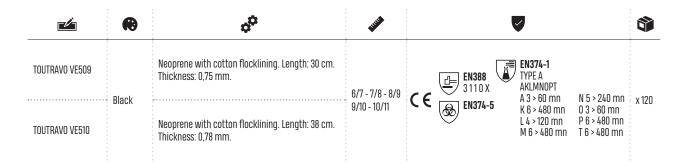

#### **TOUTRAVO VE509**

















Embossed structure on palm and fingers →Improved object grip



#### **TOUTRAVO VE510**















Embossed structure on palm and fingers ⇒Good grip of handled objects





⇒Versatile and highly efficient material against heat, detergents, alcohols, chemicals, greases and hydrocarbons

→Absorption of perspiration for comfort

	€	o <sup>o</sup>	<b>July</b>	₹	
TOUTRAVO VE511	Black	Neoprene on cotton knitted lining gauge 10. Length: 38 cm. Thickness 1,40 mm.	9/10 - 10/11	EN374-1 TYPE A AJKLMNOPT A 6 > 480 mn J 3 > 60 mn K 6 > 480 mn L 5 > 240 mn P 6 > 480 mn M 6 > 480 mn T 6 > 480 mn	
NEOCOLOR VE530		Latex/Neoprene mix with cotton flocklining. Length: 30 cm. Thickness: 0,70 mm.	6/7 - 7/8 - 8/9 9/10 - 10/11	EN388 2121X TYPE A JKLNPT J2 > 30 mn N 3 > 60 mn K 6 > 480 mn P 6 > 480 mn L 4 > 120 mn T 6 > 480 mn	x 120

### **TOUTRAVO VE511**





















everyday life

perspiration and moisture for improved comfort in

















#### Neoprene

→Versatile and highly efficient material against heat, detergents, alcohols, chemicals, greases and hydrocarbons

### **NEOCOLOR VE530**























Flocked inside

➡Absorption of perspiration for comfort

Neoprene/Latex blend **⇔**Comfort and flexibility for heavy work

## **WORKS REQUIRING CHEMICAL RESISTANCE**

	•	o <sup>©</sup>	<b>LIFTE</b>		
VENIZETTE VE920	Blue	Latex on interlock cotton lining. Length: 30 cm. Thickness: 1,25 mm.	6/7 - 7/8 - 8/9 9/10 - 10/11	EN388 4121X EN407 X1X X X X X EN374-5 EN374-1 TYPE A AKLMNPT A 2 > 30 mn K 6 > 480 mn N 3 > 60 mn L 4 > 120 mn P 6 > 480 mn M 6 > 480 mn T 6 > 480 mn T 6 > 480 mn	x 120
VENIFISH VE990	Orange		•	( <del>-</del>	•
LAT50	- Croon	Latex on interlock cotton lining. Rough textured palm and back. Length: 30 cm.	7/8 - 8/9 - 9/10 10/11	EN388 3121X  EN407 EN374-5  EN374-1 TYPE A  AKLMNPT  A 6 > 480 mn  K 6 > 480 mn	
DPLAT50	Green	Thickness: 1,80 mm.	7/8 - 9/10	X1X XXX	x 60

#### **VENIZETTE VE920**





















Versatile glove

⇒Resistance to chemicals and contact heat of 100°C for 15 seconds

Structure on very rough palm

⇒Excellent grip of very slippery objects







Cut cotton interlock stitched ightharpoonup Absorption of perspiration and moisture for improved comfort in everyday life

## **VENIFISH VE990** LAT50 100°C Also available with header card ⇒DPLAT50 Versatile glove Resistance to chemicals and contact heat of 100°C for 15 seconds Cut cotton interlock stitched →Absorption of perspiration and moisture for improved comfort in everyday life



	•	o <sup>to</sup>	<b>LILLIA</b>	lacksquare	
SOFT-NIT VE470	Blue	Latex/ Nitrile, smooth chlorinated interior. Length: 30 cm. Thickness: 0.40 mm.	6/7 - 7/8 - 8/9 9/10 - 10/11	EN388 2 0 11 X EN374-1 TYPE B AKL A 2 > 30 mn K 6 > 480 mn L 2 > 30 mn	x 120



## **SOFT-NIT VE470**























Chlorinated interior

Easy glove implementation

High comfort

Less risk of allergies








Thickness : 0.40 mm ⇒Fine touch

Blue colour ➡Ideal in food environment due to its easy visual identification

Latex/Nitrile blend ➡Polyvalent

## **WORKS IN INDUSTRY**

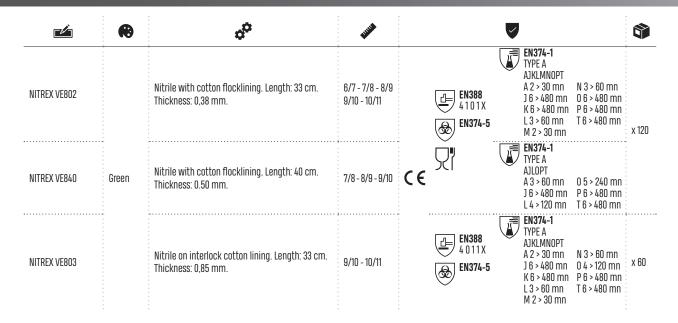

#### **NITREX VE802**























Embossed structure on palm and fingers ⇒Good grip of handled objects NITREX VE802 - NITREX VE840



Flocked inside →Absorption of perspiration for comfort NITREX VE802 - NITREX VE840

#### **NITREX VE840**

























#### Maximum abrasion performance ⇒Increased lifespan CM Textured structure Cut cotton interlock **⇒**Good grip of handled stitched →Absorption of obiects perspiration and moisture for improved

comfort in everyday




	•	o <sup>©</sup>	<b>jul</b>		$\checkmark$	
NITREX VE846	Green	Thin nitrile. Chlorinated smooth inside. Length: 46 cm. Thickness: 0,55 mm.	8/9 - 9/10 10/11		EN388 4102X	n : x 36 n :
NITREX VE830	Blue	Thin nitrile. Chlorinated smooth inside. Length: 33 cm. Thickness: 0,20 mm.	7/8 - 8/9 9/10 - 10/11	C€	EN388 2 0 0 1 X  FN374-5  EN374-1  TYPE A  JKLOPT J 6 > 480 mn 0 2 > 30 mr K 6 > 480 mn P 6 > 480 m L 2 > 30 mn T 6 > 480 m	n :
NITREX VE801	Green	Nitrile with cotton flocklining. Length: 33 cm. Thickness: 0,40 mm.	07 / 08 / 09 / 10 / 11		EN388 3101X TYPE B JKL J 6 > 480 mn K 6 > 480 mn L 3 > 60 mn	

## **NITREX VE846** ≤30°<sup>c</sup> Chlorinated interior 46 cm ⇒Easy glove implementation ⇒High comfort ⇒Less risk of allergies NITREX VE846 - NITREX 830 Length: 46 cm **⇒**Complete arm protection



## **WORKS IN INDUSTRY**

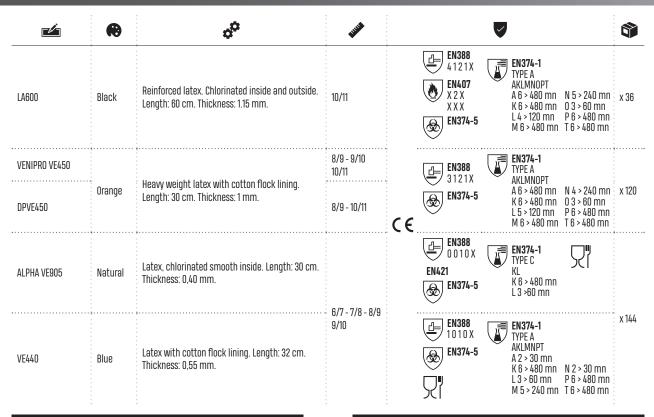















Very thick and long ⇒Enhanced protection of the arm



#### **VENIPRO VE**450











Thickness : 100 mm ⇒Suitable for heavy duty tasks



Also available with header card ⇒DPVE450



#### **ALPHA VE905**











Tested according to standard EN421 **⇒**Can be used as a glove or under glove against radioactive contamination



Chlorinated interior



⇒Easy glove implementation → High comfort Less risk of allergies



**→**Airtightness and water proofing

⇒Flexibility, elasticity and tactility

#### **VE440**













Rough structure ⇒Improved object grip



Flocked inside ➡Absorption of perspiration for comfort





	•	o <sup>©</sup>	<b>H</b> ITTE	<b>V</b>	
NI170		Nitrile on cotton jersey lining. 6-cm canvas safety cuff. Ventilated back.	10	EN388 3111X C €	
N1175	Pluo	Nitrile on cotton jersey lining. 6-cm canvas safety cuff. Fully coated.	09 / 10 / 11		
NI150	Blue	Nitrile on cotton jersey lining. Knitted wrist. Ventilated back.	07 / 08 / 09 / 10		v 100
NI155	•	Nitrile on cotton jersey lining. Knitted wrist. Fully coated.	10		x 120
NI015	Vallow		07 / 08 / 09 10 / 11		
DPNI015	TEHOW		10	21111	

### **NI170**









**(** 

























Safety cuff 6 cm ⇒Good protection of the garment

**⇒**Easy implementation

Cotton jersey lining with ventilated back

**⇒**Comfort

➡Increased breathability



Nitrile on cotton jersey lining →Not very sensitive to heat →Ideal in oily and greasy environments







⇒Easy implementation

Fully coated hand →Protection of the back of the hand

#### **NI150**























**NI155** 

















#### **NI015**





Cotton jersey lining with

➡Increased breathability

ventilated back

**⇒**Comfort







Also available with header card →DPNI015





# **WORKS IN INDUSTRY**

	æ	o <sup>©</sup>	<b>LIFTE</b>	•	<b>&gt;</b>		
DUOCOLOR VE330	Blue-Yellow	Latex with cotton flock lining, double-dipped. Length: 30 cm. Thickness: 0,60 mm.			EN388 AKL A2 EN374-5 K6 L3 M55 P66	374-1 FE A MNPT > 30 mn > 480 mn > 60 mn 5 > 240 mn > 30 mn > 480 mn > 480 mn	
ZEPHIR VE210	Pink	Latex with cotton flock lining. Length: 30 cm. Thickness: 0,38 mm.	6/7 - 7/8 - 8/9 9/10	C€	EN374-5 TYP	<b>374-1</b> PE C > 480 mn > 60 mn	x 144
PICAFLOR VE240	Yellow	Latex with cotton flock lining. Length: 30 cm. Thickness: 0,38 mm.			EN374-5 K6 L2 P 4	374-1 PE B MPT > 480 mn > 30 mn • > 120 mn > 120 mn > 480 mn	
VE200	0 0 0 0 0 0	Latex with cotton flock lining. Length: 30 cm. Thickness: 0,33 mm.	-		₹	-	

## **DUOCOLOR VE330**











## **ZEPHIR VE210**











## **PICAFLOR VE240**












## **VE200**








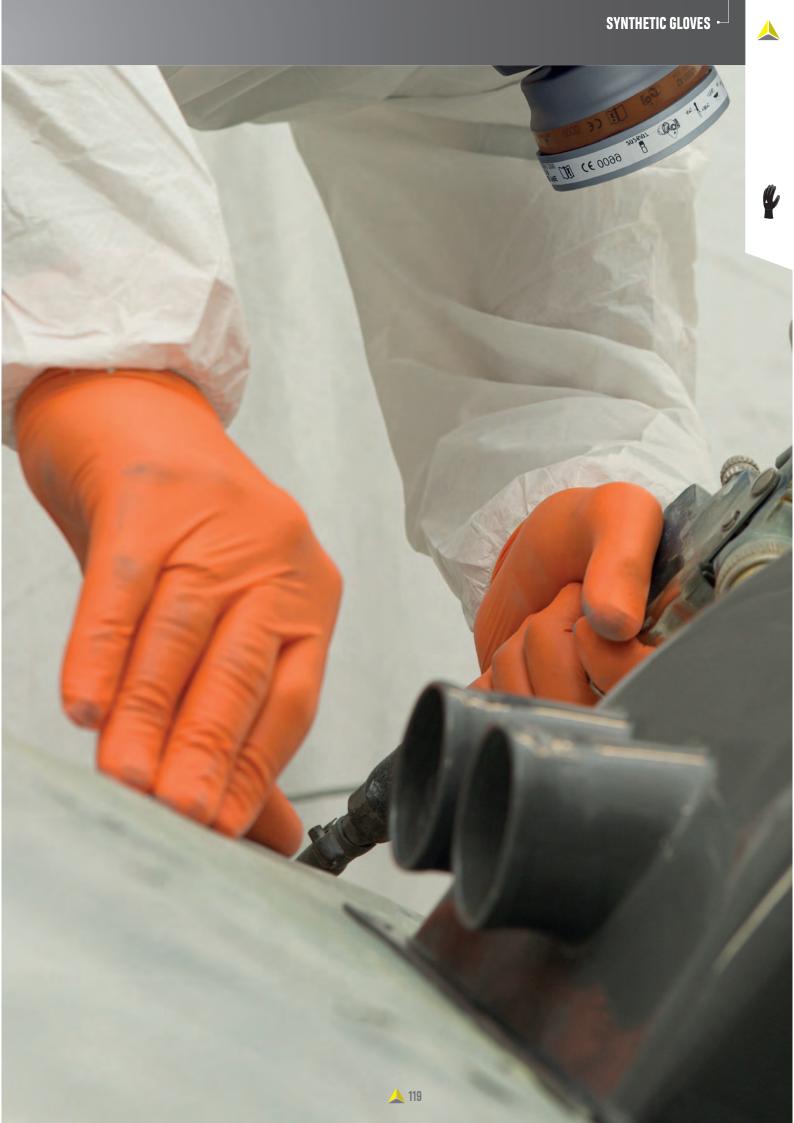

## SYNTHETIC GLOVES DISPOSABLE

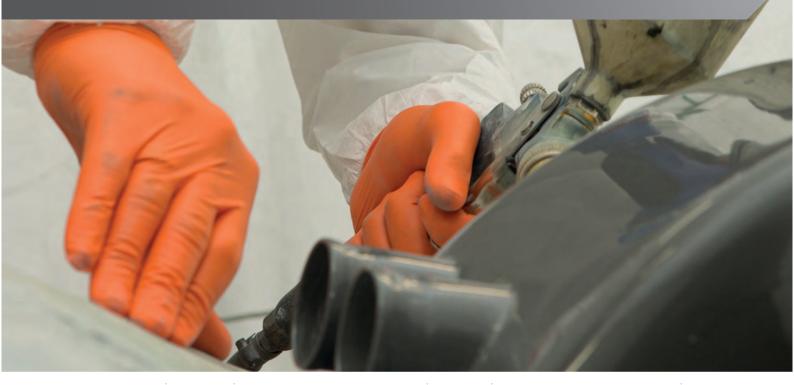

	æ	o <sup>o</sup>	<b>LILLIA</b>	V	
VENIPLUS V1500	Orange	Powder-free nitrile. AQL 1,5. Length: 27 cm. Thickness: 0,17 mm. Box of 50 disposable gloves.	7/8 - 8/9 - 9/10 10/11	EN374-5  EN455-1 EN455-2 EN455-3 EN374-1 TYPE B KPT K 6 > 480 mn P 5 > 240 mn T 6 > 480 mn	

## VENIPLUS V1500















- →Airtightness and water proofing
  →Flexibility, elasticity and tactility
  →No risk of allergies

Powder-free gloves

→Protection from manipulated objects





Thickness: 0.17 mm


Resistance to chemicals (> 30 min) compared to a conventional disposable glove

Orange colour ⇒Easy visual identification at the workstation

Glove tested in accordance with EN ISO 371-1:2016

Type B

→ Protection from certain concentrated chemicals

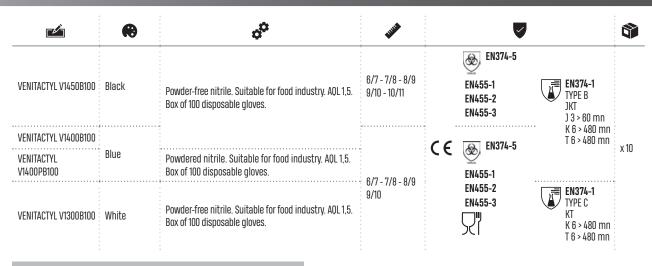

#### **VENITACTYL V1450B100**















#### Nitrile

**VENITACTYL V1400PB100** 

- NITHE

  →Airtightness and water proofing

  →Flexibility, elasticity and tactility

  →No risk of allergies

  VENITACTYL V1450B100

  VENITACTYL V1400B100

  VENITACTYL V1400PB100

  VENITACTYL V1400PB100 VENITACTYL V1300B100

#### **VENITACTYL V1400B100**



















→ Ideal in food environment due to its easy visual identification VENITACTYL V1450B100 VENITACTYL V1400B100



Glove tested in accordance with EN ISO 371-1:2016 Type B

→Protection from certain concentrated chemicals





Powdered glove ⇒Easy glove implementation



#### **VENITACTYL V1300B100**









## SYNTHETIC GLOVES DISPOSABLE LATEX



0 •  $\checkmark$ EN374-1 Type B Klmpt EN374-5 KLMP1 K 6 > 480 mn L 2 > 30 mn M 4 > 120 mn P 5 > 240 mn T 6 > 480 mn EN455-1 EN455-2 Powder-free latex, chlorinated inside. AQL 1,5. 7/8 - 8/9 - 9/10 10/11  $\epsilon$ VENIPLUS V1383 Blue Length: 30 cm. Thickness: 0,25 mm. Box of 50 x 10 disposable gloves. EN455-3

## **VENIPLUS V1383**











Powder-free gloves →Protection from manipulated objects





Glove tested in accordance with EN ISO 371-1:2016 Type B

→ Protection from certain concentrated

chemicals

Extra long and thick glove ➡Thickness : 0.25 mm ➡Longer lifespan and increased safety



	•	o <sup>©</sup>	<b>JUL</b>	$\checkmark$	
VENITACTYL V1310		Powdered latex. Suitable for food industry. AQL 1,5. Box of 100 disposable gloves.	•	EN374-5 EN374-1 TYPE C	
VENICLEAN V1340	Natural	Powder-free chlorinated latex. Suitable for food industry. AOL 1,5. Box of 100 disposable gloves.	6/7 - 7/8 - 8/9	EN455-1 K 2 > 30 mn EN455-2 T 6 > 480 mn EN455-3	x 10
VENITACTYL V1371	Transparent	Powdered vinyl. Suitable for food industry. AQL 1,5. Box of 100 disposable gloves.	6/7 - 7/8 - 8/9 9/10	[TIII]	
DPV1371	Transparent	Powdered vinyl. Suitable for food industry. AQL 1,5. Box of 10 disposable gloves.	7/8 - 9/10	XI	x 60

### **VENITACTYL V1310**













## **VENICLEAN V1340**











Chlorinated interior

- ⇒Easy glove implementation
  ⇒Less risk of allergies (latex
- proteins)





- →Airtightness and water proofing
  →Flexibility, elasticity and tactility
- Powder-free gloves →Protection from manipulated objects
- VENITACTYL V1310 VENICLEAN V1340

## **VENITACTYL V1371**









Also available in a box of 10 gloves **⇒**DPV1371







## **HELP WITH CHOICE**



#### **LEATHER GLOVES**

#### AMERICAN ASSEMBLY

Side palm, middle and ring finger form a single piece that is sewn separately to the rest of the palm

















Wing thumb

Docker type


Long wrist or cuff

Latex wrist with vein protection

#### FOURCHETTE ASSEMBLY

The thumb is sewn separately (thumb added). A strip of material is sewn between each finger (fourchette). The glove perfectly matches the shape of the hand.










Round thumb Gusset on fingers

Choy thumb



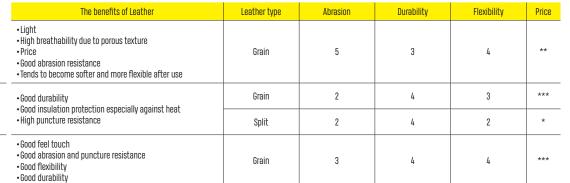



## **CHOOSE THE BEST GLOVE FOR COLD ENVIRONMENTS**



#### • Extremely cold conditions

Very light activity levels or special applications requiring extra heat



#### Very cold conditions


Levels of light activity where the wearer generates little body heat by activity



Fresh climate conditions when light heat is needed

## HANDLING IN COLD ENVIRONMENT



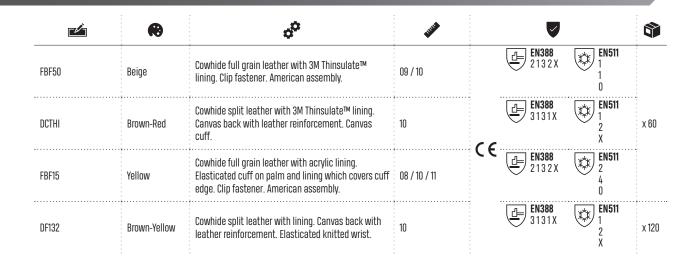















#### **DF132**













# HANDLING IN WET ENVIRONMENT

	æ	o <sup>©</sup>	<b>LIGHT</b>	₹ 📦
FIBKV02	Beige	Water-repellent cowhide full grain leather. Reverse hide cowhide full grain leather palm. 100% Kevlar® Technology knitted lining. 2 threads. Gauge 10.	08 / 09 / 10	C € EN420 4.2 4/4 ≥ 180 mn × 60

## FIBKV02













⇒Increased resistance to cut, tear, and puncture



Water repellent treatment applied on the reverse hide full grain

→Ten times more effective than the grain







	æ	a <sup>c</sup>	<b>JULI</b>	<b>V</b>		
BUCH520V	Green-Blue	Water-repellent cowhide full grain leather. Palm, thumb and metacarpal in polyester foam. Kevlar® Technology sewn.	08 / 09 / 10 / 11	EN388 3123X		x 36
FIB49	Beige	Water-repellent cowhide full grain leather. Reverse hide cowhide full grain leather palm.	09 / 10	EN388 3122X	<b>EN420 4.2</b> 4/4 ≥ 180 mn	v.100
CBHV2	Buff	Buff Water-repellent cowhide full grain leather. American assembly. Knitted wrist and vein protection.	08 / 09 / 10 / 11	EN388	4/4 ≥ 18U ITIII	x 120
DPCBHV2			08 / 10	2132X		x 60

# **BUCH520V**















Special green spaces glove

Polyester foam on the palm and back →Increased resistance to tearing and perforation





# GENERAL HANDLING

	æ	o <sup>©</sup>	<b>LILLIA</b>	$\checkmark$	<b>*</b>
FB149	Beige	Cowhide full grain leather. High quality leather. American assembly.	08 / 09 / 10	EN388 3122X	0 0 0 0 0 0 0
50MAC	White	Lambskin full grain leather. Reinforced palm. Knitted open-work back.	08 / 09 / 10 / 11		eo
51FEDF	Notural	Goatskin full grain leather. American assembly. Full index. Knitted wrist and vein protection.	08 / 09 / 10	<b>C €</b> EN388 2111X	x 120
GFBLE	Natural	Cowhide full grain leather. American assembly. Knitted wrist and vein protection.	08 / 09 / 10 / 11	EN388 3122X	









	•	o <sup>©</sup>	<b>jijis</b>		<b>V</b>	
DPCT502	Beige-Green	Cowhide split leather. Polyester canvas back. American assembly.	07 / 09	0	EN388 3121X	x 60
FBN49		Cowhide full grain leather. American assembly.	07 / 08 / 09 / 10 / 11		EN388	x 120
DPFBN49	Natural	Cowing full grant leather. Afficilitati assembly.	10		3122X	x 60
FCN29		Cowhide grain leather palm. Full index. Cowhide split leather back. American assembly.	08 / 09 / 10 / 11	CE	EN388 2121X	x 120
CT402	Natural-Blue	Goatskin full grain leather palm. Cotton jersey back. American	07 / 08 / 09 / 10 / 11			
DPCT402	Blue-White	assembly.	10		EN388 2111X	x 60
FP159	Beige	Pigskin full grain leather. American assembly. Full index.	09 / 10			x 120

# **DPCT502**











Available only with header card



# FBN49













Also available with header card →DPFBN49



# **CT402**













Also available with header card →DPCT402



# FCN29











# FP159











# - LEATHER GLOVES GENERAL HANDLING

	æ	o <sup>©</sup>	<b>LILLE</b>	<b>V</b>	
DS202RP	Grey-Blue	Cowhide split leather with cotton canvas lining. Reinforcement on palm, thumb and index. Canvas back with leather reinforcement. Reinforced canvas cuff.		EN388 4223)	
DC103	Doigo Novy bluo	Cowhide split leather. Canvas back with leather reinforcement.	10	<b>C €</b>	x 120
DPDC103	Beige-Navy blue	Reinforced canvas cuff.		2111X	0 0 0 0 0

# DS202RP













# DC103







Also available with header card







# Exceptional thermal results, a constant quality unmatched in its field thanks to the aluminised Preox made in France.



## TERK400

















Aluminised Kevlar® Preox

→ High thermal resistance to radiant heat

THT treated heat resistant leather

- →Decreased responsiveness to flames →Increased resistance to contact heat due
- to its treatment
- ⇒High flexibility of the leather





	•	o <sup>C</sup>	<b>J</b> JJJJ	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	~			
TER250	Brown-Grey	Heat-resistant cowhide split leather palm (HR). Wool fleece lining on palm. Cuff with canvas lining. Kevlar® Technology sewn. American assembly. 20 cm cuff. Length: 40 cm.	10		EN388 3243X	EN407 413	x 60	
TC716	Grey	High quality cowhide split leather. American assembly. 15 cm cuff. Length: 35 cm.	09 / 10 / 11	C€	CE	EN388 4122X	X 4 X EN12477 TYPE A	x 120
DPTC715		Cowhide split leather. 15 cm cuff. American assembly. Length: 35 cm.			4122X			
FC115		High quality cowhide full grain leather palm with full index. Cowhide split leather back and cuff. American assembly. 15 cm cuff. Length: 35 cm.	10	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	EN388 2132X	EN407 412 X 4 X EN12477 TYPE B	x 60	

## **TER250**














⇒Resistance to flame, heat and large projections of molten metal





►Increased resistance to contact heat due to its treatment ►High flexibility of the leather

Kevlar® thread stitching ⇒Self-extinguishing







# FC115













Artery protection →Wrist protection

# WELDERS WORKS

	•	<b>o</b> c	<b>LIFE</b>	$\checkmark$		
GFA115K	Grev	Lambskin full grain leather. Cowhide split leather cuff. Kevlar® Technology seams. Fourchette assembly. 15 cm cuff. Length: 35 cm.	10	EN388 2111X	EN407 41X X 4 X EN12477 TYPE B	x 120
TIG15K	отеу	Goatskin full grain leather. Cowhide split leather cuff. Kevlar® Technology sewn. American assembly. 15 cm cuff. Length: 35 cm.	08 / 09 / 10	<i>( (</i>	TIPED	x 36
CA615K	Red	High quality heat-resistant split leather (HR). Cuff with canvas lining. Kevlar® Technology sewn. American assembly. Length: 35 cm.	- 10	EN388 3132X	EN407 413 X 4 X EN12477 TYPE A	x 60
CA515R	neu	Heat-resistant cowhide split leather (HR). Hand with cotton fleece lining. Cuff with canvas lining. American assembly. Length: 35 cm.	IU		IIFLA	A UU

# GFA115K













⇒Self-extinguishing

# TIG15K











Welding and heat-resistant gloves →Resistance to flame, heat

and splashes of molten metal

#### Goat leather

- ⇒Flexibility and dexterity ⇒Good mechanical resistance

# **CA615K**









# **CA515R**










# HANDLING REQUIRING CUT AND HEAT RESISTANCE



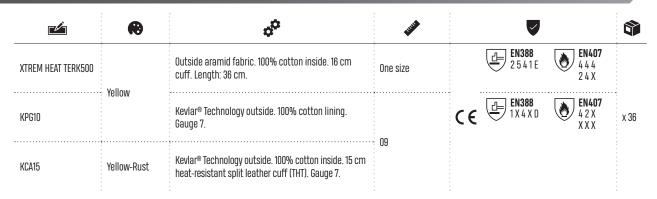

Your best ally in extreme conditions!

#### XTREM HEAT TERK500

















Double insulation ⇒Optimum performance for cuts and heat



The construction of the glove in superposition of layers →Protection from the effects of contact heat

- ⇒Un to 250°C for 1 minute
- ⇒Up to 500°C for 30 seconds





We have used the best materials to create this glove that offers a quaranteed protection up to 500°C in contact heat. It is the ideal glove for the foundry and steelmaking trades.

Laetitia Guillerm, Hand Protection Product Expert

#### KPG10

























Knit Gauge 7 ⇒Excellent compromise between thermal resistance





KCA15



THT treated heat resistant

leather →Decreased

responsiveness to flames ⇒Increased resistance to contact heat due to its

treatment ⇒High flexibility of the leather










and dexterity

⇒Optimum performance for cuts and heat thanks to the thickness with the cotton lining



## - LEATHER GLOVES

# HANDLING IN COLD ENVIRONMENT

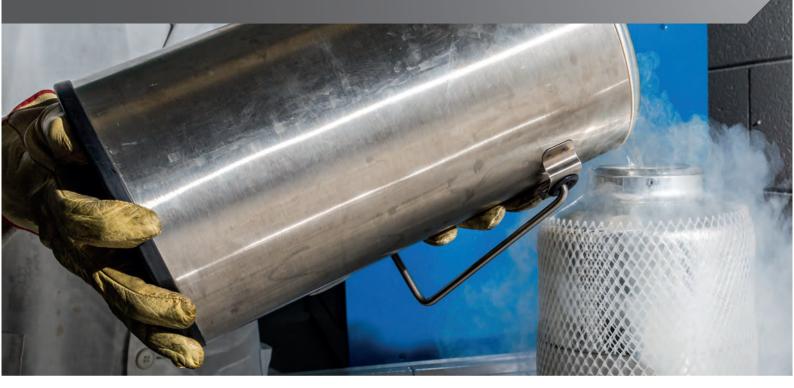

	•	o <sup>c</sup>	<b>J</b> JJJJ <b>S</b>	$\checkmark$	
CRYOG	Straw-coloured	Water-repellent cowhide full grain leather. Aluminized polyester insert. Cowhide split leather cuff. Hand and cuff in synthetic. American assembly. 20 cm cuff. Length: 40 cm.	10	<b>C €</b> EN388	x 36

# **CRYOG**











Water repellent leather **⇒**Good splash protection



Tested with liquid nitrogen using method MR019

→Work in all safety up to -196°C (a few seconds)



Velcro tape →Adjustable fit



Aluminised polyester →Thermal protection







- Superior quality

  Increased lifespan

  Comfortable to wear

  Flexibility

# L. KNITTED GLOVES SMALL HANDLING



	•	o <sup>©</sup>	, junt	<b>V</b>		
PM159		100% foam polyamid. 6-cm long knit wrist. Gauge 13. Ambidextrous.		EN388 214XX		
PM160	White	100% foam polyamid. 6-cm long knitted wrist. PVC dots on palm. Gauge 13.		n long knitted wrist. PVC dots on palm. 07 / 09	214XX	- x 300
TP169		Polycotton. PVC dots on palm. Gauge 7.		EN388 X12XX	X 300	
CP149	Beige	Brushed drill cotton lining 270 g/m². PVC dots on palm and full thumb, index and little finger. French assembly.	08 / 10		•	
C0131	Natural	Interlock cotton 100 g/m². Knitted wrist. Gauge 18. Ambidextrous.	07 / 09		x 600	
COB40	White	Bleached cotton 180 g/m². Fourchette assembly.	06 / 07 / 08 / 09		X 000	

# PM159









# PM160









# **TP169**







# **CP149**









# C0131









# COB40







# THE ESSENTIAL GLOVES SELECTION FOR YOUR POINT OF SALES

#### **■ BUILDING AND CONSTRUCTION**



**CUT RESISTANCE** DPVECUT42GN **78** 



**CUTTING WORKS** 

DPVECUT34 7 - 9 ₽83



**AGILITY** DPVE702PG 6 - 7 - 9 ₽87





DPVE730 8 - 10 **102** 



WINTER MASONRY DPVV735 **100** 



TOOL HANDLING DPFBN49 10 **129** 



WELDING DPTC715 10 **133** 

#### **■ MULTI PURPOSE**



VV900 8 - 9 - 10 - 11 - 12 **95** 



LIGHT WORKS VV901 7 - 9 **97** 



VV902 10 - 11 **97** 



VV903 7 - 9 - 11 **97** 



VV904 10 - 11 **96** 



W905 7 - 8 - 9 - 10 - 11 **-** 97



VV910 8 - 9 - 10 - 11 **92** 

#### OUTSIDE WORKS





DPVV733EVL **102** 





BALCONY AND TERRACE DPVV733VL 7

**102** 





SPECIAL HARVEST DPVE715 7 - 9



MULTI PURPOSE DPVE716 7 - 9 - 10



DPVE450 8 - 10 **116** 



ROSEBUSH DPVV831 7 - 8 - 9 - 10



DPLAT50 7 - 9

#### SECOND WORK



POWER TOOL

DPCT402 10 **129** 



PRECISION WORKS

DPVE702PN 9 - 10 **87** 





GENERAL HANDLING DPVV733JA **□**101





DPW7330R 7 - 9 - 10 **101** 





EXTRA GRIP

DPVE727 7 - 9 **90** 



WET ENVIRONMENT

DPVE712GR 91



GREASE AND FUEL

DPPVC7327 10 **109** 

#### PAINTING AND DECORATING



INTENSIVE WINTER WORKS VV913 8 - 9 - 10 - 11

**92** 



OIL & GAS VV911 8 - 11 **94** 



PAINTING DPVE702P 7 - 9 **87** 



FINISHING OFF

DPV1371 7 - 9 **123** 

#### **■ STANDARD**



**FORESTER** 

DPCBHV2 8 - 10 **127** 



GARDEN MAINTENANCE

DPCT502 7 - 9 **129** 



LIGHT HANDLING


DPDC103 10 **130** 



OUTSIDE WORKS

DPNI015 10 **117** 



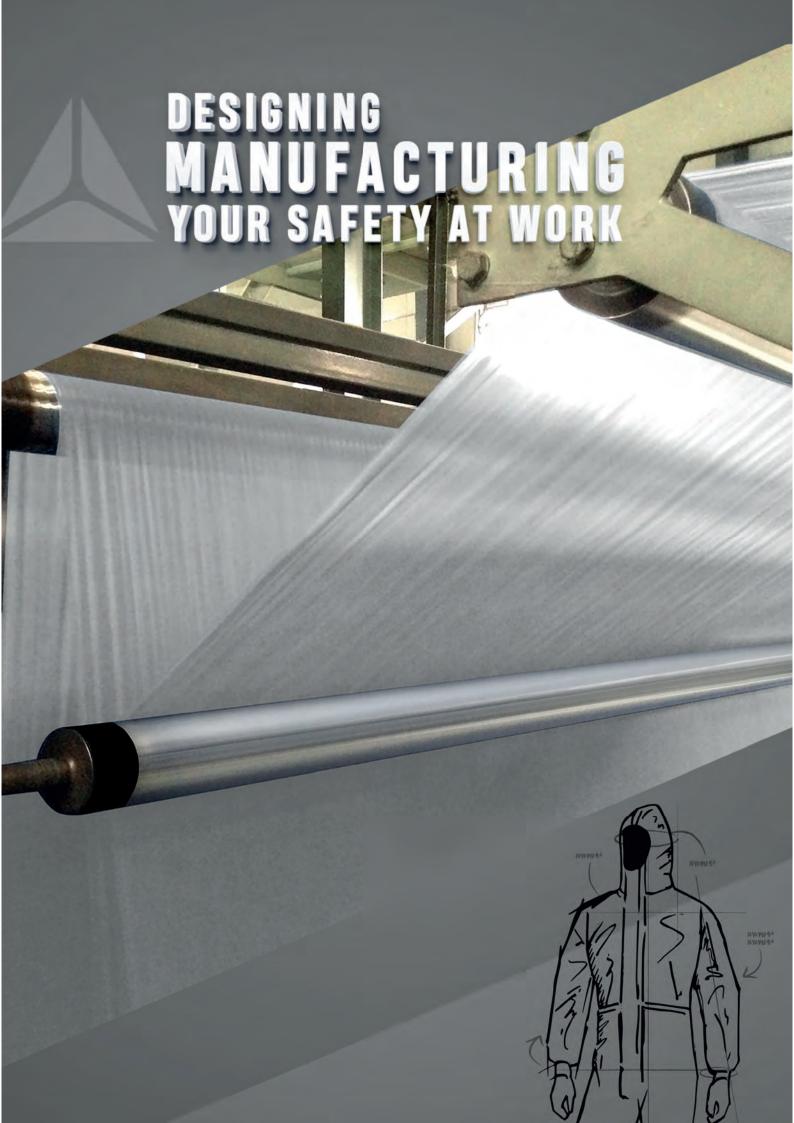



# Å

# **DISPOSABLE WEAR**


## 142 • HELP WITH CHOICE

- 146 Chemical protection overalls
- 156 Overalls Coats Aprons Headwear
- 158 Masks Sleeves Overshoes
- 399 TECHNICAL INFORMATION



# **HELP WITH CHOICE**

## TO FIND THE SUITABLE PRODUCT FOR YOUR JOB



#### **MATERIALS**

#### **POLYETHYLENE (PE)**

Is a flexible plastic fibre which provides good chemical resistances.


#### POLYPROPYLENE (PP)

Is a nonwoven breathable fibre which provides excellent comfort.

#### SMS/SMMS


#### POLYPROPYLENE - MELT BLOWN POLYPROPYLENE - POLYPROPYLENE - DT2XX

The combination of the three polypropylene (PP) layers provides exceptional protection and provides a breathable non-woven fabric. The melt blown is incorporated with warm air to form a chemical barrier. The other two layers make the combination flexible and breathable.

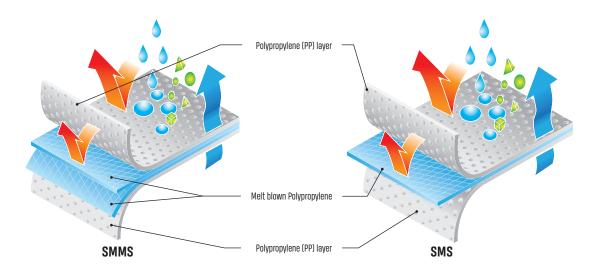


#### LAMINATED MICROPOROUS MATERIAL - DT1XX

The combination of a polypropylene (PP) layer and a Polyethylene layer (PE) ensures outstanding properties and excellent protection against most chemical products and particles. The non-woven fabric is very resistant and lint free.

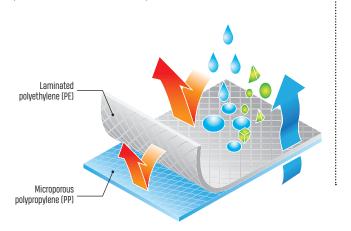


#### DELTACHEM POLYPROPYLENE + CHEMICAL BARRIER - DT3XX

The combination of several high performance polymer layers (chemical barrier) combines with several polypropylene (PP) layers, provides exceptional protection and ensures a non-woven breathable fabric. The polypropylene (PP) with the chemical barrier ensure flexible and comfort in extreme conditions



#### **PERFORMANCES**

What performance to choose according to your needs?

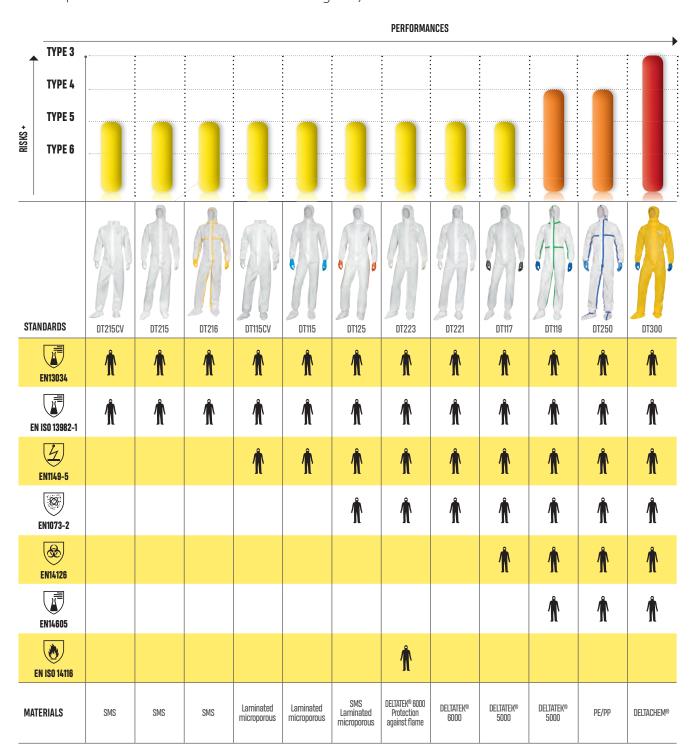


TYPE 1: Gas-tight
 TYPE 2: Not gas-tight
 TYPE 3: Liquid-tight

TYPE 4: Spray-tight
 TYPE 5: Dry particle-tight
 TYPE 6: Against sprays (limited)


This list is not contractual. It is an indicative list and in no way incurs the liability of DELTA PLUS.




# **HELP WITH CHOICE**

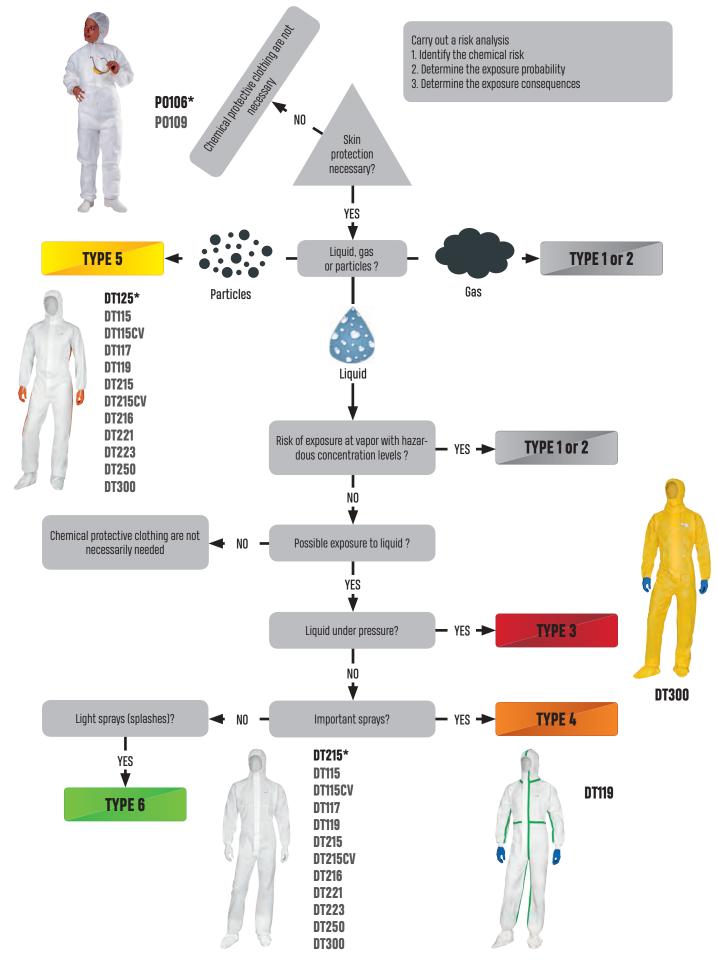

# **SELECT YOUR DISPOSABLE CHEMICAL OVERALL**

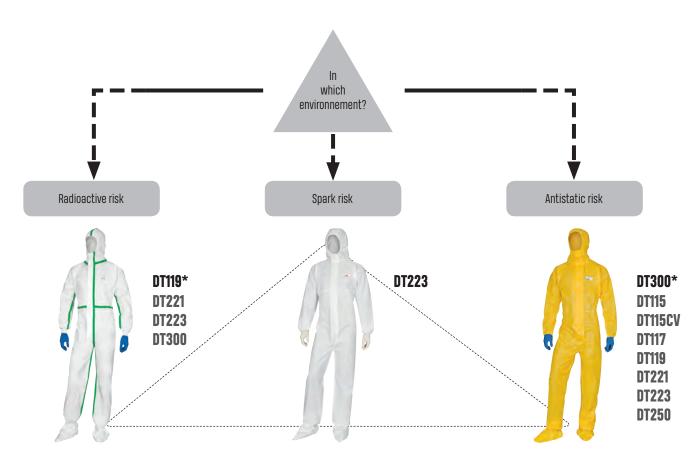

## **STANDARDS**



Protective clothing against liquid chemicals (sprays).

Protective clothing against liquid chemicals (mists).

Protective clothing for use against solid particles (dust - asbestos).

Protective clothing against liquid chemicals (splashes).

EN14126

EN ISO 14116

Protective clothing against infective agents.

EN1073-2

Protective clothing against radioactive contamination.



EN1149-5

Protective clothing to dissipate static electricity.




Protective clothing against heat and flame.

EXAMPLES OF APPLICATIONS					
Applications	Risks	Level of protection			
Work Maintenance	Fouling	Category I/Non PPE			
Industrial cleaning	Exposure to hazardous chemical substances and particles	TYPE 6 TYPE 5			
Asbestos abatement / removal (dust > 1 micron)	Contact with particles or fibres	TYPE 5			
Agriculture and horticulture (Handling of herbicides / pesticides / fungicides / fertilizers )	Contact with harmful elements	TYPE 4			
Paint spraying (Solvents)	Contact with low-concentrate aerosols	TYPE 4			
Paint spraying (Preparation / Mixing)	Contact with high concentrate aerosols	TYPE 3			
Laboratories / Chemical Industries	Projection of chemical products	TYPE 3			
Emergency / Rescue Personnel	Bacteriological contamination	TYPE 4-B TYPE 3-B			



# **CHEMICAL PROTECTION OVERALLS**

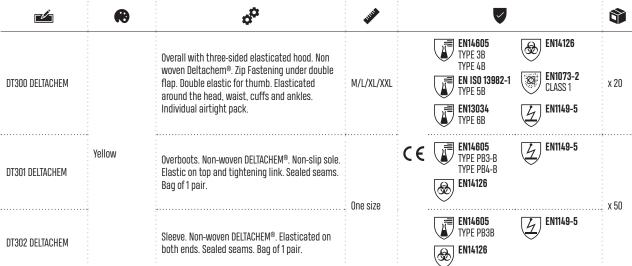









3-part hood Supports head movement for increased comfort



Waterproof seams →Decontamination work



Closure with double flap ➡Total water-proofing



Double thumb loops ⇒Good hold of the glove on the hand



Elasticated ankles →More comfort



















#### DT302 DELTACHEM



















# CHEMICAL PROTECTION OVERALLS



## DT250















→Decontamination work

PE/PP material ➡No risk of lint





Closure with chin strap →Very good support and reinforced protection



Double thumb loops →Very good support



Adhesive tape to connect a glove ➡Total water-proofing



	•	o <sup>c</sup>	<b>J</b>	lacksquare	
DT119	White	Overall with elasticated hood. Non-woven microporous laminate Deltatek® 5000. Fastening with zip under adhesive flap (top and bottom opening). Elasticated waist and ankles. Knitted wrist. Antistatic. Individual airtight pack.	M/L/XL/XXL	EN14605 TYPE 4B  EN ISO 13982-1 TYPE 5B  EN13034 TYPE 6B  EN14126 EN1073-2 CLASS 1 EN1149-5	x 20

# DT119













## DELTATek<sup>5000</sup>





DELTATEK® 5000 →Polyethylene film ensures better a resistance to chemical attack and better mechanical resistance (abrasion - tearing)





Microporous laminate
→No risk of lint
→Very soft







Supports head movement for increased comfort



Closure with self-adhesive flap

⇒Very good seal



Ribbed cuffs →Good hold of the glove on the hand



Elasticated ankles



# - DISPOSABLE WEAR CHEMICAL PROTECTION OVERALLS DELTATEK® 5000

	€	o <sup>©</sup>	<b>LILLIA</b>	<b>V</b>	
DT117	White	Overall with elasticated hood. Non-woven microporous laminate Deltatek® 5000. Fastening with zip under adhesive flap (top and bottom opening). Elasticated waist and ankles. Knitted wrist. Antistatic. Individual airtight pack.	M/L/XL/XXL	EN13034 TYPE 6-B C EN ISO 13982-1 TYPE 5-B EN14126 EN1073-2 CLASS 1 EN1149-5 EN1149-5	x 20

## **DT117**











# DELTATek 5000





⇒Polyethylene film ensures better a resistance to chemical attack and better mechanical resistance (abrasion - tearing)





Microporous laminate

- →No risk of lint
- ⇒Very soft





3-part hood ⇒Supports head movement for increased comfort



Closure with self-adhesive

flap ➡Very good seal



Ribbed cuffs ⇒Good hold of the glove 



Elasticated ankles



	•	o <sup>c</sup>	<b>HILLIA</b>	<b>V</b>	
DT125	White-orange	Non-woven overall with three-sided elasticated hood. Made in 2 materials: laminated microporous and SMS. Fastening with zip under flap. Elasticated round head, waist, cuffs and ankles. Individual pack.	M/L/XL/ XXL/3XL	EN ISO 13982-1 TYPE 5 CLASS 1  EN13034 TYPE 6  EN1073-2 CLASS 1 EN1149-5	. v.E0

# DT125









# DELTATek 5000







DELTATEK® 5000 ⇒Polyethylene film ensures better a resistance to chemical attack and better mechanical resistance (abrasion - tearing)



SMS and Microporous Laminate Association →Optimum comfort →Cooler due to the ventilated back





Antistatic

Microporous laminate **→**Less risk of lint





3-part hood ⇒Supports head movement for increased comfort



Crotch reinforcement →Increased resistance to tearing



Thumb loop ⇒Good support





# CHEMICAL PROTECTION OVERALLS DELTATEK® 6000



#### **DT221**











# DELTATek 6000









DELTATEK® 6000

⇒100% polypropylene SMMS\*

\*Spunbound Nonwoven (x1), Melt Blown (x2), Spunbound (x1)

The SMMS\* process provides better product breathability



SMMS

⇒Breathable





3-part hood ⇒Supports head movement for increased comfort



→Very good seal



Ribbed cuffs ⇒Good hold of the glove on the hand



Elasticated ankles



	•	o <sup>to</sup>	<b>HILL</b>	<b>▼</b>	
DT223	White	Overall with three-sided elasticated hood. Non-woven SMMS Deltatek® 6000. Flame retardant material. Fastening with zip under flap. Elasticated around the head, waist, cuffs and ankles. Individual airtight pack.	M/L/XL/XXL/3XL	EN ISO 13982-1 TYPE 5  EN ISO 13982-1 TYPE 5  EN ISO 14116 TYPE 6  EN ISO 14116 Index 1	x 20

# DT223











# DELTATek 6000









DELTATEK® 6000

⇒100% polypropylene SMMS\*
\*Spunbound Nonwoven (x1), Melt Blown (x2), Spunbound (x1)
The SMMS\* process provides better product breathability



SMMS →Breathable





3-part hood →Supports head movement for increased comfort



Tested according to standard EN ISO14116

→ Protection against flames



# CHEMICAL PROTECTION OVERALLS

	æ	o <sup>©</sup>	<b>LILLIA</b>	✓	
DT115		Microporous lamined non-woven overall with elasticated hood. Fastening with zip under flap. Elasticated round head, waist, cuffs and ankles. Individual pack.	M/L/XL/ XXL	EN ISO 13982-1	
DT115CV		Microporous lamined non-woven overall with collar. Fastening with zip under flap. Elasticated round waist, cuffs and ankles. Individual pack.	M/L/XL/ XXL/3XL	EN13034 TYPE 6	
DT215	White	Non-woven overall with elasticated hood. 100% SMS. Fastening with zip under flap. Elasticated round head, waist, cuffs and ankles. Individual pack.	M/L/XL/ XXL	C E ISO 13982-1 EN 13034 TYPE 5 TYPE 6	x 50
DT215CV		100% SMS non-woven overall with collar. Fastening with zip under flap. Elasticated round waist, cuffs and ankles. Individual pack.	M/L/XL/		
DT216	δ	Non-woven overall with elasticated hood. 100% SMS. Sealed seams. Fastening with zip under flap. Elasticated round head, waist, cuffs and ankles. Individual pack.	XXL/3XL	EN ISO 13982-1 EN13034 TYPE 5 TYPE 6	

#### **DT115**























3-part hood ⇒Supports head movement for increased

#### DT115CV













Tested with the hood DT115CA Available on demand →For a complete protection of the body

#### **DT215**























3-part hood ⇒Supports head movement for increased



#### DT215CV













Tested with the hood DT215CA Available on demand ⇒For a complete protection of the body

#### **DT216**











ESSENTIAL version SMS ⇒Breathable **⇒**Comfortable



3-part hood Supports head movement for increased comfort











# OVERALLS - COATS - APRONS - HEADWEAR

	•	o <sup>c</sup>	, just	<b>V</b>	
P0106	White	Overall with elasticated hood. Non-woven polypropylene 35 g/m². Zip fastening. Elasticated waist, ankles and cuffs. Suitable for food industry. Individual pack.	M/L/XL/XXL	<b>c€</b> 兄∜	x 50
BLOUSPE		Coat for visitors. Polyethylene 18 µm. Fastening with 3 press studs. Shirt collar. Raglan sleeves. Dispenser box of 100 pieces.	One size		х5
TABP002	••	Apron. Polyethylene 20 μ. Dimensions: 120 x 70 cm. Bag of 100 pieces.			v.10
TABP004	• • • • • • • • • • • • • • • • • • •	Apron. Polyethylene 40 μ. Dimensions: 120 x 70 cm. Bag of 50 pieces.			x 10
P0109	Blue	Overall with elasticated hood. Non-woven polypropylene 35 g/m². Zip fastening. Elasticated cuffs. Individual pack.	L/XL/XXL	C€	v.E0
BLOUSPO	White	Coat. Non-woven polypropylene 35 g/m². Fastening with 4 press studs. Shirt collar. Made-up sleeves. 2 patched low pockets. Suitable for food industry. Individual pack.	M/L/XL/XXL	77	x 50

# P0106











# P0109











# **BLOUSPE**





# **BLOUSPO**



# TABP002





# TABP004







	•	o <sup>c</sup>	ijiji	
P0111	White	Accordion pleating mobcap. Non-woven polypropylene 10 g/m². Elasticated border. Dispenser box of 100 pieces.		0 0 0 0 0 0
P0110	White	Round mobcap. Non-woven polypropylene 10 g/m². Elasticated border. 53 cm in diameter.		
ruliu	Blue	Dispenser box of 100 pieces.	One size	x 10
P0112		Mobcap with peak. Non-woven polypropylene 10 g/m². Box of 100 pieces.	One size	
P0115	White	Chin/beard protector. Non-woven polypropylene 10 g/m². Elasticated for a good fit. Dispenser box of 100 pieces.		
TOQUE		Adjustable pleated hat. Extra-white crepe paper, 80 g/m². Height: 25 cm. Bag of 10 pieces.		x 25



# P0111





# P0110



# P0112





# P0115





# **TOQUE**







# MASKS - SLEEVES - OVERSHOES

	æ	o <sup>o</sup>	<b>LIGHT</b>	<b>V</b>		
MASQU	White	Hygiene masks. Non-woven polypropylene 160 g/m². Elasticated straps and nose clip. Box of 50 masks.				
MASQUV	0	Hygiene mask, medical type, 3 pleats. Non-woven polypropylene 58 g/m². Tie and nose clip. Box of 50 masks.			x 20	
MASQUG	- Green	Hygiene mask, medical type, 3 pleats. Non-woven polypropylene 62 g/m². Elastic tie and nose clip. Box of 50 masks.			x 40	
MANCHBL	White	Sleeve. Polyethylene 21 µm. Suitable for food industry. Elasticated on both ends.	One size		x 20	
MANCHBE	Blue	Dimensions: 40 x 20 cm. Bag of 100 pieces.		Xl	X 2U	
DT302 DELTACHEM	Yellow	Sleeve. Non-woven DELTACHEM®. Elasticated on both ends. Sealed seams. Bag of 1 pair.		EN14605 TYPE PB3B C €	x 50	

# MASQU













# MASQUV











# **MASQUG**











# DT302 DELTACHEM















# MANCHBL





# **MANCHBE**







	•	o <sup>©</sup>	<b>LIJUL</b>	$\overline{\mathbf{v}}$	
DT111	White	Overboots. Non-woven microporous laminate Deltatek® 5000. Elastic and tie on top. Bag of 10 pairs.	One size		x 5
SURCHPLUS	Blue-White	Overshoes. Non-woven polypropylene, 8,8 g/m². Polyethylene 120 µ. Waterproof plasticized sole. Elasticated ankle. Bag of 50 pairs.			χυ
SURCHPE	Blue	Visitor overshoes. Polyethylene 25 µm. Elasticated ankle. Bag of 50 pairs.			x 20
SURCHPO	White	Overshoes. Non-woven polypropylene 40 g/m². Elasticated ankle. Dimensions: 35 x 17 cm. Bag of 50 pairs.			x 10
KITVI		Kit for visitor: 1 polyethylene overall Ref. BLOUSPE). 1 accordion pleating mobcap (Ref. P0111). 1 two-pleats paper mask (Ref. MASQU2). 1 polyethylene pair of overshoes (Ref. SURCHPE). Box of 100 kits.			х4
DT301 DELTACHEM	Yellow	Overboots. Non-woven DELTACHEM®. Non-slip sole. Elastic on top and tightening link. Sealed seams. Bag of 1 pair.		EN14605 TYPE PB3-B TYPE PB4-B EN14126 EN1149-5	x 50





































# **SURCHPE**









# **SURCHPO**










# KITVI







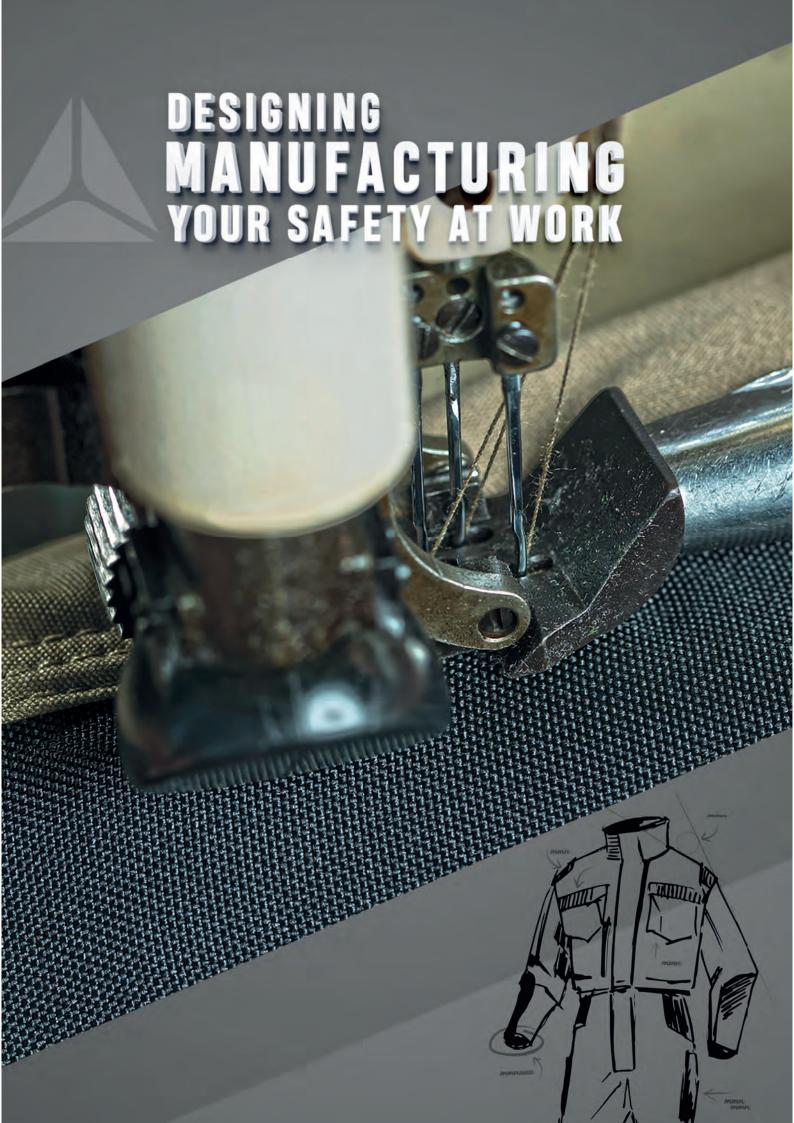

# **WORK WEAR**


#### 163 • HELP WITH CHOICE


- 164 Mach Originals
- 166 Mach 5
- 172 Mach 2 Corporate
- 178 D-Mach
- 182 Mach 2
- 186 Panostyle
- 192 Mach Spring Palaos
- 194 Polos Tshirts Underwear
- 196 High Visibility Workwear
- 202 Caps Belts Kneepads
- 402 TECHNICAL INFORMATION

**WORK WEAF** 



# **HELP WITH CHOICE**

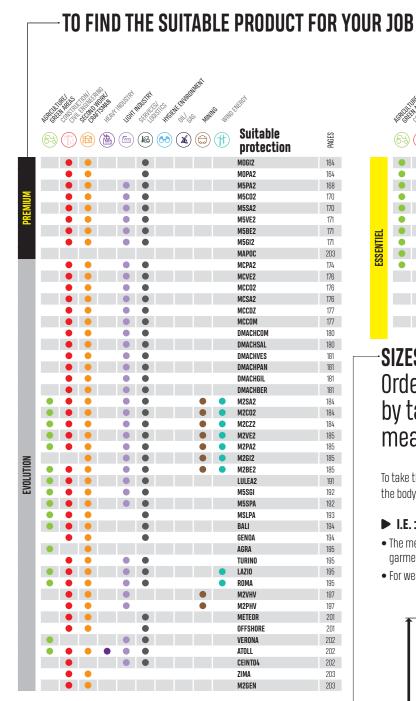




# **SIZES** Order the right size by taking the correct measurements

To take the correct measurements, take the measurements directly on the body, without tightenning.

#### **▶** I.E.:

- The measurements outlined in the tables are for the **body**, not the garment.
- For wearing a garment over another, the width required is provided.



### SIZE EQUIVALENCE TABLE

MALE	XS	S	M	L	XL	XXL	3XL
FEMALE	S	M	L	XL	XXL	-	-

MALE	В	<b>XS</b> 156/164	<b>S</b> 156/164	<b>M</b> 164/172	<b>L</b> 172/180	<b>XL</b> 180/188	<b>XXL</b> 188/196	<b>3XL</b> 196/204
	EU	42/44	44/46	48/50	52/54	56/58	60/62	64/66
JACKET / BOMBER / BODYWARMER / OVERALL	IT	36/38	38/40	42/44	46/48	50/52	54/56	58/60
UVERALL	DE	46/48	48/50	52/54	56/58	60/62	64/66	68/70
Chest measurement	cm	78/86	86/94	94/102	102/110	110/118	118/129	129/141
(A)	inch	321/2/34	34/37	37/40	40/43	43/461/2	461/2/501/2	501/2 /551/2
TROUSERS /	EU	32/34	34/36	38/40	42/44	46/48	50/52	54/56
DUNGAREES	IT/DE	36/38	38/40	42/44	46/48	50/52	54/56	58/60
Waist measurement	cm	58/66	66/74	74/82	82/90	90/98	98/106	106/117
(C)	inch	23/26	26/29	29/32	32/35 <sup>1/2</sup>	35 <sup>1/2</sup> /38 <sup>1/2</sup>	38 <sup>1/2</sup> /41 <sup>1/2</sup>	4111/2/46
TEE-SHIRT (A)	cm	76/79	80/88	89/97	98/106	107/115	116/124	125/133



## MACH ORIGINALS

	æ	o <sup>©</sup>	#	<b>Light</b>	<b>V</b>	
MOGI2	Grey	Vest. Bias finishing. 10 pockets including 2 inner.	Canvas 97% cotton 3% elastane 290 g/m². Yokes : Cordura®	C/M/I /VI /VVI /3VI	<i>( (</i>	v 10
MOPA2	Navy blue	Trousers. Inside adjustable waist with elastic and buttons. 12 pockets.	Cordura®.	S/M/L/XL/XXL/3XL	CE	X IU

#### MOGI2













Fixed badge holder included



Covered zips







Mesh insert on the back for ventilation

→Increased breathability for better evacuation of perspiration



Large pocket on the back

The necessary tools always at hand

#### MOPA2













Crotch reinforcement ⇒Increased lifespan



Decorative retro-reflective piping on the front and back MOGI2 - MOPA2



Kneepad pockets →Allows you to insert M2GEN kneepads to work more comfortably on your knees





Triple seams



Fleece lined kidney protector

- →Perfect protection of the lower back against the cold
- ⇒Increased comfort





Easy adjustment of leg length by pressure (3 lengths possible)
















# WORK WEAR MACH 5

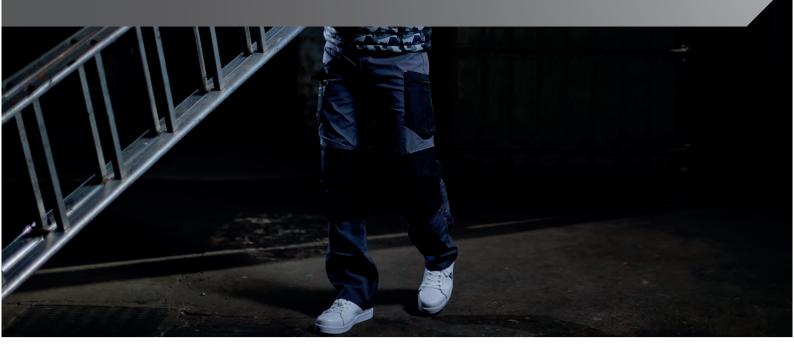

	•	o <sup>c</sup>	#	, ijus	<b>V</b>	
M5PA2	Beige-Black Grey-Black	Trousers. Elasticated waist on both sides. Preformed knees. 8 pockets including 1 ruler.	Canvas 60% cotton 40% polyester 270 g/m². Yokes: Cordura® and Oxford polyester.	S/M/L/XL/XXL/3XL	C€	x 10

#### M5PA2



















MAPOC removable pockets sold separately
The necessary tools always at hand



#### The M5V2 range is highly resistant thanks to its triple seams and Cordura® reinforcements.



Triple seams ➡Increased lifespan



Covered zips



Tool holder pocket →The necessary tools always at hand



Retro-reflective piping (front and back)



Fixed badge holder included




→Increased lifespan



Cordura® kneepad pockets →Allows you to insert M2GEN kneepads to work more comfortably on your knees



Using Cordura® and triple seams to improve product life.

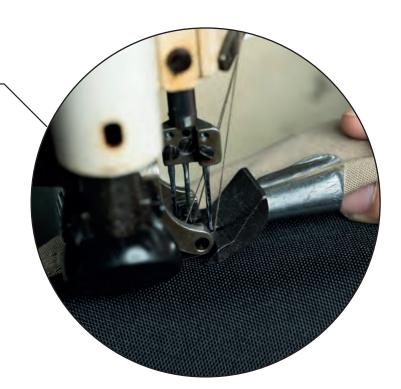



We have developed the M5 range to meet the needs of demanding customers and to enable intensive use of the product. That's why we chose a heavy cotton majority fabric to lend comfort and durability. The Cordura®, highly resistant to abrasion, is positioned on areas of high wear such as knees and forearms for maximum durability.

Laurent Kostrzewa, Body Protection Product Expert

#### └- WORK WEAR MACH 5

	æ	o <sup>o</sup>	#	<b>JULI</b>	<b>V</b>	
M5C02	Beige-Black Grey-Black	Overalls. Fastening zip under storm flap with Velcro strap (top and bottom opening). Elasticated waist. Underarm ventilation eyelets. Preformed elbows. 11 pockets including 1 ruler.	Canvas 60% cotton 40%	S/M/L/XL/	<i>( \ \ \</i>	v.10
M5SA2		Dungarees. Fastening zip under flap (top and bottom opening). Elasticated waist on both sides. Adjustable elasticated braces. Preformed knees. 10 pockets including 1 ruler.	polyester 270 g/m². Yokes: Cordura® and Oxford polyester.	S/M/L/XL/ XXL/3XL		X IU

#### M5C02















Triple seams ⇒Increased lifespan M5C02 - M5PA2 - M5BE2



Retro-reflective piping (front and back) M5VE2 - M5PA2 - M5CO2 -M5SA2 - M5GI2



Fixed badge holder included M5VE2 - M5PA2 - M5CO2 -M5SA2 - M5GI2 - M5BE2



Covered zips M5VE2 - M5PA2 - M5CO2 -M5SA2 - M5GI2 - M5BE2



Tool holder pocket →The necessary tools always at hand M5PA2 - M5CO2 - M5SA2 -



Cordura® kneepad pockets ➡Allows you to insert M2GEN kneepads to work more comfortably on your knees M5PA2 - M5CO2 - M5SA2



Reinforcement ⇒Increased lifespan M5PA2 - M5CO2 - M5SA2

#### M5SA2





















	•	o <sup>o</sup>	#	<b>Triple</b>	<b>V</b>	
M5VE2	Beige-Black Grey-Black	Jacket. Fastening with zip under velcro storm flap. Elasticated waist on both sides. Underarm ventilation eyelets. 9 pockets including 2 inner.	Canvas 60% cotton 40% polyester 270 g/m². Yokes: Cordura® and Oxford polyester.			
M5BE2	Beige Black	Bermuda. Elasticated waist on both sides. 8 pockets including 1 ruler.	Canvas 60% cotton 40% polyester 270 g/m².	S/M/L/XL/XXL/3XL	CE	x 10
M5GI2	Beige-Black Grey-Black	Vest. Zip fastening under bias. Elasticated waist on both sides. 9 pockets including 2 inner.	Canvas 60% cotton 40% polyester 270 g/m². Yokes: Oxford polyester			

#### M5VE2

















- Cordura® reinforcement

  Increased lifespan

  Very good resistance to abrasion







#### M5BE2















#### M5GI2















# WORK WEAR MACH 2 CORPORATE



### MACH 2C






















#### WORK WEAR

### MACH 2 CORPORATE

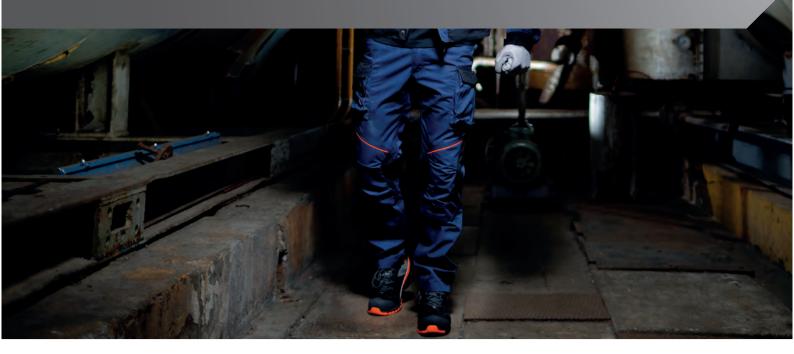

	•	o <sup>o</sup>	#	<b>tim</b>	<b>V</b>
MCPA2	Grey-Black Navy blue-Black Light grey-DarK grey	Trousers. Elasticated waist on both sides. Preformed knees. Reinforced crotch. 13 pockets including 1 ruler.	Canvas 65% polyester 35% cotton Ripstop 260 g/m².	S/M/L/XL/XXL/3XL	<b>C €</b> x10

#### MCPA2



















MAPOC removable pockets sold



#### The new Mach Corporate range meets the expectations of today's demanding professionals thanks to its many pockets and the Ripstop fabric used.



Triple seams ⇒Increased lifespan




Kneepad pockets →Allows you to insert M2GEN kneepads to work more comfortably on your knees



Retro-reflective piping (front and back)



Fixed badge holder included

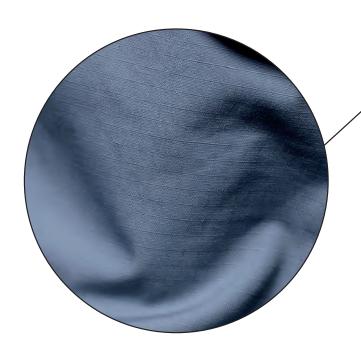



The use of the 260g/m² Ripstop polyester/ cotton fabric guarantees the user a very high level of tear resistance while remaining comfortable and relatively

A modern cut A current design



We took inspiration from current trends to develop the new Mach Corporate range. Ripstop fabric improves tear strength. Heavier, it significantly increases the life of the product. The many functional pockets are a real advantage to always have the necessary tools at hand. The 3 colours available and the decline of design on winter products make the Mach Corporate a usable range throughout the year.

Laurent Kostrzewa, Body Protection Product Expert

# MACH 2 CORPORATE

	æ	o <sup>©</sup>	#	<b>LIGHT</b>	<b>V</b>	
MCVE2	Grey-Black Navy blue-Black Light grey-DarK grey	Jacket. Fastening with zip under velcro storm flap. Elasticated cuffs adjustable with Velcro. 9 pockets including 1 zipped.	Canvas 65% polyester 35% cotton Ripstop 260 g/m².		0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
MCC02	Grey-Black	Overalls. Elasticated waist at the back. 11 pockets including 1 ruler.	Canvas 65% polyester	S/M/L/XL/XXL/3XL	C€	x 10
MCSA2	Grey-Black Navy blue-Black Light grey-DarK grey	Dungarees. Adjustable elasticated braces. 9 pockets including 1 ruler.	35% cotton Ripstop 260 g/m².			

#### MCVE2















Triple seams ⇒Increased lifespan



Fixed badge holder included





#### MCC02













Retro-reflective piping



Kneepad pockets →Allows you to insert M2GEN kneepads to work more comfortably on your knees



#### MCSA2













	<b>®</b>	o <sup>c</sup>	#	<b>tites</b>	<b>V</b>	<b>\$</b>
MCCDZ	Navy blue-Black Light grey-DarK grey Beige-Grey	Overalls with 2 zips. Adjustable elasticated waist at the back, through velcro band at the front Adjustable bottom of legs with velcro band. 7 pockets. 2 Hand slits.	Twill 65% polyester 35%	S/M/L/XL/XXL/3XL	~ ~	v.10
мссом	Beige-Grey	Overalls. Elasticated waist at the back. 8 pockets including 1 ruler. 2 Hand slits.	Twill 65% polyester 35% cotton 245 g/m².	J/W/L/AL/XXL/JXL		XIU

#### MCCDZ



























Hand pocket MCCOM



Buttock reinforcement ⇒Increased lifespan MCCOM





ergonomics







Eyelets under arms

- ⇒Gusset at the back
  ⇒Increased breathability for better evacuation of perspiration

Kneepad pockets

→Allows you to insert M2GEN kneepads to work more comfortably on your knees MCCDZ - MCCOM

WORK WEAR D-MACH

## D-MACH

































### **D-MACH**

	•	o <sup>©</sup>	#	ijus	<b>V</b>	<b>\$</b>
DMACHCOM	Black-Red	Overalls. Elasticated waist. Fastening with zip under bias (top and bottom opening). 9 pockets including 1 ruler.	Twill 65% polyester 35% cotton 245 g/m².	S/M/L/XL/XXL/3XL	<i>( (</i>	v 10
DMACHSAL	Grey-Yellow Grey-Orange	Dungarees. Adjustable elasticated braces. 8 pockets including 1 ruler.			7.7	X IU

#### **DMACHCOM**













Smocked back ⇒Easy to put on

⇒Freedom of movement



Tool holder pocket →The necessary tools always at hand DMACHCOM - DMACHPAN -DMACHSAL



#### **DMACHSAL**













Button closure on the waist



Jean style pockets DMPAN - DMSAL - DMCOM



Buttock reinforcement ⇒Increased lifespan





Kneepad pockets →Allows you to insert M2GEN kneepads to work more comfortably on your knees DMCOM - DMPAN - DMSAL





Lower trousers reinforced with anti-dirt coating DMACHCOM - DMACHPAN - DMACHSAL





	•	<b>o</b> o	#	<b>HILLIA</b>	<b>V</b>	
DMACHVES	Black-Red Grey-Yellow Grey-Orange	Jacket. Cuffs with press studs fastening. 4 pockets.		S/M/L/XL/XXL/3XL		0
DMACHGIL	Grey-Yellow	Vest. Zip fastening under bias. 5 pockets.	Twill 65%			
DMACHPAN	Black-Red Grey-Yellow Grey-Orange	Trousers. Elasticated waist on both sides. 6 pockets including 1 ruler.	polyester 35% cotton 245 g/m².		CE	x 10
DMACHBER	Black-Red Grey-Yellow	Bermuda. Elasticated waist on both sides. 6 pockets.	•• • • • • • • • • • • • • • • • • • •	G 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5		

#### **DMACHVES**











Badge holder location





Inner pocket →The necessary tools always at hand



Hand pockets



Reinforced anti-soil cuffs







#### **DMACHGIL**













Hand pockets



#### **DMACHPAN**













#### **DMACHBER**















WORK WEAR MACH 2



















M2GI2 C € S->3XL















#### **WORK WEAR**

### MACH 2

	æ	o <sup>o</sup>	#	<b>LIGHT</b>	<b>V</b>	<b>\$</b>
M2SA2	Grey-Orange Navy blue-Royal blue Black-Grey	Dungarees. Adjustable elasticated braces. 8 pockets including 1 ruler.	Twill 65% polyester 35% cotton 245 g/m².			2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
M2C02		Overalls. Zip fastening under bias. Elasticated waist. Elasticated cuffs. 10 pockets including 1 on the sleeve and 1 ruler.		S/M/L/XL/XXL/3XL	C€	x 10
M2CZ2	Grey-Orange Navy blue-Royal blue Green-Black	Overalls with 2 zips. Elasticated waist. 10 pockets including 1 ruler.				

#### M2SA2

















Decorative retro-reflective piping on M2C02 - M2CZ2 - M2VE2 - M2PA2



Fixed badge holder included M2CO2 - M2CZ2 - M2VE2 - M2PA2 -M2SA2 - M2GI2 - M2BE2



Triple seams ⇒Increased lifespan M2CO2 - M2CZ2 - M2PA2 - M2SA2 - M2BE2



Waist adjustable with buttons ⇒Elasticated back waist

➡Freedom of movement and optimised comfort



Kneepad pockets →Allows you to insert M2GEN kneepads to work more comfortably on your knees M2C02 - M2PA2 - M2SA2





#### M2C02

















Covered zips M2CO2 - M2VE2







#### M2CZ2

















Adjustable bottom by











	<b>€</b>	o <sup>©</sup>	#	<b>J</b>	<b>V</b>			
M2VE2	Grey-Orange Navy blue-Royal blue Black-Grey	Jacket. Elasticated cuffs adjustable with Velcro. 5 pockets including 1 zipped and 1 inside.		S/M/L/XL/XXL/3XL	C/M/I /VI /VVI /2VI		) ) ) ) ) )	
M2GI2	Grey-Orange Navy blue-Royal blue Green-Black	Multipocket vest. Bias finishing. 10 pockets.	Twill 65% polyester 35% cotton 245 g/m².	5/M/L/AL/AAL/3AL				
M2PA2	Grey-Orange Navy blue-Royal blue Black-Grey Green-Black	Trousers. Elasticated waist on both sides. 7 pockets including 1 ruler.		XS/S/M/L/XL/ XXL/3XL	C€	x 10		
M2BE2	Grey-Orange Navy blue-Royal blue Green-Black	Bermuda. Elasticated waist on both sides. 7 pockets including 1 ruler.		S/M/L/XL/XXL/3XL	•• • • • • • • • • • • • • • • • • • •			

#### M2VE2





















#### M2GI2



















Large pocket on the back →The necessary tools always at hand









#### M2PA2



























































MAPOC removable pockets sold separately →The necessary tools always at hand



WORK WEAR PANOSTYLE





### PANOSTYLE

	•	o <sup>c</sup>	#	<b>LIGHT</b>	abla	
M6COM	Grey-Green Navy blue-Orange Grey-Orange Brown-Green	Overalls. Front zip fastening with bias finishing. Elasticated waist. Elasticated cuffs. 7 pockets.	Twill SEM, polynotor			2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
M6SAL	Grey-Orange Navy blue-Orange Grey-Green Brown-Green White-Grey	Dungarees. Elasticated waist on both sides. Adjustable elasticated braces. 6 pockets.	Twill 65% polyester 35% cotton 235 g/m².	XS/S/M/L/XL/XXL/3XL	C€	x10

#### M6COM













Badge holder location sold separately



Contrasting colours



Internal kneepad pockets →Allows you to insert M2GEN kneepads to work more comfortably on your knees

#### M6SAL













Button closure on the waist







	•	n <sup>o</sup>	#	<b>LIGHT</b>	abla	
M6VES	Grey-Green Navy blue-Orange	Jacket. Front zip fastening with bias finishing. Elasticated cuffs. 4 pockets.			0 0 0 0 0 0	
M6GIL	Grey-Orange Brown-Green	Multipocket vest. Front zip fastening with bias finishing. Bias finishing. 6 pockets.		XS/S/M/L/XL/	o o o o	•
M6PAN	Grey-Orange Navy blue-Orange Grey-Green Brown-Green White-Grey	Trousers. Elasticated waist on both sides. 5 pockets including 1 ruler.		: VVI /9VI	CE	x10
M6BER	Grey-Green Navy blue-Orange	Y ROTMING FIGETING TO THE OTHER OF THE CHILDS A NORVETE		S/M/L/XL/XXL/3XL	00 0 0 0 0 0 0 0 0 0	

#### **M6VES**











#### M6GIL















#### M6PAN































### **PANOSTYLE**

#### The new PanostrPa trousers completes the PANOSTYLE offer by providing a more modern fit and incomparable comfort thanks to the cleverly positioned stretch fabric.

	•	o <sup>©</sup>	#	<b>LIGHT</b>	<b>V</b>	
PANOSTRPA	Navy blue-Orange Grey-Black	Trousers. Elasticated waist at the back. 5 pockets including 1 ruler.	Twill 63% polyester 34% cotton 3% elastane 240 g/m².	XS/S/M/L/XL/ XXL/3XL	C€	x 10

#### **PANOSTRPA**















The use of 240 g/m² polyester/cotton/elastane stretch fabric quarantees the best price/value ratio for this range without compromising the quality and durability of the product.



We have integrated a stretch line in the Panostyle range to meet the expectations of our customer users. They can continue to dress in Panostyle, or rediscover this range while having pants with a current cut that offers greater freedom of movement whatever the job they do. Laurent Kostrzewa, Body Protection Product





	•	a <sup>c</sup>	#	<b>LIGHT</b>	<b>V</b>	
LULEA2	White-Grey	Jacket. Fastening with zip under storm flap. Bottom of sleeves with bias finishing. Adjustable bottom of garment with elastic drawstring. 5 pockets.	Softshell 96% polyester 4% elastane fabric.	S/M/L/XL/XXL/3XL	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
NAPOLI	White	Tee-shirt with short sleeves. Round collar.	Jersey stitch 100% cotton 140 g/m².			x 10
M6PAN	**************************************	Trousers. Elasticated waist on both sides. 5 pockets including 1 ruler.	Twill 6506 polyaetar	XS/S/M/L/XL/XXL/3XL (		3 1 3 3 3
M6SAL	White-Grey	Dungarees. Elasticated waist on both sides. Adjustable elasticated braces. 6 pockets.	Twill 65% polyester 35% cotton 235 g/m².		CE	) 1 1 2 3 3 5 0 0 0

#### LULEA2

Softshell ⇒Lightness and protection from cold, wind and fine rain











#### NAPOLI







#### M6PAN















#### M6SAL











# MACH SPRING - PALAOS

	•	o <sup>©</sup>	#	<b>Light</b>	abla	
M5SGI	Poigo	Stonewashed multipocket vest. Zip fastening under bias. 12 pockets.	Twill 65% polyester 35% cotton 245 g/m².	S/M/L/XL/XXL/3XL	~ ~	v 10
M5SPA	Beige	3 in 1 stonewashed trousers. Elasticated waist on both sides. Preformed knees. 8 pockets including 1 ruler.			(6	XIU

#### M5SGI















Dorsal ventilation flap



Fixed badge holder included

















Triple seams →Increased lifespan Crotch reinforcement ⇒Increased lifespan



Kneepad pockets →Allows you to insert M2GEN kneepads to work more comfortably on your knees





Pants convertible via zip







Tool holder pocket →The necessary tools always at hand



MAPOC removable pockets sold separately →The necessary tools always at hand

	æ	o <sup>o</sup>	#	<b>HILLIA</b>	<b>V</b>	
MSLPA		Trousers. Elasticated waist on both sides. Preformed knees. 6 pockets including 1 ruler.	Canvas 100% cotton 195 g/m². Cordura® reinforcement 100% polyamide.	0		
PALIGVE		Jacket. Zip fastening under bias. Elasticated cuffs. 3 pockets including 1 inner.	Twill 100% cotton 200 g/m².	S/M/L/XL/XXL/3XL	C€	x 10
PALIGPA	Navy blue	Trousers. Elasticated waist on both sides. 5 pockets including 1 ruler.	Twill 100% cotton 200 g/m².		0 0 0 0 0 0	

#### **MSLPA**















Kneepad pockets

→Allows you to insert M2GEN kneepads to work more comfortably on your knees



Crotch reinforcement →Increased lifespan

#### **PALIGVE**















#### **PALIGPA**



















# POLOS - TSHIRTS - UNDERWEAR

	•	o <sup>©</sup>	#	<b>LIGHT</b>	<b>V</b>	
BALI	Grey-Navy blue Black-Yellow Orange-Navy Blue Red-Grey Green-Grey	Two-coloured tee-shirt with short sleeves. Round collar.	M/I/XI/XXI			
GENOA	Grey-Orange Royal blue-Navy blue Black-Grey Green-Black	Two-coloured tee-shirt with short sleeves (To match the MACH range). Round collar.	Jersey stitch 100% cotton 180 g/m².	S/M/L/XL/XXL/3XL		x 10
NAPOLI	Blue Grey White	Tee-shirt with short sleeves. Round collar.	Jersey stitch 100% cotton 140 g/m².		o o o o o o o o o o o o o o o o o o o	

#### BALI











Synthetic fabric →Quick drying to keep the skin dry →Lighweight





#### **GENOA**









#### **NAPOLI**







	•	o <sup>©</sup>	#	<b>LIGHT</b>	<b>V</b>	
AGRA	Blue Black Red	Polo with short sleeves. Collar with button fastening.	Piqué stitch 100% cotton 200 g/m².		0	
TURINO	Black Grey-Black	Polo with long sleeves (To match MACH range). Knitted cuffs.	Piqué stitch 100% cotton 210 g/m².	S/M/L/XL/XXL/3XL	0 0 0 0 0	x 10
LAZIO	Black	Tee-shirt with short sleeves. Round collar.	Jorgan etiteb 1000/ eetten 100 g/m²		0	
ROMA	Grey	iee-siiit wilii siidit sieeves. Kuunu cunai.	Jersey stitch 100% cotton 180 g/m².			





#### **LAZIO**















#### ROMA



















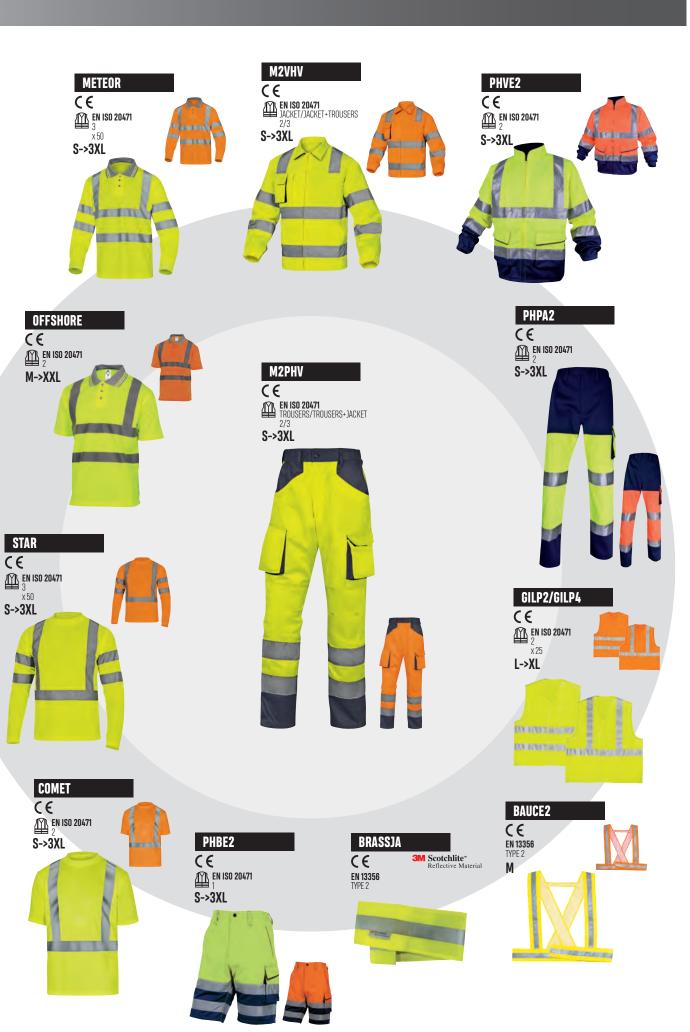

#### - WORK WEAR

### HIGH VISIBILITY WORKWEAR

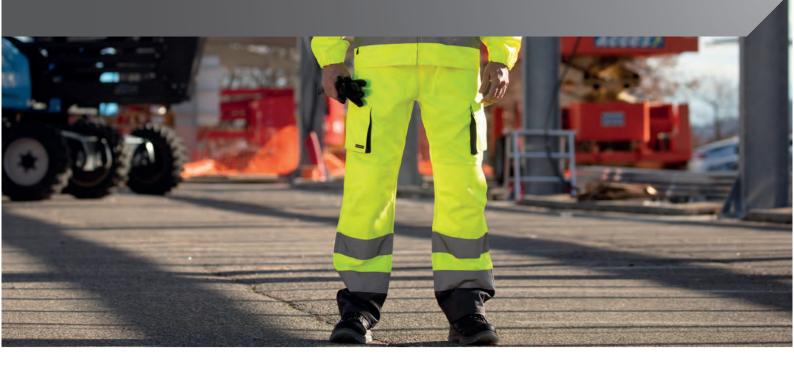

	æ	o <sup>c</sup>	#	<b>AUUU</b>	V	
M2VHV	Fluorescent yellow- Grey	Jacket. Elasticated cuffs adjustable with Velcro. 4 pockets including 1 zipped and 1 inside. High visibility: Class 2 - Silver colour - Parallel assembly.	Twill 54% cotton 46% polyester 260 g/m².	S/M/L/XL/	EN ISO 20471  JACKET/ JACKET+TROUSERS 2/3	
M2PHV	Fluorescent orange- Grey	Trousers. Elasticated waist on both sides. High visibility: Class 2 - Silver colour. 7 pockets including 1 ruler pocket.	polyester 260 g/m². Retro-reflective sewn bands.	XXL/3XL	EN ISO 20471 TROUSERS/ JACKET+TROUSERS 2/3	x 10

#### M2VHV











#### M2PHV















#### From T-shirts to the parka to pants and work jackets, our high-visibility clothing line lets you be seen for your safety in any season wherever you work.



Fixed badge holder included







Triple seams ⇒Increased lifespan



MAPOC removable pockets sold separately →The necessary tools

always at hand



Kneepad pockets →Allows you to insert M2GEN kneepads to work more comfortably on your knees

Class		aren de -
1	> 0,14 m <sup>2</sup>	> 0,10 m <sup>2</sup>
2	> 0,50 m <sup>2</sup>	> 0,13 m <sup>2</sup>
3	> 0,80 m <sup>2</sup>	> 0,20m²

A high visibility garment that will allow you to be visible to other road users and machine operators day and night.

To be visible by day, they must use yellow, orange or red fabrics that meet the EN ISO 20471 standard.

To be visible at night, they must use retro-reflective tapes that also meet the EN ISO 20471 standard.

The surface and positioning of the retro-reflective fabrics and bands will certify the garment in class 1, 2 or 3.

These classes guarantee a visibility to a greater or lesser distance that you define according to your place of work: construction site, road, highway... We mainly use retro-reflective tapes sewn to guarantee the best value for money.





Our entire range meets the requirements of standard EN ISO 20471 A1 2016.

Most models are available in orange and yellow, we developed them with the constant concern of the best value for money without compromising on the quality of the materials used

Laurent Kostrzewa, Body Protection Product Expert

### HIGH VISIBILITY WORKWEAR

	æ	o <sup>o</sup>	#	<b>THE</b>	<b>V</b>	
PHVE2		Jacket. Elasticated cuffs. High visibility: Class 2 - Silver colour - Shoulder-belt and parallel assembly. 2 pockets.			∫¶∏N EN ISO 20471	
PHPA2	Fluorescent yellow-Navy blue Fluorescent orange-Navy blue	Trousers. Elasticated waist on both sides. High visibility: Class 2 - Silver colour. 5 pockets including 1 ruler pocket.	Twill 80% polyester 20% cotton 230 g/m². Retro-reflective sewn bands.	S/M/L/XL/XXL/3XL	⊞ CLASS 2 C €	x10
PHBE2		Bermuda. Elasticated waist on both sides. High visibility: Class 1 - Silver colour. 5 pockets.			EN ISO 20471 Class 1	

#### PHVE2















#### PHPA2

















#### PHBE2













	•	o <sup>©</sup>	#	<b>JULIA</b>	lacksquare	
METEOR		Polo with long sleeves. Contrast collar with button placket. High visibility. Class 3 - Silver colour - Shoulder-belt and parallel assembly.	Piqué stitch 100% polyester 235 g/m². Retro-reflective sewn	S/M/L/XL/XXL/3XL	EN ISO 20471 Class 3	
STAR	Fluorescent yellow	Long Sleeve T-Shirt. Round collar. High visibility: Class 3 - Silver colour - Shoulder-belt assembly.	bands.		EN ISO 20471 CLASS 3 x 50	x 10
OFFSHORE	Fluorescent orange	Polo with short sleeves. Contrast collar with button placket. High visibility, Class 2 - Silver colour - Shoulder-belt and parallel assembly.	100% polyester stich 160 g/m². Retro-reflective sewn bands.	M/L/XL/XXL	EN ISO 20471	XIU
COMET	COMET	Short sleeve tee-shirt. Round collar. High visibility: Class 2 - Silver colour - Shoulder-belt assembly.	RELIO-TETRECTIVE SEWIT DATIUS.	S/M/L/XL/XXL/3XL	<u> </u>	

### METEOR











### STAR











#### OFFSHORE













#### COMET















### CAPS - BELTS - KNEEPADS

	æ	o <sup>c</sup>	#	<b>tille</b>	<b>V</b>	
VERONA	Navy blue-Royal blue Grey-Orange Black-Grey Red-Grey	Cap (To match the MACH range).	Twill 65% polyester 35% cotton 245 g/m².	One size	0 0 0 0 0 0 0 0 0	x100
BADGE	Black	Removable badge holder suitable for all products with badge holder text. Outside dimensions: width 10,5 cm x height 9,5 cm.	Fabric. Plastic.			x 750
ATOLL	Grey	Belt. Length: 120 cm.	100% polyester.	One size		x 100
CEINTO4	Black	Adjustable lumbar belt with velcro band. Double elasticated band for adjustment. Adjustable tightening shoulder-straps. Reinforced at the back with a system of «4 stiffeners».	Canvas polyester elastane. Stiffeners in polypropylene.	M/L/XL	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	x 48

#### **VERONA**













#### **BADGE**





#### ATOLL















#### CEINT04









	æ	o <sup>o</sup>	#	<b>Juli</b>	<b>V</b>	<b>**</b>
MAPOC		Set of 2 removable pockets. 6 pockets and 1 hammer holder.	100% Oxford polyester canvas.	0 0 0 0 0		x 40
ZIMA	Black	Pair of gel kneepad with outside anti slip shell. Elastic velcro band to maintain the knee. Adjustable strips in elastic velcro.	PVC-coated 100% polyester. 100% polyester lining. PVC shelve.	One size	EN14404 TYPE 1 LEVEL 1	
M2GEN		Pair of kneepads 20 x 15 cm for trousers, dungarees and overalls of the MACH and PANOSTYLE ranges (not M2CZ2).			EN14404 TYPE 2 LEVEL 1	x 10

#### MAPOC





### ZIMA








### M2GEN







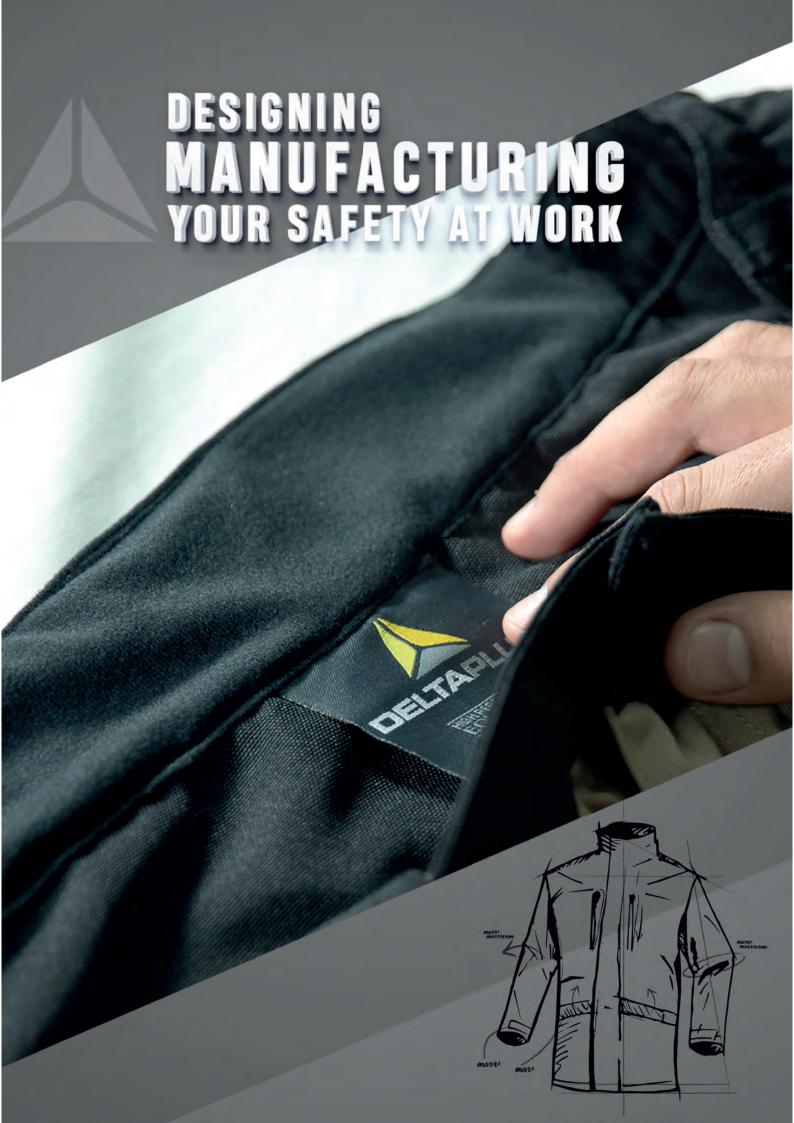

### **OUTDOOR WEAR**

#### 207 • HELP WITH CHOICE

- 208 Parkas and bombers jackets
- 224 Bodywarmers
- 228 Trousers
- 230 Polars Softshell Sweats Pull-over
- 237 Caps Hoods Gloves
- 238 Rain
- 402 TECHNICAL INFORMATION





OUTDOOR WEAF



### **HELP WITH CHOICE**

		T	) F	INE	) T	HE	SI	JIT	'AB	LE	<b>PRODUCT</b>	<b>FOR</b>
		- 1	-									
		مداء	1014/25	HAN	.CTRY	-TRI		M. EMIRO	MEN		d	
	REFERE	MARCA	SECONO SECONO	NO THAN	MUISTRY	MUSER	SICS	METHIN	MINI	o will	HERO	
		0,0	. es. Cr.	0	$\sim$	$\overline{}$	H.	0	W.	111.	Suitable	83
	(6-9)		) 📵			(188)	( <del>60</del> )	( <b>A</b>		(TL)	protection	PAGES
		•	•	•	•	•					KOLDYTOP	208
		•	•	•	•	•					KOLDYPANTS	208
			•								MILTON2	210
			•			•					EOLE	212
											TATRY	212
≥											MOOVE	220
PREMIU											MOTION	221
<b>E</b>											FIDJI2	224 225
-											NATORI Horten2	230
											BRIGHTON	233
											NAGOYA	234
	Ť										OTAKE	239
											850	242
											YEMAN	211
						•					VIGO	213
		•				•					KOPER	213
		•				•			•	•	CARSON	214
											FINNMARK	215
		•	•			•					GOTEBORG	215
											DOON	221
	•	•	•		•	•			•	•	NORTHWOOD2	222
			•			•					RANDERS	223
			•			•				•	G-DOON	226
			•		•	•					GRANDERS	226
	•	•	•		•	•					DMACHGIW	228
		•	•		•	•					DMACHPAW	228
		•	•		•	•			•	•	STOCKTON2	229
<u>S</u>	•	•	•		•					•	M2PW2	229
EVOLUTION			•		•	•					MYSEN2	232
	•	•	•			•					LULEA2	232
		•	•		•	•					SHERMAN	233
		•	•							•	MARMOT	234
		•	•			•					ANZIO	235
		•									LECCO	235
		•									KARA	237
											JURA	237
		•									CHAMONIX	237
											NORDIC	237
											NEVE	237
						•					SLIGO GALWAY	240 240
											LIDINGO	240
						•					TYPHOON	241
		•				•					TOFINO	241
						-						_71

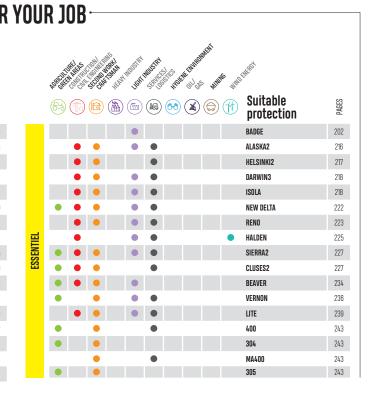

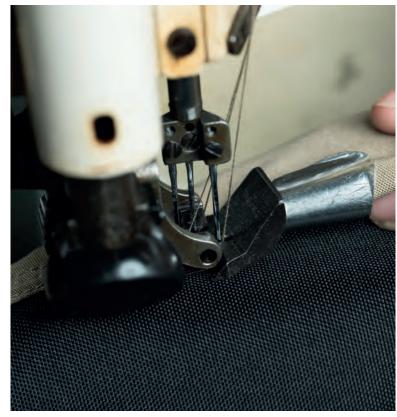



#### - SIZES


Order the right size by taking the correct measurements

To take the correct measurements, take the measurements directly on the body, without tightenning.

#### I.E.:

- the measurements outlined in the tables are for the **body**, not the garment.
- for wearing a garment over another, the width required is provided.

A	В	C
Chest measurement	Height	Waist measurement

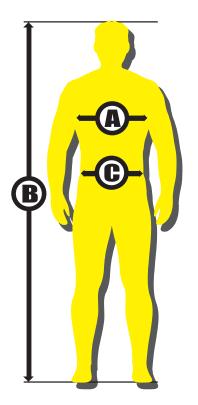

#### **SIZE EQUIVALENCE TABLE**

MALE	В	<b>XS</b> 156/164	<b>S</b> 156/164	<b>M</b> 164/172	<b>L</b> 172/180	<b>XL</b> 180/188	<b>XXL</b> 188/196	<b>3XL</b> 196/204
	EU	44/46	46/48	48/50	50/52	52/54	54/56	56/58
	IT	36/38	38/40	42/44	46/48	50/52	54/56	58/60
JACKET / BOMBER Parka / Vest	DE	48/50	50/52	52/54	54/56	56/58	58/60	60/62
Chest measurement (A)	cm	90/94	94/98	98/102	102/106	106/110	110/114	114/118
	inch	351/2/37	37/38 <sup>1/2</sup>	381/2/40	40/411/2	411/2/431/2	431/2/45	45/461/2
TROUSERS Waist measurement (C)	EU	/	34/36	38/40	42/44	46/48	50/52	54/56
	IT/DE	/	38/40	42/44	46/48	50/52	54/56	58/60
	cm	/	66/74	74/82	82/90	90/98	98/106	106/117
	inch	/	26/29	29/32	32/351/2	351/2/381/2	381/2/411/2	411/2/46
HADEDWEAD	EU	/	34/36	38/40	42/44	46/48	50/52	54/56
UNDERWEAR	IT/DE	/	38/40	42/44	46/48	50/52	54/56	58/60
01 1	cm	/	78/86	86/94	94/102	102/110	110/118	118/123
Chest measurement (A)	inch	/	301/2/34	34/37	37/40	40/431/2	431/2/461/2	461/2/481/2
Weist massurement (C)	cm	/	66/74	74/82	82/90	90/98	98/106	106/117
Waist measurement (C)	inch	/	26/29	29/32	32/351/2	351/2/381/2	381/2/411/2	411/2/46

	æ	o <sup>©</sup>	#	<b>LILLIA</b>	<b>\$</b>
KOLDYTOP	Dlook	Long sleeve raglan t-shirt.		S/M/L/	. v 10
KOLDYPANTS	Black	Long Johns.	60% polyamide 35% Coolmax® 5% elastane.	XL/XXL	X IU

#### **KOLDYTOP**















Thermoregulator Lightweight

➡Very comfortable to wear, the Coolmax® technology allows faster evacuation of perspiration. Quick drying to give the user maximum



#### **KOLDYPANTS**

















#### The 3-layers system allows you to always be well protected whatever the weather conditions.



The 3-layers concept guides you in the choice of clothes to use in order to not suffer from the weather conditions.



The first layer in contact with the skin should be comfortable and facilitate the evacuation of sweat to stay dry.



The second layer must protect you from the cold. This is the layer that can be doubled or tripled if the cold is really intense. We must favour textiles that trap the air as it is an excellent insulation : fleece, wadding...



The third and last layer must primarily protect you from external aggressions, particularly rain and wind, but also allow the evacuation

Remember that the best way to get rid of moisture is to open the zip and limit perspiration by adapting the intermediate layers to the outside temperature and the intensity of the planned work.



Evacuate, isolate and protect are reminiscent of first aid terms (Protect - Alert - Rescue) but if we stay within the protection, it's a concept that allows you to choose your clothes to protect you in any weather.

Laurent Kostrzewa, Body Protection Product Expert

	•	o <sup>©</sup>	#	<b>J</b> JJJJJ	<b>V</b>	<b>*</b>
MILTON2	Black Red Navy blue	Parka. Waterproof seams. Fastening with zip storm flap. Adjustable bottom of garment with elastic drawstring. 6 pockets.	94% polyester 6% elasthane fabric, 2 laminated layers, Yokes: Polyurethane-coated Oxford polyester fabric. Quilted Taffeta polyester lining.	S/M/L/XL/ XXL/3XL	C€	x 10

#### MILTON2













BREATHABLE WATERPROOF **⇒**Evaporative resistance Class 2



Fleece lined collar →Comfort wear for optimised cold protection



Internal audio guide



Document storage pocket ⇒The necessary tools always at hand



Fixed badge holder included



Wind-proof mitten → Maintains heat **→**Wind-breaker



Inner opening ⇒Easy and qualitative marking





Padded removable hood ⇒Increased protection from the cold







	•	o <sup>C</sup>	#	<b>LITTLE</b>	<b>V</b>	
YEMAN	Black	Bomber jacket. Fastened with a zip under storm flap. Knitted cuffs and bottom of garment. 6 pockets.	65% polyester 35% cotton Ripstop fabric. Top lining: polyester polar fleece - Bottom lining: polyester Taffeta.	S/M/L/XL/ XXL/3XL	CE	x 10

#### YEMAN

















Padded removable hood Increased protection from the cold



Fleece lined collar **⇒**Comfort wear for optimised cold protection



Decorative retro-reflective piping on the front and back



Fixed badge holder included



Inner opening ⇒Easy and qualitative marking







	•	o <sup>©</sup>	#	<b>AUTUS</b>	<b>V</b>	
EOLE	- Grey	Parka 3 in 1, removable jacket. Rain parka: Waterproof seams. Fastening with zip under storm flap. 6 pockets. Removable Jacket: Fastening with zip under storm flap. Bottom of sleeves with bias finishing. 2 pockets.	Fabric 74% polyamide 26% polyester with polyurethane coating. Fixed polyester mesh lining. Removal "Softshell" fabric vest 96% polyester 4% elastane.	S/M/L/XL/	EN343 3 1*	x5
TATRY		Parka. Waterproof seams. Fastening with zip under storm flap. Wadded removable hood. Adjustable bottom of garment with elastic drawstring. 8 pockets.	Fabric 94% polyester 6% elastane 2 laminated layers. Padded polyester taffeta lining.	XXL/3XL		x 10

#### **EOLE**













Waterproof zips



Decorative retro-reflective





Fixed hood



Detachable jacket "Softshell" fabric - 3 in 1

- **⇒**Lightness and protection against cold and fine rain
- ⇒Use all year round

#### **TATRY**













BREATHABLE WATERPROOF ⇒Evaporative resistance Class 2



→ Maintains heat **→**Wind-breaker





Padded removable hood **→**Increased protection from the cold



Fleece lined collar optimised cold protection



Inner opening ⇒Easy and qualitative marking



	æ	o <sup>o</sup>	#	<b>JULIA</b>	<b>V</b>	<b>\$</b>
VIGO	Grey Red-Black	Parka. Fastening zip under storm flap. Fixed hood. 4 pockets.	Fabric 96% polyester 4% elastane 2 laminated layers. Padded polyester taffeta lining.	S/M/L/XL/	<i></i>	10
КОРЕП	Black	Stonewashed jacket. Fastening with zip under press studs storm flap. 6 pockets including 2 inner.	Cloth 100% cotton 270 g/m². Polyester polar fleece lining.	S/M/L/XL/ XXL/3XL		XIU

#### **VIGO**













Removable badge holder included



Fleece lined collar **⇒**Comfort wear for optimised cold protection



Inner opening ⇒Easy and qualitative marking











#### **KOPER**















Sherpa lining on the back → Comfort wear for optimised cold protection





	<b>€</b>	o <sup>o</sup>	#	<b>J</b> JJJJ <b>J</b>	<b>V</b>	<b>\$</b>
CARSON	Grey-Orange Black-Grey Navy blue-Royal blue	Parka (To match the MACH range). Waterproof seams. Fastening with zip under velcro storm flap. Adjustable waist with elastic drawstring. Removable hood. 5 pockets.	Polyurethane-coated Oxford polyester fabric. Quilted polyester Taffeta lining.	S/M/L/XL/ XXL/3XL	<b>C</b> €	x 10

#### **CARSON**

















Fleece lined collar **⇒**Comfortable to wear and protects against the cold



Decorative reflective piping on sleeves





Inner cuffs →Maintains heat **→**Wind-breaker



Inner opening ⇒Easy and qualitative marking









To match the STOCKTON2 vest and NORTHWOOD2 bomber jacket

	æ	o <sup>c</sup>	#	<b>PITTLE</b>	•	<b>~</b>	<b>\$</b>
FINNMARK	Navy blue-Black	Parka. Waterproof seams. Collar with polar lining for optimal comfort. Fastening with zip under velcro storm flap. Adjustable bottom of garment with elastic drawstring. 5 pockets.	PVC-coated Ripstop polyester fabric. Ouilted polyester Taffeta lining.	S/M/L/XL/		EN343 3 1*	
GOTEBORG	Navy blue	Parka. Waterproof seams. Collar with polar lining for optimal comfort. Fastening with zip under velcro storm flap. Removable hood. Adjustable bottom of garment with elastic drawstring. 5 pockets.	PVC-coated Twill polyester fabric. Top lining: Wadded polyester polar fleece. Bottom lining: Wadded polyester Taffeta.	XXL/3XL	C€	EN14058 3 3 0,199 m². K/W WP EN343 3 1*	x 10

#### **FINNMARK**

















Removable hood



Inner opening ⇒Easy and qualitative marking



#### **GOTEBORG**













Fixed badge holder included



Inner opening ⇒Easy and qualitative marking







Ĺ	•	o <sup>©</sup>	#	<b>HILL</b>	<b>&gt;</b>	
ALASKA2	Black-Red Navy blue-Royal blue Black-Grey	Parka 2 in 1, removable lining. Parka: Waterproof seams. Fastening with zip under storm flap with Velcro strap. Adjustable bottom of garment with elastic drawstring. 5 pockets. Removable lining: 1 pocket.	Polyester pongee fabric with PVC coating Fixed polyester taffeta lining. Padded polyester taffeta removable lining 3M Thinsulate™.	S/M/L/XL/ XXL/3XL	<b>C €</b>   EN14058   4   3   0,215 m². K/W   X   X   1   1   1   1   1   1   1   1	x10

#### **ALASKA2**

















Removable hood



Decorative reflective strips (front and back)



Fixed badge holder included



Ribbed inner cuffs ➡Maintains heat

→Wind-breaker









3M Thinsulate™ padded thermal removable lining

►Very high heat retention

►Modulable according to the activity



	æ	o <sup>c</sup>	#	PRINTE	V	<b>\$</b>
HELSINKI2	Navy blue Navy blue-Royal blue	Parka. Waterproof seams. Fastening zip under velcro and press studs storm flap. Adjustable waist with elastic drawstring. 4 pockets.	PVC-coated polyester fabric. Wadded polyester Taffeta lining.	S/M/L/XL/ XXL/3XL	<b>C €</b>   EN342   0.273m² K/W (B)   2   X	x 10

#### HELSINKI2











Wadded removable hood ⇒Increased protection from the cold



Decorative retro-reflective piping on the front and back



Removable badge holder included



Ribbed inner cuffs → Maintains heat and wind-proof



Inner opening ⇒Easy and qualitative marking









	æ	o <sup>©</sup>	#	<b>LIJUL</b>	<b>&gt;</b>	
DARWIN3		Parka. Waterproof seams. Fixed hood. Adjustable waist with drawstring. 5 pockets.	PVC-coated Pongee polyester fabric. Quilted polyester Taffeta lining.	XS/S/M/L/ XL/XL/3XL		
ISOLA	Navy blue	3 in 1 parka: Removable lining. Parka :Waterproof seams. Fixed hood. Adjustable waist and bottom of garment with elastic drawstring. 6 pockets. Removable lining :Collar with corduroy lining. Removable sleeves. Fastening with press studs. Gusset opening on sides with press-studs. 2 pockets.	PVC-coated polyester fabric. Fixed polyester Taffeta lining. Removable quilted polyamide Taffeta lining.	S/M/L/ XL/XXL		x10

#### **DARWIN3**













Removable badge holder included



Inner opening ⇒Easy and qualitative marking



Ribbed inner cuffs

- →Maintains heat
- **→**Wind-breaker





#### **ISOLA**















Removable lining →Increased protection from the cold

⇒Use all year round







	•	o <sup>o</sup>	#	<b>LITTLE</b>	<b>*</b>
MOOVE	Black-Red Nawy blue-Orange Black-Camouflage	Bi-material jacket. Fastening zip under storm flap. Fixed hood. Knitted cuffs. 5 pockets.	Quilted polyurethane-coated Ripstop polyamide fabric. Yokes: Polyester fabric. 2 laminated layers. Polyester taffeta lining.	S/M/L/XL/ XXL/3XL	x10

#### MOOVE



Removable badge holder included



Decorative retro-reflective piping on the front and back





Polyamide ripstop ⇒Increased resistance to tearing

Polyester wadding



	<b>€</b>	o <sup>o</sup>	#	<b>TITLE</b>	<b>V</b>	
MOTION	Grey	Bi-material jacket. Fastening with zip under storm flap. Bottom of sleeves with bias finishing. 5 pockets.	"Softshell" fabric 96% polyester 4% elastane. Yokes: Polyester fabric coated with acrylic padded. Polyester taffeta lining.	S/M/L/XL/	C€	
DOON	Black-Red Grey-Orange Navy blue-Royal blue	Down jacket (to match MACH range). Fastening with zip under storm flap. Cuffs and bottom of garment with bias finishing. Fixed hood. 2 pockets.	Ouilted polyamide fabric. Polyester taffeta lining.	XXL/3XL		x 10

#### **MOTION**









Fixed hood



Decorative retro-reflective serigraph



Softshell ⇒Lightness and protection from cold, wind and fine rain

#### DOON











SLIGO matching rain parka ➡To add rain protection







	•	o <sup>o</sup>	#	jujuk	$\checkmark$	<b>\$</b>
NORTHWOOD2	Grey-Orange Navy blue-Royal blue Black-Grey Green-Black	Warm padded jacket (to match the MACH range). Waterproof seams. Fastening with zip under storm flap with Velcro strap. Fixed hood. 9 pockets.	Polyurethane-coated Oxford polyester fabric. Quilted polyester Taffeta lining.	S/M/L/XL/ XXL/3XL	<b>EN343</b> 3 1* <b>C €</b>	x 10
NEW DELTA	Navy blue	Bomber jacket with removable sleeves. Elasticated cuffs and bottom of garment. 4 pockets.	65% polyester 35% quilted cotton fabric. Quilted polyester Taffeta lining.	M/L/XL/XXL		

#### NORTHWOOD2























Fixed badge holder included



Inner opening ightharpoonupEasy and qualitative marking



Fixed hood



Decorative retro-reflective piping on the front and









STOCKTON2 jacket and matching CARSON parka

#### **NEW DELTA**





















	•	o <sup>c</sup>	#	<b>HILLIP</b>	<b>V</b>	
RANDERS	Grey Navy blue Black	Quilted bomber jacket with removable sleeves (To match the MACH range). Fastened with a zip under the storm flap with press studs. Knitted cuffs and bottom of garment. 5 pockets.	p : Quilted polyurethane-coated polyamide fabric	S/M/L/XL/	((	v 10
RENO	Black Navy blue Green	Bomber jacket with removable sleeves. Collar with polar lining for optimal comfort. Knitted cuffs and bottom of garment. 5 pockets.	Polyurethane-coated Oxford polyester fabric. Polyester polar fleece lining.	XXL/3XL		X IU

#### **RANDERS**














Padded removable hood ⇒Increased protection from the cold



Fixed badge holder included









Removable sleeves **→**Use all year round

#### **RENO**















Fleece lining

Comfort wear for optimised cold protection



Fixed badge holder included









#### OUTDOOR WEAR

# BODYWARMERS

	æ	o <sup>o</sup>	#	juus	lacksquare	
FIDJI2	Navy blue-Royal blue Grey-Black Black Black-Red	Bodywarmer. Collar with polar lining for optimal comfort. 4 pockets.	PVC-coated Pongee polyester fabric. Yokes: PVC-coated Oxford polyester. Wadded polyester polar fleece lining.	S/M/L/XL/ XXL/3XL	C€	x 10

#### FIDJ12













Lateral zips ⇒Freedom of movement



Kidney protector

→ Perfect protection of the lower back against the cold









	•	o <sup>c</sup>	#	<b>LITTLE</b>	<b>V</b>	
NATORI	Grey-Black	Bodywarmer (To match MACH 5 range). Fastened with a zip under storm flap. Bias finishing. 6 pockets.	Softshell fabric polyamide/polyester polar.	S/M/L/XL/	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	v 10
HALDEN		Vest. Fastening with zip under storm flap. Armholes with bias finishing. 4 pockets.	Softshell 100% polyester fabric, 3 laminated layers.	XXL/3XL	D 1 1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	x 10

#### NATORI











Decorative retro-reflective piping on the front and back



#### HALDEN













3 layers softshell ►Lightness and protection from cold, wind and fine rain





### OUTDOOR WEAR

## BODYWARMERS



	æ	o <sup>©</sup>	#	<b>LILLIA</b>	abla	<b>\$</b>							
G-DOON	Black-Red Black-Camouflage Navy blue-Royal blue	Bodywarmer. Fastening zip under storm flap. Armholes with bias finishing. Low back protection. 3 pockets.	Polyurethane-coated Ripstop polyamider fabric. Polyester Taffeta lining.	S/M/L/XL/ XXL/3XL	S/M/L/XL/	XL/	w 10						
GRANDERS	Black	Padded vest. Zip fastening. Armholes with bias finish. Adjustable bottom of garment with elastic drawstring. 3 pockets.	Polyester fabric coated with polyurethane. Polyester taffeta lining.		C€	x10							

#### G-DOON















Polyamide ripstop

→Increased resistance to tearing

Polyester wadding ⇒Light and warm

#### **GRANDERS**









SLIGO matching rain parka →Offers protection against the rain



	•	o <sup>o</sup>	#	, jujuk	<b>V</b>	<b>\$</b>
SIERRA2	Navy blue-Orange Grey-Green Navy blue-Red Navy blue	Multipocket bodywarmer (to match the PANOSTYLE range). Fastening with zip under storm flap. Elasticated on both sides and back. 9 pockets.	65% polyester 35% quilted cotton canvas. Wadded polyester Taffeta lining.	S/M/L/XL/ XXL/3XL	C€	x 20
CLUSES2	Navy blue	Bodywarmer. Fastening with zip under storm flap. Elasticated bottom of garment. 6 pockets.	65% polyester 35% quilted cotton canvas. Polyester Taffeta lining.		) ; ; ; ; ; ; ; ; ; ; ; ; ; ; ; ; ; ; ;	

#### **SIERRA2**













Wind-proof armholes



Fixed badge holder included



Kidney protector
Perfect protection of the lower back against the cold













#### **CLUSES2**















### BODYWARMERS - TROUSERS

	•	o <sup>o</sup>	#	<b>J</b> JJJJ <b>J</b>	<b>V</b>	<b>\$</b>
DMACHGIW	Black-Red Grey-Yellow	Multipocket bodywarmer (To match theD-MACH range). Fastened with a zip under the storm flap with press studs. Elasticated on both sides and back. 8 pockets.	Twill 65% polyester 35% cotton 245g/m². Padded polyester taffeta lining.	S/M/L/XL/ XXL/3XL	CE	x 10
DMACHPAW	• · · · · · · · · · · · · · · · · · · ·	Trousers. Elasticated waist on both sides. 6 pockets including 1 ruler.				

#### **DMACHGIW**

















Decorative retro-reflective



Fixed badge holder



Kidney protector ⇒Perfect protection of the lower back against the cold



Fleece lined collar **⇒**Comfort wear for optimised cold protection



Inner opening ⇒Easy and qualitative marking





#### **DMACHPAW**















Lower trousers reinforced with anti-dirt coating



Quilted lined pants **⇒**Comfort wear for optimised cold protection



Jean style pockets



Kneepad pockets →Allows you to insert M2GEN kneepads to work more comfortably on your knees





	•	o <sup>c</sup>	#	<b>JULIA</b>	<b>V</b>	*											
STOCKTON2	Grey-Orange Navy blue-Royal blue Black-Grey Green-Black	Multipocket bodywarmer (to match the MACH range). Fastening with zip under storm flap. Adjustable bottom with elastic drawstring. 9 pockets.	Ouilted twill 65% polyester 35% cotton 235 g/m². Wadded polyester Taffeta lining.		\$/M/1/V1/	\$/M/1/Y11/							(M/L/XL/	/XL/	$c\epsilon$	IV cc	40
M2PW2	Grey-Orange Navy blue-Royal blue Black-Grey	Warm trousers. Elasticated waist on both sides. 7 pockets including 1 ruler.	Twill 65% polyester 35% cotton 245 g/m². 100% flannelette lining.		CE	X1U											

#### STOCKTON2



















Wind-proof armholes



Multi-pocket



Hand pockets











To match the NORTHWOOD2 jacket and CARSON parka

#### M2PW2

















Decorative retro-reflective piping on the back



Flannel lined trousers **⇒**Comfort wear for optimised cold protection



Fixed badge holder included



Triple seams ⇒Increased lifespan





Kneepad pockets →Allows you to insert M2GEN kneepads to work more comfortably on your knees




MAPOC removable pockets sold separately →The necessary tools always at hand





# POLARS - SOFTSHELL - SWEATS - PULL-OVER

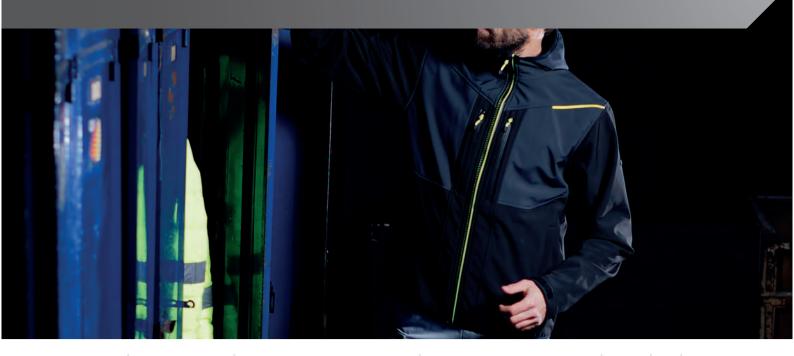

	•	o <sup>o</sup>	#	<b>JULI</b>	<b>V</b>	
HORTEN2	Black-Orange Black-Camouflage Black-Yellow	Jacket. Fastening zip under storm flap. Fixed hood. 4 pockets.	Softshell 96% polyester 4% elasthane fabric. 3 laminated layers.	S/M/L/XL/ XXL/3XL	CE	x 10













Removable badge holder included



Decorative retro-reflective piping on the front and back

3 layers softshell →Lightness and protection from cold, wind and fine rain










#### Softshells are developed to meet everyday use throughout the year whether worn in the first or second layer.



Softshells are jackets that derive their name from the textile that make them up and whose performance differs according to the textiles used.

The presence of a membrane makes the textile a windbreaker, it is then composed of 3 textile layers:

- external very often stretch
- the membrane
- the inner side very often polar for the comfort and the contribution of heat.



Composed of 2 textile layers with no membrane, it is a real technical alternative to the polar with its appearance and its Water repellent properties.

The Softshell jacket can be used as a 2nd or 3rd layer. Wind-proof, Water repellent, insulating with or without a hood, with or without sleeves, this is real everyday clothing.



Today it is unavoidable, the softshell is THE technical clothing that can be used all year round. Light, flexible, wind-proof it is a true ally for everyday life. When temperatures are mild it is an excellent garment to protect from the wind, cold and light rain. And when it's colder, we recommend using the softshell as a 2nd layer under a parka.

Laurent Kostrzewa. Body Protection Product Expert

### POLARS - SOFTSHELL - SWEATS - PULL-OVER

	•	o <sup>©</sup>	#	<b>jijis</b>	
MYSEN2	Blue-Black Grey-Fushia Black-Red Grey-Yellow	Jacket (to match the D-MACH range). Fastening with zip under storm flap. Bottom of sleeves with bias finishing. 5 pockets.	"Softshell" fabric 96% polyester 4% elastane.	XS/S/M/ L/XL/XXL/ 3XL	v.10
LULEA2	Grey-Orange Navy blue-Black Grey-Black	Jacket. Fastening with zip under storm flap. Bottom of sleeves with bias finishing. Adjustable bottom of garment with elastic drawstring. 5 pockets.		S/M/L/XL/ XXL/3XL	- x10



#### LULEA2























	æ	o <sup>©</sup>	#	<b>tilite</b>	
BRIGHTON	Grey-Black	Polar fleece jacket. Zip fastening. 3 pockets.	Polyester polar fleece 350 g/m². Inserts: Polyester Taslon fabric.	S/M/L/XL/ XXL/3XL	x 10
SHERMAN	Grey	Polar fleece jacket. Fastened with a zip under storm flap. Knitted cuffs and bottom of garment. 5 pockets.	Polyester polar fleece 540 g/m².		х5

#### BRIGHTON











### **SHERMAN**















### POLARS - SOFTSHELL - SWEATS - PULL-OVER

	•	o <sup>©</sup>	#	<b>j</b> jju <b>j</b>	abla	
NAGOYA	Navy blue Grey	Cardigan jacket (To match the MACH ORIGINALS range). Fastened with a zip under storm flap. Cuffs and bottom of garment with bias finishing. 6 pockets.	Polyester stitch. Yokes: Cordura® and "Softshell" 96% polyester 4% elastane fabric.		C€	
MARMOT		Truck driver polar fleece, pullover appearance. Zip closure. Cuffs and bottom of fleece with bias finish.	Polyester knit 285 g/m². Yokes: 100% polyester material, 2 laminated layers.	S/M/L/XL/ XXL/3XL		x10
BEAVER	Navy blue- Orange Grey-Orange Grey-Green Black	Cardigan jacket (To match the MACH and PANOSTYLE ranges). Fastened with zip under storm flap. Cuffs and bottom of garment with bias finishing. 4 pockets.	Polyester stitch 380 g/m². Yokes: "Softshell" 96% polyester 4% elastane fabric.			

#### NAGOYA



















Fleece lined collar **⇒**Comfort wear for optimised cold protection



Decorative retro-reflective piping on the front and sleeves





#### **MARMOT**



















#### **BEAVER**





















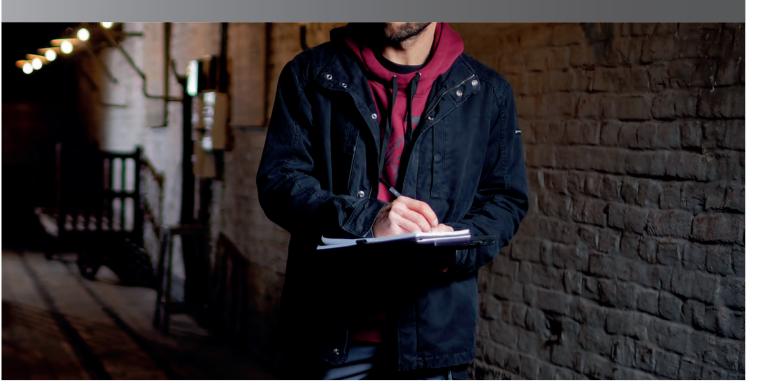

	æ	o <sup>©</sup>	#	<b>titit</b>	<b>V</b>	•
ANZIO	Grey Navy blue	Sweat jacket. Front fastening with zip. Knitted cuffs and bottom of garment. 4 pockets. Adjustable hood with drawstring.	OFSV palvadas flaces OFSV palkas	S/M/L/XL/		10
LECCO	Wine-coloured- Black Grey-Yellow Black-Red	Sweat jacket. Knitted cuffs and bottom of garment. 2 lower pockets. Adjustable hood with drawstring.	65% polyester fleece 35% cotton.	XXL/3XL		x 10

#### **ANZIO**











#### **LECCO**













# POLARS - SOFTSHELL - SWEATS - PULL-OVER

	•	o <sup>o</sup>	#	<b>LILLIA</b>	
VERNON	Black Royal blue Red	Polar fleece jacket. Elasticated cuffs. 2 pockets.	Polyester polar fleece 280 g/m².	S/M/L/XL/	v.10
ALMA	Navy blue Black Orange	Under Shirt. Raglan sleeve with zip Mandarin collar. Designed for next to skin use.	Polyester polar fleece 200 g/m².	XXL/3XL	X1U

#### **VERNON**















#### **ALMA**















# CAPS - HOODS - GLOVES



	•	o <sup>©</sup>	<b>Julia</b>	
KARA	Red Black Orange Grey Navy blue	Cap in wadded 3M Thinsulate™ polyester polar fleece.		x 120
CHAMONIX	Red Navy blue	Neck scarf in polyester polar fleece. Tightening with elastic drawstring.	••• • • • • • • • • • • • • • • • • •	
JURA	Grey Black Navy blue	Double thickness cap in acrylic knit.	One size	x 240
NORDIC	Navy blue	Warm cap in polyamide canvas with synthetic lining. Wadded polyester Taffeta lining. Protective ear flaps		100
NEVE	Navy blue Black	Gloves in polyester polar fleece.		x 120



### **CHAMONIX**





### JURA







### NORDIC





### NEVE










	•	o <sup>o</sup>	#	<b>JULI</b>	<b>V</b>	
OTAKE	Grey-Black	Light bomber jacket (To match the MACH 5 range). Waterproof seams. Fixed hood with mesh lining. Fastening with zip under storm flap. Elasticated waist and bottom of garment. 6 pockets.	Polyurethane-coated polyamide fabric. Polyester mesh lining.	S/M/L/XL/	<b>C</b> € ⊕ 8 8 3 3 3 3	x5
LITE	Grey-Orange Grey-Green Navy blue-Orange Black	Light bomber jacket (To match the MACH and PANOSTYLE ranges). Waterproof seams. Fixed hood. Fastening with zip under storm flap. Elasticated waist and bottom of garment. 5 pockets.	PVC-coated polyester fabric. Polyester mesh lining.	XXL/3XL		x 10















piping on the front and





Inner opening ⇒Easy and qualitative marking



LITE

back













Decorative retro-reflective piping on the front and back



Inner opening ⇒Easy and qualitative marking









### **OUTDOOR WEAR** RAIN

	æ	o <sup>c</sup>	#	<b>JULI</b>	$\overline{\mathbf{v}}$	
SLIGO	Black-Red Navy blue-Royal blue Grey-Orange	Light parka (To match the MACH and PANOSTYLE ranges). Waterproof seams. Fastening with zip under storm flap with Velcro strap. Fixed hood. 7 pockets.	Polyurethane-coated Oxford polyester fabric. Polyester mesh lining.	S/M/L/XL/	C € ⊕ EN343	x 10
GALWAY	Black	Rain trousers. Waterproof seams. Elasticated waist. Bottom legs with press-stud opening. 2 pockets and 2 hand slits.	Polyurethane-coated Oxford polyester fabric.	AAL/ JAL	1*	0 0 0 0 0 0 0 0 0 0 0 0

#### SLIGO













Decorative retro-reflective piping on the back



Fixed badge holder included



Inner opening ⇒Easy and qualitative marking



Matching DOON puffer jacket







#### **GALWAY**













Adjustable leg bottoms with gussets

Easy dressing



	•	o <sup>o</sup>	#	<b>JULI</b>	<b>V</b>	<b>\$</b>
LIDINGO	Navy blue	Rain jacket and trousers. Waterproof seams, JACKET: Fixed hood. Adjustable bottom with elastic drawstring. 5 pockets. TROUSERS: Elasticated waist. Adjustable bottom of legs with press-studs. 2 pockets.	PVC-coated polyester fabric. Jacket lining: Polyester mesh. Trousers lining: Polyester Taffeta.	S/M/L/XL/ XXL/3XL		
TYPHOON	Navy blue	Rain trousers. Waterproof seams. Elasticated waist. Bottom legs with press- stud opening. 5 pockets.	PVC-coated polyester fabric. Polyester Taffeta lining.	M/L/XL/ XXL	<b>C</b> € ⊕ 33 3 1*	x 10
TOFINO	Black	Rain coat. Waterproof seams. Fastening with zip under velcro and press studs storm flap. Fixed hood. 2 pockets. Flap ventilation.	PVC-coated polyester fabric. Polyester mesh lining.	S/M/L/XL/ XXL/3XL		

#### **LIDINGO**

















Fixed hood



Decorative Retro-reflective tapes



Eyelets under arms
Increased breathability
for better evacuation of
perspiration



#### **TYPHOON**













Adjustable leg bottoms



#### **TOFINO**











Ventilation flap with pressures to facilitate

marking ►Increased breathability for better evacuation of perspiration



Decorative reflective bands (front and back)





	•	o <sup>o</sup>	#	<b>LILLIA</b>	<b>V</b>	
850	Navy blue Yellow Green	Rain jacket and trousers. Sealed seams.  JACKET: Fastening with zip under storm flap. Fixed hood. Underarm ventilation with eyelets. Elasticated inside cuffs.  Adjustable bottom of garment with elastic drawstring. 2 pockets. Ventilation back flap. TROUSERS: Elasticated waist. Fly closed with press-studs. Adjustable bottom of legs with press-studs. 2 hand slits.	Mixed polyurethane-coated polyester support.	S/M/L/XL/ XXL/3XL	<b>C</b> €	x 10

### 850











	æ	o <sup>©</sup>	#	<b>HIGH</b>	<b>V</b>	•
400	Royal blue Navy blue Yellow Green	Rain jacket and trousers. Waterproof seams. JACKET: Fastening with zip under storm flap. Fixed hood. Raglan sleeves. Adjustable cuffs with press-studs. 2 pockets. TROUSERS: Elasticated waist. Adjustable bottom of legs with press-studs. 2 hand slits.	PVC-coated polyester fabric.			x 20
MA400		Rain coat. Waterproof seams. Fixed hood. Fastening with zip under storm flap. Elasticated inside cuffs. 2 pockets.		M/L/XL/ XXL	EN2/2	
304	Yellow Green	Rain jacket and trousers. Sealed seams. JACKET: Fixed hood. Fastening with zip under press-studs flap. Raglan sleeves. Elasticated inside cuffs. 2 pockets. TROUSERS: Elasticated waist. Fly closed with press-studs. Adjustable bottom of legs with press-studs. 2 hand slits.	PVC-coated polyester support. Double sided		C €	x 10
305	7	Rain coat. Sealed seams. Fixed hood. Fastening with double press-stud flap. Raglan sleeves. Elasticated inside cuffs. 2 pockets.	coating.	M/L/XL/ XXL/3XL	7	











### MA400









Decorative retro-reflective bands (front and back)





#### 304







#### 305




















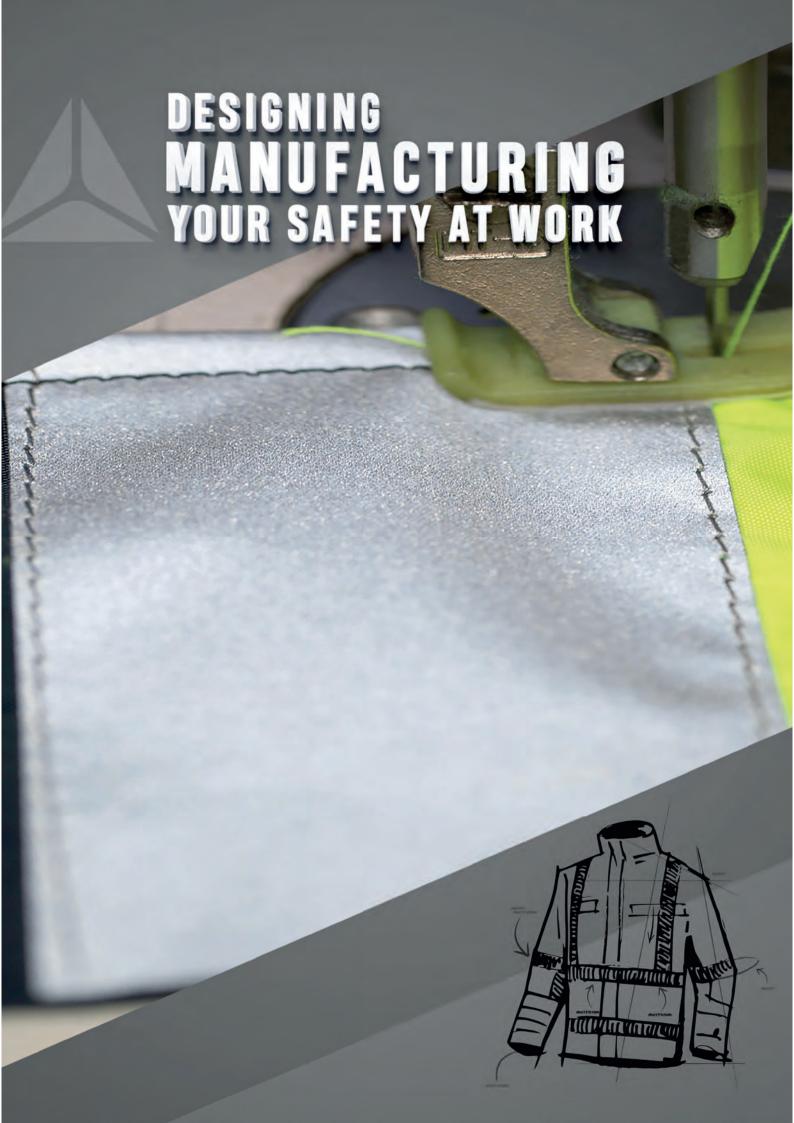

## **TECHNICAL WEAR**


#### 247 • HELP WITH CHOICE

- 248 Outdoor high visibility
- 258 High Visibility Workwear
- 260 Forestry
- 262 Chill Room and Cold Store
- 265 Chemical resistant Flame retardant Antistatic
- 266 Chemical protection overalls
- 267 Protective aprons Welders
- 399 TECHNICAL INFORMATION

ECHNICAL WEA




### **HELP WITH CHOICE**

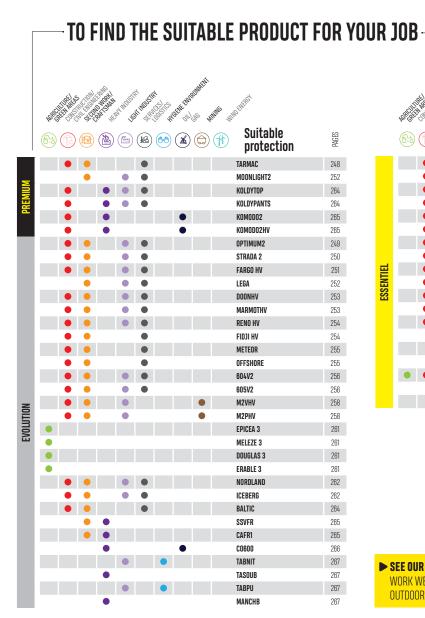


		C. C	<i>k.</i>	JUSTRY LIGHT	A SEPTO		M. Hundi	MATHER STATE	_	Suitable	S
	(6 <del>-3</del> ) ( <del>15</del> )		( <u>M</u> ) (		(18)	( <del>60</del> )	( <u>*</u>		(ff)	protection	PAGES
	•	•			•					RUNWAY	250
	•	•		•	•					EASYVIEW	251
	•	•			•					FREEWAY HV	254
	•	•			•					STAR	255
	•	•								COMET	255
	•	•			•					208V2	256
	•									GILP2	257
	•				•					BAUCE2	257
핃	•									GILP4	257
ESSENTIEL	•				•					BRASSJA	257
SS	•	•								PHVE2	259
	•	•		•				•		PHPA2	259
	•	•								PHBE2	259
										LAPONIE II	263
										AUSTRAL II	263
										IGLOO II	263
	•	•								ALMA	264
										TABLIVE	267
						•				TABALPV	267

#### ► SEE OUR SIZE CHARTS FOR:

WORK WEAR : PAGE 163 OUTDOOR WEAR : PAGE 207

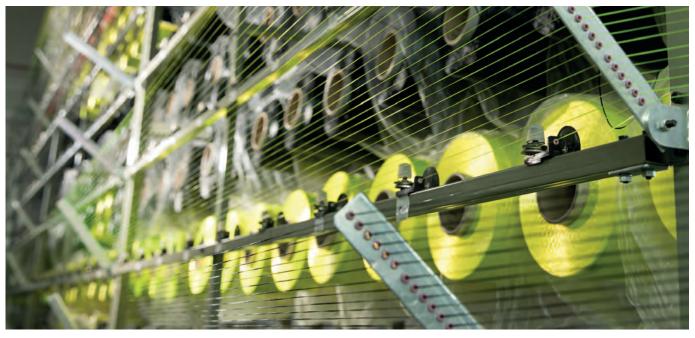




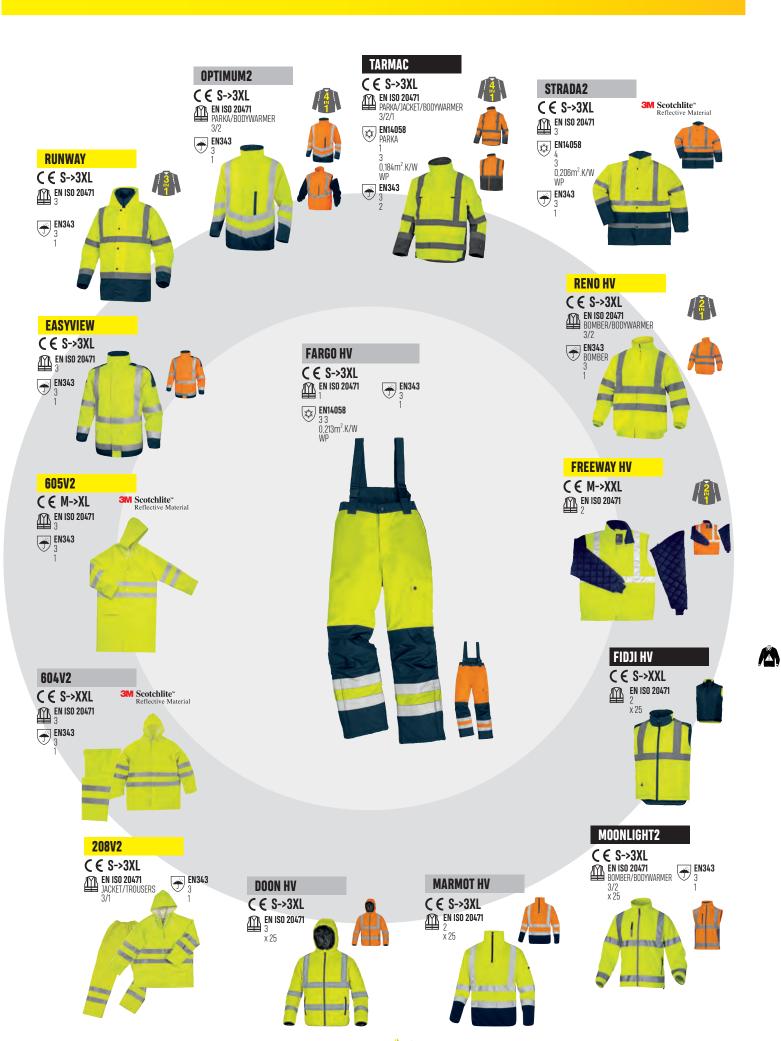

# OUTDOOR HIGH VISIBILITY


	æ	o <sup>o</sup>	#	<b>LIJUS</b>	<b>V</b>	
TARMAC	Fluorescent orange-Grey Fluorescent yellow-Grey	4 in 1 parka with removable jacket. Rain parka: waterproof seams. Fastening with zip under press stud storm flap. 6 pockets. high visibility. Class 3 - silver colour - Shoulder-belt and parallel assembly. Removable jacket: zip fastening. Bottom of sleeves with biais finishing. 2 pockets. high visibility: Class 2 - silver colour - Shoulder-belt assembly.	Polyurethan-coated Oxford polyester fabric. Fixed polyester Taffeta lining. Softshell removable jacket 96% polyester 4% elastane. Retro-reflective sewn bands.	S/M/L/XL/ XXL/3XL	EN ISO 20471 PARKA/JACKET/ BODYWARMER 3 / 2 / 1  EN343 PARKA 3 2	x5

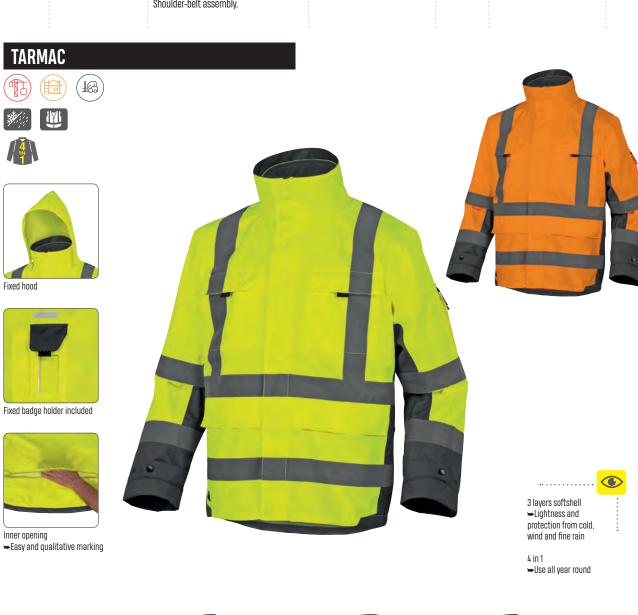





	•	o <sup>©</sup>	#	<b>Little</b>	<b>V</b>	<b>\$</b>
OPTIMUM2	Fluorescent yellow- Navy blue Fluorescent orange- Navy blue	Parka 4 in 1, removable bodywarmer. Parka: Waterproof seams. Fastening with zip under velcro storm flap. Fixed hood. Polar fleece collar. High visibility: Class 3 - Silver colour - Shoulder-belt and parallel assembly. 4 pockets. Removable jacket: Waterproof seams. Removable sleeves. High visibility: Class 2 - Silver colour - Shoulder-belt assembly. 4 pockets.	Polyurethane-coated Oxford polyester fabric. Fixed polyester Taffeta lining. Removable bodywarmer: Polyurethane-coated Oxford polyester with removable sleeves in polyester polar fleece. Quilted polyester Taffeta lining. Retro-reflective sewn bands.	S/M/L/XL/ XXL/3XL	EN ISO 20471 PARKA/JACKET/ BODYWARMER 3 / 2 / 2 EN343 3 1*	x 10

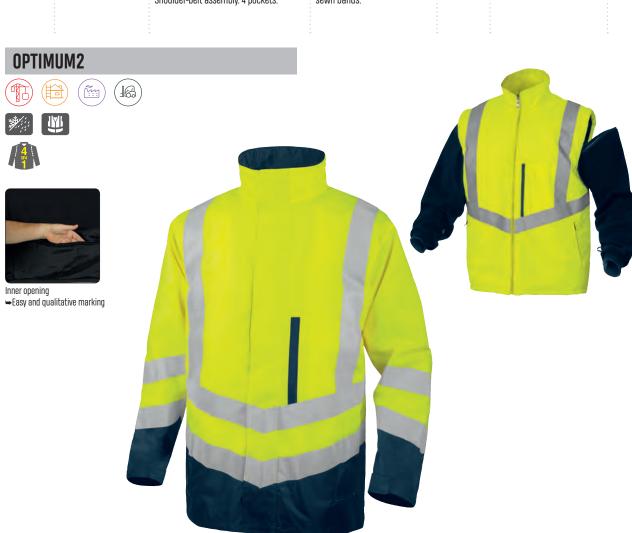





# OUTDOOR HIGH VISIBILITY

Ď	æ	o <sup>o</sup>	#	<b>LIJU</b>	o o o o o o o o o o o o o o o o o o o	<b>V</b>	
STRADA 2	Fluorescent yellow-Navy blue Fluorescent orange-Navy blue	Warm parka. Waterproof seams. Fixed hood. Underarm ventilation eyelets. Fastening with zip under press stud flap. Adjustable waist with elastic drawstring. High visibility. Class 3 - Silver colour - Shoulder-belt and parallel assembly. 3 pockets.	Polyurethane-coated Oxford polyester fabric. Ouilted polyester Taffeta lining. 3M Scotchlite™ retro-reflective sewn bands.	S/M/L/XL/	<i>C G</i>	EN ISO 20471 CLASS 3 EN EN343	x 5
RUNWAY	Fluorescent yellow-Navy blue	Parka 3 in 1, removable lining. Rain parka: Waterproof seams. Fastening with zip under press studs storm flap. 3 pockets. High visibility. Class 3 - Silver colour - Shoulder belt and parallel assembly. Removable lining: Zip fastening.	Polyurethan-coated Oxford polyester fabric. Fixed polyester taffeta lining. Removable padded polyester taffeta fabric lining. Retro-reflective sewn bands.	XXL/3XL	CE	PARKA 3 1*	x 10

#### STRADA 2

















Ribbed inner cuffs

- ➡Maintains heat
- **→**Wind-breaker



#### **RUNWAY**





















	•	o <sup>c</sup>	#	<b>LILLIA</b>	<b>V</b>	<b>\$</b>
EASYVIEW	Fluorescent yellow-Navy blue	Warm parka Waterproof seams. Fixed hood. Fastening with zip under velcro storm flap. High visibility: Class 3 - Silver colour - Shoulder-belt and parallel assembly. 4 pockets.	Polyurethane-coated Oxford polyester fabric. Ouilted polyester Taffeta lining. Retro- reflective sewn bands.	S/M/L/XL/	EN ISO 20471 CLASS 3 Max. 25 x	
FARGO HV	Fluorescent orange-Navy blue	Warm salopettes. Waterproof seams. Elasticated waist on both sides. Adjustable elasticated braces. Preformed knees. High visibility: Class 1 - Silver colour. 4 pockets.	Polyurethane-coated Oxford polyester fabric. Wadded polyester Taffeta lining. Retro- reflective sewn bands.	XXL/3XL	EN343 3 1*	x 10

#### **EASYVIEW**

















#### **FARGO HV**















Kidney protector →Perfect protection of the lower back against the cold



Bottom with gusset ⇒Easy dressing







# OUTDOOR HIGH VISIBILITY

	æ	o <sup>o</sup>	#	<b>LILLIA</b>	♥		
MOONLIGHT2	Fluorescent orange-Grey Fluorescent yellow-Grey	Jacket. Fastening with zip under storm flap. Bottom of sleeves with bias finishing. Adjustable bottom of garment with elastic drawstring. High visibility: Class 3 - Silver colour - Shoulder-belt assembly. 5 pockets.	Softshell 100% polyester fabric, 3 laminated layers. Retro- reflective sewn bands.		3 Jaminated Javers Retro- 3/M/L/XL/	EN ISO 20471 BOMBER/ BODYWARMER 3 / 2 Max. 25 x	x 10
LEGA	Fluorescent yellow Fluorescent orange	Jacket. Fastening with zip under storm flap. Bottom of sleeves with bias finishing. High visibility: Class 3 - Silver colour - Shoulder-belt assembly. 4 pockets.		XXL/3XL	EN ISO 20471 CLASS 3	X IU	

#### MOONLIGHT2

















3 layers softshell **⇒**Lightness and protection from cold, wind and fine rain







⇒Use all year round

#### **LEGA**















3 layers softshell ⇒Lightness and protection from cold, wind and fine rain







⇒Evaporative resistance Class 3 high visibility



	•	o <sup>o</sup>	#	<b>JUL</b>	•	
DOONHV	Fluorescent yellow Fluorescent orange	Down jacket. Fastening with zip under storm flap. Cuffs and bottom of garment with bias finishing. Fixed hood. 2 pockets.	Ouilted Ripstop polyester fabric. 2 laminated layers. Polyester taffeta lining. Retro-reflective sewn bands.	S/M/L/XL/ XXL/3XL <b>C€</b>	EN ISO 20471 CLASS 3 Max. 25 x	
MARMOTHV	Fluorescent yellow- Navy blue Fluorescent orange- Navy blue	Truck driver polar fleece, pullover appearance. Zip closure. Cuffs and bottom of fleece with bias finish. High visibility: Class 2 - Silver colour - Shoulder- belt and parallel assembly.	Polyester knit 380 g/m². Yokes: Polyester knit 285 g/m².		EN ISO 20471 CLASS 2 Max. 25 x	x 10

### DOONHV



















### MARMOTHV



















# **OUTDOOR HIGH VISIBILITY**

	æ	o <sup>c</sup>	#	<b>LILLIA</b>	V	
RENO HV	Fluorescent yellow Fluorescent orange	Bomber jacket with removable sleeves. Collar with polar lining for optimal comfort. Knitted cuffs and bottom of garment. Bomber jacket: High visibility Class 3 - Silver colour - Shoulder-belt and parallel assembly. Bodywarmer: High visibility Class 2 - Silver colour - Shoulder-belt and parallel assembly. 4 pockets.	Polyurethane-coated Oxford polyester fabric. Polyester polar fleece lining. Retro-reflective sewn bands.	S/M/L/XL/ XXL/3XL	EN ISO 20471 BOMBER/ BODYWARMER 3 / 2 Max. 25 x  EN343 PARKA 3 1*	
FIDJI HV	Fluorescent yellow- Navy blue	Reversible body warmer. Zip fastening. 4 pockets. High visibility: Class 2 - Silver colour - Shoulder-belt assembly.	Polyurethan-coated Oxford polyester fabric on 1 side. Quilted polyester taffeta fabric on 1 side. Retro-reflective sewn bands.	S/M/L/ XL/XXL	<b>C €</b> EN ISO 20471  CLASS 2  Max. 25 x	x10
FREEWAY HV	Fluorescent yellow Fluorescent orange	Jacket with removable sleeves. Collar with polar fleece lining. Knitted cuffs. High visibility: Class 2 - Silver colour - Shoulder-belt assembly. 4 pockets.	Polyester fabric. Quilted polyester Taffeta lining. Sleeves 65% polyester 35% quilted cotton fabric. Retro-reflective sewn bands.	M/L/ XL/XXL	EN ISO 20471 CLASS 2 Max. 25 x	









	<b>®</b>	o <sup>c</sup>	#	<b>Julia</b>	<b>V</b>	<b>\$</b>	
METEOR	Fluorescent vellow	Polo with long sleeves. Contrast collar with button placket. High visibility. Class 3 - Silver colour - Shoulder-belt and parallel assembly.	Piqué stitch 100% polyester 235 g/m². Retro-reflective sewn bands.	wn S/M/L/XL/ XXL/3XL	CLASS 3	EN ISO 20471 CLASS 3	
STAR		Long Sleeve T-Shirt. Round collar. High visibility: Class 3 - Silver colour - Shoulderbelt assembly.			EN ISO 20471 CLASS 3 Max. 50 x	·· x 10	
OFFSHORE	Fluorescent orange	Polo with short sleeves. Contrast collar with button placket. High visibility: Class 2 - Silver colour - Shoulder-belt and parallel assembly.	100% polyester stich 160 g/m². Retro-reflective sewn bands.	M/L/ XL/XXL	EN ISO 20471 CLASS 2		
COMET	······	Short sleeve tee-shirt. Round collar. High visibility: Class 2 - Silver colour - Shoulderbelt assembly.		S/M/L/XL/ XXL/3XL			












## **OUTDOOR HIGH VISIBILITY**

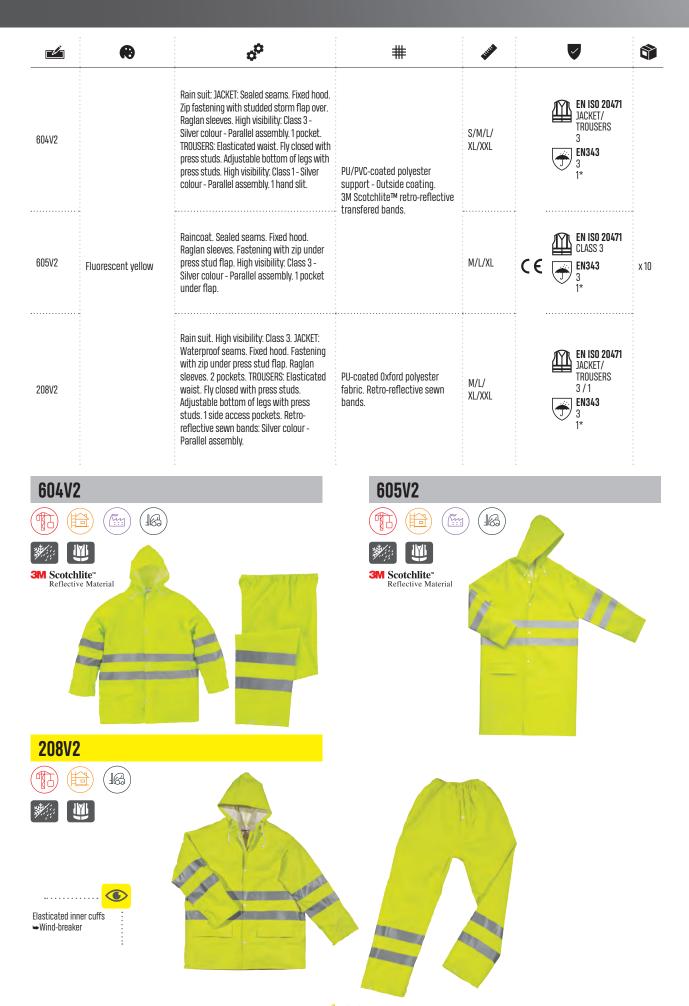



	æ	o <sup>c</sup>	#	<b>LIJUE</b>	<b>V</b>	
GILP2	riuorescent yellow Fluorescent orange  Vest. Fastening with velcro bar visibility: Class 2 - Silver colour belt assembly.  Shoulder-belt. Fastening with band. Belt and shoulder bands	Vest. Fastening with velcro band. High visibility. Class 2 - Silver colour - Parallel assembly.	Polyester fabric. Retro-reflective sewn bands.	L/XXL	EN ISO 20471 CLASS 2	x 100
GILP4		Vest. Fastening with velcro band. High visibility. Class 2 - Silver colour - Shoulderbelt assembly.			Max. 25 x	
BAUCE2		Shoulder-belt. Fastening with velcro band. Belt and shoulder bands width: 7.5 cm. High visibility: Silver colour - Shoulder-belt assembly.	PU-coated Oxford polyester fabric. Retro-reflective sewn bands.	М	EN13356	x10
BRASSJA	Fluorescent yellow	Armlet. Fastening with velcro band. Dimensions: 9 cm x 50 cm. High visibility - Silver colour.	PVC-coated Oxford polyester fabric. 3M Scotchlite™ retro- reflective sewn bands.	Adjustable	2	x 50











## **HIGH VISIBILITY WORKWEAR**

	æ	o <sup>©</sup>	#	<b>LILLE</b>	V	<b>\$</b>
M2VHV	Fluorescent yellow- Grey	Jacket. Elasticated cuffs adjustable with Velcro. 4 pockets including 1 zipped and 1 inside. High visibility: Class 2 - Silver colour - Parallel assembly.	Twill 54% cotton 46% polyester 260 g/m². Retro-reflective sewn bands.	S/M/L/XL/ XXL/3XL	EN ISO 20471  JACKET/ JACKET+TROUSERS 2/3	v 10
M2PHV	Fluorescent orange- Grey	Trousers. Elasticated waist on both sides. High visibility: Class 2 - Silver colour. 7 pockets including 1 ruler pocket.			EN ISO 20471 TROUSERS/ JACKET+TROUSERS 2/3	x10

#### M2VHV













Fixed badge holder



Covered zips







#### M2PHV















Fixed badge holder



Triple seams ⇒Increased lifespan



Kneepad pockets

Allows you to insert M2GEN kneepads to work more comfortably on your knees



MAPOC removable pockets sold separately →The necessary tools







Our entire range meets the requirements of standard EN ISO 20471 A1 2016.

Most models are available in orange and yellow, we developed them with the constant concern of the best value for money without compromising on the quality of the materials used.

Laurent Kostrzewa, Body Protection Product Expert



	•	o <sup>c</sup>	#	<b>JULI</b>	$\checkmark$	
PHVE2		Jacket. Elasticated cuffs. High visibility: Class 2 - Silver colour - Shoulder-belt and parallel assembly. 2 pockets.			√√n EN ISO 20471	
PHPA2	Fluorescent yellow-Navy blue Fluorescent orange-Navy blue	Trousers. Elasticated waist on both sides. High visibility: Class 2 - Silver colour. 5 pockets including 1 ruler pocket.	Twill 80% polyester 20% cotton 230 g/m². Retro-reflective sewn bands.	S/M/L/XL/ XXL/3XL	⊞ CLASS 2 C €	x 10
PHBE2		Bermuda. Elasticated waist on both sides. High visibility: Class 1 - Silver colour. 5 pockets.			EN ISO 20471 Class 1	

#### PHVE2

































#### PHBE2











TECHNICAL WEAR FORESTRY **A** 260



	•	o <sup>©</sup>	#	<b>LILLIA</b>	<b>V</b>	
EPICEA 3	Green-Orange	Cut resistant jacket. Zip fastening. Adjustable cuffs with press studs. 2 pockets.	Twill 60% cotton 40% polyester 290 g/m². Polyester mesh lining with a cut resistant compound.	M/L/ XL/XXL	<b>EN381-11</b> CLASS 0	
DOUGLAS 3		Cut resistant gaiters. Internal zip opening. Tightening strap with press studs. 1 pocket.		One size		
MELEZE 3		Cut resistant trousers. Adjustable elasticated waist with internal buttons on both sides. Bottom of legs with zip opening. Preformed knees. 6 pockets including 1 ruler.		M/L/ XL/XXL	C €  EN381-5  TYPE A  CLASS 1	x 5
ERABLE 3		Cut resistant dungarees. Zip opening leg hem with preformed knees. Adjustable elasticated waist with internal buttons to both sides. Adjustable elasticated braces. 5 pockets including 1 ruler.				

#### **EPICEA 3**





Ventilated back closed with Velcro ⇒Increased breathability for better evacuation of perspiration



#### **DOUGLAS 3**











Decorative Retro-reflective tapes DOUGLAS 3 - EPICEA 3 -MELEZE 3 - ERABLE 3





#### **MELEZE 3**







⇒The necessary tools always at hand ERABLE 3 - MELEZE 3





#### **ERABLE 3**







Buttock reinforcement ⇒Waist reinforcement ⇒Increased lifespan ERABLE 3 - MELEZE 3





# CHILL ROOM AND COLD STORE

	•	o <sup>©</sup>	#	<b>LIGHT</b>	lacksquare	
NORDLAND	Navy blue Grey	Parka. Waterproof seams. Removable hood. Collar with polar lining for optimal comfort. Fastening with double zip under press stud storm flap. Adjustable waist and bottom with elastic drawstring. 7 pockets.	Polyurethane-coated Oxford polyester fabric. Quilted	S/M/L/XL/ XXL/3XL	<b>C €</b>   EN342   0.358 m².K/W (B)   3	x 5
ICEBERG		Warm Salopette. Waterproof seams. Adjustable waist with elastic drawstring. Adjustable braces. Preformed and reinforced knees. 5 pockets.	polyester Tabric. Quilted polyester Taffeta lining.	AND ONE	X	

#### **NORDLAND**













Insulating textile complex →A true bulwark from extreme cold



Fixed badge holder included



Decorative retro-reflective tapes NORDLAND - ICEBERG



Wind-proof mitten →Maintains heat







#### **ICEBERG**













Kidney protector →Perfect protection of the lower back against the cold



Pockets with waterproof zip



Storm flaps to bottom of legs for extra protection against the cold









	•	o <sup>p</sup>	#	<b>HILL</b>	<b>&gt;</b>	*						
LAPONIE II		Parka. Removable hood with padded 3M Thinsulate™ polar fleece lining. Collar with polar lining for optimal comfort. Zip fastening with Velcro closing storm flap. Elasticated waist at the back. 6 pockets.									EN342 0.408 m <sup>2</sup> .K/W (B)	
AUSTRAL II	Navy blue	Warm salopette. Adjustable elasticated braces. Bottoms of legs closed with zip under velcro flap. 4 pockets.	85% polyester 15% cotton cloth. Ouilted polyester Taffeta lining with 3M Thinsulate™ padded.	M/L/ XL/XXL	<b>`</b>	x 5						
IGLOO II		Overall. Removable hood with padded 3M Thinsulate™ polar fleece lining. Collar with polar fleece lining. Zip fastening with Velcro storm flap over. Elasticated waist at the back. Bottoms of legs closed with zip under Velcro flap. 5 pockets.			EN342 0.373 m <sup>2</sup> .K/W (B) 2 X							

#### **LAPONIE II**











Insulating textile complex →A true bulwark from extreme cold









#### **AUSTRAL II**











Kidney protector →Perfect protection of the lower back against the cold



#### IGLOO II











Bottom with gusset ⇒Easy dressing





# CHILL ROOM AND COLD STORE

	æ	o <sup>©</sup>	#	<b>LIGHT</b>	
KOLDYTOP	Black	Long sleeve raglan t-shirt.	SON/ polyomide 250/ Coolmov® 50/ plactone S/M/L/		
KOLDYPANTS	DIACK	Long Johns.	60% polyamide 35% Coolmax® 5% elastane.	XL/XXL	
ALMA	Navy blue Black Orange	Under Shirt. Raglan sleeve with zip Mandarin collar. Designed for next to skin use.	Polyester polar fleece 200 g/m².	S/M/L/XL/ XXL/3XL	x 10
BALTIC	Navy blue	Lightweight Polar fleece Balaclava.	Polyester polar fleece 100 g/m².	One size	

#### KOLDYTOP















#### **KOLDYPANTS**















#### **ALMA**

Thermoregulator Lightweight Ergonomic cut

perspiration. Quick drying to give the user maximum



comfort







**BALTIC** 













# CHEMICAL RESISTANT - FLAME RETARDANT - ANTISTATIC

	€	o	#	<b>LILIUM</b>	•	$\checkmark$		
KOMODO2	Navy blue	2 in 1 parka: Removable jacket. Parka: Waterproof seams. Fastening with zip under velcro flap. Removable jacket: Zip fastening. Knitted cuffs. 3 pockets.	Polyurethane-coated 98% polyester 2% antistatic fibre fabric. 100% flame retardant cotton fixe lining. 100% polyester polar fleece removable lining.	S/M/L/ XLXXL/ 3XL/4XL		EN13034 TYPE PB (6) EN ISO14116	EN343	
KOMODO2HV	Fluorescent yellow-Navy blue	2 in 1 parka: Removable jacket. Parka: Waterproof seams. Fastening with zip under velcro flap. High visibility: Class 2 - Silver colour - Parallel assembly. Removable jacket: Zip fastening. Knitted cuffs. 3 pockets.	Polyurethane-coated 98% polyester 2% antistatic fibre fabric. 100% flame retardant cotton fixe lining. 100% polyester polar fleece removable lining. Loxy® retro-reflective sewn bands.	XLXXL/	C€	EN ISO 20471 CLASS 2 EN13034 TYPE PB (6) EN ISO14116	S EN1149-5	x 5
SSVFR	Now blue	Underwear set. Long sleeve tee-Shirt and Long Johns.	50% Aramid knitwear 48% Viscose 2% Antistatic fibre 200 g/m².	S/M/L/ XL/XXL/ 3XL/4XL		EN ISO14116 4 EN1149-5	x 10	
CAFR1 Navy blue	navy blue	Hood with flap covering shoulders.	50% Aramid knitwear 48% Viscose 2% Antistatic fibre 200 g/m².	One size		3/12H/60	$\stackrel{\smile}{\smile}$	x 50

#### KOMODO2

















#### KOMODO2HV















⇒Use all year round



#### **SSVFR**











#### CAFR1













# CHEMICAL PROTECTION OVERALLS

	•	o <sup>©</sup>	#	<b>ijiji</b>	V	
C0600	Green	Chemical protective overall type 3, liquid- tight. Raglan sleeves. Sealed seams. Zip fastening with studded cover flap and Velcro straps. Fixed elasticated hood, elasticated at wrist and ankles.	Polyester support with double sided PVC 380 g/m² coating.	S/M/L/XL/ XXL/3XL	<b>C €</b> EN14605 TYPE 3	x 10

#### C0600









M9200 - ROTOR GALAXY



M9000E A2B2E2K2P3



RUIZ1 ACETATE



PETRO VE766



# PROTECTIVE APRONS - WELDERS

	•	o <sup>©</sup>	#	<b>HILLIA</b>	<b>S</b>	
TABNIT		Apron. Adjustment buckle on the neck. Dimensions: 115 cm x 90 cm. Thickness: 0,35 mm.	Nitrile/Vinyl.			x 50
TABPU	White	Apron. Elasticated strap with hook. Adjustment buckle on the waist. Dimensions: 115 cm x 90 cm. Thickness: 0,30 mm.	100% polyurethane 355 g/m².	i g/m².	<b>(€</b> ∏"	x 25
TABLIVE	Green	Waterproof all-purpose apron. Drawstring straps. Dimensions: 110 cm x 75 cm. Thickness: 0,35 mm.	PVC-coated polyester support. Double sided coating.			
TABALPV	White	Apron. Adjustment buckle on the neck. Dimensions: 120 cm x 90 cm. Thickness: 0,30 mm.	100% PVC.	One size		
TASOUB	Grey	Welder apron with bib. Adjustment buckle on the neck. Sewn split leather strap with plastic bucklet. Dimensions: 90 cm x 60 cm. Thickness: 1,40 mm to 1,60 mm.	Cowhide split leather.		C E EN11611 TYPE A1	x 50
MANCHB		Welders over sleeve. with elasticated hems. 40cm length. Sold in Pairs.		0 0 0 0 0 0 0	CLASS 2	

### **TABNIT**







### TABPU







### **TABLIVE**







### **TABALPV**







#### **TASOUB**








### **MANCHB**







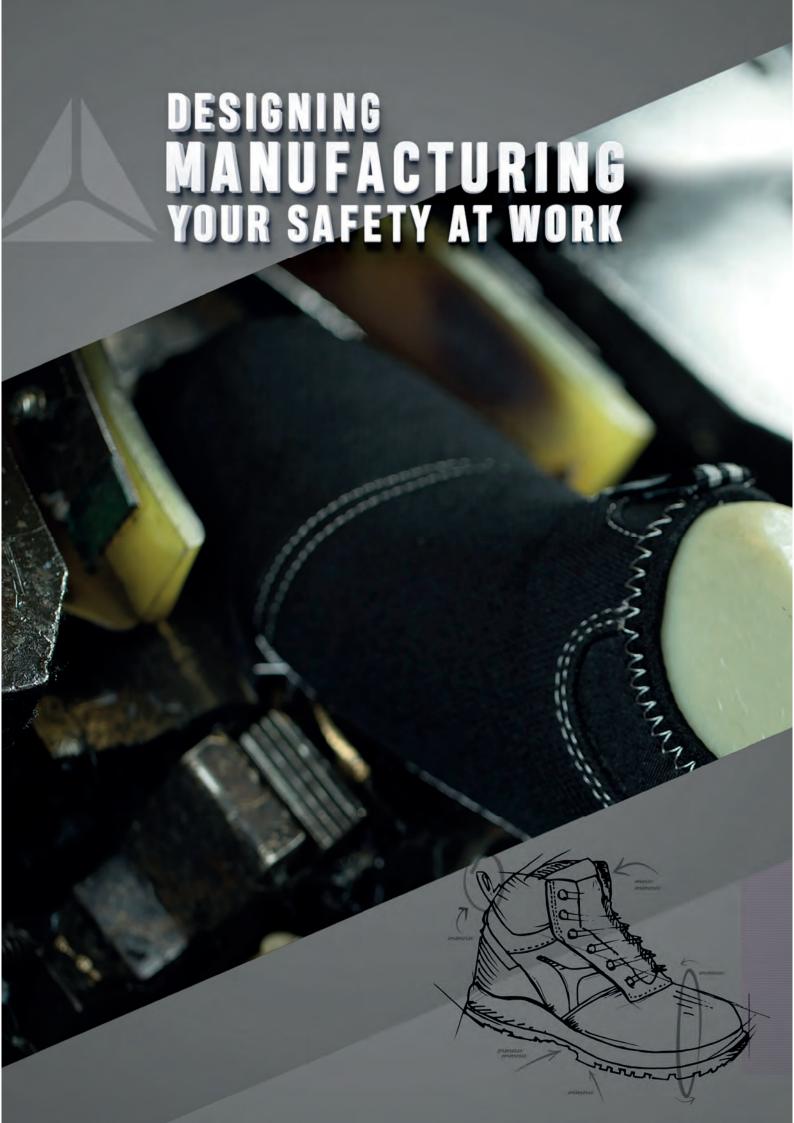

## **FOOT PROTECTION**

#### SHOES

- 270 Help with choice
- 272 Trek Work
- 274 Comfort Tech
- 276 Waterproof
- 278 Outdoor
- 279 Pro Tech
- 280 X-Large Composite
- 281 Classic Industry
- 284 ESD
- 286 Classic Industry Classic +
- 290 Sportswear
- 296 Light Walkers
- 301 Agro Executive

#### **BOOTS**

- 302 Winter Boot
- 306 Rain Boot

#### **ACCESSORIES**

- 307 Soles Laces Socks
- 404 TECHNICAL INFORMATION

FOOT PROTECTION



### **HELP WITH CHOICE**

_	TO FIND	THE SU	JITABLE	PRODU	JCT FOF	R YOUR	JOB —					
		chen chen	Seith Charles	Helyholsky	JeH Hullsfr.		ing the time	ON SEE	ning.	<b>u</b> nd heed	<b>&gt;</b>	
	6-3						<b>6</b>			<b>(17)</b>	Suitable protection	PAGES
	•	•									TREK WORK	272
			•			•					COMFORT TECH	274
	•	•	•								WATERPROOF - NOMAD S3 SRC	276
置			•			•					SPORTSWEAR - DELTAFLY S1P SRC	290
	•	•	•			•					ESKIMO SBHP SRC	302
			•								COMFORT TECH - SAGA S3 SRC	274
	•	•	•								WATERPROOF - SAMY S3 SRC	276
			•			•					OUTDOOR	278
	•	•	•			•					PRO TECH	279
EVOLUTION	•	•	•	•					•		X LARGE COMPOSITE	280
5		•	•	•					•		X LARGE INDUSTRY	281
E			•			•					ESD	284
			•			•					SPORTSWEAR	292
			•								LIGHT WALKERS	296
						•					EXECUTIVE	301
		•	•	•					•		WINTER BOOT	304
	•	•	•			•			•		PRO TECH	279
		•	•								CLASSIC INDUSTRY	286
ভ		•	•			•			•		CLASSIC +	286
ESSENTIEL											LIGHT WALKERS	297
ESS											AGRO	301
			•								WINTER BOOT	305
												306

#### RANGES -















					HEAVYWORKS			
	TREK WORK	COMFO	RT TECH	WATERPROOF OUTDOOR PROTECH		X LARGE INDUSTRY	CLASSIC +	CLASSIC
COMPOSITE		COMPOSITE		COMPOSITE	COMPOSITE	COMPOSITE NO COMPOSITE	OLAGOIO .	INDUSTRY
Material	PU / NITRILE RUBBER	PU / TPU	PU / RUBBER	PU / RUBBER PU / PU PU PU / PU		PU / PU	PU / PU	PU / PU
Advantages	Ladder grips     Flex-Zone for increased flexibility     Slip-resistant cleated outsole	Lightness     Comfort     TPU outsole is resistance to hydrocarbon <0°C (CONCORCARAVELLE S:	o abrasion, s and cold RDE S3 -	100% waterproof Deltatex membrane     TPU Back reinforcement for a high wear protection and lifespan (NOMAD S3 SRC)     PU bumper protection     Staples specially designed for an optimal traction and a best slip- resistance on all slippery surfaces	• Ladder grips • V STAB SYSTEM • Flex-Zone	Areas of integrated bending (PANOFLEX® system)     Shock absorber Available in ESD (SAULT2 S3 ESD)	• Lifespan and comfort	Lifespan and comfort     JUMPER2 S3 FUR / JUMPER2 S3 FUR HC PU properties resistant to -30°C
SRC HRO HI CI		SRC	SRC HRO	SRC WR HI CI	SRC	SRC	SRC	SRC



















			LIGHTWORKS				BOOTS
	POSITE	LIGHT WALKERS  COMPOSITE COMPOSITE COMPOSITE		EXECUTIVE	AGRO	ESKIMO SBHP SRC	
PU / RUBBER	PHYLON / RUBBER	PU / PU	PU MONO DEN	NSITY	PU MONO DENSITY	PU / PU	COMPOSITE
Midsole for effective cushing to LO-SPIRIT / D-STAR) Phylon (DELTAFLY/DELTASPO) Rubber outsole for improve Crampon design specially to Upper with MATRYX© technical special s	RT/BROOKLYN/MANHATTAN) ed abrasion resistance designed for optimum grip	Upper Mesh (ASTI S (SUMMER SIP) for b     Available in ESD ver     Upper in canvas fo     XL large sole for op	r more lightness (ARONA S	TP) or knitted	Non-metallic     Lightness and flexibility	• Microfibre upper	• Overshoes and soles PU properties resistant to -30°C
	RC RO		SRC		SRC	SRC	SRC

### - SHOES TREK WORK



### TW402 S3 SRC





















COMPOSITE















NON METALLIC

→ Compatible with security checks (metal detectors)



Composite toe cap 200j

Lightweight and less fatigue

Non conductive hot and cold



Anti-perforation composite protective

⇒Increased flexibility at the metatarsal level



### The design and comfort of a trekking shoe with high tech performance of a safety shoe.

	æ	o <sup>©</sup>	<b>JULI</b>	•	<b>V</b>	<u></u>	
TW402 S3 SRC	Dleek	Upper: Full grain leather, S3 water resistant treatment, with premolded front and back reinforcements. Lining: Polyamide absorbing. Insole:	39 → 48 <b>( €</b>	EN ISO 20345	770 g	v.E	
TW302 S3 SRC	Black	Removable preformed - Polyester on PU. Midsole: Cemented - PU with Panoshock® shock absorber. Outsole: Rubber Nitrile. Non metallic footwear.	39 → 48	7)	SRC	740 g	χo





Rear reinforcement

- ⇒Stabilisation of the foot when
- walking

  → Reinforced protection on the rear of the shoe



PANOSHOCK® system

⇒Decreased propagation of shock



**⇒**Comfort and easy drying



Pre-moulded bumpers provide extra protection from the front and the back

This PU/ RUBBER NITRILE SOLE has been developed with:

- 1- Areas of attachment, allowing secure stabilisation on the ladder rungs.
- 2-Large cleats for soft flooring, meeting SRC standards, for reinforced grip on all types of indoor and outdoor surfaces.
- 3- A rubber nitrile outsole that guarantees good resistance to abrasion and contact heat (HRO = 300°C for 1 minute).



Our goal is to meet the most extreme working conditions. These highly technical and functional shoes allow you to reach unequalled levels of





### Designed for the most demanding workers in terms of comfort.

	æ	o <sup>o</sup>	<b>LIUL</b>		<b>V</b>	<u></u>	
CONCORDE S3 SRC	Brown	Upper: Calfskin full grain leather, S3 water resistant treatment. Lining: Air Mesh 3D polyester. Insole: "Deltaplus	36 → 48	<b>EN ISO 20345</b> S3		762 g	0 0 0 0 0
CARAVELLE S3 SRC	Black	Air Flow System" - Removable premolded - Polyester on PU. Outsole: Injected - PU. Outsole: TPU. Non-metallic footwear.	30 - 40	CE	SRC	744 g	x 5
SAGA S3 SRC	Beige Black	Upper: Nubuck leather, S3 water resistant treatment. Lining: Polyester. Insole: Removable - polyester on EVA. Outsole: Cemented - PU/Rubber. Non-metallic footwear.	39 → 48	4§])y	EN ISO 20345 S3 HRO SRC ASTM F2413 M I/75 C/75 PR SD	842 g	







RUBBER SOLE ⇒Increased durability



#### COMFORT TECH:

A full-grain leather upper and a specially designed performance oriented sole:

- 1- The Wide Fitting is suitable for all types of feet and provides a better fit.
- 2- Full grain cowhide leather offers great flexibility in movement as does the TPU outsole.
- 3- "Delta Plus Air Flow System" is a new technology, integrated into our sockliner, allowing for excellent ventilation of the foot and great comfort all day





At the heart of this premium collection, our team has developed a major concept "The Comfort" which translates into 4 axes (the shape, the leather, the flex, the insole). Trying it is adopting it!






### The protection also goes through an innovative concept of impermeability and water resistance. The DELTA-TEX™ membrane protects you from the weather while wicking away moisture.

	•	o <sup>c</sup>	<b>LITTLE</b>	•	<b>V</b>	_	
NOMAD S3 SRC	Brown Black	Upper: Full grain leather, S3 water resistant treatment. Lining: DELTA-TEX™ waterproof polyester membrane. Insole: Removable - polyester on EVA. Midsole: Injected - Dual density PU. PU bumper protection. Non metallic footwear.	39 → 48	<i>C C</i>	EN ISO 20345	812 g	v.E
SAMY S3 SRC	Black	Upper: Full grain leather, S3 water resistant treatment. Lining: DELTA-TEX™ waterproof polyester membrane. Insole: Removable preformed - Polyester on EVA. Outsole: Injected - Dual-density PU. PU bumper protection.	39 → 48		S3 WR HI CI SRC	844 g	ΧŪ







It offers a water-proofing greater than 10,000 mm/cm<sup>2</sup> (ISO811). Impermeability is measured by placing this membrane under a tube of water (water column). The minimum water height at which the first drops of water pass through this membrane represents its impermeability.



Rear reinforcement

- ⇒Stabilisation of the foot when walking
- Reinforced protection on the rear of the shoe



⇒Softer and more comfort







The 4 nylon bands at the instep have two main functions:

1- They offer a reinforced support of the foot 2- Due to the retro-reflective strips, they increase the visibility for even more security.



The weather, work and the outdoor business sector leads you to face harsh conditions. That is why we have developed this range whose "waterproof" membrane protect you perfectly from bad weather.

### The nature sports and walking shoe dedicated to safety. Comfortable, technical and performance, the shoes of OUTDOOR range will take you far!

	æ	o <sup>©</sup>	<b>JULI</b>		lacksquare	<u></u>	
OHIO3 S3 SRC	Black	Upper: Full grain leather, S3 water resistant treated. Lining: Polyester. Insole: Removable preformed - Polyamide on EVA. Outsole: Injected - Dual density PU. Non metallic footwear.			EN ISO 20345 S3 SRC	684 g	
AURIBEAU3 S1P SRC	Croop Blook	Upper: Split suede leather and mesh. Lining: Polyester. Insole:	36 → 47	C€	EN ISO 20345	640 g	х5
PERTUIS3 S1P SRC	Green-Black	Removable preformed - Polyamide on EVA. Outsole: Injected - Dual density PU. Non metallic footwear.			S1P SRC	622 g	60 0 0 0 0 0 0 0

#### OHIO3 S3 SRC



















- 2- V STAB SYSTEM
- 3- Lateral ladder grips
- 4- Cleats SRC standards
- ➡1- Foot motion improved
- ➡2- Reinforced control of foot torsion
- ➡3- Secured stabilisation on ladder rungs
- ➡4- Good grip on all types of indoor and outdoor surfaces



⇒Compatible with security checks (metal detectors)



Composite toe cap 200j

- →Lightweight and less fatigue
- ⇒Non conductive hot and cold



Anti-perforation composite protective midsole

►Increased flexibility at the metatarsal level

#### **AURIBEAU3 S1P SRC**





















#### **PERTUIS3 S1P SRC**






### A professional range combines resistance, comfort and lightness.

	•	o <sup>©</sup>	<b>JULI</b>		lacksquare	<u></u>	
PHOENIX S3 SRC		Upper: Pigmented split leather, S3 water resistant treatment. Lining: Polyamide mesh. Insole: Removable preformed - Polyamide on EVA.			EN ISO 20345	590 g	
PHOCEA S3 SRC		Outsole: Injected - PU bi-density. Non metallic footwear.			SRC	570 g	
PROTON S1P SRC	Black	Upper: Pigmented split leather. Lining: Polyamide mesh. Insole: Removable preformed - Polyamide on EVA. Outsole: Injected - PU bi-density. Non metallic footwear.	36 → 47	C€	EN ISO 20345 S1P	594 g	x 5
PRISM S1P SRC		Upper: Pigmented split leather. Lining: Polyamide mesh. Insole: Removable preformed - Polyamide on EVA. Outsole: Injected - PU bi-density. Non metallic footwear.			SRC	590 g	

#### **PHOENIX S3 SRC**

#### **PHOCEA S3 SRC**





NON METALLIC → Compatible with security checks (metal detectors)





Composite toe cap 200j

- ⇒Lightweight and less fatigue
- ➡Non conductive hot and cold



Anti-perforation composite protective midsole

⇒Increased flexibility at the metatarsal level

#### **PROTON S1P SRC**













➡1- Foot motion improved

outdoor surfaces

→2- Reinforced control of foot torsion

⇒3- Secured stabilisation on ladder rungs

→4- Good grip on all types of indoor and



DUAL DENSITY PU OUTSOLE 1- Flex zone

2- V STAB SYSTEM

3- Lateral ladder grips

4- Cleats, SRC standards







#### **PRISM S1P SRC**





# **X-LARGE COMPOSITE**

### X-LARGE COMPOSITE is the perfect answer for trades where RESISTANCE and PROTECTION are essential and the concept of COMFORT a must.

	•	o <sup>c</sup>	<b>HILLIP</b>		$\checkmark$	<u></u>	
SANTANA S3 SRC		Upper: Buffalo smooth leather , S3 water resistant treatment.				720 g	
MAESTRO S3 SRC	Black	Lining: Polyester. Insole: Removable preformed - Polyamide on EVA. Outsole: Injected - Dual-density PU with bump cap. Non	39 → 48	C€	EN ISO 20345 S3 CR SRC	670 g	x 5
CALYPSO S3 SRC	40 0 0 0 0 0 0	metallic footwear.	o		UIIU	856 g	

Areas of integrated bending (PANOFLEX® system) ⇒Less fatigue at the end of the day →More comfortable walking

#### **SANTANA S3 SRC**






























NON METALLIC **⇒**Compatible with security checks (metal detectors)



Composite toe cap 200j →Lightweight and less fatique





Anti-perforation composite protective midsole

►Increased flexibility at the metatarsal level



Wide fitting (mondo 11) →Hard wearing



SHOCK ABSORBER ⇒Dual density PU outsole

⇒Decreased propagation of shock waves



Outsole with PU protection bumper

⇒Reinforced protection of the forefoot

#### **MAESTRO S3 SRC**



#### **CALYPSO S3 SRC**





- ➡1- Reinforced adhesion on loose ground
- ⇒2- Secured stabilisation on ladder rungs

# **X-LARGE INDUSTRY**



### Symbol of comfort, protection and durability, the X-LARGE INDUSTRY range meets the toughest working environments.

	•	<b>o</b> c	<b>LITTLE</b>	•	<b>V</b>	<u></u>	
CADEROUSSE S3 SRC	Block	Upper: Full grain leather, S3 water resistant treatment. Lining: Acrylic furlined. Insole: Preformed removable - Felt. Outsole: Injected - Dual-density PU with bump cap.	39 → 48		EN ISO 20345 S3 CI SRC	852 g	
MONTBRUN S3 SRC	Black	Upper: Pigmented split leather, S3 water resistant treatment. Lining: Polyamide. Insole: Removable preformed - Polyamide on EVA. Outsole: Injected - Dual-density PU with bump cap.		C€	<b>EN ISO 20345</b> S3 SRC	702 g	x 5
CAROMB S1P SRC	Grev-Blue	Upper: Suede split leather and polyamide nylon. Lining: Polyamide. Insole: Preformed removable - Polyamide on EVA.			<b>EN ISO 20345</b> S1P	772 g	
MAZAN S1P SRC	oley-blue	Outsole: Injected - Dual-density PU with bump cap.	0 0 0 0 0	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	SRC	682 g	0

#### **CADEROUSSE S3 SRC**

















Wide fitting (mondo 11) → Hard wearing



Retro-reflective tapes →Increased visibility















DUAL DENSITY PU OUTSOLE 1- Hear wearing outsole with toe and heel grip 2- Lateral ladder grips

- ➡1- Reinforced adhesion on loose ground
  - ⇒2- Secured stabilisation on ladder rungs



for better safety



Outsole with PU protection bumper

- ⇒Reinforced protection
- of the forefoot



Areas of integrated bending (PANOFLEX® system)

- →Less fatigue at the end of the day
- →More comfortable walking



















SHOCK ARSORBER

- ightharpoonup Dual density PU outsole
- →Decreased propagation of shock waves

#### **CAROMB S1P SRC**















#### **MAZAN S1P SRC**



#### - SHOES

# X-LARGE INDUSTRY



### **SAULT2 S3 SRC**





















Areas of integrated bending (PANOFLEX® system)

→Less fatigue at the end of the day

→More comfortable walking



Retro-reflective tapes

→Increased visibility for better safety



Outsole with PU protection bumper

Reinforced protection of the forefoot



- SHOCK ABSORBER

  Dual density PU outsole

  Decreased propagation of shock waves





### Symbol of comfort, protection and durability, the X-LARGE INDUSTRY range meets the toughest working environments.

	æ	o <sup>c</sup>	<b>LIVE</b>	•	$\checkmark$	<u></u>	
SAULT2 S3 SRC	Black	Upper: Pigmented split leather, S3 water resistant treatment. Lining: Polyamide. Insole: Removable preformed - Polyamide on EVA. Outsole: Injected - Dual-density PU with bump cap.	39 → 48	CE	<b>EN ISO 20345</b> S3 SRC	736 g	x 5



#### **DUAL DENSITY PU OUTSOLE**

- 1- Hear wearing outsole with toe and heel grip 2- Lateral ladder grips
- 1- Reinforced adhesion on loose ground 2- Secured stabilisation on ladder

rungs

#### Wide fitting (mondo 11):

The footwear is suitable for wide and strong feet.

Padded collar and tongue with a reinforced leather tongue provide better protection from rubble and improved comfort.

This form has been designed to meet all the needs of the construction and heavy industry sectors. Indeed, the design of the sole protects the user from shocks, either at the front of the foot (bumper) or on the sides (side bumper).

The recognised success of the SAULT2 model is linked to the durability that is widely appreciated by all users in the construction and industry sectors.



It is the study of the needs of the Civil engineering/Construction sector which led us to develop this iconic DELTA PLUS product whose strengths are extra large footwear (XL) and a maximum durability. Often copied, never equalled!

	æ	o <sup>c</sup>	<b>HILL</b>	<b>V</b>	<u></u>	
SAULT2 S3 SRC ESD	Black	Upper: Pigmented split leather, S3 water resistant treatment. Lining: Polyamide. Insole: Removable preformed - Polyamide on EVA. Outsole: Injected - Dual-density PU with bump cap.	39 → 48	EN ISO 20345 S3 SRC EN61340 CLASSE 1	734 g	х5
VIAGI S1P SRC ESD	Black-Red	Upper: Suede split leather and polyester mesh. Lining: Polyester. Insole: Removable preformed - Polyester on EVA. Outsole: Injected - Dual-density PU. Non metallic footwear.	36 → 48	EN ISO 20345 STP SRC EN61340 CLASSE 1	610 g	x 10

### **SAULT2 S3 SRC ESD**

























### **VIAGI S1P SRC ESD**























#### What does the regulation say?

Areas with potentially explosive atmospheres called ATEX and the protection of workers against the risks of explosion are regulated by 1999/92/EC Directive.

The use of a qualified footwear dissipating electrostatic charges, is recommended in these areas as part of a comprehensive system of prevention of explosion risk.

Requirements for the design, implementation of systems controlling electrostatic discharge (ESD) that can damage electronic components are defined by the EN61340-5-1 standard.

#### The device said ESD must offer resistance between $10^5 \Omega$ and $3.5 \cdot 10^7 \Omega$ ).

To be used in an ESD system, a shoe must at least be qualified according to EN61340-4-3 standard and offer resistance less than  $10^8 \Omega$  (and greater than  $10^5 \Omega$ ), it is then dissipative.

**SAULT ESD** and **VIAGI ESD** perform particularly well because they have not only reached a maximum resistance between 10<sup>5</sup> and 3.5 10<sup>7</sup> (sigle ohm), but **these tests were conducted under severe restraints: the climatic environment class number 1 (high drought: 15% humidity rate).** 

Due to their low resistance level, **SAULT ESD** and **VIAGI ESD** are a particularly efficient part of global grounding system (gloves, clothing, carpet, seat, etc ...).

Thus, their performances help this system to achieve the level of resistance required for 🏟 compliance.



### RISK OF ELECTROSTATIC DISCHARGE (ESD\*)

The static electricity on the operators must be controlled in the following application areas, because it can:



- > Generate electrostatic sparks that can ignite explosive atmospheres: plastic industry, mining, oil and gas industry, chemical industry ...
- > Damage sensitive equipment against electric shock: various electronic industries ...
- > Generate particles that may be deposited on the painting: car industry, house appliances ...

<sup>\*</sup> Electrostatic Discharge

# **CLASSIC INDUSTRY - CLASSIC +**

	•	o <sup>©</sup>	<b>titit</b>		$\checkmark$	<u></u>	
COBRA4 S3 SRC		Upper: Pigmented split leather, S3 water resistant treatment. Lining: Polyester. Insole: Removable premolded - Polyamide on EVA. Outsole: Injected - PU/Rubber nitrile. • Para aramid seams. • Flap. Fastening with velcro band.	36 → 48		EN ISO 20345 S3 HRO HI SRC EN ISO 20349-2 WG	628 g	
MIWA S3 M SRC	Black	Upper: Pigmented Buffalo leather 1.8-2 mm, S3 water resistant treatment. Lining: Polyamide mesh. Insole: Removable - Polyamide on EVA. Outsole: Injected - Dual-density PU. • Integrating a protection flap with a pre-molded part to the metatarsals.	36 → 47	C€	<b>EN ISO 20345</b> S3 M SRC	650 g	x 10
GARGAS II S1P SRC		Upper: Pigmented split leather. Lining: Polyamide absorbing. Insole:	OE . /O		EN ISO 20345	644 g	
GOULT II S1P SRC	•0  0  0  0  0  0  0  0  0  0  0	Removable premolded - Polyester on EVA. Outsole: Injected - Dualdensity PU.	35 → 48		S1P SRC	636 g	eo 

#### **COBRA4 S3 SRC**




















- ⇒Protection against thermal risks and projections
- ⇒Specially designed for any multi-sector welding activity

Two elastics inside for closer fitting protection

- →Improved hold on the kick of the foot Leather collar and para-aramid thread
- ➡Enhanced heat protection













#### RUBBER NITRILE OUTSOLE

- ⇒Good resistance to abrasion and contact heat (standard HRO = 300°C for 1 minute)
- ⇒Guaranteed insulation of the foot in the shoe against heat (HI: the temperature inside must not exceed 22°C after 30 minutes in a sand bath
- ⇒Optimum adhesion on all types of surfaces

MIWA S3 M SRC

METAL



#### Integrated flexion zones

Velcro closure ⇒Fast opening

- ➡Increased flexibility at the metatarsal level
- →Work facilitated whatever the position

⇒Protection against projections

#### **GARGAS II S1P SRC**



























#### **GOULT II S1P SRC**



	æ	o <sup>©</sup>	<b>J</b>	<b>V</b>	_	
TANGARA S1P SRC	Grey-Yellow	Upper: Ventilated suede split leather. Lining: Polyamide	00 - 17		630 g	v.10
RIMINI III S1P SRC	Beige-Yellow Navy blue-Orange	- absorbing. Insole: Removable - Polyamide on EVA. Outsole: Injected - Dual-density PU.	36 → 47	EN ISO 20345 S1P	610 g	x 10
FENNEC3 S1P SRC		Upper: Suede split leather. Lining: Polyamide absorbing. Insole:	36 → 45	C€ SRC	564 g	x 10
FENNEC3 S1 SRC	Orey  NNEC3 S1 SRC	Fixed - Polyamide on EVA. Outsole: Injected - Dual-density PU.	46 → 47	<b>EN ISO 20345</b> S1 SRC	474 g	x 5

#### TANGARA S1P SRC



















### RIMINI III S1P SRC





















### FENNEC3 S1P SRC























### FENNEC3 S1 SRC



















# **CLASSIC INDUSTRY**

	•	o <sup>c</sup>	<b>LIGHT</b>	<b>V</b>	<u></u>	
JUMPER2 S3 FUR HC SRC		Upper: Pigmented leather croupon, S3 water resistant treatment. Lining: Polyester fur. Insole: Removable preformed - Felt. Outsole: Sole:	36 → 48	<b>EN ISO 20345</b> S3 CI	690 g	x 5
JUMPER2 S3 FUR SRC		Injected - Dual density PU. • PU formula sole keeping its properties until -30°C		SRC	658 g	
JUMPER2 S3 BUMPER SRC	Black	Upper: Pigmented split leather, S3 water resistant treatment, with TPU toe cap. Lining: Polyamide mesh. Insole: Fixed - Polyamide on EVA. Outsole: Injected - Dual-density PU.	$36 \rightarrow 45$ $46 \rightarrow 48$	<b>C €</b> EN ISO 20345	660 g	x 10 x 5
JUMPER2 S3 SRC		Upper: Pigmented split leather, S3 water resistant treatment. Lining:		S3 SRC	664 g	
JET2 S3 SRC		Polyamide mesh. Insole: Fixed - Polyamide on antibacterial latex. Outsole: Injected - Dual-density PU.	36 → 45 46 → 47		644 g	x 10 x 5

#### **JUMPER2 S3 FUR HC SRC**































#### **JUMPER2 S3 FUR SRC**

















#### **JUMPER2 S3 BUMPER SRC**



























JET2 S3 SRC





	€	o <sup>©</sup>	<b>LILLIA</b>	•	$\triangleleft$	<u>^</u>	
JUMPER2 S1P SRC	0 0 0		EN ISO 20345 S1P	664 g			
JET2 S1P SRC	Dlook	Upper: Pigmented split leather. Lining: Polyamide mesh. Insole: Fixed -	36 → 45	66	SRC	638 g	x 10
JUMPER2 S1 SRC	Black	Polyamide on EVA. Outsole: Injected - Dual-density PU.	46 → 47	. 47 CE	EN ISO 20345	596 g	x 5
JET2 S1 SRC					SRC	564 g	

### **JUMPER2 S1P SRC**





















### **JUMPER2 S1 SRC**





















### JET2 S1 SRC



### - SHOES **SPORTSWEAR**



	•	o <sup>c</sup>	<b>LIFT</b>		$\checkmark$	
DELTA FLY S1P SRC	Grey-Green	Upper: Matryx® technology consisting of PU-coated polyamide yarns, polyester monofilament yarns, reflective yarns and Kevlar® areas. Lining: Polyester. Insole: Removable preformed - Polyester on EVA. Outsole: Cemented - EVA/Rubber Nitrile. Non metallic footwear.	39 → 47	CE	EN ISO 20345 S1P HRO SRC	520 g x 5

#### **DELTA FLY S1P SRC**















NON METALLIC **⇒**Compatible with security checks (metal detectors)



Composite toe cap 200j ⇒Lightweight and less fatigue



Anti-perforation composite protective midsole —Increased flexibility at the metatarsal level





### MATRYX® is a high performance technical complex made from high tenacity polyamide and KEVLAR® thread. This unique and patented French technology enables specific areas to provide efficient solutions in terms of ergonomics and lightness.




#### RUBBER NITRILE OUTSOLE

Good resistance to abrasion and contact heat (HRO = 300°C for 1 minute) Optimum adhesion

#### WELDED SOLE WITH PHYLON MIDSOLE (EVA)

Incomparable comfort and lightness



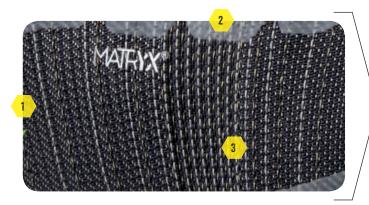

#### Unique MATRYX® Technology:

1- Multizone woven upper : brings extreme lightness and flexibility to the upper material as well as very good ventilation. This complex fabric does not deform. 2- Reflective threads: allow increased visibility.

3- Kevlar® thread : provide excellent support around the instep in any position and increased resistance to abrasion.

4- Seamless upper for optimal comfort.



Our goal is to combine the best of sport and safety in order to push performance limits. It is due to our partnership with the French company Chamatex, which patented the MATRYX® Technology, that we have developed this innovative premium product. The most of MATRYX®: the option of choosing, according to our needs, predefined strategic function zones during weaving. This construction of the upper material reduces by approximately 50% the weight of our upper material. MATRYX® is a unique technology and DELTA FLY is unique in the world of PPE.

### A Sport attitude for many professional activities.

	<b>₽</b>	o <sup>C</sup>	<b>HILLIP</b>		<b>~</b>	<u></u>			
MANHATTAN S3 SRC	Black-Yellow	Upper: Suede split leather (cowhide), S3 water resistant treatment with front rubber reinforcement. Lining: Polyester non-woven and			EN ISO 20345	565 g			
BROOKLYN S3 SRC	Black-Orange	knitted mesh. Insole: Removable preformed - Polyamide on EVA. Outsole: Cemented - Phylon. Outsole: Rubber. Non metallic shoe.	39 → 47	C€	S3 HRO SRC	535 g	x 10		
DELTA SPORT S1P SRC	Blue-Yellow Black-Red	Upper: Injected PU on mesh. Lining: Polyester. Insole: Removable preformed - Polyester on EVA. Outsole: Cemented - Phylon. Outsole: Rubber Nitrile. Non metallic footwear.		CE			<b>EN ISO 20345</b> S1P HRO SRC	482 g	

#### **MANHATTAN S3 SRC**

#### **BROOKLYN S3 SRC**





















➡Reduction of pressure points at the lacing





NON METALLIC →Compatible with security checks (metal detectors)










Outsole with protection rubber toe

bumper ⇒Reinforced protection of the forefoot



Composite toe cap 200j ⇒Lightweight and less fatigue



- ⇒Reinforced ergonomics and comfort during
- ⇒Confort et légèreté incomparables

Anti-slide on the inside of the shoe

- ⇒Improved heel hold
- →Reinforced rear section



RUBBER NITRILE OUTSOLE

- ⇒Good resistance to abrasion and contact heat (HRO = 300°C for 1 minute)
- ⇒0ptimum adhesion

WELDED SOLE WITH PHYLON MIDSOLE (EVA) →Incomparable comfort and lightness



Anti-perforation composite protective midsole ➡Increased flexibility at the metatarsal level
























PU upper injected on Mesh

- ⇒Increased resistance of the upper material to
- ightharpoonupImproved foot support thanks to the "Cage" concept
- ⇒Excellent ventilation with Mesh





### A Sport attitude for many professional activities.

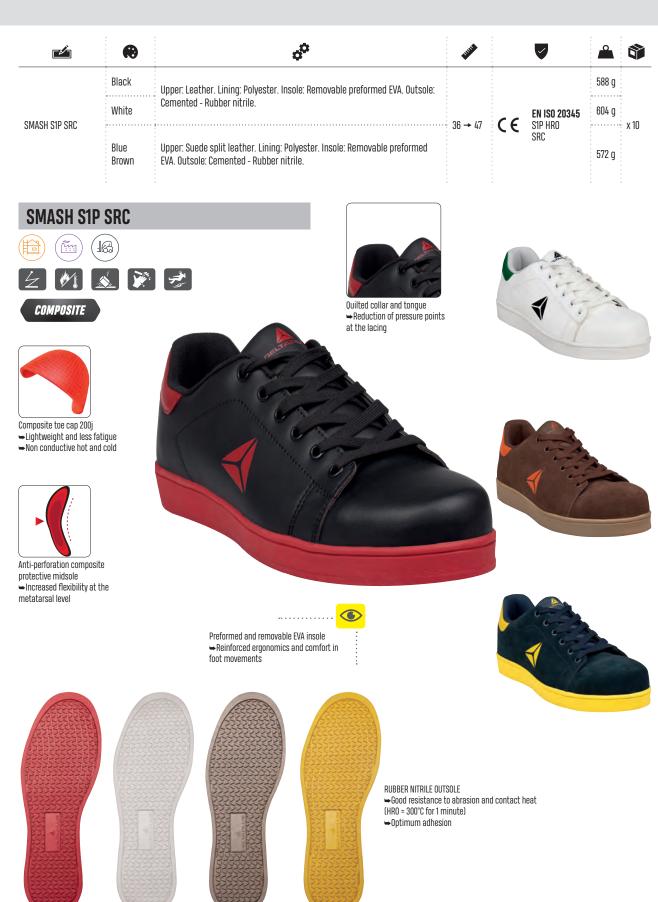

	•	o <sup>©</sup>	<b>JULI</b>		abla		
D-SPIRIT S3 SRC	Plank	Upper: Leather, S3 water resistant treatment. Lining: Polyester. Insole: Removable - Polyester on EVA. Outsole: Cemented - PU/Rubber. Non metallic footwear.	36 → 47		EN ISO 20345 S3 HRO SRC	540 g	
D-SPIRIT S1P SRC	··· Black	Upper: Leather/mesh. Lining: Polyester. Insole: Removable - Polyester on EVA. Outsole: Cemented - PU/Rubber. Non metallic footwear.	38 → 47	C€	EN ISO 20345	498 g	х5
b of milition one	Blue-Grey	Upper: Suede split leather. Lining: Polyester. Insole: Removable - Polyester on	36 → 47		S1P HRO SRC	514 g	
D-STAR S1P SRC	Beige	EVA. Outsole: Cemented - PU/Rubber. Non metallic footwear.				534 g	



### **D-SPIRIT S1P SRC**





Anti-perforation composite protective midsole

⇒Increased flexibility at the metatarsal level













#### **D-STAR S1P SRC**




















RUBBER OUTSOLE

**⇒**0ptimum adhesion

Good resistance to abrasion and contact heat (HRO = 300°C for 1 minute)



A lightweight and ventilated system make these shoes particularly suitable for professional activities requiring comfort.

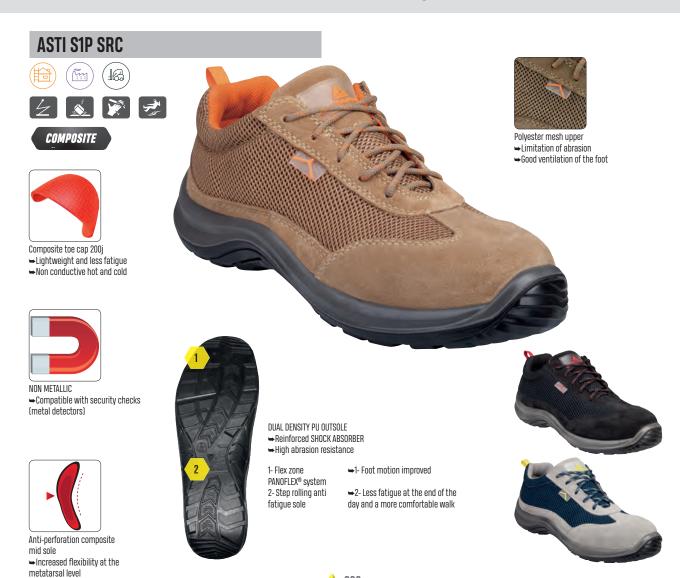



	•	o <sup>c</sup>	<b>JIJIJA</b>	V	<u></u>			
ASTI S1P SRC	Beige Grey-Blue Black	Upper: Suede split leather and polyester mesh. Lining: Polyester. Insole: Removable premolded - Polyester on EVA. Outsole: Injected - Dual- density PU. Non metallic footwear.	36 → 48	26 - 40	26 - 40		544 g	
VIRAGE S1P SRC	Grey-Green Black-Red	Upper: Suede split leather and polyester mesh. Lining: Polyester. Insole: Removable preformed - Polyester on EVA. Outsole: Injected - Dual-density PU. Non metallic footwear.		EN ISO 20345 SIP SRC	612 g	x 10		
COMO S1P SRC	Navy blue Brown-Beige Black-Fushia	Upper: Suede split leather and polyester mesh. Lining: Polyester. Insole: Removable premolded - Polyester on EVA. Outsole: Injected - Single density PU.	$39 \rightarrow 48$ $39 \rightarrow 48$ $35 \rightarrow 43$		508 g			
SUMMER S1P SRC	Blue-Yellow Grey-Orange	Upper: Polyester and cotton. Insole: Removable preformed - polyester on EVA. Midsole: injected - Single density PU.	35 → 48		440 g			

#### **VIRAGE S1P SRC**



















ARCH SUPPORT SYSTEM

→ Reinforced stability in the supports

⇒Good twist control



DUAL DENSITY PU OUTSOLE

- ⇒Reinforced shock absorption ⇒Good resistance to abrasion
- 1- Flex zone PANOFLEX® system 2- Step rolling for optimal comfort during movement
- ➡1- Foot motion improved
- →2- Less fatigue at the end of the day and a more comfortable

#### COMO S1P SRC





































### - SHOES LIGHT WALKERS



	•	o <sup>©</sup>	<b>HILLIP</b>	<b>V</b>	<u> </u>	
MIAMIXL S1P SRC	Black	Upper: Suede split leather combined with polyester and cotton. Lining: Polyester. Insole: "Deltaplus Air Flow System" - Removable premolded - Polyester on PU. Midsole: injected - Single density PU. Non metallic footwear	36 → 48	C € SIP SRC	540 g	x 10





Anti-perforation composite protective midsole ⇒Increased flexibility at the metatarsal level



### If you are looking for lightness, flexibility and comfort, the Light Walkers range will meet these expectations throughout the day!



The concept of the MIAMI is a simple, innovative idea, with a very good price-comfort ratio for a unique safety shoe: 400q of barefoot

This concept now has a family to meet different user needs: MIAMI, SUMMER, COMO, ARONA and MIAMI X-LARGE.



#### Wide Fitting (mondo 10):

The footwear is suitable for all foot shapes. The shape has been specially designed to meet the sizes and measurements of the average European foot.



"Delta Plus Air Flow system" insole technology Increased breathability and optimal comfort





Comfortable at work and at home, this is what makes MIAMI a unique product. Responding to the needs of the manufacturing trades was our brief to design a range of safety footwear that is worn as if you were at home.

# A lightweight and ventilated system make these shoes particularly suitable for professional activities requiring comfort.

	•	o <sup>©</sup>	<b>JULI</b>	•	$\triangleleft$	<u></u>	
MIAMI S1P SRC	Grey-Navy blue Black	Upper: Polyester and cotton. Insole: Removable preformed - polyester on EVA. Midsole: injected - Single density PU.	0 0 0 0 0 0 0		EN 100 202/ E	442 g	
MIAMI S1P CAMO SRC	Khaki	,	35 → 48	C€	EN ISO 20345 S1P SRC	460 g	x 10
ARONA S1P SRC	Beige Black	Upper: Canvas. Insole: Removable preformed - polyester on EVA. Midsole: injected - Single density PU.	0 0 0 0 0 0		JNU	440 g	



# **AGRO - EXECUTIVE**



	€	o <sup>©</sup>	<b>JULI</b>		<b>V</b>	<u></u>		
MIAMI S2 SRC		Upper: Microfibre/PU. Insole: Removable preformed - polyester on EVA. Midsole: Injected - Single density PU. • Water resistant upper in microfibre • Machine wash up to 30° C, easy to maintain	35 → 48		EN ISO 20345 S2 SRC	402 g	x 10	
ROBION3 S2 SRC	White	Upper: Microfiber Lining: Polyamide. Insole: Preformed removable - Polyester				468 g		
MAUBEC 3 SBEA SRC		on EVA. Outsole: Injected - PU bi-density. • Water resistant upper in microfibre • Machine wash up to 30° C, easy to maintain • Absorbent non woven lining for quick dry	35 → 47	CE	EN ISO 20345 SB A E SRC	524 g	х5	
BRISTOL S3 SRC	Dlook	Upper: Derby light pigmented grain leather. Lining: Polyamide. Insole: Removable - EVA foam. Outsole: Mono density PU. Non metallic shoe.	20 - 10		EN ISO 20345 S3 SRC	494 g	v.10	
RICHMOND S1 SRC	Black	Upper: Oxford light pigmented grain leather. Brogue shoe. Lining: Polyamide. Insole: Removable - EVA foam. Outsole: Mono density PU. Non metallic shoe.	39 → 48	39 → 48	•	<b>EN ISO 20345</b> S1 SRC	486 g	x 10

#### **MIAMI S2 SRC**













#### **ROBION3 S2 SRC**













#### **MAUBEC 3 SBEA SRC**













#### **BRISTOL S3 SRC**

















NON METALLIC →Compatible with security checks (metal detectors)





#### **RICHMOND S1 SRC**





















⇒Softer and more comfort

EVA insole

Reinforced plantar comfort throughout the day Leather upper, S3 treated

→Water repellent upper (Bristol S3 only)



Composite toe cap 200j

- ⇒Lightweight and less fatigue ➡Non conductive hot and cold

Anti-perforation composite protective midsole

- ➡Increased flexibility at the metatarsal level
- ► Except RICHMOND S1



Quilted collar

⇒Great freedom of movement



PU MONO-DENSITY SOLE

- **⇒**Good cushioning
- ⇒Abrasion resistance
- ➡Certified SRC anti-slip resistant

- BOOTS

# WINTER BOOT

COMPOSITE - 100% DELTA-TEX WATERPROOF MEMBRANE



#### **ESKIMO SBHP SRC**

















NON METALLIC **⇒**Compatible with security checks (metal detectors)



Composite toe cap 200j

Lightweight and less fatigue

Non conductive hot and cold



Anti-perforation composite protective midsole ⇒Increased flexibility at the metatarsal level



Felt insole ⇒Better insulation against the cold



Safety boot specially designed for the cold ⇒Suitable for use in outdoor cold environments but also in cold rooms




Canadian WATERPROOF boot combining a pre-moulded PU pad and an impermeable membrane

- ⇒Resistance to extreme cold and snow ⇒Moisture protection

### ESKIMO will be able to protect you safely in all weather conditions.

	æ	o <sup>©</sup>	<b>JULI</b>	<b>V</b>	<u>^</u>	<b>\$</b>
ESKIMO SBHP SRC	Black	Canadian safety boot. Upper: PU and Polyester. Lining: SNOWTEX™ fur-lined and DELTA-TEX™ waterproof polyester membrane + fur-lined polyester collar. Insole: Removable preformed - Felt. Outsole: Injected - Dual density PU resistant to -30°C. Amagnetic boot.	38 → 48	<b>C €</b> SBH P A E FO CI WR SRC	865 g	x5



The DELTA-Tex WATERPROOF membrane, with SNOWTEX polyester lining offers optimal protection against harsh weather and harsh environments. The DELTA-Tex polyester membrane is waterproof and breathable. It offers waterproofing higher than 10,000 mm/  $cm^2$  (ISO 811). Impermeability is measured by placing this membrane under a tube of water (water column). The minimum water height at which the first drops of water pass through this membrane represents its impermeability.

#### PU DOUBLE DENSITY SOLE:

- The PU sole and padding made with specific composition guarantee the PU properties down
- The crampons as well as the SRC sliding resistance provide secure stabilisation on the ladder rungs. They lend a good grip on all types of indoor surfaces (cold rooms) and outdoors.





Following the Nordic markets' demand for boots suited to extreme cold, rain and wind conditions, we designed ESKIMO in order to protect your feet against these elements. The Canadian boot design, the DELTA-TEX™ membrane combined with SNOWTEX™ lining are durably waterproof and insulating.

# **WINTER BOOT**

	æ	o <sup>©</sup>	<b>TITLE</b>		<b>V</b>	<u></u>	
SAKHA S3 SRC	Beige	Upper: Cowhide leather, water resistant treatment S3 with TPR heel	39 → 48			870 g	
SAMARA S3 SRC		protection. Lining: Acrylic fur. Insole: Removable preformed - Polyester on EVA. Outsole: Injected - Dual density PU with front PU reinforcement.		<i>C €</i>	<b>EN ISO 20345</b> S3 CI	882 g	x 5
CADEROUSSE S3 SRC	Black	Upper: Full grain leather, S3 water resistant treatment. Lining: Acrylic furlined. Insole: Preformed removable - Felt. Outsole: Injected - Dual- density PU with bump cap.			SRC	852 g	

#### **SAKHA S3 SRC**














































#### **CADEROUSSE S3 SRC**



























- DUAL DENSITY PU OUTSOLE 1- Hear wearing outsole with toe and heel grip 2- Lateral ladder grips
- ⇒1- Reinforced adhesion on loose ground ⇒2- Secured stabilisation on ladder rungs

	•	o <sup>c</sup>	<b>titit</b>	•	$\triangleleft$	<u></u>	<b>\$</b>
LAUTARET 3		Canadian fur-lined winter working boots. Lining: 100% polyester. Upper: PVC-coated fabric and polyamide Water-repellent treatment. Outsole: Thermoplastic (keeps it's property until -30°C).	38 → 47		<b>EN ISO 20347</b> SRC OB E CI	626 g	x 6
ECRINS S5 SRC	Black	Safety boots. Upper: Bi-injection PVC. Lining: Polyester furlined. Insole: Fixe with aluminium protection. Sole: PVC - Nitrile with cleats - Steel S5 sole. Easy put on with band.	39 → 47	C€	<b>EN ISO 20345</b> S5 CI SRC	1.1 kg	x 5
MORNAS SRC	Green	Bi-injection PVC boot. Collar: PU. Lining: Polyester furlined. Outsole: PVC with cleats.	•• • • • • • • • • • • • • • • • • • •		EN ISO 20347 SRC OB E CI	884 g	х 6

### **LAUTARET 3**















### ECRINS S5 SRC















### **MORNAS SRC**

















### BOOTS

# **RAIN BOOT**

	<b>€</b>	o <sup>o</sup>	<b>t</b> itit.	o	<b>V</b>	_	
GIGNAC2 S5 SRC	Green	Safety boots. Upper: Bi-injection PVC. Lining: Jersey polyester. Puncture-resistant stainless steel plate. Sole: PVC - Nitrile with cleats - Steel S5.	39 → 47	 ( <b>€</b>	EN ISO 20345 S5 SRC	1.20 kg	x 5
JOUCAS2 SRC		Working boots. Upper: Bi-injection PVC. Lining: Jersey polyester. Sole: PVC with cleats.			EN ISO 20347 SRC	1.0 ka	x 6
JOUCAS2 NO SRC	Black			OB E	i.u ky	λ υ	
VIENS2 S4 SRC	White	Safety boots. Upper: Bi-injection PVC. Lining: Jersey polyester. Outsole: PVC - Nitrile with staples.	36 → 47		<b>EN ISO 20345</b> S4 SRC	1.0 kg	x 5
JAVON 2 E	Green	Garden half-boots. Upper: Bi-injection PVC. Lining: Jersey polyester. Sole: PVC with cleats.	39 → 47			788 g	x 6

### **GIGNAC2 S5 SRC**

### **JOUCAS2 SRC**

JOUCAS2 NO SRC



























### VIENS2 S4 SRC

























### JAVON 2 E







# SOLES - LACES - SOCKS



	•	o <sup>©</sup>	<b>LIGHT</b>	<u></u>	
46500	Black-Grey	Spare soles. Polyester on PU.	36 → 48	60 g	x 100
45400	Dlook	Spare soles. Polyamide.	35/36 → 47/48		x 350
22180	···· Black	Round polyamide laces. Length: 100 cm.	One size	 10 g	. F00
LACET XL	Black-Grey	Round polyamide laces. Length: 120 cm.	· One size		x 500
PRATO	Khaki-Green Black-Grey	Antistatic and antibacterial socks. 64% cotton / 17% polyamide / 16% Nostatex® / 3% Lycra®. Anti-stress soft edge. Lycra® stretch. Antishrinking treatment (Prewashed).	39/42 → 43-46	82 g	x 100
CHAUSSETT	Champagne	Acrylic fleeced socks for boots.	One size	 120 g	
CHAUSSON	Grey	100% polyester Isothermic slipper. Rubber band ankle support - width 22 mm.	38/39 → 46/47	 46 g	x 50

### 46500





**45400** 



22180



**LACET XL** 



PRATO




CHAUSSETT



CHAUSSON



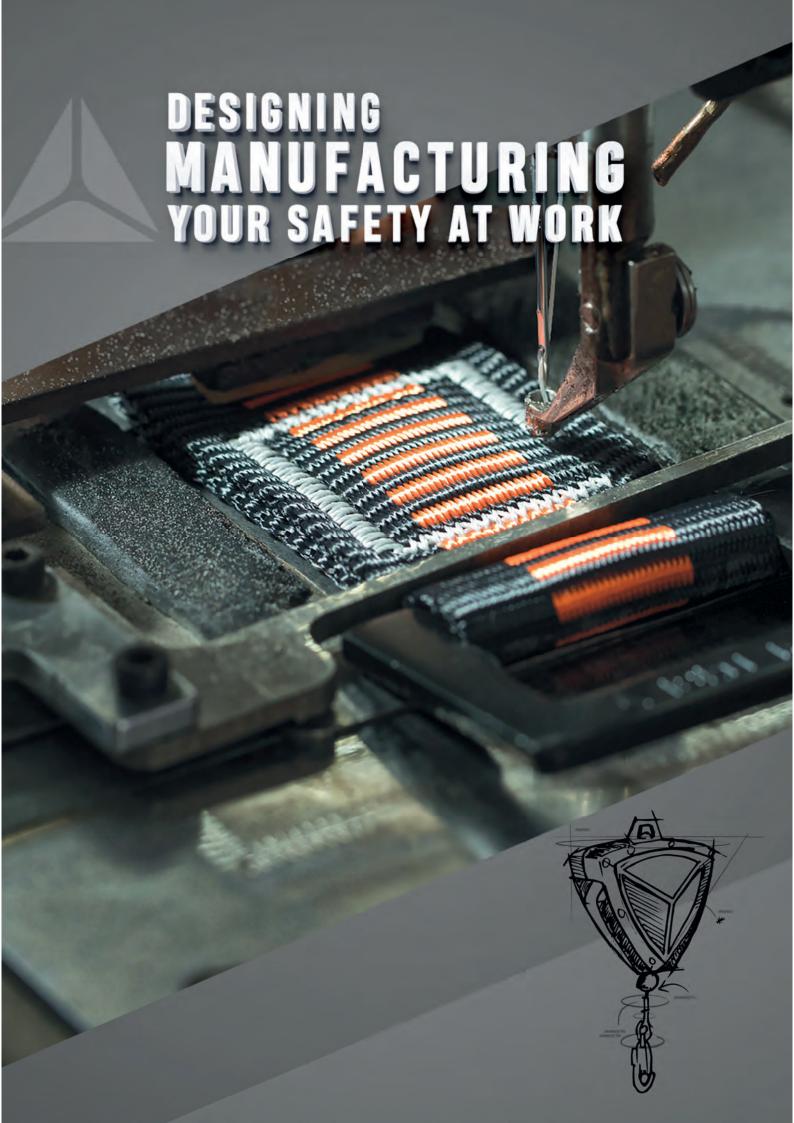

## **FALL PROTECTION**

#### 308 • HELP WITH CHOICE

#### **BODY SUPPORT**

- 320 Fall arrester and suspension harnesses
- 324 Fall arrester harnesses

#### ANCHORAGE - WORK POSITIONING

- 330 Work positioning systems
- 355 Anchorage devices
- 360 Lanyards

#### FALL ARRESTER SYSTEMS

- 332 Kits
- 338 Energy absorbing lanyards
- 344 Retractable fall arresters
- 352 Fall arresters on rope
- 354 Fall arresters on cable
- 371 Accessories and storage bags

#### **CONNECTING SYSTEMS**

361 • Connectors


#### SUSPENSION

362 • Rope access work

#### RESCUE

- 364 Fall arrest and rescue, confined space
- 367 Rescue & evacuation

#### 406 • TECHNICAL INFORMATION








## **HELP WITH CHOICE**

#### **BODY SUPPORT** Suitable protection JAGUAR HAR36TCP 320 GALAGO HAR35TC 322 GALAGO HAR35TCA 322 **EOLIEN HAR35** 324 **EOLIEN HAR35A** 324 ANATOM HAR32 324 HAR44EL 325 HAR42EL 325 367 RAH33 367 HAR25HA 326 HAR24H 326 HAR23H 327 EX220 327 HAR22H 327 HAR14 328 HAR12 328 HAR11 328 HAR12GILNO 328 EX120 328 HARVESGI



### **ANCHORAGE -WORK POSITIONING - CONNECTING SYSTEMS**

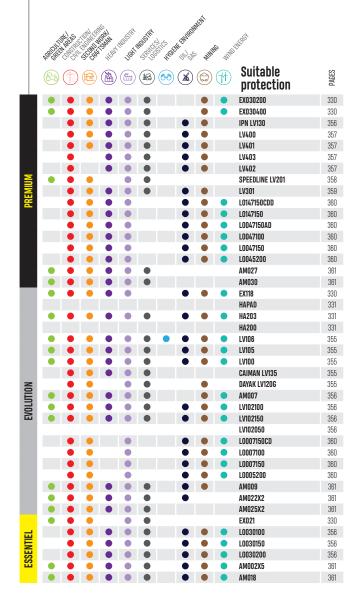



#### **FALL ARRESTER SYSTEMS - RESCUE - SUSPENSION** Suitable PAGES protection ELARA340H 332 ELARA350H 332 ELARA390H 333 AN245200PRR 338 • • AN245200CDD 338 AN240CDD 338 AN235200PR 338 AN235200CD 338 • AN230CD 338 PROTECTOR EXTRA LARGE AN19040T 347 PROTECTOR EXTRA LARGE AN19060T 347 PROTECTOR LOAD AN517 351 PROTECTOR LOAD ANS18 • 351 PROTECTOR LOAD AN530 351 CAMELEON ANOGGA 352 ΔN410 352 CAMELEON ANOGG • 352 ΔN420 352 • AN430 352 AN401 352 • AN701 354 ASCAB ANO71 354 AN801 354 ASCAB ANO24 354 AN802 354 ASCAB ANO25 354 363 PROTECTOR ELEVATOR TR01720F PROTECTOR ELEVATOR TRO1720T 348 PROTECTOR ELEVATOR TR01730F 348 PROTECTOR ELEVATOR TR01730T TRBAG3 371 TRBAG 371 TRA20 364 TRA22\_ 364 TRA30 364 • TRA32 364 TRA101 • 364 . TRA102 364 TRA103 364 • • • • TROO3C 364 TROO3K 364 • GIRAFF TRG20 366 TRG01 366 TRG02 366 TRG03 366 TC022 367 TC102C 367 RESCUEHUB TC063 • 368 • DESCENDER TC062 370 • • ROPE ACCESS KIT TCO39 370 370 • TC001 362 362 TC003 362 • SAFECORD TCOO7 362 DESCORD TC006 362 TC004 362 TC044 362 363 TC005 TC015 363 • TC016 363 • TC025 363 • • • • • TC040 363 TC029 363

	REALCHE	GHELL WELL	St.Ch	KIS, HERY	MULTER	HUISTRY	SICS HAGINE	OII] <sup>CU</sup> S	MININ	MAIN	MEE <sup>t</sup>	
	6-9					<b>1</b> 63)		<b>X</b> ) (		1	Suitable protection	PAGES
										•	ELARA320	333
		•	•		•						ELARA280	334
											ELARA270	334
		•	•			•					ELARA170	33
		•									ELARA150	335
		•	•								ELARA140	336
										•	AN218S200CDD	339
		•	•	•		•					AN218R2CDD	339
			•								AN208S200CD	33
		•	•		•	•					AN208R2CD	339
		•									PROTECTOR TETRA AN15006F	344
		•		•	•	•					PROTECTOR TETRA AN15006T	344
		•		•		•					PROTECTOR TETRA AN15010F	344
		•		•	•						PROTECTOR TETRA AN15010T	344
					•						PROTECTOR TETRA AN15015F	344
											PROTECTOR TETRA AN15015T PROTECTOR TETRA AN14006F	346
											PROTECTOR TETRA ANI4006T	346
											PROTECTOR TETRA AN14008F	346
5											PROTECTOR TETRA AN14008T	346
EVOLUTION											PROTECTOR LARGE AN18020T	347
											PROTECTOR LARGE AN18030T	347
											PROTECTOR METAL AN115F	348
				•		•					PROTECTOR METAL AN115T	348
		•		•	•						PROTECTOR METAL AN116F	348
				•		•					PROTECTOR METAL AN116T	348
											PROTECTOR METAL AN11730F	348
		•	•	•	•	•					PROTECTOR METAL AN11730T	348
		•									MAXIBLOC AN10006T	349
											MAXIBLOC AN10010T	349
								•			MEDBLOC AN13006C	349
		•	•					•		•	MINIBLOC AN102	350
		•						•			FIXBLOC AN105	350
	•	•		•	•	•		•		•	ASDRISS2 ANO68	352
								•			ASCORD ANO65	350
											AN30010	350
											AN30020	350
											AN30030	350
											ELARA190	336
											ELARA130 ELARA160	337
											AN201200CC	340
										•	AN211200CCC	340
											AN201200CD	340
						•					AN211200CDD	340
		•				•					AN203200CC	34
		•			•	•				•	AN213200CCC	34
ESSENTI		•	•			•					AN203200CD	34
ES		•								•	AN213200CDD	34
		•	•	•		•				•	AN213100CDD	342
		•									AN203100CC	342
		•	•		•						FENNEC ANO6310	350
		•									FENNEC ANO6320	350
											FENNEC ANO6330	350
		•									RA038_	37
											TC008	371



## **HELP WITH CHOICE**



# **POSITIONING**

## **ROPE ACCESS WORK**

## RESCUE

2




EN 358 RESTRAINT



HARNESSES

EN 567







ROPE ACCESS WORK













## **HELP WITH CHOICE**

### **FALL ARREST**

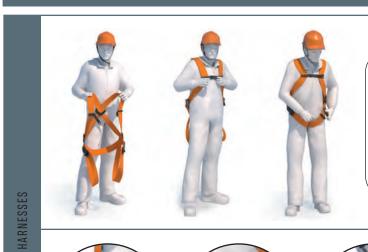

REF	SIZES	1	2
CT			
GT	S-M-L	<195 cm	<110 cm
XX	XL-XXL	>190 cm	>105 cm
		3	4
GT	S-M-L	<115 cm	<65 cm
XX	XL-XXL	>110 cm	>60 cm
	GT	GT S-M-L	3 GT S-M-L <115 cm







F0

2 m













F1

m 7

F2

E 9


































## **POSITIONING**

## ROPE ACCESS WORK

## RESCUE































## **SAFETY INFORMATION - READY TO USE PROTECTION**





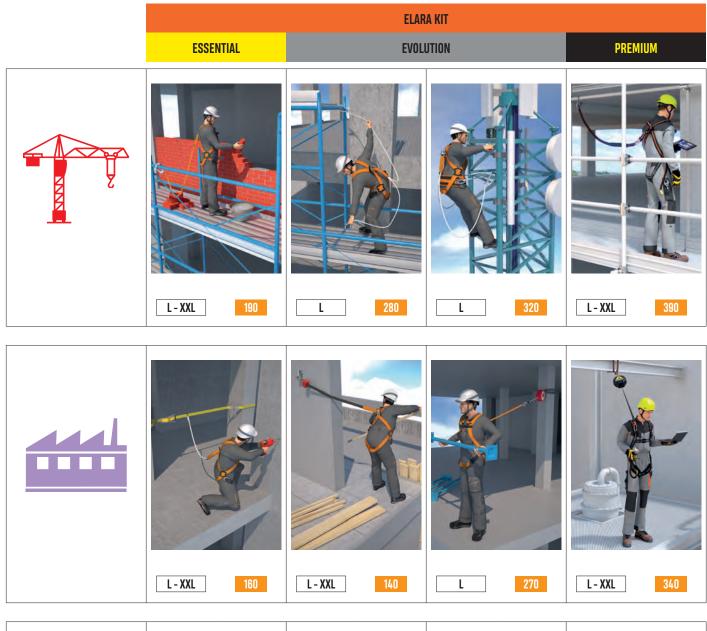





L-XXL 130



L 150



L - XXL 170



L - XXL

350



# HELP WITH CHOICE LIFETIME







#### WE ARE PROUD TO PRESENT OUR INNOVATIVE IDENTITY CARD



for all our Fall Arrest Products (except the carabiners). Since mid-2015, in addition to the compulsory printed label, our products have an electronic microchip indicating:

- ▶ PRODUCT REFERENCE
- SERIAL NUMBER
- MANUFACTORING DATE

Using an Android or Windows mobile phone having technology,



NFC

(Near Field Communication)


any user can scan the tag ((N)) and download our free "DELTA PLUS ID CARD" APP from our Website.





#### **USING APP ON YOUR SMARTPHONE**

- 1. After flashing NFC tag, user can write/read:
- THE WEARER'S PRODUCT NAME.
- THE COMMISSIONING DATE OF THE PPE.
- 2. The Official Service Center (SAV) will write:
- > THE DATE OF EACH ANNUAL CONTROL.
- 3. Both user and controller can check anytime:
- > THE STATUS OF PRODUCT CONTROLS.





A PPE DATABASE is included to check anytime all the inventoried products.

#### ANNUAL CHECK REMINDER SERVICE

After creating all your products on the APP, you will receive an email 15 days before each compulsory annual control.


A full access to a more complete PPE DATABASE is available on our website using the same login/password as on ID Card Application.

ID Card App and Website databases are synchronized for using both tools together. It's up to you to use both or only one of them.





## FALL ARRESTER AND SUSPENSION HARNESSES

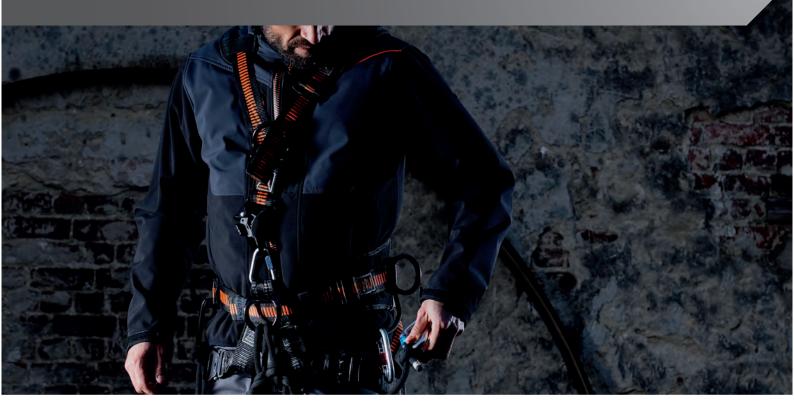

	o <sup>c</sup>	<b>j</b> jju <b>j</b>	<b>S</b>	<u></u>	
JAGUAR HAR36TCP	Two colour harness with positioning belt for rope access work. 2 fall arrest anchorage points (dorsal-sternal). Positioning and seat belt with thermoformed large back and shorts. 3 work positioning attachment points (2 lateral and 1 on back). 1 suspension point (ventral). 1 ventral blocker for rope access. 6 adjustable buckles, of which 2 are automatic. 1 carabiner.	S/M/L XL/XXL	EN361 150 kg EN358 150 kg EN813 150 kg EN12841 TYPE B EN362	2.4 kg	x 5

#### **JAGUAR HAR36TCP**






















Comfortable with the thermoformed backrest and thigh with sponge lining and comfort pad

⇒Increased comfort



Tested at 150 kg →No problem related to the weight of the tools transported or other





2 accessory attachment holders incorporated into the belt

→Anchorage carabiners, lanyards



Automatic buckles ⇒Quick and easy set-up and adjustment



### Comfort and multiple functionality for rope work.



#### 1- Comfort and speed of implementation.

6 adjustment buckles 180° belt rotation


#### 2- Dedicated to rope access

Ventral point of suspension Integrated ventral stopper

#### 3- Functional and safe

Certified 150 kg 3 work positioning points Fall indicator

The strap, developed by our R&D department and woven in our factories, allows to have a real flexibility and thus to accentuate the notion of comfort for the user.

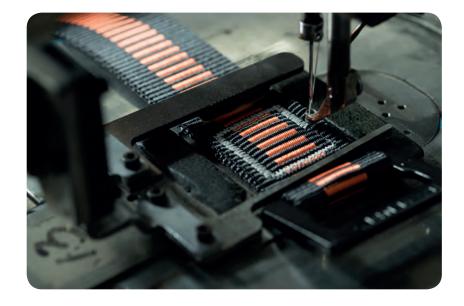



To optimise the progression of the user on his rope, we integrated a stopper on the harness, because it gives him a better stability.

David Naulin, Fall Protection Product Expert



# FALL ARRESTER AND SUSPENSION HARNESSES

	o <sup>©</sup>	<b>JUL</b>	<b>V</b>	<u></u>	
GALAGO HAR35TC	Two colour harness with belt: 2 fall arrester anchorage points (back - front). Positioning belt with thermoformed back and shorts, 2 work positioning attachment points (lateral). 1 suspension point. 8 adjustable buckles, 1 carabiner.	S/M/L	EN361 150kg	2.2 kg	v.E
GALAGO HAR35TCA	Two colour harness with belt: 2 fall arrest anchorage points (dorsal-sternal). Positioning belt with thermoformed back and shorts. 2 work positioning attachment points (lateral). 1 suspension point. 8 adjustable buckles, of which 4 are automatic. 1 carabiner.	XL/XXL	150kg <b>EN813</b> 150 kg	2.6 kg	ΧĴ

#### **GALAGO HAR35TC**



















Comfortable with the thermoformed backrest and thigh with sponge lining and comfort pad ⇒Increased comfort



Tested at 150 kg

→No problem related to the weight of the tools transported or other





2 accessory attachment holders incorporated into the belt

→Anchorage carabiners, lanyards and tools



2 quick release buckles to adjust or remove the shoulder straps to get a shorts belt EX320TC ⇒Can only be used as a harness for positioning

#### **GALAGO HAR35TCA**
























Automatic buckles

⇒Quick and easy set-up and adjustment





## **FALL ARRESTER HARNESSES**

	o <sup>©</sup>	<b>HILL</b>	•	$\checkmark$	<u></u>	
EOLIEN HAR35	Two colour harness with positioning belt. 3 fall arrester attachment points (back-front right side - front left side). 4 adjustable buckles in light alloy. 2 automatic buckles. Positioning belt with thermoformed back closed with wide Velcro for more comfort. 180° rotation. 2 lateral anchorage points. 1 adjustment loop. Sponge back lining.	C/M/L/		<b>EN361</b> 150 kg		
EOLIEN HAR35A	Two colour harness with positioning belt. 3 fall arrester attachment points (back-front right side - front left side). 4 adjustable buckles. Positioning belt with thermoformed back closed with wide Velcro for more comfort. 180° rotation. 2 lateral anchorage points. 3 adjustable automatic buckle. Sponge back lining.	S/M/L/ XL/XXL	C€	<b>EN358</b> 150 kg	2 kg	x 5
ANATOM HAR32	Two colour harness. 2 fall arrester anchorage points (back - front). 4 adjustable buckles.	3 / / 3 3 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6		<b>EN361</b> 150 kg	1.3 kg	

#### **EOLIEN HAR35**





















1234910 7 8 9 11 12















Soft padding on shoulders and thigh straps

- Removable back protection
- →Increased comfort



Fall indicator ⇒Easy visual verification







180° rotation ➡Easy rotation of the basin









2 accessory attachment holders incorporated into the belt

→Anchorage carabiners, lanyards and tools



Automatic buckles →Quick and easy set-up and adjustment





**ANATOM HAR32** 















## 123459 678911



Soft padding on shoulders and thigh straps





➡Easy visual verification





Tested at 150 kg →No problem related to the weight of the tools transported or other



Automatic buckles ⇒Easy implementation





	o <sup>©</sup>	iggi	<b>V</b>	<u> </u>	
HAR44EL	Dielectric harness with positioning belt. 2 fall arrester anchorage points (back - front). 4 adjustable buckles. Positioning belt with thermoformed back closed with wide Velcro for more comfort. 180° rotation. 2 lateral anchorage points for work positioning. Sponge back lining. Buckles with plastic coating. Material insulates to 20kV.	S/M/L/ XL/XXL	EN361 EN358 <b>C €</b>	2 kg	x 5
HAR42EL	Dielectric harness. 2 fall arrester anchorage points (back - front). 4 adjustable buckles. Buckles with plastic coating. Material insulates to 20kV.		EN361	922 g	

### HAR44EL

















2 accessory attachment holders incorporated into the belt →Anchorage carabiners, lanyards and tools



180° rotation ⇒Easy rotation of the basin





DIELECTRIC ⇒Insulator up to 30KV

Tested at 150 kg →No problem related to the weight of the tools transported or other

#### HAR42EL



















# **FALL ARRESTER HARNESSES**

	o <sup>©</sup>	<b>J</b> JJJJ <b>J</b>			<u></u>	
HAR25HA	Harness with positioning belt. 2 fall arrest anchorage points (dorsal - sternal). 6 automatic adjustable buckles. Positioning belt with thermoformed back closed by large velcro. 2 lateral work positioning anchorage points. 1 extension lanyard.	S/M/L/	(6	<b>EN358</b> 150 kg <b>EN361</b>	1.8 kg	v 5
HAR24H	Harness with positioning belt. 2 fall arrest anchorage points (back - front). 6 adjustable buckles. Positioning belt with thermoformed back closed with wide Velcro. 180° rotation. 2 lateral anchorage points for work positioning.	XL/XXL		150 kg <b>EN813</b> 150 kg	1.7 kg	λŪ



















180° rotation

⇒Easy rotation of the basin



Automatic buckles ⇒Quick and easy set-up and adjustment





2 accessory attachment holders incorporated into the belt

→Anchorage carabiners, lanyards and



Tested at 150 kg ➡No problem related to the weight of the tools transported or other

#### HAR24H


















Fall indicator

⇒Easy visual verification



2 accessory attachment holders incorporated into the belt

→Anchorage carabiners, lanyards and tools





180° rotation ⇒Easy rotation of the basin



→No problem related to the weight of the tools transported or other

	o <sup>©</sup>	<b>HILLIP</b>	<b>V</b>	<u></u>	<b>\$</b>
HAR23H	Harness with 3 fall arrest anchorage points (back - right front side - left front side). 5 adjustable buckles.		EN361	1.3 Kg	
HAR22H	Harness with 2 fall arrester anchorage points (back - front). 5 adjustable buckles.	S/M/L/ XL/XXL	150 kg <b>C €</b>	1 Kg	x 5
EX220	Positioning belt with thermoformed back closed with wide Velcro for more comfort. 180° rotation. 2 lateral anchorage points. 1 adjustment loop. Sponge back lining.		<b>EN358</b> 150 kg	712 g	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0

#### HAR23H


















Fall indicator ⇒Easy visual verification



Tested at 150 kg ►No problem related to the weight of the tools transported or other



#### HAR22H


















Fall indicator ⇒Easy visual verification



Tested at 150 kg ►No problem related to the weight of the tools transported or other



#### **EX220**

















180° rotation ⇒Easy rotation of the basin





## **FALL ARRESTER HARNESSES**

	o <sup>c</sup>	<b>HILLIP</b>		<b>Y</b>	_	*
HAR14	2 fall arrester anchorage point harness (back - front). 2 adjustment loops. 2 adjustable lateral plates. Positioning belt with broad thermoformed back. Sponge lining. 2 anchorage points for work positioning.			<b>EN358</b> 140 kg <b>EN361</b> 140 kg	1.1 kg	
HAR11	1fall arrester anchorage point harness (back). 2 adjustment loops. 2 adjustable lateral plates.	S/M/L/ XL/XXL			624 g	0 0 0 0 0 0
HAR12	2 fall arrester anchorage point harness (back - front). 2 adjustment loops. 2 adjustable lateral plates.	AL/AAL	C€	<b>EN361</b> 140 kg	730 g	x 10
HAR12GILNO	Harness with work vest not removable: Harness (Ref. HAR12). Vest: 100% polyester. Polyester Mesh lining. Zip closure. 4 pockets including 1 phone pocket. Adjustable size by zip.	7			1.1 kg	
EX120	Positioning belt with thermoformed back. 2 lateral anchorage points for work positioning. 1 adjustment loop. Sponge back lining.	One size	7	<b>EN358</b> 140 kg	400 g	

#### HAR11













#### HAR12

















### **EX120**















### HAR12GILNO





















### Intuitive and fast set-up

#### HAR14


















#### 1- Intuitive

Bi-colour strap ensuring correct positioning of the harness Only 2 adjustment loops. Adjustable side plates for better adjustment of the

#### 2- Ergonomics

Ultra light thanks to a thin but ultra compact strap

The 100% integrated construction allows the flexibility to create different typologies of straps, whether in the weaving technique, or, as in the case of the harnesses in the Essential range, to have a colour on each side.







David Naulin, Fall Protection Product Expert



# WORK POSITIONING SYSTEMS

	o <sup>©</sup>	<b>LIVIA</b>	$\overline{\lor}$	<u></u>	
EX030200	Lanyard tensioner equipped with a rope and 1 AMO10 carabiner. The positioning device allows adjustment of the distance between the operator (with work positioning belt)	0,20 → 2 m		998 g	
EX030400	and the structure. Lanyard: Braided rope ø 11mm with manufactured ends. (See ANO66 description too)	0,20 → 4 m		1.2 kg	x 5
EX118200A EX118400A	Adjustable work positionning lanyard via stainless steel tensioner. Adjustable length. Stranded rope Ø 14 mm equipped with a wear indicator. Thimble loop. Splice protection. Protective sheath. 1 hook.	0,20 → 2 m 0,20 → 4 m	C€ EN358	872 g 1.1 kg	
EX021	Adjustable work positionning lanyard via reducer. Adjustable length. Stranded rope Ø 12 mm. Protective sheath on the splices.	1,10 → 2 m		306 g	x 15

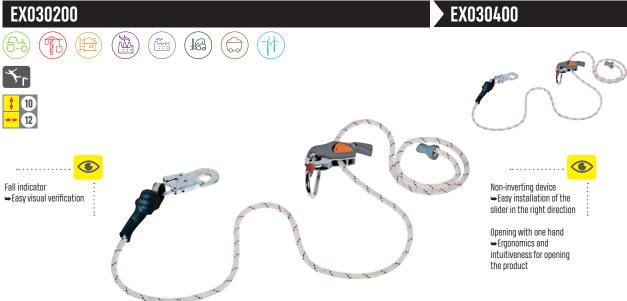

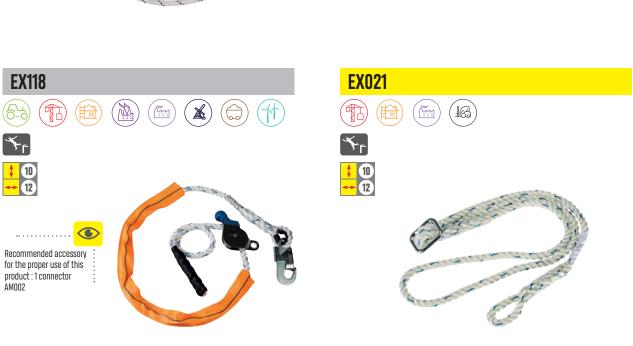

## **FALL ARRESTER HARNESSES**



	o <sup>©</sup>	<b>Juli</b>	$\checkmark$	<u></u>	
HARVESGI	Vest. Zip fastening. 4 pockets including 1 phone pocket. Adjustable size by zip. High visibility: Class 1 - Silver colour - Shoulder-belt assembly.	One size	EN ISO 20471 CLASS 1		x 10
LV102050	Extension strap in high tenacity polyester with D-ring. Width 45 mm. End loop with shrinkage and steel anchor D.	0,50 m	EN795 TYPE B EN354	300 g	x 15
HAPAD	Comfort pad for back.			170 g	x 10
HA203	Pair of straps enabling blood circulation in the legs after a fall while waiting for help. Adjustable for any type of harness by positioning on the side straps. Ease and speed of implementation. Carrying case.	One size		80 g	x 25
HA200	Tool holder. Extended length: 1 m. Maximum working load: 4 kg.			60 g	x 20

### HARVESGI



4 M



















#### HAPAD

HA200



### **HA203**



































## **KITS**

	o <sup>©</sup>	<b>JUL</b>	₹	<u></u>	
ELARA340H	INDUSTRY 6 M - ready for use fall arrest kit: Harness with 3 fall arrester anchorage points (backright front side - left front side). 5 adjustable buckles (Ref. HAR23H). Self retractable fall arrester with polyester webbing 25 mm. ABS protection. Swivel with fall indicator. 1 carabiner AM002 (Ref AN13006C). Anchorage ring with high tenacity polyester strap. Width 45 mm. End loop with shrinkage and steel anchor D (ref. LV102100). Comfort pad for back (Ref. HAPAD). 1 tool holder (Ref. HA200). 1 carabiner AM002.		EN360 EN361 EN362 EN795 TYPE B	4.1 kg	x 5
ELARA350H	SERVICES - ready for use fall arrest kit: Harness with positioning belt. 2 fall arrest anchorage points (back - front). 6 adjustable buckles. Positioning belt with thermoformed back closed with wide Velcro. 180° rotation. 2 lateral anchorage points for work positioning (ref. HAR24H). Fall arrest sliding on anchorage line stranded rope Ø 14 mm, opening type, equipped with automatic locking, non-inverting device, energy absorber with fall indicator (ref. AN065). Anchorage line stranded rope Ø 14 mm (ref. AN30010). Adjustable work positionning lanyard via reducer. Adjustable length. Stranded rope Ø 12 mm. Protective sheath on the splices (ref. EX021). Anchorage ring with high tenacity polyester strap. Width 45 mm. End loop with shrinkage and steel anchor D (ref. LV102100). 1 tool holder (ref. HA200). 2 carabiners AM002.	S/M/L/ XL/XXL	EN353-2 EN358 EN361 EN362 EN795 TYPE B	5.2 kg	х3

### ELARA340H



























### ELARA350H



































	o <sup>to</sup>	<b>LIGHT</b>	V	<u></u>	•
ELARA390H	CONSTRUCTION - ready for use fall arrest kit: Harness with 2 fall arrest anchorage points (back - front). 5 adjustable buckles (Ref. HAR22H). Fall arrest with energy absorber elastic strap.  Thimble loops. Equipped with 1 AM002 carabiner + 1 AM022 hook (Ref. AN235200CD). 1 tool holder (Ref. HA200). 1 carabiner AM002.	S/M/L/ XL/XXL	EN355 EN361 EN362	2.8 kg	
ELARA320	POSITIONNING & SCAFFOLDING - ready for use fall arrest kit: 2 fall arrester anchorage point harness (back - front). 2 adjustment loops. 2 adjustable side plates. Positioning belt (Ref. HAR14).  Adjustable work positionning lanyard via reducer. Length of 1.1 to 2 m. Stranded rope 0 12 mm (Ref. EXO21). Fall arrester with energy absorber in double stranded rope (Y) 0 12mm. Length 2 m. 1 AM002 carabiner and 2 AM022 hooks (Ref. AN211200CDD) 2 connectors AM002.	S/M/L	€ EN355 EN358 EN361 EN362	3.5 kg	x 5

### ELARA390H





















Storage bag





























### - FALL ARRESTER SYSTEMS

## **KITS**

	o <sup>©</sup>	<b>AUTU</b>	,		<u></u>	
ELARA280	SCAFFOLDING - ready for use fall arrester kit: 2 fall arrester anchorage point harness (back - front). 2 adjustment loops. 2 adjustable side plates. (Ref. HAR12). Fall arrester with energy absorber in double stranded rope (Y) Ø 12mm. Length 2 m. 1 AM002 carabiner and 2 AM022 hooks (Ref. AN211200CDD)			EN355 EN361 EN362	2.5 kg	x 5
ELARA270	VERTICAL 10 M - Ready for use fall arrester kit: 2 fall arrester anchorage point harness (back - front). 2 adjustment loops. 2 adjustable side plates. (Ref. HAR12). Self retractable fall arrester with steel strap. Length 10 m. ABS case. 1 automatic swivel connector and fall indicator AM016 (Ref. AN12010T). Lanyard and anchorage point in tubular strap, length 2 m (Ref. L0030200). 2 connectors AM002.	S/M/L	C€	EN354 EN360 EN361 EN362 EN795 TYPE B	9.1 kg	<b>x</b> 1

### ELARA280











































	o <sup>©</sup>	<b>JULI</b>		<b>V</b>	<u> </u>	•
ELARA170	ROOF - ready for use fall arrester kit: 2 fall arrester anchorage point harness (back - front). 2 adjustment loops. 2 adjustable side plates. (Ref. HAR12). Sliding non opening fall arrester set with fall indicator on stranded rope anchorage line Ø 12 mm, length 20 m. (Ref. AN063/20). 2 connectors AM002.	S/M/L/ XL/XXL		EN353-2	3.4 kg	
	ROOF - ready for use fall arrester kit: 2 fall arrester anchorage point harness (back - front). 2 adjustment loops. 2 adjustable side plates. (Ref. HAR12). Sliding non opening fall arrester set with fall indicator on stranded rope anchorage line Ø 12 mm, length 10 m (Ref. AN063/10). 2 connectors AM002.	S/M/L	Ce	EN361 EN362	2.4 kg	ХЪ

### ELARA170












































# - FALL ARRESTER SYSTEMS KITS

	o <sup>o</sup>	<b>LIGHT</b>	•		<u></u>	<b>*</b>
ELARA140	VERTICAL 2.50 M - Fall arrester kit ready for use: 2 fall arrester anchorage point harness (back - front). 2 adjustment loops. 2 adjustable side plates. (Ref. HAR12). Self retractable fall arrester with 46 mm strap with energy absorber. Protection case. 1 connector AM002 (Ref. AN102). 1 connector AM002.	S/M/L/	<i>CC</i>	EN360 EN361 EN362	1.9 kg	VE
ELARA190	SCAFFOLDING - ready for use fall arrester kit: 2 fall arrester anchorage point harness (back - front). 2 adjustment loops. 2 adjustable side plates. (Ref. HAR12). Fall arrest with energy absorber with lanyard strap, length 2 m, equipped with 1 connector AM002 and 1 AM022 hook (Ref. AN203200CD).	XL/XXL		EN355 EN361 140 Kg EN362	1.8 kg	ΧŪ

## ELARA140











































	o <sup>©</sup>	<b>Little</b>	•	<b>V</b>	<u></u>	
ELARA130	RESTRAINT - ready for use kit: 1 fall arrester anchorage point harness (back). 2 adjustment loops, 2 adjustable side plates with lanyard in irremovable stranded rope Ø 12 mm. Length 1.50 m. 1 connector AM002.	S/M/L/ XL/XXL	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	<b>EN358</b> 140 kg	900 g	
ELARA160	CLASSIC - ready for use fall arrester kit: 1 fall arrester anchorage point harness (back). Two adjustment loops, 2 adjustable side plates with fall arrester with not removable energy absorber in stranded rope Ø 12mm, length 2 m. 1 carabiner AM002.	S/M/L/ XL/XXL	C€	EN361 EN355	946 g	х5

### ELARA130





































## **ENERGY ABSORBING LANYARDS**

	o <sup>c</sup>	<b>JULU</b>	C	)	<b>V</b>	<u></u>	
AN245200PRR	Dielectric fall arrest with energy dissipater in double elastic strap (Y). Thimble loops. Equipped with 1 carabiner AM010D + 2 hooks AM022D. Material insulates to 30kV.		<b>AMO10D</b> x1	₽x2 AM022D		1.9 kg	
AN235200PR	Dielectric fall arrest with energy dissipater in elastic strap. Thimble loops. Equipped with 1 carabiner AM010D + 1 hook AM022D. Material insulates to 30kV.		<b>A</b> x 1	<b>₽</b> x1 AM022D		1.2 kg	
AN245200CDD	Fall arrest with energy dissipater in double elastic strap (Y). Thimble loops. Equipped with 1 carabiner AM002 + 2 hooks AM022.		X1 AM002	AM022 x 2		1.6 kg	
AN235200CD	Fall arrest with energy absorber elastic strap. Thimble loops. Equipped with 1 carabiner AM002 + 1 hook AM022.	1,40 → 2 m	X1 AM002	x1 AM022	<b>C €</b> EN355	994 g	х5
AN240CDD	Fall arrester with extensible energy absorber in double woven webbing (Y) with integrated crumple on the lanyard. Retracted length: 1.40 m. Stretched length: 2 m. 1 carabiner AM002. 2 hooks AM022.		X1 AM002	AM022 x 2		1.8 kg	3 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
AN230CD	Fall arrester with energy absorber in woven webbing with integrated crumple on the lanyard. Retracted length: 1.40 m. Stretched length: 2 m. 1 Screw lock carabiner in galvanized steel, opening 17 mm (AM002). 1 Automatic hook lock in galvanized steel, large opening 55 mm (AM022).		x1	2 x1		1kg	

#### AN245200PRR



AN235200CD























#### AN245200CDD

**169 67891** 























#### AN240CDD

















#### Energy dissipater in woven strap with integrated crumple on the lanyard

Reduced resting length limits discomfort to the operator and the risk of stumbling

Protective sheath on loops to reduce wear caused by the friction of connectors

#### AN230CD

















	o <sup>©</sup>	<b>LIGUE</b>		)	<b>V</b>	_	<b>\$</b>
AN218S200CDD	Fall arrester with energy absorber in double braided rope (Y) Ø 10.5 mm with shrink tubing to compress the lanyard. Thimble loops.	- 2 m	X1 AM002	AM022 x 2		1.9 kg	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
AN208S200CD	Fall arrester with energy absorber in braided rope Ø 10.5 mm with shrink tubing to compress the lanyard. Thimble loops.	2 m -	X1 AM002	2 x1	<b>( €</b> EN355	1.2 kg	x 5
AN218R2CDD	Fall arrester with energy absorber in double braided rope Ø 12 mm (Y), adjustable by means of two gear rings on the rope.	1.50 → 2 m	X1 AM002	X 2 AM022		1.9 kg	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
AN208R2CD	Fall arrester with energy absorber in braided rope Ø12 mm, simple and adjustable by means of a gear ring on the rope.	1,50 - 2111	X1 AM022	x1 AM022		1.2 kg	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0

### AN218S200CDD



































### AN218R2CDD



4



























## **ENERGY ABSORBING LANYARDS**

	o <sup>©</sup>	<b>tille</b>	0	<b>V</b>	<u></u>	
AN201200CC	Fall arrester with energy absorber in stranded rope Ø 12 mm.	in stranded rope Ø 12 mm.  2 m  AM002  AM002  X1  AM022  X1  AM022  C € EN355		800 g		
AN201200CD	Thimble loops.		x1	C€ EN355	11 l/a	x 5
AN211200CCC	Fall arrester with energy absorber in stranded rope (Y) Ø 12 mm.				1.1 kg	
AN211200CDD	Thimble loops.		x1		2 kg	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0

#### AN201200CC

















#### AN201200CD















#### AN211200CCC





















4

† 1 4 9 + 8 9 11



















	o <sup>©</sup>	<b>LILLIA</b>	0	<b>V</b>	<u></u>	
AN203200CC	Fall arrester with energy absorber in lanyard webbing. Thimble loops.	x1		668 g	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
AN203200CD	r an arrester with energy ausorber in langard webbing. Hillible 100ps.			C C ENGE	1kg	x 5
AN213200CCC	Fall arrester with energy absorber in double lanyard webbing (Y).	Z III	x1  x2 AM002	C EN299	1.3 kg	ΧŪ
AN213200CDD	Thimble loops.		x1		1.6 kg	







## **ENERGY ABSORBING LANYARDS**

	o <sup>©</sup>	<b>LILLIA</b>	0	$\overline{\mathbf{v}}$	<u></u>	
AN213100CDD	Fall arrester with energy absorber in double lanyard webbing (Y). Thimble loops.		x1	<b>( €</b> EN355	1.3 kg	v 5
AN203100CC	Fall arrester with energy absorber in lanyard webbing. Thimble loops.	- 1m	x1	C EN200	600 g	A J

### AN213100CDD















### AN203100CC





















### Identifying a usage factor is complex. With this device no more hesitation possible: it is the safest factor.







#### 1-Ergonomics

Easy anchoring thanks to its large connectors

The length of 1m reduces the air draft in factor 1 Impossible to position in factor 2

The No Shock absorber system developed by Delta Plus makes it possible to find the right compromise between braking force and stopping distance for a better safety of the operator.



The failure to recognise or to take into account the air draft as a fall factors is a problem for some companies who want to ensure that their employees are always in a secure position. That's why we created these 1m long absorbers: the employer ensures the safety of the user with a reduced air draft and the impossibility of anchoring in factor 2.

David Naulin, Fall Protection Product Expert



# RETRACTABLE FALL ARRESTERS

	<b>o</b> o	<b>LIJUA</b>	0	<b>V</b>	<u>^</u>	
PROTECTOR TETRA AN15006F	Self retractable fall arrester with galvanised steel cable with integrated energy absorber. ABS case. Fall indicator. Inertia locking system.	6 m	≈ x 1 AM020		5.6 kg	
PROTECTOR TETRA AN15015F		15 m	≈ x 1 AM020	C € EN360 150 kg	6.5 kg	
PROTECTOR TETRA AN15006T		6 m	× 1 AM016		5.6 kg	
PROTECTOR TETRA AN15015T		15 m	x 1 AM016		6.5 kg	XI
PROTECTOR TETRA AN15010F		10 m	≈ x 1 AM020		5.8 kg	
PROTECTOR TETRA AN15010T		10 m	<b>→</b> x 1 AM016		5.3 kg	2 2 3 4 6 6

### **PROTECTOR TETRA**















Fall indicator ightharpoonupEasy visual verification





2 integrated carrying handles ⇒Easy to transport and set-up



Tested at 150 kg

➡No problem related to the weight of the tools transported or other

High strength ABS casing →High impact resistance



### Link performance with ergonomics



ABS shock casing for a very high resistance Certified 150 kg Excellent reactivity and very low braking force thanks to a mechanical system specifically developed for these type of results



Brake discs prepared during manufacture by running them in order to be 100% efficient from the first use. This preparation, which consists of carrying out a calibration of the whole brake system, makes it possible to have the best possible compromise between braking force and fall stopping distance.



Innovation developed thanks to the know-how of FROMENT, our historical subsidiary expert in mechanical systems, this TETRA range is acclaimed by professionals who work at height.

David Naulin, Fall Protection Product Expert



# RETRACTABLE FALL ARRESTERS

	o <sup>o</sup>	ijiji	0		lacksquare	<u></u>	
PROTECTOR TETRA AN14006F	6 Self retractable fall arrester with webbing with energy absorber.	Cm	≈ x 1 AM021		EN360 HORIZONTAL CERTIFICATION 100 kg	5.4 kg	
PROTECTOR TETRA AN14006T			<b>⊶</b> x 1 AM016	<i>.</i>			1
PROTECTOR TETRA AN14008F	ABS case. Fall indicator. Inertia locking system.	8 m	≈ <b>==</b> \$ x 1 AM021	7		5.4 kg	X1
PROTECTOR TETRA AN14008T	8		<b>→</b> x 1 AM016			•	

### **PROTECTOR TETRA**















Fall indicator ⇒Easy visual verification







2 integrated carrying handles ⇒Easy to transport and set-up

High strength ABS casing ➡High impact resistance

Tested at 150 kg →No problem related to the weight of the tools transported or other



	o <sup>c</sup>	<b>j</b> jju <b>j</b>	0	$\checkmark$	<u></u>	
PROTECTOR EXTRA LARGE AN19040T	Self retractable fall arrester with Ø 4,8 mm steel cable with integrated	40 m	× 1 AM016	<b>C €</b> EN360	21.1 kg	- x1
PROTECTOR EXTRA LARGE AN19060T	energy absorber. ABS case. Fall indicator. Inertia locking system.	60 m	×1 AM016		30.5 kg	
PROTECTOR LARGE AN18020T	Sell lettactable tall attester with dalvallisen steel caple with	20 m	×1 AM016		11.5 kg	
PROTECTOR LARGE AN18030T	tegrated energy absorber. ABS case. Fall indicator. Inertia locking stem.	30 m	×1 AM016		12.35 kg	* * * * * * * * * * * * * * * * * * *

### PROTECTOR EXTRA LARGE


















IP66 waterproof stainless steel cable ⇒Resistance in aggressive environments





Fall indicator ⇒Easy visual verification

PROTECTOR LARGE



Fall indicator ⇒Easy visual verification









## RETRACTABLE FALL ARRESTERS

Ċ	o <sup>©</sup>	<b>LILLIA</b>	0	<b>V</b>		<u></u>	
PROTECTOR METAL AN115F		20 m	≈ x1AM020			9.5 kg	
PROTECTOR METAL AN115T		20 111	×1 AM016			9.5 kg	
PROTECTOR METAL AN116F	Self retractable fall arrester with galvanised steel	9E m	≈ x1AM020			10 kg	
PROTECTOR METAL AN116T	cable with integrated energy absorber. Steel case. Fall indicator. Inertia locking system.	25 m	× 1 AM016	**************************************		10 kg	
PROTECTOR METAL AN11730F		30 m	≈ x 1 AM020	<b>C € EN360</b> 150 kg		11 l/a	v.1
PROTECTOR METAL AN11730T		30 m	× 1 AM016			11 kg	x1
PROTECTOR ELEVATOR TR01720F		00 m	≈ x1AM020			14.6 kg	• • • • • • • • • • • • • • • • • • •
PROTECTOR ELEVATOR TR01720T	Self retractable fall arrester in steel cable with	20 m	× 1 AM016	#0 0 0 0 0 0 0	EN1496	14.6 kg	• 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
PROTECTOR ELEVATOR TR01730F	novable rescue winch. Steel case. Inertia locking tem. Energy absorber	00 m	≈ <b>≠</b> x1AM020	•)	CLASS A	18.9 kg	•
PROTECTOR ELEVATOR TR01730T		30 m	<b>→</b> x 1 AM016	**************************************		18.9 kg	

### **PROTECTOR METAL**















Fall indicator ⇒Easy visual verification



Tested at 150 kg →No problem related to the weight of the tools transported or other



### **PROTECTOR ELEVATOR**





















Equipped with a rescue winch ⇒Rescue a person without sending a rescuer



Fall indicator ⇒Easy visual verification







Tested at 150 kg →No problem related to the weight of the tools transported or other



	o <sup>©</sup>	<b>WILLIA</b>	0	V	<u></u>	
MAXIBLOC AN10006T	Self retractable fall arrester with Ø 4 mm galvanised steel cable with	6 m	×1 AM016		2.80 kg	- x1
MAXIBLOC AN10010T	integrated energy absorber. PP case. Fall indicator.	10 m	<b>→</b> x 1 AM016	<b>C €</b> EN360 150 kg	3.75 kg	
MEDBLOC AN13006C	Self retractable fall arrester with polyester webbing 25 mm. ABS protection. Swivel with fall indicator. 1 carabiner AM002.	6 m	<b>X1AM002</b>		1.60 kg	х5

### **MAXIBLOC**












Lightweight ⇒Easy to transport and set-up



Fall indicator **⇒**Easy visual verification



Tested at 150 kg ► No problem related to the weight of the tools transported or other

### **MEDBLOC AN13006C**

















Light and compact: 1.8 kg ⇒Easy to transport and set-up



Fall indicator ➡Easy visual verification



Tested at 150 kg →No problem related to the weight of the tools transported or other





## RETRACTABLE FALL ARRESTERS

	o <sup>o</sup>	<b>JULI</b>	0	$\overline{\mathbf{v}}$	<u></u>	
MINIBLOC AN102	Self retractable fall arrester with 46 mm strap with energy absorber. Protection case. 1 carabiner AM002.	2,50 m	<b></b> x1AM002		1.1 kg	
FIXBLOC AN105	Self retractable fall arrester with 17 mm polyester/Aramid Kevlar® strap. Plastic case. Inertia locking system. 1 automatic swivel connector with fall indicator. 1 carabiner AM002.	1,90 m	<b>*</b> x1AM002	<b>C €</b> EN360 150 kg	834 g	х5

### MINIBLOC AN102



















### **FIXBLOC AN105**


















Fall indicator ⇒Easy visual verification





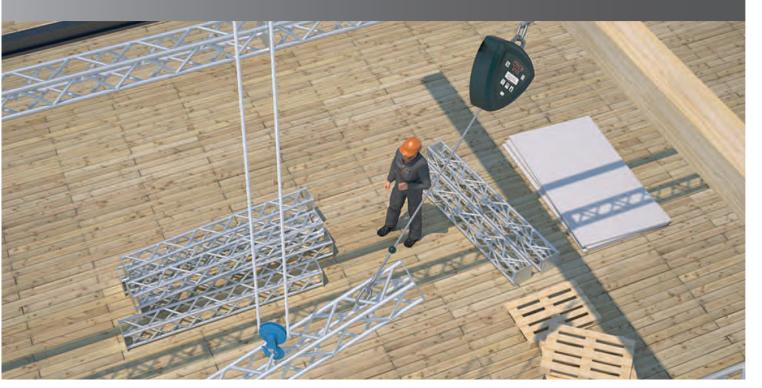

	o <sup>©</sup>	<b>Lift</b>	V	_	
PROTECTOR LOAD AN517	Load fall arrester in galvanized cable Ø 4 mm to secure all moving loads under	10 m		5.1 kg	
PROTECTOR LOAD AN518	250 kg. High resistance ABS case.	15 m	<b>C €</b> 2006/42/EEC	5.9 kg	x1
PROTECTOR LOAD AN530	Load fall arrester in galvanized cable Ø 6 mm to secure all moving loads under 500 kg. Steel case.	12 m		11.6 kg	

#### LOAD SELF RETRACTING FALL ARREST

#### **PROTECTOR LOAD AN517 - AN518**















LOAD SELF RETRACTING FALL ARREST

#### **PROTECTOR LOAD AN530**

















# FALL ARRESTERS ON ROPE

Ž	o <sup>©</sup>	<b>LIJUM</b>	0	<b>V</b>	<u></u>	
ASDRISS2 ANO68	Fall arrester sliding on anchorage line stranded rope 0 10.5 mm (rope sold separately). Opening type fall arrester equipped with automatic locking and energy absorber. 1 carabiner.		◯ x1AMO0	EN353-2 EN362	549 g	
CAMELEON ANO66A	3 multi function products in 1: 1- Sliding fall arrester on braided rope anchorage line ø 10,5 - 11mm equipped with an extension tab with energy absorber and an AM002 carabiner. 2- Stopper on rope: The rope's adjusting device used in the safety bracket (type A) accompanies the user during his changes of position and locks under the action of a static or dynamic load. 3- Stopper on rope: The ascension device on its work support, locks under the action of a load in one direction and slides freely in the opposite direction (type B) (see EX030 description too).		<b>◯</b> x1AMO(	12	706 g	
CAMELEON ANOGG	3 multi function products in 1:1-Sliding fall arrester on braided rope anchorage line Ø 10,5-11mm +1 AM002. 2-Stopper on rope: The rope's adjusting device used in the safety bracket (type A) accompanies the user during his changes of position and locks under the action of a static or dynamic load. 3-Stopper on rope: The ascension device on its work support, locks under the action of a load in one direction and slides freely in the opposite direction (type B) (see EX030 description too).		◯ x1 AMO(	EN353-2 EN12841 TYPE A TYPE B	300 g	x 5
AN410		10 m	₩ x 1 AMO		1.4 kg	
AN420	Anchorage line in braided rope () 11mm for CAMELEON® and ASDRISS2.	20 m	₩ x 1 AMO	02	2.1 kg	
AN430	1 loop sewn thimble. Equipped with an ANOO6 counterweight and an AMOO2 connector.	30 m	X1AMO	12	2.9 kg	
AN401		per meter	₩ x 1 AMO	02		
ASDRISS2	CAMELEON AND  CAMELEON AND  CAMELEON AND  CAMELEON AND  CAMELEON AND  CAMELEON AND  COPENING With one hand  Fryonomic and simple to use		CAN (ICA)	MELEON AND	66	
×.			Ex	ll indicator and non-invert Easy visual verification tension carabiner Better user mobility	ing device	
AN410	AN42	0	AN430	AN	401	



	o <sup>©</sup>	<b>JULIA</b>	0	0 0 0 0	<b>V</b>	<u></u>	
ASCORD ANO65	Fall arrester sliding on anchorage line stranded rope 0 14 mm (rope sold separately). Opening type fall arrester equipped with automatic locking, non-inverting device, energy absorber with fall indicator. 1 carabiner AM002.		<b></b> x1AM002			736 g	x 5
FENNEC ANO6310	iding non appoing fall arrester out with fall indicator on atrended	10 m		0 0 0 0	<b>C €</b> EN353-2	1.3 kg	x 10
FENNEC ANO6320	Sliding non opening fall arrester set with fall indicator on stranded rope anchorage line 0 12 mm. Wear indicator. 1 loop spliced on high	20 m	- <b>40</b>	CE		2.2 kg	x 5
FENNEC ANO6330	end.	30 m	· · · · · · · · · · · · · · · · · · ·			3 kg	x 5
AN30010	Anchorage line stranded rope Ø 14 mm for ASCORD®. End spliced with thimble loop. 1 carabiner AM002.  10 m 20 m x1 AM002 30 m			1.6 kg	x 10		
AN30020		20 m	x1AM002	a		3 kg	x 5
AN30030		30 m	•	•		4.1 kg	x 5

### **ASCORD AN065**





















Non-inverting device →Easy installation of the slider in the right direction

Energy dissipater with fall indicator



### AN30010

### AN30020

### AN30030



### **FENNEC**













Recommended accessory for the proper use of this product : 1 connector AM002









## **FALL ARRESTERS ON CABLE**

	o <sup>o</sup>	<b>LIGHT</b>	•	lacksquare	_	
AN701	Vertical central attachment composed of 2 stainless steel plates with Ø 12 mm anchor screws and tensioner system. ANO24/ANO25 cable sold separetly by meter.			<b>EN795</b> Type A	4 kg	х1
AN801	Top attachment (EN795-A), lower attachment and tensioner system in stainless steel with universal anchorage.			EN795 TYPE A (AN801UNI)	4.2 kg	х 6
AN802	Intermediary attachment in stainless steel with universal anchorage. Recommended at least every 8 m.		0 0 0 0 0		1.3 kg	x 12
ASCAB ANO71	Sliding opening fall arrester on anchorage line in cable Ø 8 mm with self-locking, non-inverter device, extension tab with energy absorber. 1 carabiner AM002.				1 kg	х5
ASCAB ANO24	1 meter anchorage line cable for ASCAB in stainless steel. 1 thimble sleeve loop. 1 carabiner AM002.	1m	CE	EN353-1		x1
ASCAB ANO25	Additional meter of anchorage line cable for ASCAB.	per meter	<b>C €</b> EN353-1			

### **AN701**

































Non-inverting device ⇒Easy installation of the slider in the right direction

of environment













### **ANCHORAGE DEVICES**



	o <sup>c</sup>	<b>LILLIA</b>		$\checkmark$	<u> </u>	
LV106	Swivel anchorage point in stainless steel, for vertical or horizontal installation (ceiling).				100 g	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
LV105	Anchorage with stainless steel eye Ø 12 mm. Overall length 140 mm. Rod length (under flange) 100 mm. Thread length 80 mm.			EN795 Type a	174 g	x 10
LV100	Stainless steel anchorage mounting plate with screws Ø 12 mm.				46 g	
CAIMAN LV135	Anchorage for concrete block. Adjustable length from 80 cm to 120 cm.	Adjustable	( (	<b>EN795</b> Type B	12.9 kg	х1
DAYAK LV120G	Transportable anchorage point, galvanized steel, for door frame or window of 63 to 123 cm. Adjustable with clamping screw.			<b>TS16415</b> 2	7 kg	х1

#### LV106



























**CAIMAN LV135** 



















### LV105

















































































## **ANCHORAGE DEVICES**

	o <sup>©</sup>	<b>Juli</b>	<b>V</b>		
IPN LV130	A transportable interim anchorage device with aluminium alloy wheels. It can be attached to beams of width 76 to 255 mm.	Adjustable	<b>EN795</b> TYPE B	4 kg	х4
AM007	Sling anchor in galvanized steel cable Ø 8 mm. Protective sheath. 2 thimble ferrule loops.	1m		600 g	х5
LV102100	Anchorage ring with high tenacity polyester strap. Width 45 mm. End loop with shrinkage and steel anchor D.	1m		222 g	
LV102150	Anchorage ring with high tenacity polyester strap. Width 45 mm. End loop with shrinkage and steel anchor D.	1,50 m	<b>C €</b> EN795	258 g	e)  0  0  0  0  0  0  0  0  0  0  0  0  0
LV102050	Extension strap in high tenacity polyester with D-ring. Width 45 mm. End loop with shrinkage and steel anchor D.	0,50 m	EN354	300 g	x 15
L0030100		1m		70 g	
L0030150	Lanyard and anchorage point in tubular strap. 2 sewn loops. Width 25 mm.	1,50 m		187 g	
L0030200		2 m		218 g	



























#### **AM007**

























#### LV102100

#### LV102150

### LV102050





























### L0030100

L0030150

L0030200

























	o <sup>©</sup>	<b>HILLIP</b>	•	$\checkmark$	_		
LV400	Telescopic rod with 5 sections. Closed length 2 m. Open Length 8 m. Material insulates to 30kV.	Adjustable				5 kg	х1
LV403	Telescopic rod with 3 sections. Closed length 1,2 m. Open Length 3 m. Material insulates to 30kV.				4 kg		
LV401	Automatic lock hook in aluminium with double opening action. Opening 90 mm R> 23kN.		C€	EN795 TYPE B EN362 CLASS A	1.1 kg	x10	
LV402	Adapter for connector, for use with AM022 or AM030 (sold separately). Usable on LV400 and LV403 rods. Particularly suitable for rescuing upwards or downwards.				362 g		

### LV400




























LV403

4







### LV401




















































### **ANCHORAGE DEVICES**






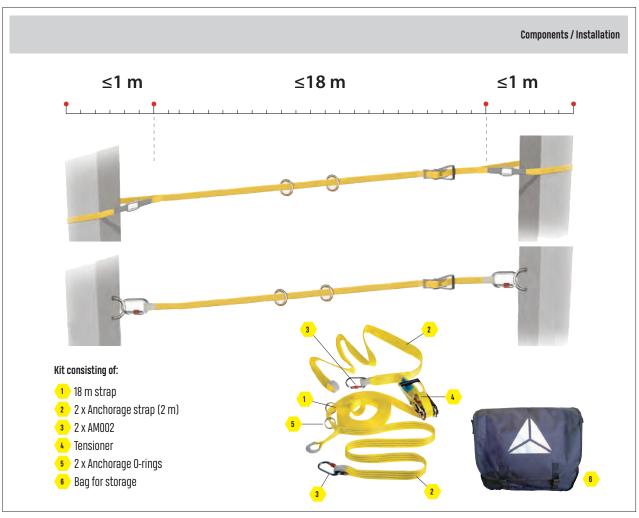





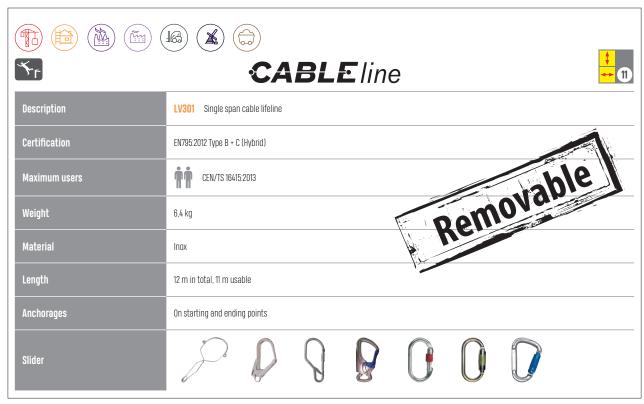





	o <sup>o</sup>	<b>LILLIA</b>	0	lacksquare	•	*
L0147150CDD	Double lanyard in braided rope Ø 10.5 mm. 3 thimble loops ends.	1,50 m	$\bigcirc_{x1} \mathcal{D}_{x2}$	C € EN354	1.4 kg	х5
3			AMOO2 AMO22			
L0147150	Double lanyard in braided rope Ø 10.5 mm. 3 thimble loops ends.	1,50 m		<b>C</b> € EN354	264 g	x 15
Commence of the second						
0						
L0047150AD	Lanyard in braided rope Ø 10.5 mm. 2 thimble loops ends.	1,50 m	$\sim$ x1 $\rho_{x1}$	<b>C</b> € EN354	802 g	x 5
			AM010 AM022			
	- A					
L0047100	Lanyard in braided rope 0 10.5 mm. 2 thimble loops ends.	1 m		<i></i>	116 g	x 15
L0047150		1,50 m		<b>C</b> € EN354	150 g	x 15
L0045200		2 m			188 g	x 15
L0007150CD	Lanyard in stranded rope Ø 12 mm. 2 thimble loops.	1,50 m	$\bigcirc_{x_1} \mathcal{O}_{x_1}$	C € EN354	850 g	x 15
			AM002 AM022			
L0007100	Lanyard in stranded rope Ø 12 mm. 2 thimble loops.	1 m		<i></i>	154 g	x 15
L0007150		1,50 m		<b>C</b> € EN354	198 g	x 15
L0005200		2 m			260 g	x 15
10000400						
L0030100	Lanyard and anchorage point in tubular webbing. 2 sewn loops. Width 25 mm.	1 m		EN795	70 g	x 15
L0030150		1,50 m 2 m		<b>C</b> € TYPE B <b>EN354</b>	187 g 218 g	x 15 x 15
L0030200		∠ III			210 Y	ΛIŨ
mm	2 3 4 3 6 7 8 12					

# CONNECTING SYSTEMS CONNECTORS



<b>AM027</b>	Automatic lock carabiner in light alloy. Large opening 58 mm. Sliding ring. Eye hook	C€	EN362	<b>△</b> 240 g	x 20
	opening with latch.		CLASS A / T		
U					
AM030	Automatic lock hook in aluminium alloy. Opening 25 mm.	C€	EN362 CLASS A / T EN12275 TYPE D TYPE K	130 g	x 20
				•	
AM009	Quick docking in stainless steel. Large aperture 150 mm. Eye hook. R > 23 kN.	CE	EN362 CLASS A / T	380 g	x 20
AM022X2	Set of 2 automatic hooks lock in galvanized steel. Large opening 55 mm. Eye hook. R > 20 kN.	CE	EN362 CLASS A	1.0 kg	x 10
			CLAGO A		
AM025X2	Set of 2 automatic lock carabiners in light alloy. Opening 22 mm. Ring 1/4 turn. R > 25 kN.	CE	EN362 CLASS B	180 g	x 10
			CLASS B		
AM002X5	Set of 5 screw lock carabiners in galvanized steel. Opening 17 mm. R > 23 kN.	CE	EN362 CLASS B	802 g	x 4
			CLASS B		
AM018	Karabiner with 1/4 turn automatic lock in steel. Opening 17 mm. R > 25 kN.	CE	EN362 CLASS B	200 g	x 20
			CLASS B		



# - SUSPENSION ROPE ACCESS WORK

TC001	Ventral opening blocker type in aluminium alloy. Works on braided rope Ø 8 to 13 mm.	C€	EN567	160 g	x 10
TC002	Right hand ascension handle in aluminium alloy. Works on braided rope Ø 8 to 13 mm.	C€	EN567	240 g	x 10
TC003	Left hand ascension handle in aluminium alloy. Works on braided rope Ø 8 to 13 mm.	CE	EN567	240 g	x 10
TC012	Mono stirrup adjustable strap 25 mm from 90 to 120 cm. Pedal ascent. To pair with TC002 or TC003.	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		200 g	x 10
SAFECORD TC007	Locking device suitable for descent and ascent, with mechanical traction systems.	CE	<b>EN12841</b> Type C	360 g	x 50
1000 (0101) (0101) (1000)			EN341 Type 2 Class a EN358		
DESCORD TC006	Self locking descender with double security (anti-panic system) in aluminium. Intended for works on braided rope Ø 9 à 12 mm.	C€	EN341 CLASS 2A EN12841	360 g	x 50
			TYPE C		
TC004	Figure of eight in aluminium alloy. Works on braided rope Ø 9 to 12 mm.	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		130 g	x 20
TC044	Safety figure of eight in aluminium alloy. Works on braided rope Ø 9 to 16 mm.	0 0 0 0 0		260 g	x 20
8					



Ċ	o <sup>©</sup>	<b>J</b> IJU <b>J</b>	·	$\overline{\mathbf{v}}$	<u></u>	
TC005	Oscillating pulley flanges in aluminium alloy. Intended for works on braided rope less than Ø 16 mm.		C€	EN12278	250 g	x 10
Total Control						
TC015	Double pulley with oscillating flanges in aluminium alloy for braided rope less than 0 16 mm.		CE	EN12278	430 g	x 10
TANK THE STATE OF						
TC016	Mini pulley in aluminium alloy for braided rope less than 0 13 mm and cable less than 0 12 mm.		C€	EN12278	140 g	x 10
TC025	Double aluminium alloy pulley on ball bearings, designed for zip lines (less than ø 13 mm) and cables (less than ø 12 mm).		C€	EN12278	280 g	x 10
TC040	Double swivel on ball bearing.		C€	EN362 EN354	160 g	x 20
8						
TC009	Semi-static braided rope Ø 10,5mm - Length on request.	per meter	CE	<b>EN1891</b> Type a	200 g	х1
TC029	Opening rope protection 35 cm. Velcro tape closure. Scalable length by adding elements.				200 g	x 100
<u> </u>						



RESCUE

## FALL ARREST AND RESCUE, CONFINED SPACE







### Easy to install, it is lightweight and adapts to all types of floors

	o <sup>c</sup>	<b>LIJUL</b>	0	7	,	<u></u>	
TRA20	Telescopic aluminium tripod. Height adjustable from 1.20 m to 1.97 m. Maximum wheelbase on ground 1.89 m. 3 central anchor points, 2 anchor points on the legs. Ability to set the TRA101 or TRA102 adjuster plate or the TRA103 steps.					15.3 kg	0 0 0 0 0 0 0 0 0
TRA22	Telescopic aluminium tripod. Height adjustable from 1.20 m to 1.97 m. Maximum wheelbase on ground 1.89 m. 3 central anchor points, 2 anchor points on the legs. Equipped with TRA101 and TRA102 adjuster plates. TRA103 steps not included.	Adimahahla		EN7 C € TYPI		17.4 kg	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
TRA30	Telescopic aluminium tripod. Height adjustable from 1.74 m to 3.02 m. Maximum wheelbase on ground 2.62 m. 3 central anchor points, 2 anchor points on the legs. Ability to set the TRA101 or TRA102 adjuster plate or the TRA103 steps.	Adjustable		3 TS16	6415	20.1 kg	
TRA32	Telescopic aluminium tripod. Height adjustable from 1.74 m to 3.02 m. Maximum wheelbase on ground 2.62 m. 3 central anchor points, 2 anchor points on the legs. Equipped with TRA101 and TRA102 adjuster plates and the TRA103 steps.					22.2 kg	
TRA101	Aluminium mounting plate for a self retracting fall arrest. To set on tripod TRA20 and TRA30.					1.3 kg	0
TRA102	Aluminium mounting plate for hoist. To set on tripod TRA20 and TRA30.					860 g	y1
TRA103	Step to access the tripod head and the pulley. Sold individually.	• • •				500 g	
PROTECTOR ELEVATOR TR01720F		20 m	<b>₩</b> x 1 AM020			14.6 kg	
PROTECTOR ELEVATOR TR01720T	Self retractable fall arrester in steel cable with removable rescue winch. Steel case.	20111	<b>→</b> x 1 AM016	<b>EN3</b> 150	00	14.6 kg	
PROTECTOR ELEVATOR TR01730F	Inertia locking system. Energy absorber	30 m	₩ <b>₩</b> x 1 AM020	C € EN1	SS A	18.9 kg	
PROTECTOR ELEVATOR TR01730T		00111	<b>∞</b> x 1 AM016			10.5 kg	
TR003C	Manual winch in galvanized cable. Length 20 m. Non-return system. Folding handle.	20 m		200	0// 0/550	7.8 kg	o o o o o
TR003K	Manual winch in galvanized cable. Length 30 m. Non-return system. Folding handle.	30 m		200	6/42/EEC	8.1 kg	0
TRBAG3	Storage bag with wheels for TRA30 and TRA32 3m tripod. 260 x 260 x 2100 mm.	One eize				1.8 kg	v 10
TRBAG	Storage bag with wheels for tripod. 250 x 250 x 1640 mm.	··· One size				1.5 kg	ΧIU



There are as many types of flooring as types of applications, our tripods had to be able to adapt: here is the challenge that we had to meet during the creation of this device: complex but exciting! Today the user's testimony proves that we have developed the expected solution.

David Naulin, Fall Protection Product Expert



## FALL ARREST AND RESCUE, CONFINED SPACE

	o <sup>o</sup>	<b>LITTLE</b>	<b>V</b>	<u></u>	
GIRAFE TRG20	Mobile anchor for confined space. 360° rotation. Height adjustable from 1.90 m to 2.50 m. Base sold separately. Option to attach the adapter board TRA101 or TRA102.	Adjustable	C € EN795 TYPE B	25 kg	
TRG01	Rotating base on floor for TRG20 anchorage.			16 kg	x1
TRG02	Rotation base for wall for TRG20 anchorage.	• 40 0 0 0 0		19 kg	
TRG03	Mobile base for confined space for TRG20 anchorage.	• •0 • • • • • • • • • • • • • • • • • • •	0 0 0 0	36 kg	

### **GIRAFE TRG20**

























TR01720 TR01730





TROO3C TROO3K



TRBAG3

TRG01





TRG02





TRG03





### **RESCUE & EVACUATION**



	o <sup>©</sup>	<b>LIGHT</b>	$\checkmark$	_	
TC022	Rapid evacuation triangle. Fits all body types with its 12 adjustment points.	Adjustable	EN1498 CLASS B	1.1 kg	
RAH33	Head down harness with rescue sling. 3 attachment points (sternal, dorsal and for rescue). 7 adjustment buckles.	S/M/L	C € EN1498 CLASS C EN361	2 kg	х5
TC105	A seat for a vertical movement. Adjustable footrest length for better stability. Ring D tool holder on both sides.	One size		2.2 kg	x 2
TC102C	Universal rescue stretcher sold with safety belts, mattress and foot rest. Flame retardant.	One size	<b>C €</b> 93/42/EEC	23 kg	х1

### TC022





















### RAH33























### TC105





















### TC102C

















### **RESCUE & EVACUATION**

### **RESCUEHUB TC063**





















2 magnetic brakes →Preservation of brake pads





Length 300 m max.

2 people, ≤ 225 kg Speed ~ 0.8m/ sec (no matter the weight)

→Precise control of the speed of descent for better safety

⇒Improved rescue speed via use with a screwdriver





### Designed specifically to facilitate and execute rescue operations

	o <sup>©</sup>	<b>LIFE</b>	<b>V</b>	<u></u>	
RESCUEHUB TC063	Descender, rescue and lifting equipment with hand wheel able to lift up to 225 kg. Approved for 2 people. Automatic brake system. 2 centrifugal brake systems. 3 connectors AM030. TC064 rope sold separately by the meter (max length 300 m), sewn thimble loops.	One size	EN341 TYPE 1 CLASS A EN1496 CLASS B	3.40 kg	x1
TC064	Static polyamide rope, Ø 9.6 mm for TCO62 and TCO63. Sold by meter, max length 300 m. Loops sewn thimble.	per meter < 160 m	<b>EN1891</b> Type a	**************************************	

- 1- Full steering wheel with counterweight to ensure a better stability during the operation.
- 2-3 separate rooms to ensure non-pollution of the mechanical system.
- 3- Quick connectors.
- 4- Can be mounted with an electric screwdriver.



Our sewing system for the end of the rope ensures a non-variation of its resistance over time.





Rescue operations are often burdensome and must be carried out as quickly as possible to provide assistance to the victim. Lending intuitiveness to a tricky application : that's why we designed the TC063.

David Naulin, Fall Protection Product Expert



### **RESCUE & EVACUATION**

	o <sup>©</sup>	<b>THILL</b>	<b>V</b>	<u></u>	<b>*</b>
DESCENDER TC062	Descender and rescue equipment for self-rescue. Automatic brake system. 2 centrifugal brake systems. 3 connectors AMO30. TC064 rope sold separately by the meter (max length 300 m), sewn thimble loops.	One size	<b>EN341</b> Type 1 Class B	1.8 kg	
TC064	Static polyamide rope, Ø 9.6 mm for TCO62 and TCO63. Sold by meter, max length 300 m. Loops sewn thimble.	per meter < 160 m	<b>EN1891</b> Type a		v1
ROPE ACCESS KIT TC039	Rope access set comprised of: 1 double safety auto locking descender device TC006, 1 anchor ring LV102150, 2 connectors AM025, 1 carrier bag TC008. Rope TC009 sold separately per meter.	One size	EN12841 TYPE C EN341 CLASS A EN362 CLASS B EN795 TYPE B	1kg	A 1

### **DESCENDER TC062**





















Speed ~ 0.8m/ sec (no matter the weight) →Precise control of the speed of descent for better safety

1 person, ≤ 150 kg





2 magnetic brakes ⇒Preservation of brake pads





→Lightweight and easy to set up

























For use with TC009



For use with HAR36TCP



For use with TC105













For use with CAMELEON





### **ACCESSORIES AND STORAGE BAGS**

	o <sup>o</sup>	<b>Ligut</b>	<u></u>	
TRBAG3	Storage bag with wheels for TRA30 and TRA32 3m tripod. 260 x 260 x 2100 mm.		1.8 kg	v.10
TRBAG	Storage bag with wheels for tripod. 250 x 250 x 1640 mm.		1.5 kg	ΧIU
RA038_	PVC fabric bag for storage and protection of equipments during transport. Dimensions: 60 x 37 x 17 cm.	One size	512 g	x 20
TC008	PVC fabric bag for storage and protection of equipments during transport. Dimensions: 30 x 65 cm.		1 kg	x 5

### TRBAG3



































### **RA038\_**











### **TC008**














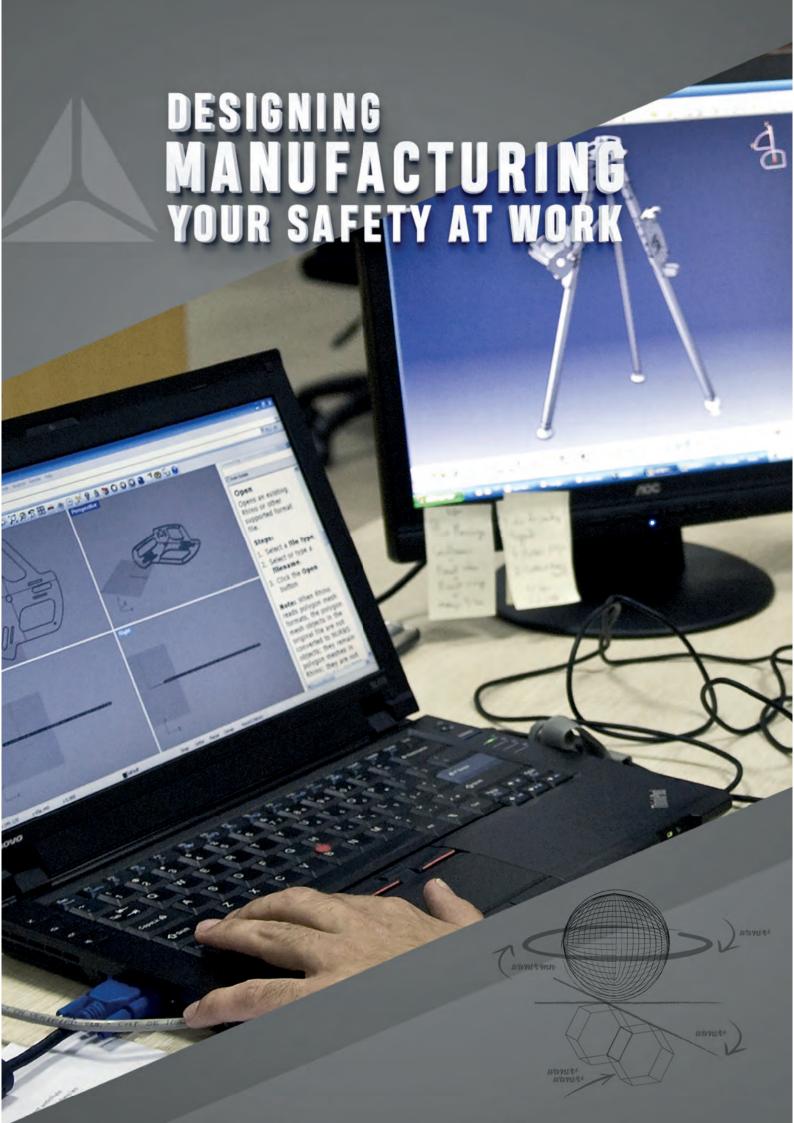

374 • PACKAGING

376 • MERCHANDISING

380 • ALPIC - DPG TRAINING

382 • HEAD PROTECTION

394 • HAND PROTECTION

398 • BODY PROTECTION

404 • FOOT PROTECTION

406 • FALL PROTECTION

409 • GLOSSARY

423 • INDEX




























**4** 376

Subject to conditions, contact us







#### CORNERSHOES10

H 5,5 x W 32 x D 48 cm 1 support of 2 pairs of shoe without box. Suitable for perforated back panel







#### CORNERFRAMESHOES

H 10 x W 20 x D 50 cm Set of 4 magnetic shoe supports





#### CORNERSTOOL

H 40 x W 40 x D 40 cm Seat





#### PLV028N0






























# OUR ALPIC AND DPG TRAINING UNITS ARE AVAILABLE TO MONITOR YOU DURING YOUR TRAINING COURSE TO MATCH YOUR NEEDS AS CLOSE AS POSSIBLE. A TRAINING CENTRE DEDICATED MAINLY TO HEALTH AND SAFETY.





### OUR IN PERSON AND E-LEARNING TRAINING OFFERS PPE DESIGNED FOR **BOTH DISTRIBUTORS AND USERS.**

Our offer proposes structured training as follows:

- PRESENT (in the classroom with a trainer): on topics around PPE, sales techniques applied to PPE, risk assessment and recommendations for solutions etc.
- ON SITE (practical training): working at height, working in wind, rescue and evacuation etc.
- E-LEARNING (PPE course): visual inspection of fall arrest PPE, full course of PPE, modules dedicated to the standard PPE environment etc.



### KEY OBJECTIVES TO BETTER UNDERSTAND THE ISSUES OF PERSONAL **PROTECTION**

- · Act within the framework of health and safety at work.
- · Argue a range of personal protection.
- Understand the technical features of personal protection.
- Follow a study of work position and recommend a solution for personal protection.
- · Identify and assess risks, adjust the performance of protection.
- · Comply with requirements for recording, storage, maintenance, product control.
- · Read and understand the product certification.
- · Know the legal, regulatory and normative environment.

### > THEREFORE WE ADDRESS:

- For sales teams to organize and deepen their knowledge of PPE to develop their sales and give more meaning to their job as their business proposals.
- For companies that use PPE to identify the most appropriate answers to the risks of their work environment, to choose the most efficient products and follow up the necessary review of PPE category III.
- QSE employers and managers, whose teams work at height and who, in accordance with the Labor Code, must be trained in the risks related to their work.

### TRAINING IS ESSENTIAL:

For example, particularly when it is about Fall protection PPE Category III against fatal and irreversible risks.

It allows:

- · Awareness of working at height
- · Analysis of risk situations
- · Securing workstations
- · Finding protection solutions
- Providing more productivity
- Providing technical expertise in inspection, maintenance and repair of products



### **EN365**

USERS: "It is essential that staff are trained, that their competence is controlled and they have written instructions enabling them to choose, use, maintain and periodically revise the PPE or other equipment."

AUDITOR: "It is possible that a competent person has to be trained by the manufacturer (i.e.) significant security related knowledge necessary for the disassembly, reassembly, or evaluation of PPE or other equipment."

### REGULATORY FRAMEWORK

### THE REGULATION (EUROPEAN UNION)

Regulation EU 2016/425) is intended for Personal Protective Equipment (PPE) manufacturers and determines conditions for market trade. It defines the essential requirements in terms of design, manufacture and test methods for PPE, which must comply in order to ensure the safety of the users. The EU Regulation 2016/425 has replaced the EEC Directive 89/686 since 21/4/2018.

### **STANDARDIZATION**

Its aim is to draw up test methods and in the form of standards defining the technical specifications for products. The respect of these standards is evidence of conformity to Regulation EU 2016/425 and allows CE marking.

### **CATEGORIZATION**

Taking into account the level of risk covered, the Regulation defines the PPE categories and determines the various manufacturer's obligations:

- **PPE category 1:** Protection against minor risks.
- PPE category 2: All PPE that are not category 1 or 3.
- PPE category 3: Protection against disability or fatality.

### **CERTIFICATION PROCEDURE**



- Category 1 PPE: Evaluation of conformity by the manufacturer (Module A)
- PPE category 2 and 3: EU type examination of the PPE (Module B) by a notified independent body for which
  compliance (with Regulation EU 2016/425) is verified using standards that are in accordance with the
  regulation. Issuance of the EU Type Examination Certificate (confidential document).
- PPE category 1, 2 and 3: CE marking on the product.
- **PPE category 3**: Control by a notified independent body that ensures compliance of the manufacture with the examined PPE:
  - either monitoring of conformity to the type based on the internal control of production and supervised controls of the product at random intervals (Module C2),
  - or conformity to the type based on quality assurance of the production method (Module D).
- PPE category 1, 2 and 3: Writing by the manufacturer of the EU Compliance Declaration which proves the compliance of the PPE with Regulation EU 2016/425 the user.

The product sheet, the user instructions and the Declaration of Conformity are available online on our website: www.deltaplus.eu

# OTHER ACCREDITATIONS (EXCEPT EUROPEAN UNION)

Some of our products are accredited under the regulations of many countries.

The products concerned (and / or their packaging) bear the following markings :

USA	ANSI, ASTM, NIOSH
Argentina	(AR 1983)
Brazil	CA
Ukraine	<b>&amp;</b>
Common Economic Space (Russia, Belarus, Kazakhstan)	EAC

### **SAFETY EYEWEAR**

Safety eyewear provides protection from spray and splatter from particles, liquids and dust, and from chemical product fumes and radiation.

### HOW TO PROTECT YOURSELF?

Select the most suitable protective glasses or shields

- Identify the type of risk: sprays, radiation, other, ...
- **Determine the type of protection:** spectacles-type safety glasses, goggles, face mask, cover goggles, ...
- Note the protective features: scratch-resistant, fog-resistant, tinted, ...
- Select the type of eye-piece: one-piece or double lens
- · Choose the frame type: design, classical, ...

### STANDARDS

**EN166:** applies to all types of individual protection of the eye which protects from hazards likely to damage the eye, except for nuclear radiation, x-rays, laser emissions and infrared emitted by low-temperature sources. Does not apply to eye protection for which separate standards exist (anti-laser eye protection, sunglasses for general use, ...).

**EN175:** Specifications for the safety requirements for eye and face protection equipment for welding and related techniques (filters frames/ media).

**EN169:** Specifications of level numbers and requirements relating to the transmittance of filters to protect operators for welding and related techniques. Specification of requirements for welding filters with double number of levels.

**EN170:** Specifications of level numbers and of requirements relating to the transmittance of the filters for protection against ultraviolet radiation.


**EN172:** Specification of level numbers and requirements relating to the transmittance of filters for protection against solar radiation, industrial use.


**EN379:** Specification of the requirements for automatic welding filters, i.e. welding screens with automatic variation of the transmission factor. These screens are intended to protect operators during welding and related techniques.

**EN1731:** Material specifications, design, performance and test methods for eye and face mesh type protective, for professional use.

**ANSI (US American National Standards Institute) 287.1-2003:** Specifications and minimum general requirements, test methods, selection, use and maintenance of eve and face protection.

### MARKING

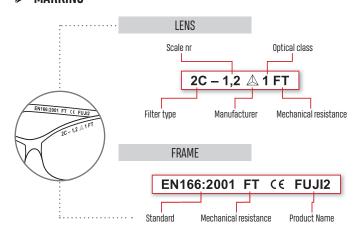

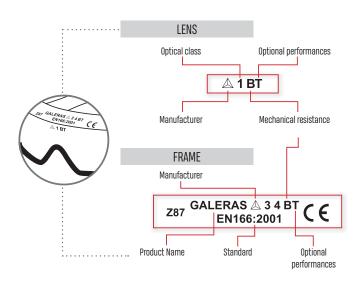

### · SYMBOL MEANING - EN166:

1: optical class allowing permanent wear of the spectacles

### **Mandatory performances**

- S: Increased robustness: steel ball of 22 mm diameter at 5.1 m/s. (18.36 km/h)
- **F:** Low energy impact: steel ball of 6 mm diameter at 45 m/s. (162 km/h)
- **B:** Medium energy impact: steel ball of 6 mm diameter at 120 m/s. (432 km/h)
- A: High energy impact: steel ball of 6 mm diameter at 190 m/s. (684 km/h)

### **Optional performances**

- 3: Liquid resistance (droplets or splashes).
- **4:** Large dust particles resistance (size of > 5  $\mu$ m).
- 5: Gas and fine dust particles resistance (size < 5 µm).
- **8:** Short circuit electric arc resistance.
- 9: Resistance to splashes of molten metal and penetration of hot solids.
- **T:** (F B A) Mechanical resistance to extreme temperatures -5°C/+55°C.
- N: Resistance to fogging of lenses.
- **K:** Resistance to surface damage by fine particles (anti-scratch).



### **▶** FILTERS

Special filters can eliminate certain parts of light and a high proportion of the electro-magnetic spectrum (ultraviolet rays, infrared rays...).


				SP	ECTACLES LENS MARK	(ING			
						EN	166		
		Minimal		UV FILTER	RS (EN170)	IR FILTERS (EN171)	SUN FILTE	RS (EN172)	WELDING (EN169)
1	ens colour	transmission factor	SCALE Nr	2	2C	4	5	6	
		of visible light	OUNCE III	Colours perception may be alterated	Colours perception is not alterated		Without IR protection specification	With IR protection specification	no code nr
CLEAR		80,0%	1,1				5-1,1	6-1,1	
핑	INDOOR	74,4%	1,2	2-1,2	2C-1,2	4-1,2			
NE NE		58,1%	1,4	2-1,4	2C-1,4	4-1,4	5-1,4	6-1,4	
LIGHT SMOKE	OUTDOOR + INDOOR	43,2%	1,7	2-1,7	2C-1,7	4-1,7	5-1,7	6-1,7	
99	+ INDOOR	29,1%	2	2-2	2C-2	4-2	5-2	6-2	
SMOKE	OUTDOOR	17,8%	2,5	2-2,5	2C-2,5	4-2,5	5-2,5	6-2,5	
SM	OUTDOOR	8,0%	3,1				5-3,1	6-3,1	
		8,5%	3	2-3	2C-3	4-3			3
		3,2%	4	2-4	2C-4	4-4	5-4,1	6-4,1	4
		1,2%	5	2-5	2C-5	4-5			5
		0,44%	6			4-6			6
ing)		0,16%	7			4-7			7
VERY DARK (for welding)		0,061%	8			4-8			8
K(for	MIG-TIG	0,023%	9			4-9			9
IY DAR	MI0-110	0,085%	10			4-10			10
Æ		0,0032%	11						11
		0,0012%	12						12
		0,00044%	13						13
		0,00016%	14						14
		0,000061%	15						15
		0,000023%	16						16

Lens marking is composed by 2 numbers (separated in the middle by a "-"):

CODE NUMBER: from 2 to 6. Welding lens have no code number.


SCALE NUMBER: from 1,1 (the highest % of transmission in visible light, the clearest lens). to 16 (the lowest % of transmission in visible light, the darkest lens).

DELTA PLUS RANGE: The yellow coloured possibilities are available on DELTA PLUS range.

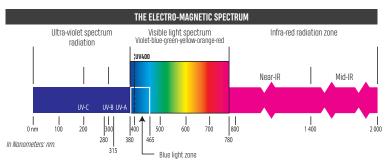

All our polycarbonate glasses filter 99.9% of UV A, B and C from 130 to 380 nm.
Our UV400 glasses carry UV filtration up to 400 nm.

	RISKS TO THE EYE FROM HARMFUL RADIATION										
Zone	Wave Length	Environment	Eyesight damage								
UV-A	315-380 nm	Outdoor work.	Eye fatigue, partial blindness, cataract. Sunshine.								
UV-B	280-315 nm	Sunlight. Industrial environment. Black light tests.	Cataract. Welder flash. Arc flash.								
UV-C	100-280 nm	Industrial environment. Arc welding.	Cornea or crystalline lesions. Loss of eyesight.								
Harmful blue light	380-465 nm	Industrial environment. Computer work (fatigue, VDU). Electrical installations. Outdoor work.	Retinal lesions. Loss of eyesight. Blurring degeneration (age). Retinitis pigmentosis.								
Infra-red	780-1400 nm (near IR) 1400-2000 nm (IR mid)	Electric welding. Molten work (glassmaking, steel production). Micro-wave processes. Sunlight.	Retinal lesions. Blurring degeneration (age). Retinitis pigmentosis (near-IR). Crystalline and cornea lesions (mid-IR).								

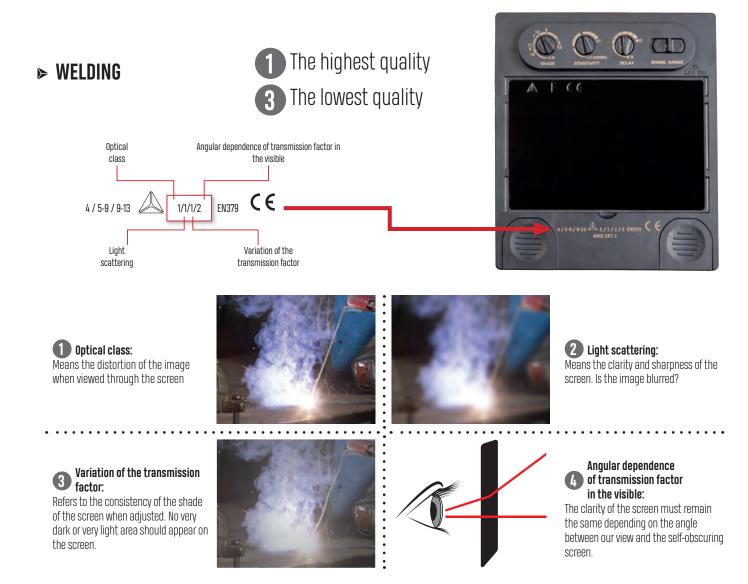

### > ARC WELDING

AND WELDING																						
	R	ECOMM	IENDEI	USE (	)F DIFFE	RENT GI	RADE	NUMBE En169/		ARC	WEL	.DING	ACC	ORDIN	G TO ST	AND	ARDS					
Process									(A	) Cur	rent	amp	eraç	je								
1100000	1.5	6	10	15	30	40	60	70	100	125	15	0 .	175	200	225	250	300	350	400	450	500	600
MMA				8				9		10			11		12			13			14	
MAG				8				9		10			1	1			12			13		14
TIG			8			9			10			11			12		13					
MIG (heavy metals)		-			9			•			10	)		1	1		12		13	14		
MIG (light metals)						10				11				12		13 14		4				
Arc air gouging	10 11 12 13				14		15	i														
Plasma cutting					9						10	11		1:	2		13					
Micro plasma welding		4		5	6	7		8	9		10	)		11		1	2					

This table is valid under normal conditions of use, in which the distance between the eye of the user and the mass of molten metal is approx. 50 cm and average light is approx. 100 lux.



### **SKULL PROTECTION**

### ► HOW TO PROTECT YOURSELF?

To choose the correct safety helmet

**To identify the risk:** falling bumps or combined risks (hearing protection and face protection).

The safety helmet has three functions:

Antipenetration for an effective skull protection.

Shock absorber because the cap and the harness absorb shocks.

**Deflector** thanks to a suitable design which makes it possible to deflect the fall of an object from the top of the head.

There is in addition a selection of accessories which offers a face and hearing protection.

### **▶** STANDARDS

EN397	Protective helmets for industry	MANDATORY	Impact*: force transmitted to the headform must not exceed 5 kN at the fall of an object of 5 kg from a 1 m height.  The impact energy of the helmet at the end of the test is 49 J.  Penetration*: the tip of the mass used in the test (3 kg over 1 m) must not come into contact with the skull  Flammability: the helmet should not burn with flame emission more than 5 seconds after removal of the flame  * The impact and penetration tests are performed at room temperature, at 50°C and at -10°C
EN	Protective heln	0 PTIO NAL	In extreme temperatures: impact and penetration tests are conducted at room temperature at 150°C, at -20°C or -30°C Protects against accidental short-term contact with a live electrical conductor up to 440 VAC. Protects against lateral compression. The maximum deformation of the helmet should be < 40 mm. Resistance to molten metal splashes.
EN50365	Electrical insulation helmets for use in low voltage environment	MANDATORY	Electrically insulating helmets for use near energized equipment not exceeding 1000 VAC or 1500 VDC (appliance class 0). Used simultaneously with other electrically insulating protective equipment, these helmets prevent dangerous currents passing through to the person's head. These optional electrical insulation tests are more stringent than the EN397 and they complement them. (2 triangle marking, Class 0).
ANSI/ISEA 289.1	(American National Standards Institute) American standard for industrial head protection	MANDATORY	Depending on the type and class of the helmet:
ANSI/IS	(American Nat Insti American stand head pr	OPTIONAL	Protection against mechanical risk (impact, penetration, crushing), flammability, electrical insulation.
EN812	Bump caps for industry	MANDATORY	Impact*: This PPE protects against impacts from knocks against structures or objects. It does not protect from the impact of a falling object at all.  The impact energy of the cap at the end of the test reached 12.25 J.  Penetration*: the tip of the mass used in the test (0.5 kg over 0.5 m) must not come into contact with the skull  * The impact and penetration tests are performed at room temperature, at 50°C and at -10°C  Should in no way be a substitute for an industry type helmet (EN397).
E	deo dwng	OPTIONAL	In extreme temperatures: impact and penetration tests are conducted at room temperature at -20°C or -30°C Protects against accidental short-term contact with a live electrical conductor up to 440 VAC Flammability: the helmet must not burn with flame emission more than 5 seconds after removal of the flame (F marking)

### > HELMET MARKING ILLUSTRATION






### **HEARING PROTECTION**

Noise-related hearing loss is the most common occupational disease in Europe and North America, accounting for almost one-third of all work-related illnesses. These disorders can lead to long-lasting effects causing stress, fatique or isolation that significantly increases the risk of work-related accidents caused by other factors. Hearing loss is irreversible and often detected late, so PPE covering this risk is classified as Category III...

### > THE EAR AND SOUND


Noise, as a vibratory phenomenon is characterized by:

- Its intensity (in decibels [dB]) corresponds to the amplitude of the vibrations emitted by the sound source. O dB corresponds to the minimum sound level audible by the human ear. The pain threshold is 120 dB and the ear can be damaged from 85 dB.
- Its frequency (in Hertz [Hz]) which will define the perceived height. The higher the frequency and the higher pitched the sound, the lower it is and the lower pitched it will be. The human ear is able to perceive sounds at frequencies between 20 Hz (very low pitch) and 20,000 Hz (very high pitch).
- Its duration and its variation, which makes it possible to differentiate very brief sounds, of a duration in the order of a second, such as impulse noises (a shot, impacts) of sounds that have longer durations (hours, or a day) for which it is important to consider the resulting dose of noise received.



The ear can be broken down into three distinct parts:

- The outer ear consisting of the horn and the ear canal
- The middle ear between the eardrum and the inner ear. It is filled with air and allows, using the ossicles, to transform the aerial vibrations into structure borne vibrations that can be analyzed by the inner ear.
- The inner ear, the heart of the auditory system, consisting of a cavity filled with liquid containing the cochlea where the body of Corti is found. Within it, the vibrations of the liquid transmitted to the ossicles are picked up by the hair cells which select them by frequency. The information is then conducted by the auditory nerve to the cerebral cortex which can interpret it.



### ▶ DB(A)

The human ear has a particular sensitivity to each frequency range. At moderate sound levels, it is less sensitive to low pitched sounds. To represent this particular sensitivity, the noise measurements and standards use a weighting of the measured sound levels called weighting A. The thus weighted decibels are denoted dB (A).

### ► HOW TO PROTECT YOURSELF?

To choose the correct product for hearing protection.

- Identify the nature of the noise: stable, fluctuating, intermittent, pulse.
- Measure the noise at the working station: intensity (dB) and volume (Hz).
- · Determine the exposure time.
- · Calculate the reduction necessary to return on an acceptable ambient level (see Directive 2003/10/CE).

Minimum require	Requirements Directive 2003/10/EC: Minimum requirements for the protection of workers against the risks related to noise exposure									
8 hours exposure time at ≥ 85 dB(A)	8 hours exposure time at ≥ 80 dB(A) and < 85 dB(A)	8 hours exposure time at > 75 dB(A) and < 80 dB(A)								
Obligatory hearing protection	Hearing protectors available to the worker	Hearing protection recommended								

The performance of the hearing protector (its attenuation level) must be adapted to the risk assessment of the workplace. It should bring the noise level to a level that is not harmful to health, while avoiding overprotection would cut the operator from his environment (warnings, communication...)

### REGULATORY DAILY DOSE AUTHORIZED ACCORDING TO THE SOUND LEVEL

**CONTINUOUS SOUNDS** 

Equivalent continuous sound pressure level in dB (A)	85 dB(A)	91 dB(A)	100 dB(A)	112 dB(A)
Daily exposure duration equivalent to an exposure of 85 dB	8 hours	2 hours	15 minutes	1 minute
Peak sound pressure level in dB	135 dB	115 dB	95 dB	90 dB
Limited number of pulses or shocks for 8 hours	1	100	10,000	30,000

**IMPULSE SOUNDS** 



### WEARING RATE

Hearing protection decreases very rapidly when the protector is not worn continuously



2 mn of non-wearing (over 8h)

=> reduction of efficacy of the protector by 25%

2 hours of non-wearing (over 8 hours)

=> loss of efficacy of the protector by 75%

### WEARING METHOD

When hearing protection equipment can be worn in several ways (on the head and under the chin for example), it must be tested for each method of wearing.

▶ OTH:



Over the head

➤ UTC:



Under the chin

**▶** BTH:



Behind the head

### **STANDARDS**

- EN352: Exigences of safety and tests.
- EN352-1: the ear-muffs.
- EN352-2: the earplugs.
- EN352-3: the adjustable head defenders for the safety helmets.
- **EN352-4:** Noise cancelling headphones with level dependent attenuation.
- EN352-6: Earmuffs with electrical audio input.
- EN352-8: Audio enabled earmuffs.

These standards establish requirements with regards to the manufacture, the design, performances and test methods.

They stipulate the putting at disposal relative to the characteristics.

• EN458: Hearing protection

Recommendations for selection, use and maintenance.

· ANSI (US American National Standards institute) S3.19 - 1974

This standard specifies the test method for determining the level of noise attenuation (NRR Noise Reduction Rating) of the hearing protection, as recommended by the EPA (U.S. Environmental Protection Agency).

### SOUND LEVEL MITIGATION VALUES



### ► HOW DO YOU USE THE ATTENUATION VALUES?


3 indicators, from the simplest to the most precise are made available to the user.

- SNR (Single Number Rating): Single average value of attenuation.
- HML: Attenuation values expressed in terms of average levels of frequency.
  - **H:** Attenuation of PPE at high frequencies (pitched noises)
  - M: Attenuation of PPE at medium frequencies
  - L: Attenuation of PPE at low frequencies (bass sounds)
- **APV (Assumed Protection Value)**: Attenuation values expressed on 8 specific frequency levels *(see the data sheet of the hearing protector).*

### DOUBLE PROTECTION

When wearing a single hearing protector is not enough, it is possible to combine them. The attenuation resulting from the simultaneous wearing of earplugs with a B SNR and a noise-cancelling headset with an ST SNR is calculated by the following formula:  $33 \times loq ((0.4 \times B) + (0.1 \times ST))$ 

### **▶** LEVEL OF NOISE

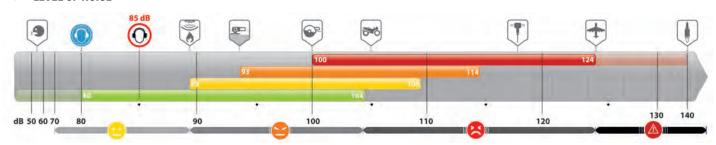

### RESPIRATORY PROTECTION

### European Directives: End user's obligations

89/391: Identify and assess the risk, take preventive and protective measures, inform and train the workers. 2004/37: Risks related to exposure to carcinogens or mutagens at work: hazard identification, "limit values", respiratory protection. 89/656: Select and use the appropriate and compliant PPE, inform and train people, check and replace the PPE when necessary.

### > STANDARDS

The main standards concerning the respiratory apparatuses

### • EN136: Overall masks

It contains laboratory tests and practical performance tests to check the conformity with resistance to temperature, to impacts, to flame, to thermal radiation, to traction, resistance to cleansers and disinfectants. Furthermore, the visual inspection must concern the marking and the manufacturers' information guide.

### • EN140: Half-masks and quarter-masks

It contains laboratory tests and practical performance tests to check the conformity with resistance to impacts, to cleaners and disinfectants, to temperature, to flame and respiratory resistance.

### • EN14387: Gas filters and compound filters

It contains laboratory tests to check the conformity with resistance to impacts, to temperature, to humidity and corrosive atmospheres, and with mechanical and respiratory resistance.

### • EN143: Filters against particles

It contains laboratory tests to check the conformity with resistance to impacts, to temperature, to humidity and corrosive atmospheres and with mechanical and respiratory resistance.

### • EN149: Filtering half-masks

It contains laboratory tests to check the conformity with resistance to impacts, to cleansers and disinfectants, to temperature, to flame and with respiratory resistance.

### • EN405: Half-masks fitted with valves and gas filters or compound filters

It contains laboratory tests to check the conformity with resistance to handling and wear, to impacts, to flame and with respiratory resistance.

### • EN148-1: Standard threaded joint

This standard is specific to the standard connection system of the cartridge for

### NIOSH (US National Institute for Occupational Safety) 42 CFR Part84 Filtering facial parts, multiple levels of protection (non exhaustive list):

N95: Filter at least 95% of the particles (non-oily) suspended in the air.

• N99: Filter at least 99% of the particles (non-oily) suspended in the air.

PRODUCTS	STANDARDS	TOTAL INWARD Leakage** (%)	NOMINAL Protection Factor*
FFP1	EN149	22	4
FFP2	EN149	8	12
FFP3	EN149	2	50
½ mask P1 ½ mask gas XP1	EN140 EN14387 EN143 + A1	22	4
½ mask P2 ½ mask gas XP2	EN140 En14387 En143 + A1	8	12
½ mask P3 ½ mask gas XP3	EN140 EN14387 EN143 + A1	2	48
½ mask gas X	EN140 EN14387	2	50
Full Face Mask P3	EN136 EN143 + A1	0,1	1000
Full Face Mask gaz XP3	EN136 EN14387 EN143 + A1	0,1	1000
Full Face Mask gaz X	EN136	0,05	2000

\*NPF: Nominal Protection Factor corresponds to the level of protection tested in the laboratory.

The Level of APF, Assigned Protection Factor, might be different according local regulations \*\*TIL: Leakage of the ambient atmosphere into the respiratory interface measured in laboratory.


http://respiratory.deltaplus.eu





### RESPIRATORY PROTECTION

### **►** MARKING

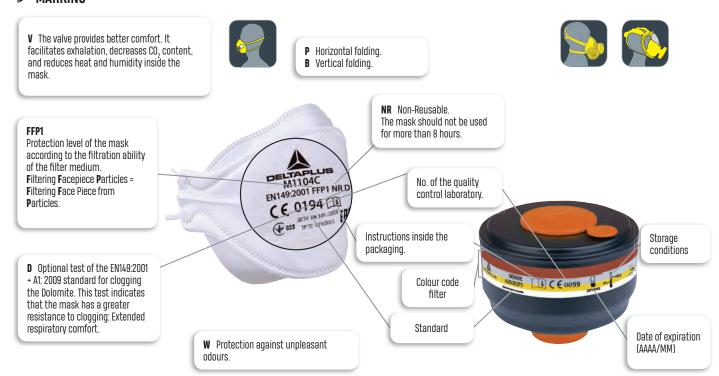

### **▶** GAS AND VAPOUR FILTER

Each filter or cartridge is identified with a colour code.

Lucii iiitoi t	adiffication of our chago to labilithou with a boloar boad.									
ТҮРЕ	1	TYPE OF PROTECTION	GAS AND VAPOUR							
A		om organic gases and vapours ing point is > 65°C	Alcohol, acetic acid, ether, hexane, toluene, xylene, white spirits, thiophenol*							
AX		om organic gases and vapours ing point is ≤ 65°C	Acetone, acetaldehyde, ethyl ether, butane, methanol, trichloromethane*							
В	Protects fr vapours	om inorganic gases and	Chlorine, chlorine dioxide, fluorine, formaldehyde, phosphine*							
E		om sulphur dioxide and some ors and gases	Sulphur dioxide*							
K	Protects fr derivatives	om ammoniac and some amine	Ammonia, ethylamine, methylamine*							
Hg	Protection	from mercury vapours	Mercury and mercury compounds*							
	FILTE	R ABSORPTION CLASS FOR (	GASES AND VAPOURS							
Clas	s1	Low capacity filter (pollutant concentration < 0.1% o	r 1000 ppm).							
Class	s 2	Average capacity filter (pollutant concentration < 0.5% o	or 5000 ppm).							
Clas	s 3	High capacity filter (pollutant concentration < 0.1% o	r 10 000 ppm).							
ppr	m	Concentration in parts per millior	1.							

### **DUST AND AEROSOL FILTERS**

PROTECTION

TYPE

P1	Protects from non-toxic dust and / or water-based aerosols.	Cement dust, flour, calcium carbonate (chalk), graphite, cotton, concrete*					
P2	Protects from slightly toxic or irritating solid aerosols and / or liquids.	Untreated softwood, grinding, cutting, welding, milling, coal, fibre glass, mineral fibre, graphite, pesticide powder*					
P3	Protects from solid aerosols and / or liquids listed as toxic.	Asbestos (without manipulation), pesticide powder, biological agents, pharmaceutical powder, treated wood, hard wood (exotic), chrome, lime, lead, graphite*					
		Manganese, kaolin, sodium hydroxide (caustic soda), quartz, silica*					

PARTICLES



<sup>\*</sup>This type of usage is indicative and cannot engage Delta Plus Responsibility.



http://respiratory.deltaplus.eu

### **USER GUIDE FOR BREATHING** APPARATUS FILTER FOR POLLUTING **SUBSTANCES**

Substances	Chemical formula	N° CAS	Gas filter	Particle: filter	MC/DM*	OEL	Unit of
- chloro- 2,3- epoxy- propane	C3H50Cl	106-89-8	А	P3	MC	VLE=2	ppi
1,1-Trifluoro-2-bromo-2-chloroethane	CF3CHBrCI	151-67-7			ARI or A AIR	2,000	ppi
1,2,2- tetrabromoethane	CHBr2CHBr2	79-27-6	Α	P3	MC	1	ppi
1'-Ethylene-2,2'-bipyridyllium dibromide	C12H12N2Br2	85-00-7		P3	MC	0,50	mg/
2,3,4,5,6,7,8-octachloronaphthalene	C10C18	2234-13-1	Α	P3	MC	0	mg/
2.4- Trichlorobenzene	C6H3Cl3	120-82-1	Α	P3	MC	5,00	pp
2,4-Benzenetricarboxylic anhydride	C9H4O5	552-30-7	Α	P3	MC	0,04	mg/
.2-Benzenedicarboxylic anhydride	C6H4(CO)2O	85-44-9		P3	MC	1,00	pp
2-Dibromo-2,2-dichloroethyl dimethyl phosphate	(CH30)2P(0)0CHBrCBrCl2	300-76-5	A	P3	MC	3,00	mg.
2-dichloroethane	CICH2CH2CI	107-06-2	Α		MC	10,00	pp
2-Dihydroxybenzene	C6H4(OH)2	120-80-9	Α	P3	MC	5	mg.
2-Ethanediamine	NH2CH2CH2NH2	107-15-3	К		MC	10,00	pp
2-ethanediol	HOCH2CH2OH	107-21-1	Α	P3	MC	50,00	PE
3- butadiene	CH2=CHCH=CH2	106-99-0	AX		MC	VLE=1	PP
.4- dichlorobenzene	C6 H4 Cl2	106-46-7	A		MC	75,00	PP
4-benzenediamine	C8H4(NH2)2	106-50-3	A	P3	MC	0	mg,
4-dihydroxybenzene	C6H4(OH)2	123-31-9	A	P3	MC	2	mg
4-dinitrobenzene	C8H4(NO2)2	100-25-4	A	P3	DM or MC	1,000	mg,
			_	P3			-
5-diisocyanatonaphthalene	C10H6(NC0)2	3173-72-6	A2B2		MC	0,10	mg.
5-pentanedial	OCH(CH2)3CHO	111-30-8	A2	P3	MC	0,20	pp
6- hexanolactam	C6H11NO	105-60-2	Α	P3	MC	0,22	pp
Chloro-2-methylbenzene	CIC8H4CH3	95-49-8	A		MC	50,00	pp
Chloro-2-propene	CH2=CHCH2CI	107-05-1	AX		MC	1,00	pp
Hydroxybutane	CH3CH2CH2CH2OH	71-36-3	A		MC	50,00	pp
Methoxy-2-propanol	CH3OCH2CHCH3	107-98-2	A		MC	100	pp
Methylpropyl acetate	CH3COOCH(CH3)CH2CH3	105-46-4	A	P3	DM or MC	200	pp
Propen-3-ol	CH2=CHCH2OH	107-18-6	Α		MC	2	pp
Propyn-3-ol	C3H3OH	107-19-7	A		MC	1	pp
- butoxyethanol	C4H9OCH2CH2OH	111-76-2	A	P3	MC	25,00	PF
- Diethylaminoethanol	(C2H5)2NCH2CH2OH	100-37-8	K		MC	10,00	PF
- ethoxyethyl acetate	CH3COOCH2CH2OCH2CH3	111-15-9	A		MC	1	PF
- ethylhexyl chloroformate	CI1 C7 O2 H12	24468-13-1		DO.	DM or MC	1	_
			A	P3			pp
- furaldehyde	C5H4O2	98-01-1	A		MC	2,00	pp
- Methoxyethyl acetate	CH3COOCH2CH2OCH3	110-49-6	A		MC	0	PP
- Methylaziridine	C3H7N	75-55-8	К	P3	MC	2,00	pp
- methylpentane- 2,4- diol	(CH3)2COHCH2CHOHCH3	107-41-5	A		DM or MC	25	pp
- nitronaphthalene	C10H7N02	581-89-5	Α	P	DM or MC		
- Pyridylamine	NH2C5H4N	504-29-0	Α	P3	DM or MC	2	mg.
,2-Diaminodiethylamine	NH2CH2CH2)2NH	111-40-0	ABEK	P3	MC	1,00	pp
,2'-dihydroxydiethyamine	(HOCH2CH2)2NH	111-42-2	К	P3	MC	3	pp
,2-Dichlorovinyl dimethyl phosphate	(CH30)2P(0)0CH=CCI2	62-73-7	A	P3	MC	0,10	PE
.3- epoxypropyl isopropyl ether	C6H12O2	4016-14-2	Α		MC	50	pp
3,4,5,6-pentachlorophenol	C6CI5OH	87-86-5	А	P3	MC	1	mg.
,3-Dihydro-2,2-dimethyl-7-benzofuranyl	GGGGGGT	07 00 0			140		g
,4- dichlorophenoxyacetic acid	C12C6H30CH2C00H	94-75-7		P3	MC	10	ma
	CI3C6H2OCH2COOH	93-76-5		P3	DM or MC	10	mg.
4,5-Trichlorophenoxyacetic acid							mg,
.4,8- trinitrophenol	(NO2)3C6H2OH	88-89-1		P3	MC	0	mg.
.4,6-tetryl	(NO2)3C6H2N(NO2)CH3	479-45-8	A	P3	MC	2	mg,
,5-Furanedione	C4 H2 D3	108-31-6	Α	P3	MC	0,25	pp
-Aminotoluene	CH3C6H4NH2	95-53-4	Α	P3	MC	2,00	pp
-butanol	CH3CH(OH)CH2CH3	78-92-2	A		MC	100,00	pp
-Carbomethoxy-1-methylvinyl dimethyl phosphate	C7H13P06	7786-34-7	Α	P3	MC	0	pp
Chloro-1,1,2-Trifluoroethyl difluoromethyl ether	CHF20CF2CHCIF	13838-16-9			ARI or A AIR	2,000	pp
-Chloro-1,3-butadiene	CH2=CCICH=CH2	126-99-8	AX	P3	MC	VLE = 1	pp
-chloroacetaldehyde	CICH2CHO	107-20-0	A		MC	1,00	pp
Chloroethanol	CH2CICH2OH	107-07-3	A		MC	1,00	pp
-hydroxymethylfuran	C5H602	98-00-0	A		MC	10,00	pp
-Isopropoxy propane	(CH3)2CHOCH(CH3)2	108-20-3	A		MC	500,00	pp
-Mercaptoacetic acid	HSCH2COOH	68-11-1	A2B2	P3	MC	1	PF
-methoxyethanol	CH3OCH2CH2OH	109-86-4	A		MC	5,00	PP
-methoxyethanor -Metholacrolic acid				P3			
	CH2=C(CH3)COOH	79-41-4	AD /FO		MC	20	pp
-methylpropenenitrile	CH2=C(CH3)CN	126-98-7	AB 450	P3	MC	1	pp
-Methylpropyl acetate	CH3COOCH2CH(CH3)2	110-19-0	A		MC	150.00	pp
-Oxetanone	C3H4O2	57-57-8			ARI or A AIR		
Pentanol acetate	CH3COOCH(CH3)C3H7	626-38-0	Α		MC	125	pp
-Phenyl propylene	C6H5C(CH3)=CH2	98-83-9	А		MC	50,00	pp
-propenamide	CH2=CHCONH2	79-06-1	A	P3	MC	0,30	mg.
-propenenitrile	CH2=CHCN	107-13-1	A	P3	MC	2,00	PE
Propenoic acid	CH2=CHCOOH	79-10-7	A		DM or MC	2,000	PP
-Propyl acetate	CH3COOCH(CH3)2	108-21-4	A		MC	250.00 (ST)	PF
-Propynyl alcohol	C3H3OH	107-19-7	A		MC	1	PF
,3- dichlorobenzidine salts	NH2CIC6H3C6H3CINH2		_	P3		1	μļ
		91-94-1	A		MC	0.00	
3-dimethylbenzidine	C14H16N2	119-93-7	A	P3	MC	0,02	mg
,5,5- trimethylcyclohex- 2- enone	C9H14O	78-59-1	A		MC	4,00	pp
a,4,7,7a-Tetrahydro-4,7-methanoindene	C10 H12	77-73-6	A	P3	MC	5,00	pp
-Heptanone	CH3CH2CO[CH2]3CH3	108-35-4	A		MC	50	pp
-Methyl-1-butanol acetate	CH3COOCH2CH2CH(CH3)2	123-92-2	A		DM or MC	100	pp
	00115000110011(0110)01100110	541-85-5	Α		MC	25	pp
I-Methyl-5-heptanone	C2H5COCH2CH(CH3)CH2CH3	341-03-3	H				

TWA

### TIME WEIGHTED AVERAGE Average Exposure limit over an **8 hour** time period



SHORT TERM EXPOSURE LIMIT Should not be longer than **15 minutes**Should not occur more than 4 times per day with at least 60 minutes between exposures



Substances	Chemical formula	N° CAS	Gas filter	Particles filter	MC/DM*	OEL	Unit of measure- ment
4,4'- Methylenedianiline (mda)	CH2(CBH4NH2)2	101-77-9	А	P3	MC	0,01	ppm
4-Hydroxy-4-Methyl-2-Pentanone	CH3COCH2C(CH3)2OH	123-42-2	Α		MC	50	ppm
4-Nitroaniline	C6 H6 N2 O2	100-01-6	A	P3	MC	6	mg/m3
4-nitrochlorobenzene	CIC6H4N02 CH3COCH2CH2CH(CH3)2	100-00-5	AB A	P3	MC MC	1,00	mg/m3
5-Methyl-2-hexanone 6,9-methano-2,4,3-benzo-dioxathiepin-3-oxide	CHACUCHZCHZCH(CHA)Z C9HRCIRO3S	110-12-3 115-29-7	A	P3	MC	0	ppm mg/m3
Acetaldehyde	CH3CHO	75-07-0	AX	10	MC	100	ppm
Acetic acid	CH3COOH	64-19-7	А	P3	MC	10.00	ppm
Acetic ester	CH3C00C2H5	141-78-6	Α		MC	400.00	ppm
Acetic axide	(CH3CO)20	108-24-7	Α		MC	5	ppm
Acetylene	C2H2	74-86-2			ARI or A AIR	2500	ppm
Acraldehyde	CH2=CHCHO	107-02-8	AX 450		MC	0	ppm
Age	C6H1002	106-92-3	A		MC	5	ppm
Aldrin Alpha-chlorotoluene	C12H8CI6 C6H5CH2CI	309-00-2 100-44-7	AB A	P3	DM or MC MC	0.25	mg/m3
Alpha-chloroacetophenone	C6H5COCH2CI	532-27-4	ABEK	P3	MC MC	0.30	ppm ppm
Alpha-starch	(C8H1005)n	9005-25-8		P3	MC	5,00	mg/m3
Aluminium metal (respirable dust)	Al	7429-90-5		P2/P3	DM or MC	5,000	mg/m3
Aluminum trioxide	Al203	1344-28-1		P3	DM or MC	4	mg/m3
Amidocyanogen	NH2CN	420-04-2		P3	DM or MC	2,000	mg/m3
Aminocyclohexane	C6H11NH2	108-91-8	Α		DM or MC	10,000	ppm
Aminodimethylbenzene	(CH3)2C6H3NH2	1300-73-8	K		DM or MC	2	ppm
Aminomethane Ammonia	CH3NH2	74-89-5	K		MC MC	10 25	ppm
Ammonium amidosulfonate	NH3 NH40S02NH2	7664-41-7 7773-06-0	K	P3	MC	5,00	ppm mg/m3
Ammonium chloride	NH4CI	12125-02-9	К	P P	MC	10	mg/m3
Amyl acetic ether	CH3COO(CH2)4CH3	628-63-7	A		MC	100	ppm
Anhydrous hydrogen bromide;	H Br	10035-10-6	В	P3	MC	3	ppm
Anone	C8H100	108-94-1	Α		DM or MC	25,000	ppm
Antimony and compounds (as sb)	Sb	7440-36-0		P3	MC	MEL	mg/m3
Antimony hydride	SbH3	7803-52-3			ARI or A AIR	0	ppm
Antimony trioxide	03 Sb2	1309-64-4		P3	DM or MC	0,500	mg/m3
Argon	Ar	7440-37-1			ARI or A AIR	0.45	ppm
Arsenic & compounds except arsine  Arsenic trihydride	As AsH3	7440-38-2 7784-42-1		P3	MC ARI or A AIR	0,15 0,020	mg/m3 ppm
Arsenic trinyunue  Arsenic trinyide	As203	1327-53-3			ARI OF A AIR	0,020	mq/m3
Artificial barite	BaSO4	7727-43-7		P3	MC	0,50	mg/m3
ASBESTOS, amiante	Hydrated mineral silicates	1332-21-4	PAPR	P3	MC	MEL	fibres/ml
Asphalt, petroleum fumes	n/a	8052-42-4			ARI or A AIR	5	mg/m3
Atrazine (iso)	C8H14CIN5	1912-24-9		P3	DM or MC	5,000	mg/m3
Azimethylene	CH2N2	334-88-3	ABEK	P3	MC	0,20	ppm
Azirane	C2H5N	151-56-4	K 450		MC		ppm
Azium Azodicarbonamide	NaN3 C2H4N4O2/NH2CON=NCONH2	26628-22-8 123-77-3	A	P3 P3	DM or MC MC	0 MEL	mg/m3 mg/m3
Barium compounds soluble (as ba)	Ba	7440-39-3	А	P2/P3	DM or MC	1	mg/m3
Basudin®	C12H21N2O3PS	333-41-5	BE	P3	MC	0,10	mg/m3
BCME (Bis (chloromethyl) ETHER)	(CH2CI)20	542-88-1	A2	P3	MC	0,05	mg/m3
Benomyl (iso)	C14H18N4O3	17804-35-2	А	P3	DM or MC	5,000	mg/m3
Benzenamine	C6H5NH2	62-53-3	Α	P3	MC	2,00	ppm
Benzene	C6H6	71-43-2	A 450		MC	1,00	ppm
Benzene chloride	C6H5CI	108-90-7	A		DM or MC	75,000	ppm
Benzene hexahydride	C6 H12	110-82-7	A	D	DM or MC	300,000	ppm
Benzyl butyl phthalate Beryllium and compounds	C19 H2O O4 Be	85-68-7 7440-41-7	A	P P3	DM or MC MC	5,000 VLE	mg/m3 mg/m3
Beta-Aminoethyl alcohol	NH2CH2CH2OH	141-43-5	А	10	MC	3	ppm
Beta-Hydroxypropyl acrylate	CH2=CHCOOCH2CHOHCH3	999-61-1	A		MC	1	ppm
BGE	C7 H14 O2	2426-08-6	Α		MC	5,60	ppm
Biotite	H2KAl3(Si04)3	12001-26-2		P3	DM or MC	3,000	mg/m3
Bipotassium chromate	K2 Cr 04	7789-00-6			ARI or A AIR		mg/m3
Bis( 2- ethylhexyl) phthalate	C24H38O4	117-81-7	A	P3	DM or MC	5,000	mg/m3
Bis( 2,3- epaxypropyl) ether	C6H1003	2238-07-5	Α	P3	MC	0,10	ppm
Bismuth telluride Borates, (tetra) sodium salts	Bi2Te3 Na2B407	1304-82-1		P3	MC DM or MC	5,00 1,000	mg/m3
Borax decahydrate	Na2B407 • 10H20	1303-96-4		P3	MC MC	5,00	mg/m3 mg/m3
Boric anhydride	B203	1303-86-2		P3	DM or MC	10,000	mg/m3
Bornan- 2- one	C10H160	76-22-2	А	P3	DM or MC	2,000	mg/m3
Boron fluoride	BF3	7637 07 02			ARI or A AIR	1,000	ppm
Boron hydride	B2H6	19287-45-7	В	P3	MC	0,10	ppm
Bromacil (iso)	C9H13BrN2O2	314-40-9	AB	P3	DM or MC	1,000	ppm
Bromine	Br2	7726-95-6	В	P3	MC	0,10	ppm
Bromine fluoride	BrF5	7789-30-2	AX		MC	0,10	ppm
Bromoethylana	CH3CH2Br	74-96-4	AX		MC DM or MC	200,00	ppm
Bromoethylene Bromoform	CH2=CHBr CHBr3	593-60-2 75-25-2	AX		DM or MC	5,000	ppm
Bromorethane	CH3Br	75-25-2	AX		MC MC	0,50 5	ppm
Butane	CH3CH2CH2CH3	106-97-8	AX		DM or MC	600,000	ppm
Butyl acrylate	CH2=CHCOOC4H9	141-32-2	A		MC	10,00	ppm
Butyl ester of 2-hydroxypropanoic acid	CH3CH(OH)COOC4H9	138-22-7	Α	P3	DM or MC	5,000	ppm
Butyl ethanoate	CH3COO(CH2)3CH3	123-86-4	Α		MC	150	ppm

This list is not contractual. It is an indicative list and in no way incurs the liability of DELTA PLUS.





Substances	Chemical formula	N° CAS		Particles filter	MC/DM*	OEL	Unitof
Butyl methyl ketone /MBK	CH3CD[CH2]3CH3	591-78-6	A		MC	5,00	ppn
Butylamine Cadmium	CH3CH2CH2CH2NH2	109-73-9 7440-43-9	BK	P3	MC DM == MC	5,00 VLE=0,05	ppn
Caesium hydroxide	Cd S CsOH	21351-79-1	В	ro	DM or MC DM or MC	2,000	mg/r mg/r
Calcium carbimide	CaCN2	156-62-7			ARI or A AIR	0,500	mg/r
Calcium carbonate	CaCO3	1317-65-3		P3	DM or MC	5,000	mg/
Calcium hydrate	Ca(OH)2	1305-62-0		P3	DM or MC	5,000	mg/
Calcium monosilicate	CaSiO3	1344-95-2		P2/P3	DM or MC	5,000	mg/
Calcium sulfate hemihydrate	CaSO4 • 0.5H2O	26499-65-0		P3	DM or MC	5,000	mg/
Captafol (iso)	C10H9C114N02S	2425-06-1	A		MC	0,10	mg/
Carbaryl (iso)	CH3NHCOOC10H7	63-25-2	Α		DM or MC	5,000	mg/
Carbofuran (iso)	C12H15N03	1563-66-2	A	P3	DM or MC	0,100	mg/
Carbolic acid	C6H5OH	108-95-2	А	P3	MC	5	pp
Carbon black	C	1333-86-4		P3	MC ADJ as A AJD	3,50	mg/
Carbon dioxide	CO2	124-38-9	AV		ARI or A AIR MC	5000,000	pp
Carbon disulphide Carbon hexachloride	C S2 CI3CCCI3	75-15-0 67-72-1	AX A	P3	MC	10,00	pp
arbon mexacillorue Carbon monoxide	CO	630-08-0	A	P3	ARI or A AIR	30,000	PF PF
Carbon tetrachloride	CC14	56-23-5	A		MC MC	2,00	PF
Carbonyl chloride	COCI2	75-44-5	В	P3	MC	0,10	PF
Carboxyethane	CH3CH2C00H	79-09-4	A	P3	MC	10	PF
18	CH2BrCl	74-97-5	A	10	MC	200,00	PF
d: Cadmium	CdO/Cd	1306-19-0	-	P3	MC	VLE=0,05	mg/
cellosolve®	C2H50CH2CH2OH	110-80-5	Α	10	MC	0,50	PF
cellulose	(C8H1005)n	9004-34-6	-	P3	DM or MC	5,000	mq.
cement	as Portland Cement	65997-15-1		P2/P3	DM or MC	10,000	mg,
Chlordan	C10H6CI8	57-74-9	A	P3	DM or MC	0,500	mg.
Chlorine	CI2	7782-50-5	В		MC	0,50	PF
Chlorine fluoride	CIF3	7790-91-2	В		MC	0,30	PE
Chlorine axide	CI 02	10049-04-4	В		DM or MC	0,100	PP
Chloroacetic acid chloride	CICH2COCI	79-04-9	A	P3	MC MC	0,00	PE
Chlorocyanide	CICN	506-77-4	B 450		MC	0,30	PP
thlorodimethyl ether	CH30CH2CI	107-30-2	2 400		ARI or A AIR	0,00	PF
Chloroethane	CH3CH2CI	75-00-3	AX		DM or MC	1000,000	pp
Chloroéthanoic acid	CICH2COOH	79-11-8	A	P3	MC	0	PF
Chloroethene	CH2=CHCI	75-01-4	AX	10	MC	1,00	pp
Chloroform	CHCI3	67-66-3	AX		MC	2,00	PF
Chloromethane	CH3CI	74-87-3	751		ARI or A AIR	100,000	pp
Chloropicrin	CCI3NO2	76-06-2	А	P3	MC	0,10	PF
Chlorosulfuric acid	HCL03S	7790-94-5	E	P3	MC	1,00	mg/
Chlorothene	CH3CCI3	71-55-6	A		MC	300,00	pp
Chlorpyrifos	C9H11Cl3NO3PS	2921-88-2	A	P3	DM or MC	0,200	mg/
Chromic acid (cro3)	CrO3	1333-82-0	BF	P3	MC	0,05	mg/
Chromium	Cr	7440-47-3	D.	P3	MC	0,50	mg/
Cobalt and compounds (as co)	Co	7440-48-4		P2/P3	DM or MC	VLE	mg/
Copper, dusts and mists	Cu	7440-50-8		P3	MC	1,00	mg/
Crag® herbicide No. 1	C6H3Cl2OCH2CH2OSO3Na	136-78-7		P3	MC	5,00	mg/
Cresols (all isomers)	C7 H8 O	1319-77-2	Α	P3	MC	5,00	pp
Currene	C6H5CH(CH3)2	98-82-8	A		MC	50,00	PF
Oyanogen chloride, (as -cn)	C- N	57-12-5	В	P3	MC	5,00	mg/
Cyclohexene	C6 H10	110-83-8	A		DM or MC	300,000	pp
Dyclohexylmethane	CH3C8H11	108-87-2	A		DM or MC	400,000	pp
DBP	C8H4(C00C4H9)2	84-74-2	А	P3	MC	5,00	mg.
Oca	C2CI2	7572-29-4			ARI or A AIR	0,100	pp
DDH	C5H6Cl2N2O2	118-52-5	ABEK	P3	MC	0,20	mg.
DOT	(C6H4CI)2CHCCI3	50-29-3		P3	MC	1	mg.
Di- N- Butyl Phoshate	(C4H9O)2(OH)PO	107-66-4	А	P3	MC	1,00	PF
Diallyl phthalate	C14 H14 O4	131-17-9	A	P3	DM or MC	5,000	pp
Diammonium peroxodisulphate	N2 H8 S2 O8	7727-54-0	А	P3	MC	1,00	mg.
Dianiline (mboca)	CH2(C6H4CINH2)2	101-14-4	A	P3	MC	0,00	mg.
Diatomaceous earth, natural, respirable dust	SiO2	68855-54-9		P3	MC	1,20	mg.
DIBENZ(a, h) ANTHRACENE	C22 H14	65996-93-2	А	P3	MC	0,10	mg.
Dibenzayl peraxide	(C6H5CO)2O2	94-36-0	А	P3	DM or MC	5,000	mg.
Dibromochloropropane	CH2BrCHBrCH2CI	96-12-8			ARI or A AIR	0,001	PF
Dibutyl phosphate	(C4H9O)2(OH)PO	107-66-4	А	P3	MC	1,00	pp
Dibutylated hydroxytoluene	(C(CH3)3)2CH3C6H2OH	128-37-0		Р	MC	10,00	mg.
Dichloromethane	CH2Cl2	75-09-2	AX		MC	50,00	pp
Dichloromethyl ether	(CH2CI)20	542-88-1	A2	P3	MC	0,05	mg.
)icyanogen	NCCN	460-19-5	BK		DM or MC	10,000	pp
Dicyclohexyl phthalate	C20 H26 O4	84-61-7	А	P3	DM or MC	5,000	pp
Dieldrin (iso)	C12H8C16O	60-57-1	А	P3	DM or MC	0,250	mg.
Diethyl ether	C2H50C2H5	60-29-7	AX		MC	400,00	pp
liethyl phthalate	C6H4(C00C2H5)2	84-66-2	А	P3	DM or MC	5,000	mg.
Diethyl sulphate	C4 H10 O4 S	64-67-5	А	P3	MC	VLE	pp
Diethylene imidaxide	C4H90N	110-91-8	А		MC	20	pp
Difluorodibromomethane	CBr2F2	75-61-6			ARI or A AIR	100,000	pp
Diisodecyl phthalate	C28 H46 O4	26761-40-0	А	P3	DM or MC	5,000	mg.
Diisononyl phthalate	C26 H42 D4	28553-12-0	А	P3	DM or MC	5,000	mg.
Diisooctyl phthalate	C24 H3B O2	27554-26-3	А	P3	DM or MC	5,000	mg.
Diisopropylamine	[(CH3)2CH]2NH	108-18-9	К		MC	5	pp
Dimethyl carbinol	(CH3)2CH0H	67-63-0	А		MC	400	pp
Dimethyl ester of 1,2-benzenedicarboxylic acid	C6H4(C00CH3)2	131-11-3	Α	P3	MC	5,00	mg.
Dimethyl ether	H6 C2 O	115-10-6			ARI or A AIR	400,000	pp
Dimethyl methane	CH3CH2CH3	74-98-6			ARI or A AIR	1000,000	pp
Dimethyl sulphate	(CH3)2SO4	77-78-1	А	P3	MC	0,10	pp
Dimethylacetone	CH3CH2COCH2CH3	96-22-0	А		DM or MC	200,000	pp
Dimethylaminoethanol	C4H11NO/(CH3)2NCH2CH2OH	108-01-0	A		MC	? 2	PF
Dimethylnitromethane	(CH3)2CH(NO2)	79-46-9	A	P3	MC	10,00	PF
Dinitrogen tetroxide (N2O4),	N O2	10102-44-0	NO		MC	3,00	DD
Diphenyl	C6H5C6H5	92-52-4	A	P3	MC	0,20	PP
Diphenyl ether (vapor)	C6H50C6H5	101-84-8	A	P3	MC	1,00	PF
Dipotassium peroxodispulphate (measured as s208)*	H2 K2 O8 S2	7727-21-1	AB	P P	MC	1,00	mg,
Direx(8)	C6H3Cl2NHCON(CH3)2	330-54-1	- ND	P3	DM or MC	10,000	mg.
muncy		7775-27-1	A	P3	MC MC	1,00	mg/
lisadium narayadisulphata (maggured oc c2c0)				173	TITLE	1.00	mily/
	Na2 08 S2			DC.			
Disodium peroxodisulphate (measured as s2o8) Disodium tetraborate, decahydrate Disodium tetraborate, pentahydrate	Na2B407 • 10H20 B4 07 2Na 10H 20	1303-96-4	A	P3	MC DM or MC	5,00	mg/

Substances	Chemical formula	N° CAS	Gas fiiter	Particles filter	MC/DM*	OEL	Unitof measure- ment
Disulphur dichloride	S2 CI2	10025-67-9	В	P3	MC	1,00	ppm
Divanadium pentaoxide (as v)	V205	1314-62-1		P3	MC	VLE=0,005	mg/m3
DMAC	CH3CON(CH3)2	127-19-5	A		DM or MC	10,000	ppm
DMF	HCON(CH3)2 (CH3)2NNH2	68-12-2 57-14-7	A K 450		MC MC	10,00	ppm
Fca	CBH7NO2	7085-85-0	AXB	P3	MC	2	ppm mg/m3
Elemental selenium	Se	7782-49-2	AND	P3	MC	0	mg/m3
Endrine	C12H8C160	72-20-8		P3	MC	0,10	mg/m3
Ethane	C2 H6	74-84-0			ARI or A AIR		ppm
Ethanedioic acid	H00CC00H • 2H20	144-62-7		P3	MC	1	mg/m3
Ethanethiol	CH3CH2SH	75-08-1	AX	P3	MC	1	ppm
Ethyl acetone	CH3COCH2CH2CH3	107-87-9	A		MC	200	ppm
Ethyl acrylate	CH2=CHCOOC2H5	140-88-5	A		MC	5,00	ppm
Ethyl alcohol	CH3CH2OH	64-17-5	A		MC	1000	ppm
Ethyl chloroformate	C3H5ClO2 / ClCOOC2H5	541-41-3	AV		ARI or A AIR	1 100	ppm
Ethyl ester of formic acid Ethyl methyl ketone	CH3CH2OCHO CH3COCH2CH3	109-94-4 78-93-3	AX A		MC MC	100 200,00	ppm
Ethyl nitrile	CH3CN	75-05-8	A		MC	40	ppm
Ethyl parathion	(C2H5O)2P(S)DC8H4NO2	56-38-2	A2	P3	MC	0	mg/m3
Ethylamine	CH3CH2NH2	75-04-7	К		MC	10,00	ppm
Ethylbenzene	CH3CH2C6H5	100-41-4	A		MC	100	ppm
Ethylene	C2 H4	74-85-1			ARI or A AIR		ppm
Ethylene bromide	BrCH2CH2Br	106-93-4	A		MC	0,05	ppm
Ethylene oxide	C2H4O	75-21-8	AX		MC	5,00	ppm
Ferbam (iso)	[(CH3)2NCS2]3Fe	14484-64-1		P3	MC	10	mg/m3
Ferrocene	C10 H10 Fe	102-54-5	Α	Р	MC	10	mg/m3
Fluoride (as f)	F	16984-48-8	AB	P3	DM or MC	3	mg/m3
Fluorine-19	F2	7782-41-4	B		MC	1,00	ppm
Formal Formaldehyde	CH3OCH2OCH3 HCHO	109-87-5 50-00-0	AX		MC MC	1000,00 0,50	ppm
Formanide	HCHU HCONH2	75-12-7	ABE	P3	MC MC	10,00	ppm ppm
Formic acid	HCOOH	64-18-6	B / BE	P3	MC	5	ppm
Formonitrile	HCN	74-90-8	В	P3	MC	2,00	ppm
Freon® 112	CCI2FCCI2F	76-12-0	A		MC	500,00	ppm
Freon® 112a	CCI3CCIF2	76-11-9	A		MC	500,00	ppm
Freon® 113	CC12FCC1F2	76-13-1			ARI or A AIR	1000	ppm
Freon® 114	CCIF2CCIF2	76-14-2			ARI or A AIR	1000,000	ppm
Freon® 12	CCI2F2	75-71-8			ARI or A AIR	1000,000	ppm
Freon® 21	CHCI2F	75-43-4			ARI or A AIR	10,000	ppm
Freon® 22	CHCIF2	75-45-6			ARI or A AIR	1000,000	ppm
Germanium tetrahydride	GeH4	7782-65-2			ARI or A AIR	0	ppm
Glycerol	HOCH2CH(OH)CH2OH	56-81-5	A	P3	MC	5,00	mg/m3
Glycidyl phenyl ether	C9H1002	122-60-1	A	р	MC	1 0.00	ppm
Clycol dinitrate Graphite	02N0CH2CH20N02 C	628-96-6 7440-44-0	A	P2/P3	MC DM or MC	0,20 5,000	ppm mg/m3
Guthion®	C10H12O3PS2N3	86-50-0	A	P3	DM or MC	0,000	mg/m3
Gypsum	Ca S 06 H4	10101-41-4		P3	MC	4	mg/m3
Hafnium	Hf	7440-58-6		P3	MC	1	mg/m3
Halon® 1301	CBrF3	75-63-8			ARI or A AIR	1000,000	ppm
Helium	He				ARI or A AIR		ppm
Heptan-2-one	CH3CO(CH2)4CH3	110-43-0	A		MC	100	ppm
Hexachlorobenzene	C6 C16	118-74-1	A	P3	MC	0,03	mg/m3
Hexahydromethylphenol	CH3C6H100H	25639-42-3	A		MC	50	ppm
Hexalin	C6H110H	108-93-0	A		MC	50,00	ppm
Hexamethyl phosphoramide Hexane	(( CH3) 2N) 3PO	680-31-9 110-54-3	A		ARI OU A AIR	50	
Hydrated lime	CH3(CH2)4CH3 Ca(OH)2	1305-62-0	A	P3	DM or MC	5,000	ppm mg/m3
Hydrazine	H2NNH2	302-01-2	К	P3	MC MC	0,10	ppm
Hydrazinobenzene	C6H5NHNH2	100-63-0	A	P3	DM or MC	0,140	ppm
Hydrazoic acid (as vapour)	H N3	7782-79-8	К	P3	MC	0	ppm
Hydrogen	H2	1333-74-0 ?			ARI or A AIR		ppm
Hydrogen chloride	H CI	7647-01-0	В	P3	MC	5,00	ppm
Hydrogen fluoride (as f)	HF	7664-39-3	B 450	P3	MC	3.00 (ST)	ppm
Hydrogen nitrate	HNO3	7697-37-2	B/BE/ NO	P3	MC	2	ppm
Hydrogen peroxide	H202	7722-84-1	AB	P3	MC	1	ppm
Hydrogen phosphide	PH3	7803-51-2	В		MC	0,10	ppm
Hydrogen sulfate	H2SD4	7664-93-9	BE 450	P3	MC	1	mg/m3
Hydrogen sulphide	H2 S	7783-06-4	В		MC	10	ppm
Hydroquinone monomethyl ether	CH30C6H40H	150-76-5		P3	MC	5	mg/m3
Hydrous magnesium silicate	Mg3Si4010(0H)2	14807-96-6		P3	MC	2,00	mg/m3
Hyponitrous acid anhydride	N2 0	10024-97-2	NO		MC	25,000	ppm
Impure corundum	Al203	1302-74-5		P3	DM or MC	5	mg/m3
Indium and compounds (as in)	In on up	7440-74-8		P3	MC	0	mg/m3
Indonaphthene	C9 H8	95-13-6 7669 68 9	A IPR	DO.	MC MC	10 n 1n	ppm
lodine lodomethane	12 CH3I	7553-56-2 74-88-4	AX	P3	MC MC	0,10 VLE=2	ppm
lodomethane Iron (III) axide	CH3I Fe203	74-88-4 1309-37-1	ΑX	P3	DM or MC	VLE=2	ppm mn/m3
Iron (III) oxide Iron oxide, fume (as fe)	Fe2U3 Fe2U3	1309-37-1		P3	DM or MC	5	mg/m3 mg/m3
Iron pentacarbonyl	Fe(CO)5	13463-40-6	A	P3	MC MC	0	ppm
Isobutanol	(CH3)2CHCH2OH	78-83-1	A		MC	50	ppm
Isobutenyl methyl ketone	(CH3)2C=CHCOCH3	141-79-7	A		MC	10,00	ppm
Isoflurane	C3 F5 H2 CI O	26675-46-7			ARI or A AIR	50	ppm
Isophorone diamine diisocyanate	C12H18N2O2	4098-71-9	A		MC	VLE=0,01	ppm
Isopropyl chloroformate	C4H7ClO2/(CH3)2CHOCOCI	108-23-6	A	P3	MC	? 1.00	ppm
Isovalerone	[(CH3)2CHCH2]2CO	108-83-8	A		MC	25,00	ppm
	C20H28D3 / C21H28D5 C21H3DD3 /		Т	P3			
Jasmolin I or II	C22H3005 C21H2B03 / C22H2B05	8003-34-7	A		MC	5.00	mg/m3
Kaolin	(AI2Si2O5(OH)4)2	1332-58-7		P3	DM or MC	5	mg/m3
Keto-ethylene	CH2=CO	483-51-4			ARI or A AIR	1	ppm
Ketone propane	(CH3)2CO	67-64-1	AX		MC	500	ppm
Lead and compounds (except lead alkyls)	Pb	7439-92-1		P3	MC	150,00	μg/ m3
Lepidolite	n/a	12001-26-2		P3	DM or MC	3,000	mg/m3
Lime	CaO	1305-78-8		P2/P3	MC	2,00	mg/m3
				P3	MC	1.00 (ST)	mm / mm O
Lithium hydroxide	LiOH	1310-65-2					-
Lithium hydroxide Lithium monohydride* LPG (Liquefied Petroleum Gas)	LiOH LiH Mix: C3 H8; C3 H8; C4 H8; C4 H10	7580-67-8 68476-85-7	A	P3	MC ARI or A AIR	0,025	mg/m3 mg/m3 ppm






	Substances	Chemical formula	N° CAS	Gas filter	Particles filter	MC/DM*	OEL	Unit of
Magnesite		MgC03	546-93-0		P3	DM or MC	5,000	mg/
,	ne and dust (as mg)	MgO	1309-48-4		P3	DM or MC	15	mg/
Malathion (iso) Manganese and com	coundo (oo ma)	C10H1906PS2 Mn	121-75-5 7439-96-5	A	P3 P2/P3	MC DM or MC	10 1,000	mg/
vanganese anu com Vanganese tetroxide	Journus (as mm)	Mn304	1317-35-7		PZ/P3	DM or MC	1,000	mg/ ma/
	vlmethylcyclopentadieny	CH3C5H4Mn(CO)3	12108-13-3	A	P3	MC MC	0	mg/
Margarite	,,,	n/ a	12001-26-2		P3	DM or MC	3,000	mg/
MD		C5H5Mn(CD)3	12079-65-1	A	P3	DM or MC	0,100	mg/
MDI		CH2(C6H4NCO)3	101-68-8	А	P3	MC	0,01	ppi
Mecrylate		CH2=C(CN)COOCH3	137-05-3	A	P3	MC	2,00	ppi
	ic divalent compounds	Hg	7439-97-6	Hg	P3	DM or MC	0,050	mg/
Mesitylene		CBH3(CH3)3	108-67-8	A		MC	25	ppi
Methacrylate monorr Methane	er	CH2=C(CH3)COOCH3 C H4	80-62-6 74-82-8	A		MC ARI or A AIR	100	ppi
vieuriarie Viethane tetrabromid	0	CBr4	74-82-8 558-13-4	A		DM or MC	1,400	pp mg/
Methane tetramethyl		C(CH2OH)4	115-77-5	A	P3	MC MC	5	mg/
Methanethiol	UI .	CH3SH	74-93-1	AXB		MC	0,50	pp
Methanol		CH30H	67-56-1	AX		MC	200	рр
Methomyl (iso)		CH3C(SCH3)NOC(O)NHCH3	16752-77-5		P3	MC	3	mg/
Methaxy-dtt		(C6H4OCH3)2CHCCl3	72-43-5	A	P3	DM or MC	15,000	mg.
Methyl acetate		CH3C00CH3	79-20-9	AX		MC	200.00	pp
Methyl ester of formi	acid	HC00CH3	107-31-3	AX		MC	100	pp
Methyl ester of isocya	nic acid	CH3NCO	624-83-9	В	P3	MC	VLE=0,02	mg.
Methyl ethylene oxide		C3H6O	75-56-9	AX 450		MC	100,00	pp
Methyl parathion		(CH30)2P(S)0C8H4N02	298-00-0	A2	P3	MC	0	mg
Methyl phosphite		(CH3O)3P	121-45-9	А	P3	MC	2	pp
fethyl propenoate		CH2=CHCOOCH3	96-33-3	А		MC	10	pp
METHYL- t- BUTYL ETHE	R	C5 H12 O	1634-04-4	AX	P3	MC	25	pp
fethylene oxide		HCH0	50-00-0	ABE		MC	0,50	pp
1ethylstyrene		CH2=CHC6H4CH3	25013-15-4	A		MC	100	pp
fiak		CH3COCH2CH2CH(CH3)2	110-12-3	A		MC	50	pp
(ibc		(CH3)2CHCH2CH(OH)CH3	108-11-2	A	DC.	MC	25	pp
(MH folybdopum compo	ande (oe ma)	CH3NHNH2 Mn	60-34-4 7439-98-7	AK	P3	MC MC	0,04 5	pp
Molybdenum compou Monochloropentafluo		CCIF2CF3	76-15-3		P3	ARI or A AIR	1000.000	mg
Aonofluorotrichloron		CCI3F	75-69-4			ARI OF A AIR	1000,000	pp
I- Butyl chloroformat		C5 H10 CL 02	592-34-7	A	P3	MC	100	PI
I- propyl acetate		CH3COOCH2CH2CH3	109-60-4	A	10	MC	200.00	pp
I, n- dimethylaniline		C6H5N(CH3)2	121-69-7	A	P3	MC	5.00	pp
I,N'-Dimethyl-4,4'-bip	vridinium dichloride	CH3(C5H4N)2CH3 • 2CI	1910-42-5	A	P3	MC	0,10	mg.
laphthalene		C10H8	91-20-3	А	P3	MC	10,00	pp
lavadel®		C4H6O2[SPS(OC2H5)2]2	78-34-2	A	P3	MC	0,20	mg.
leon		Ne	7440 01 9			ARI or A AIR		pp
I-Ethylethanamine		(C2H5)2NH	109-89-7	K + 450		MC	10,00	pp
I-Ethylmorpholine		C6 H13 N O	100-74-3	А	P3	MC	5.00	pp
lg		CH2N03CHN03CH2N03	55-63-0	A	P3	DM or MC	0,100	mg
lickel and inorganic	compounds	Ni	7440-02-0		P3	DM or MC	1,000	mg
lickel carbonyl		Ni(CO)4	13463-39-3			ARI or A AIR	0.10 (ST)	pp
licotine		C5H4NC4H7NCH3	54-11-5	A	P3	DM or MC	1	mg
litrapyrin		CIC5H3NCCI3	1929-82-4	AB	P3	MC	5,00	mg
litric oxide		N 0	10102-43-9			ARI or A AIR	25	pp
litrocarbol		CH3N02	75-52-5	A	P3	MC	100	pp
litroethane litrogen		CH3CH2NO2	79-24-3	A	P3	MC ADLOS A AID	100	pp
litrogen litrogen trifluoride		N2 NF3	7727-37-9 7783-54-2			ARI or A AIR ARI or A AIR	10	pp
litropropane		CH3CH2CH2NO2	108-03-2	A	P3	MC MC	25	PI
	20	(OLIO)ONIII	124-40-3	1 1/	ro	MO	10.00	
i-metnyimethanami IN- Dimethylethylam		C4 H11 N	598-56-1	K	P3	MC	5,00	PI
I-Nitroso-N,N-dimeth		(CH3)2N2O	62-75-9	A	P3	MC	0,00	hi
I-wicroso-w,w-uimech I-octane	,	CH3[CH2]6CH3	111-65-9	A	10	MC	75,00	mg
lonyphenols		C15H24O	25154-52-3	A	P3	MC	,5,00	my
I-phenylmethylamin	3	C6H5NHCH3	100-61-8	A		DM or MC	1	pp
	capto-4-cyclohexene 1,2-dicarboximide	C9HBCl3NO2S	133-06-2	A	P3	DM or MC	5,000	mg
	oyoronoxono i,e dicalbuxinilus	C21H22N2O2	57-24-9	-				
lux vomica L acotyleaticylic acid		C21H22N2U2 CH3COOC6H4COOH	57-24-9		P3 P2/P3	MC DM or MC	5.00	mg mg
⊢acetylsalicylic acid ⊦anisidine		NH2C6H4CUUH	90-04-0	A	P2/P3	DM or MC MC	5.00	_
-anisidine -dianisidine		NH2C6H4UCH3 (NH2C6H3OCH3)2	119-90-4	A	P3	DM or MC		mg
-dianisidine I-diphenylbenzene		(NH2C6H3UCH3)2 C6H5C6H4C6H5	84-15-1		P3	DM or MC	1	PI
il mist, mineral		Оплавинации	8012-95-1		P3	DM II MC	5	mg
il of mirbane		C8H5NO2	98-95-3	A	P3	MC	1	P
-nitrotoluene		NO2C6H4CH3	88-72-2	A	P3	MC	2,00	pp
rtho-dichlorobenzen	8	C6H4CI2	95-50-1	A		MC	50,00	pp
rthophosphoric acid		H3P04	7664-38-2	В	P3	MC	1.00 (ST)	mg
-sec-Butylphenol		CH3CH2CH(CH3)C6H4OH	89-72-5	A		MC	5,00	pp
Ismium axide		0s04	20816-12-0	В	P3	MC	0	mg
xooctyl alcohol		C7H15CH2OH	26952-21-6	А		MC	50	pp
zone		03	10028-15-6	AXB2	P3	MC	0	pp
- Aramid respirable	fibres	(C14 H10 O2 N2) n	26125-61-1		P3	DM or MC	0.50	fibre
- toluenesulphonyl c	hloride	C7 H7 S O2 CI	98-59-9	AB	P3	DM or MC	5.00 (ST)	mg
aracetamol		C8 H9 N O2	103-90-2		P3	DM or MC	10	mg
-Dioxane		C4H8D2	123-91-1	А	P3	MC	10,00	pp
entachlorophosphor	us	PCI5	10026-13-8	В	P3	MC	1,00	mg
entane		CH3[CH2]3CH3	109-66-0	AX		MC	120	p
eracetic acid		C2H4O3	79-21-0	AB	P3	DM or MC		pp
eroxide de 2-Butano	ne	C8H16O4	1338-23-4	А	P3	MC	VLE=0,2	pp
henyl phosphate		(C8H5O)3PO	115-86-6	A	P3	MC	3	mg
henylaniline		(C6H5)2NH	122-39-4	А	P3	MC	10,00	mg
henylethylene		C6H5CH=CH2	100-42-5	A		MC	50,00	pp
'horate		(C2H5O)2P(S)SCH2SC2H5	298-02-2	Α	P3	MC	0	mg
hosphorus axychoria		POCI3	10025-87-3	В	P3	MC	0	pp

Substances	Chemical formula	N° CAS	Gas filter	Particles filter	MC/DM*	OEL	Unit of
hosphorus pentoxide		1314-56-3	A	P3	DM or MC	2.00 (ST)	mg/
hosphorus trichloride	PCI3	7719-12 2	B 450	P3	MC	0	pp
hosphorus, yellow	P4	7723-14-0			ARI or A AIR	0	mg/
ricloram (iso)	C6H3Cl3O2N2	1918-02-1	AB	P3	MC	5,00	mg/
iperazine hydrochloride	C4H1DN2 HCI	142-64-3		P3	MC	5.00	mg/
iperidine	CH2(CH2)4NH	110-89-4	A	DD /DD	DM or MC	?	pp
latinum metal	Pt	7440 06 4	40	P2/P3	DM or MC	5	mg/
olychlorinated biphenyl	C6H3Cl2C6H2Cl3	11097-69-1	AB	P3	MC	0,10	mg/
olychlorinated biphenyls (pcb's)	C12 H( 10- x) Clx	1336-36-3		DO.	ARI or A AIR	0,500	mg/
otassium bromate	K Br 03	7789-01-2		P3	DM or MC MC	0.00 (07)	
lotassium hydroxide L-quinone	0C6H4O	1310-58-3 106-51-4	A	P3	MC MC	2.00 (ST) 0,10	mg.
rimary isoamyl alcohol	(CH3)2CHCH2CH2OH	123-51-3	A	Po	MC MC	100	pp
ropranolol	C16 H21 N O2	525-66-6	A	P3	DM or MC	2	pp mg.
ropylene	C3 H6	115-07-1	А	Po	ARI or A AIR		_
ropylene glycol	as Propane-1,2- diol	57-55-6	A	P3	DM or MC	150	pp
ropylene glycol-1,2-dinitrate	CH3CNO2OHCHNO2OH	6423-43-4	A	P3	MC MC	0	bt
vc (polyvinyl chloride) (resp. Dust)	(C2 H3 CI) N	9002-86-2	н	P3	MC	4	mg.
yridine	C5H5N	110-86-1	A	P3	MC	5	pp
yrophosphate	Na4P207	7722-88-5	н	P3	MC	5	mg.
uartz	Si02	14808-60-7		P3	DM or MC	0,050	mg
DX	C3H6N6O6	121-82-4		P3	DM or MC	1.500	mg.
esorcinal	C8H4(OH)2	108-46-3	A	P3	MC MC	10	_
hodium (as rh) metal fume and dust	C0H4(UH)Z	7440-16-6	H	P2/P3	DM or MC	0	pp mg.
otenone (iso)	C23 H22 O6	83-79-4	A	P2/P3	MC MC	5	mg.
ocerose	C23 H22 U6 C12H22O11	83-79-4 57-50-1	H	P2/P3	DM or MC	10	mg.
accarose ec-Hexyl acetate	C8 H16 O2	108-84-9	A	r2/Y3	MC MC	50	mg.
ec-nexyi acetate eekay wax	C10H4CI4	1335-88-2	A	P3	DM or MC	2	mq
eeray wax elenium dihydride	H2 Se	7783-07-5	-	10	ARI of A AIR	0	pp
ilica, amorphous (resp. Dust)	NZ 36 SiO2	7631-86-9		P3	MC MC	6,00	ma
ilica, fused (resp. Dust)	02 Si	60676-86-0		P3	MC MC	0,00	mg.
ilicar, ruseu (resp. bust)	SiH4	7803-62-5		1.0	ARI or A AIR	5,000	DI.
ilicon (resp. Dust)	Si Si	7440-21-3		P3	MC MC	3,000	mg.
ilicon monocarbide	SiC	409-21-2		P3	DM or MC	5,000	mg.
ilver, metallic	Ag	7440-22-4		P3	MC MC	0,000	mg.
odium bisulphite	NaHS03	7631-90-5		P2/P3	MC	5	mg.
odium hydroxide	NaOH	1310-73-2		P3	MC MC	2.00 (ST)	mg.
odium metabisulphite	Na2S205	7681-57-4	В	P3	MC	5,00	mg.
odium monofluoroacetate	FCH2COONa	62-74-8	D	P3	DM or MC	0,00	_
ubtilisins	Bacillus subtilis	1395-21-7		ro	ARI OF A AIR		mg.
ubunsins ulfur fluoride	SF6	2551-62-4	BE	P3	MC MC	1000	_
	SDCI2		BE	P3			pp
rulfurous oxychloride rulphur dioxide	S02	7719-09-7 7446-09-5	E	P3	MC MC	1.00 (ST)	pp
oupnur uuxiue Sulphur pentafluoride		5714-22-7	B	P3		0,01	pp
	S2F10		В	P3	MC ADL on A AID		pp
oulphur tetrafluoride	SF4	7783-60-0			ARI or A AIR	0	pp
ulphuryl difluoride	S02F2	2699-79-8	BE 450		MC	5	pp
lym-dichloroethylene	CICH=CHCI	540-59-0	AX		MC	200,00	pp
antalum DB	Ta Ta	7440-25-7		P3	MC DM == MC	5	mg.
CP	(CH3C6H4O)3PO	78-30-8	A	P3	DM or MC	0	mg.
DI	CH3CBH3(NCO)2	584-84-9	A2B2	P3	MC	VLE=0,01	pp
EA	(C2H5)3N	121-44-8			MC	10,00	pp
edp	[(CH3CH2O)2PS]20	3689-24-5	ABE	P3	MC	0	mg.
ellurium & compounds	Te	13494-80-9		P2/P3	DM or MC	0	mg.
ellurium fluoride	TeF6	7783-80-4			ARI or A AIR	0	pp
epp (iso)	[(CH3CH2O)2PO]20	107-49-3	A	P3	MC	0	mg.
ert-Butyl ester of acetic acid	CH3C00C(CH3)3	540-88-5	A		DM or MC	200	pp
etrachloroethylene	CI2C=CCI2	127-18-4	A		MC	50,00	pp
etraethyl silicate	(C2H5)4SiO4	78-10-4	A		MC	10	pp
etramethyl silicate	(CH30)4Si	681-84-5	A		MC	1	pp
etramethyl succinodinitrile	(CH3)2C(CN)C(CN)(CH3)2	3333-52-6	A	P3	DM or MC	1	pp
hallium, soluble compounds (as ti)	TI	7440-28-0		P3	MC	0	mg
HF	C4H80	109-99-9	Α		MC	200	pp
hio-4,4' bis (tert-butyl-8m-crésol)	[CH3(OH)C6H2C(CH3)3]2S	96-69-5		P3	DM or MC	5,000	mg
niophenol	CBH5SH	108-98-5	Α		MC	0	pp
hiram (iso)	C6H12N2S4	137-26-8	A	Р	MC	5	mg
in compounds, inorganic, except snh4 (as sn)	Sn	7440-31-5		P3	MC	2	mg
itanium peroxide	TiO2	13463-67-7		P3	MC	4	mg.
	(CH3)3N	75-50-3	К		MC	10	pp
			A		MC	100,00	pp
aluene	C8H5CH3	108-88-3		P3	MC	2,50	mg.
aluene ributyl ester of phosphoric acid	(CH3[CH2]3D)3PO	126-73-8	A	_			pp
oluene ibutyl ester of phosphoric acid ichloroethanoic acid	(CH3[CH2]30)3PO CCI3COOH	126-73-8 76-03-9	В	P3	MC	1	
oluene ributyl ester of phosphoric acid richloroethanoic acid richlorohydrin	(CH3(CH2)30)3PO CCI3COOH CH2CICHCICH2CI	126-73-8 76-03-9 96-18-4	B A	P3	MC	10,00	_
oluene iibutyl ester of phosphoric acid iichloroethanoic acid iichlorohydrin iicyclohecyltin hydroxide	(CH3(CH2)30)3P0 CCI3COOH CH2CICHCICH2CI (CBH11)3SnOH	126-73-8 76-03-9 96-18-4 13121-70-5	B A A	P3	MC MC	10,00 5,00	mg.
oluene ribulyl aster of phosphoric acid richlorethanoic acid richlorathydrin ricycloheay(thr hydraxide rigylcidyl scoyanurate (tyjc)	(CH3(CH2)30)3PO CCI3COOH CH2CICHCICH2CI	126-73-8 76-03-9 96-18-4	B A	P3	MC MC DM or MC	10,00	mg.
oluene ributyl ester of phosphoric acid richforcethanoic acid richforchtanoic acid richforchtyfrin ricyclohexyltin hydroxide ricyclohexyltin hydroxide ricyclohexyltin hydroxide ricyclodyl scorpanurale (tgic)	(CH3(CH2)30)3P0 CCI3COOH CH2CICHCICH2CI (CBH11)3SnOH	126-73-8 76-03-9 96-18-4 13121-70-5	B A A	P3	MC MC	10,00 5,00	mg.
oluene ributyl ester of phosphoric acid richforcethanoic acid richforchtanoic acid richforchtyfrin ricyclohexyltin hydroxide ricyclohexyltin hydroxide ricyclohexyltin hydroxide ricyclodyl scorpanurale (tgic)	(CH3(CH2)30)3P0 CC3C00H CH2CICHCICH2CI (CBH11)3Sn0H C12 H15 N3 06	126-73-8 76-03-9 96-18-4 13121-70-5 2451-62-9	B A A	P3	MC MC DM or MC	10,00 5,00 VLE	mg. mg.
oluene ributyl ester of phosphoric acid richlorechanicic acid richlorechydrin ricycloheayltin hydroxide ricycloheayltin hydroxide ricycloheayltin hydroxide ricycloheayltin hydroxide richlorechydrin richlorechydrin richlorechydrin richlorechyd hydroxide	(CH3(CH2)30)3PO CC3COOH CH2CICHCICH2CI (C6H11)3SnOH C12 H15 N3 O6 CH3	126-73-8 76-03-9 96-18-4 13121-70-5 2451-62-9 75-47-8	B A A AB A	P3	MC MC DM or MC MC	10,00 5,00 VLE 0,60	mg, mg, pp
oluene ibubyl ester of phosphoric acid inchlorethanoic acid inchlorotydrin inchlorotydrin incyclohewyttin hydroxide injkicidy isocyanurate (tigic) iniodomethane inlene inlene iniene	(CH3(CH2)30)3P0 CC3C00H CH2CICHOCHZCI (CBH11)3Sn0H C12 HIS N3 06 CH3 CICH-CC12	126-73-8 76-03-9 96-18-4 13121-70-5 2451-62-9 75-47-8 79-01-6	A A AB A	P3	MC MC DM or MC MC MC	10,00 5,00 VLE 0,60 75,00	mg, pp pp
oluene ilitutyl sister of phosphoric acid richloredhanoic acid richloredhanoic acid richloredhydrin ricycloheay(thr hydroxide rigylcidyl iscoyanurate (tgic) ricidomethane ritiene rimethyl carbinol rimethyl carbinol	(CH3(CH2)30)3P0 CC39C00H CH20CHCICH2CI COBHII)3Sn0H CT2 HT5 N3 O8 CH3 CICH=CCI2 (CH3)3C0H	126-73-8 76-03-9 96-18-4 13121-70-5 2451-62-9 75-47-8 79-01-6 75-65-0	B A A AB A A	P3 P3 P3	MC MC DM or MC MC MC	10,00 5,00 VLE 0,60 75,00	mg, mg, pp pp pp pp
oluene inhulyl ester of phosphoric acid inhlorethanoic acid inhlorethanoic acid incipioleev(tin hydroxide inipiciolyl scorpanurate (tipic) inicidomethane rilene iniethyl carbinol initrotoluol ungstan 6 compounds (as wi) (soluble)	(CH3(CH2)30)3P0 CD3900H CH2CHDICH2CI (D8HII)3Sn0H CT2 H15 N3 O8 CH3 CICH-CCI2 (CH3)3C0CH CH3CH2(N02)3	126-73-8 76-03-9 96-18-4 13121-70-5 2451-62-9 75-47-8 79-01-6 75-65-0 118-96-7	B A A AB A A	P3 P3 P3 P3	MC MC DM or MC MC MC MC MC MC	10,00 5,00 VLE 0,60 75,00 100	mg, mg, pr pr pr mg, mg,
oluene inbutyl ester of phosphoric acid inchloresthanoic acid inchlorohydrin incylcinewyttin hydroude ingkicolif socyanurate (tipic) inicidomethane iliane irinethy carbinol irintrotuloul ungstan 6 compounds (as w) (solutie) ungstan 6	(CH3(CH2)30)3PO CD3000H CH2CICHDCH2CI (C6H1)3Sn0H C12 H15 N3 OB CH3 OICH-CD12 (CH3)3C0H CH36CH CH37CH CH37C	126-73-8 76-03-9 96-18-4 13121-70-5 2451-62-9 75-47-8 79-01-6 75-65-0 118-96-7 7440-33-7	B A A AB A A A	P3 P3 P3 P3	MC  MC  DM or MC  MC  MC  MC  MC  MC  MC	10,00 5,00 VLE 0,60 75,00 100 1	mg mg pr pr mg mg
oluene  ributyl ester of phosphoric acid richlorethanoic acid richlorotydrin ricyclohesyltin hydroxide ripyciody socyanurate (tgic) riciodomethane riliene rimethyl carbinol rintrotobol urgstan 6 compounds (as w) (soluble) urpentne ramium compounds, natural, soluble (as u)	(CH3(CH2)30)3P0 CD3000H CH2CICHCICH2CI (OBH1)3Sn0H C12 HI5 N3 06 CH3 CICH-CCI2 (CH3)3C0H CH3S0CH CH3S0CH CH3S0H2(N02)3 W C10 HI6 (approx)	126-73-8 76-03-9 96-18-4 13121-70-5 2451-62-9 75-47-8 79-01-6 75-65-0 118-96-7 7440-33-7 8006-64-2	B A A AB A A A	P3 P3 P3 P3 P3 P3	MC MC DM or MC	10,00 5,00 VLE 0,60 75,00 100 1	mg mg pr pr mg mg
oluene intulyt ester of phosphoric acid richloresthanoic acid richloresthanoic acid richlorestytain ricycloheay(thi hydroxide rigylcidyt iscocyanurate (tgic) ricidornethane ritiene rimethyt (arbinol rintrotoluol rungstan 6 compounds (as wi) (soluble) rugestan 6 runnum compounds, netural, soluble (as u) ac	(CH3(CH2)30)3P0 CD3900H CH2CHDICH2CI (D8HIT)SSR0H CT2 H15 N3 O8 CH3 CICH-CCI2 (CH3)300H CH3CH2(N02)3 W C10 H16 (apprax) U CH2-CH00CCH3	126-73-8 76-03-9 96-18-4 13121-70-5 2451-82-9 75-47-8 79-01-8 79-65-0 118-96-7 7440-33-7 8006-84-2 7440-61-1 108-05-4	B A A A A A A	P3 P3 P3 P3 P3 P3 P3	MC DM or MC M	10,00 5,00 VLE 0,60 75,00 100 1 1 100	mg, pp pp pp mg, mg, pp mg, pp
oluene inturyl ester of phosphoric acid inturyl ester of phosphoric acid inchloraty-frin inchloraty-frin incycloheay/tin hydroxide incycloheay/tin hydroxide incycloheay/tin hydroxide inchloration interne interne interne interne interne interne intertorbiolol intrictorbiol intrictor	(CH3(CH2)30)3PO CD3900H CH20CHDCH2CI (C6H113Sn0H CT2 H15 N3 06 CH3 CICH=CD12 (CH3)3C0H CH3SCH CH3SCH2(N02)3 W C10 H16 (approx) U CH2=CH00CH3 CH2=CCI	126-73-8 76-03-9 96-18-4 13121-70-5 2451-62-9 75-47-8 79-01-6 75-65-0 118-96-7 7440-33-7 8008-84-2 7440-61-1 108-05-4 75-35-4	B A A A A A A	P3 P3 P3 P3 P3 P3 P3	MC MC DM or MC M	10,00 5,00 VLE 0,60 75,00 100 1 1 100 0 VLE =4 VLE	mg, pp pp pp mg, mg, pp mg, pp
oluene intuly( sets of phosphoric acid inchlored hancic acid inchlorohydrin inchlorohydrin incyclohewyttin hydroxide ingkicdy (secjanurale (tigic) inicidomethane intere intere intere interetucuol inicidomethane in	(CH3(CH2)30)3PO CD3500H CH20CH0CH2CI (C9HII)3Sn0H C12 HI5 N3 08 CH3 CICH-CD22 (CH3)300H CH30SD2H CH30SD3H CH30S	126-73-8 78-03-9 96-18-4 13121-70-5 245-16-2-9 75-47-8 79-01-6 75-65-0 118-96-7 7440-33-7 800-84-2 7440-61-1 108-05-84 61-81-2	B A A A A A A A AX	P3 P3 P3 P3 P3 P3 P3	MC MC DM or MC M	10,00 5,00 VLE 0,60 75,00 100 1 1 100 0 VLE =4 VLE	mg, mg, pp pp mg, pp mg, pp mg, pp mg, pp pp mg, pp
oluene intuly( sets of phosphoric acid inchlored hancic inplicid ( secjanurale (tipic) inicidente thane intene inten	(CH3(CH2)30)3PO CD3500H CH20CH0CH2CI (C9HII)SSN0H C12 HI5 N3 06 CH3 CICH-CDC2 (CH3)S00H CH3CHC/CD2 (CH3)S00H CH3CHC/CD2 W CID HI6 (approx) U CH2-CH0CCH3 CH2-CDCI CH3HI804 n/ a CHH0	126-73-8 76-03-9 96-18-4 13121-70-5 2451-62-9 75-47-8 79-01-6 75-65-0 118-96-7 7440-33-7 8008-84-2 7440-61-1 108-05-4 75-35-4	B A A A A A A	P3 P3 P3 P3 P3 P3 P3	MC MC DM or MC M	10,00 5,00 VLE 0,60 75,00 100 1 1 100 0 VLE =4 VLE	mg, mg, pp pp mg pp mg, pp mg, pp mg, pp mg, pp mg, mg, mg, mg,
oluene  ributyl ester of phosphoric acid  richtorotypdrin  ricyclohesyttin hydroxde  ripycioth socyanurale (tgic)  ricyclohesyttin hydroxde  ripycioty socyanurale (tgic)  ricidoumethene  rilene  ril	(CH3(CH2)30)3PO CD3900H CH2CHDICH2CI (DSMI)3Sn0H CT2 HI5 N3 08 CH3 CICH-CCI2 (CH3)3C0H CH36CH2(N02)3 W C10 H16 (3pprox) U CH2-CH00CH3 CH2-CCI CH3H004 n/ a CH10 CHH104	126-73-8 76-03-9 96-18-4 13121-70-2 15-18-75-9 75-18-9 79-01-6 75-65-0 118-96-7 7440-33-7 240-81-1 108-05-4 75-05-4 15-19-05-4 15-19-05-4 15-19-05-2 15-19-05-7 15-19	B A A A A A A A A A A A A A A A A A A A	P3 P3 P3 P3 P3 P2/P3 P3	MC MG MG MG MG MC	10,00 5,00 VLE 0,60 75,00 100 1 1 100 0 VLE=4 VLE 0 350,00 100 1	mg. mg. pp pp pp mg. pp mg. pp mg. pp mg. pp mg. pp mg. mg. mg. pp mg. pp mg. pp
oluene inturyl ester of phosphoric acid inturyl ester of phosphoric acid inchlorotychrin inchlorotychrin incycloheay/tin hydroxide incycloheay/tin hydroxide incycloheay/tin hydroxide inchlorotychrin interne	(CH3(CH2)30)3PO CD3900H CH20CHDCH2CI (D6H113Sn0H CT2 H15 N3 06 CH3 CICH=CCI2 (CH3)300H CH3CDH2(N02)3 W C10 H16 (approx) U CH2=CH00CCH3 CH2=CH0 CH3CH2 CH3CH3CH2 CH3CH3CH2 CH3CH3CH3CH3CH3CH3CH3CH3CH3CH3CH3CH3CH3C	126-73-8 78-03-9 96-18-4 1312-70-5 2451-62-9 75-47-8 79-91-6 75-85-0 118-96-7 7440-33-7 800-84-2 7440-81-1 130-20-7 88-98-9 7440-85-1 130-20-7 7440-85-1 130-20-7 7440-85-1 130-20-7 7440-85-1 130-20-7 7440-85-1 130-20-7 7440-85-1 130-20-7 7440-85-1 130-20-7 7440-85-1 130-20-7 7440-85-1 130-20-7 7440-85-1 130-20-7 7440-85-1	B A A AB A A A A A A A A A A A A A A A	P3 P3 P3 P3 P3 P2/P3 P3 P	MC MC MC MMC MC MC MC MC MC MC MC MC MC	10,00 5,00 VLE 0,60 75,00 100 1 1 100 0 VLE=4 VLE 0 350,00 101 1 1	mg, mg, pp pp mg, pp mg, pp mg, pp mg, mg, pp mg, pp mg, pp mg, pp mg, pp mg, pp
MA  observed in the process of the p	(CH3(CH2)30)3PO CD3900H CH2CHDICH2CI (DSMI)3Sn0H CT2 HI5 N3 08 CH3 CICH-CCI2 (CH3)3C0H CH36CH2(N02)3 W C10 H16 (3pprox) U CH2-CH00CH3 CH2-CCI CH3H004 n/ a CH10 CHH104	126-73-8 76-03-9 96-18-4 13121-70-2 15-18-75-9 75-18-9 79-01-6 75-65-0 118-96-7 7440-33-7 240-81-1 108-05-4 75-05-4 15-19-05-4 15-19-05-4 15-19-05-2 15-19-05-7 15-19	B A A AB A A A A A A A A A A A A A A A	P3 P3 P3 P3 P3 P2/P3 P3	MC MG MG MG MG MC	10,00 5,00 VLE 0,60 75,00 100 1 1 100 0 VLE = 4 VLE 0 350,00 1	ppp mg, mg, ppp mg, mg, ppp mg, ppp mg, mg, mg, ppp mg,

# HAND MEASURING

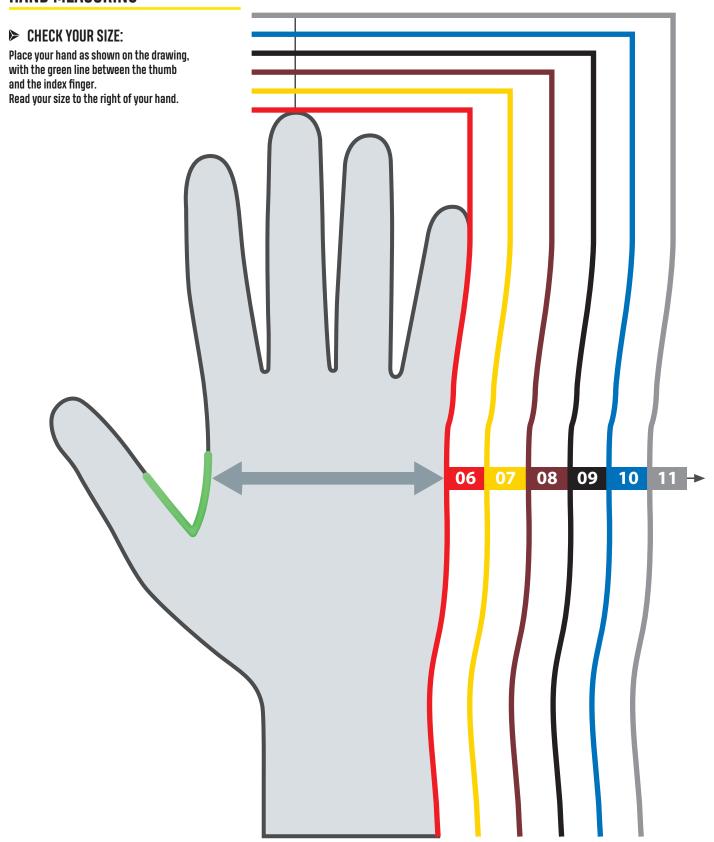

### THE EUROPEAN STANDARDS

### **EN420 EN ISO 21420**

### GENERAL REQUIREMENTS

The reference standard, cannot be used alone, but only in combination with another standard containing protection performance requirements.

- Conform to harmlessness (pH, chrome VI levels, etc...).
- Conform to the size charts (see chart on below).
- Pass the dexterity test.
- · Conform to the labelling, information and identification instructions.

	SIZES AS PER STANDARD EN420										
Glove size	Palm circumference (mm)	Length (mm)	Minimal length								
<b>*</b>	₩		(mm)								
6	152	160	220								
7	178	171	230								
8	203	182	240								
9	229	192	250								
10	254	204	260								
11	279	215	270								
12	304	226	280								

### STANDARDIZED LABELING/IDENTIFICATION

Each protective glove is clearly identified by a standardized label containing the following elements:

- Our brand logo;
- The product reference or the trade name;
- The size :
- · An information tag indicating that instructions are available for the product;
- The standardization pictogram(s) with their performance ratings.



atmosphere.

#### **▶** COLD RISK EN511

The EN511 standard defines the requirements and test methods for cold protection gloves from cold transmitted by convection or conduction down to -30°C (optionally up to -50°C). This cold can be from climatic conditions or industrial activity.

The selection process of a cold protection glove must take into account several parameters such as the ambient temperature, the health of the person, the duration of exposure, and the level of activities..


### PERFORMANCE LEVELS REOUIREMENTS 1 to 4 1 tn 4 . IMPERMEABILITY TO WATER RESISTANCE TO CONTACT COLD Measurement of the thermal insulation of the palm of a glove with respect to contact with an object of low temperature RESISTANCE TO CONVECTIVE COLD Measurement of the thermal insulation of a glove with respect to an ambient

PERFORMANCE LEVEL	INTENSE ACTIVITY	AVERAGE ACTIVITY	SLOW ACTIVITY
1	-10°C ≤ T < 0°C		
2	-30°C < T	0°C ≤ T < 10°C	
3		-15°C < T	5°C < T
4		-30°C < T	-10°C < T



### **EN407** ► HEAT AND FIRE RISK

The EN407 standard specifies the test methods, the general requirements, the thermal performance and the labelling of gloves to protect from heat and fire. It applies to all gloves which must protect hands from heat and/or flames in any one or several of the following forms: fire, contact heat, convective heat, radiating heat, small spray of molten metal or large spray of melting metal.

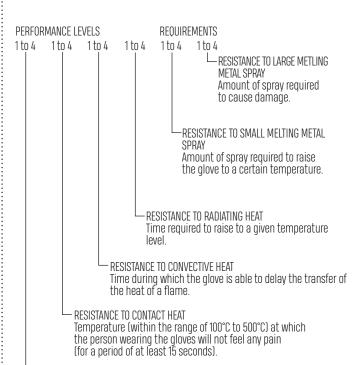

RESISTANCE TO FLAMMABILITY Time during which the material remains lighted and continues to be consumed after the ignition source has been eliminated.

PERFORMANCE Level	CONTACT TEMPERATURE °C	THRESHOLD TIME (second)
1	100°C	≥15 s
2	250°C	≥15 s
3	350°C	≥15 s
4	500°C	≥15 s

#### WELDERS RISK EN12477

Requirements and test methods for gloves used for manual welding of metals, for cutting and related techniques. Welder gloves are ranked in two types: B when great dexterity is required (e.g.: TIG welding), and A for other welding processes.





### EN ISO 374-1

# ► AGAINST THE RISKS OF MICRO-ORGANISMS & CHEMICAL RISKS

Standard EN ISO374-1, protective gloves against chemicals and micro-organisms, specifies the performance requirements required for gloves for protecting users against chemical products and/or micro-organisms and defines the terms to be used:

- Penetration (tested as per standard EN374-2):
- Diffusion of water or air, to check the impermeability, on a non-molecular level, of a chemical product and/or micro-organism through the porosities, seams, micro-holes or other imperfections present in the material of the protective glove.
- Degradation (tested as per standard EN374-4):
   Determination of the physical resistance of materials to degradation after continuous contact with hazardous chemicals.
- Permeation (tested as per standard EN374-3 or EN16523);
- Process by which a chemical product diffuses through the material of a protective glove, by continuous contact, on a molecular level.
- The EN ISO version of standard 374-1, introduces the concept of three types of protection against the permeation of chemicals:
- Type A: The glove gives a performance index to permeation at least equal to 2 for 6 chemical test substances taken from the list of chemicals specified in the standard.
- Type B: The glove gives a performance index to permeation at least equal to 2 for 3 chemical test substances taken from the list of chemicals specified in the standard
- Type C: The glove gives a performance index to permeation at least equal to 1 for 1 chemical test substances taken from the list of chemicals specified in the standard.

CODE Letter	CHEMICAL PRODUCT	N° CAS
А	Methanol	67-56-1
В	Acetone	67-64-1
С	Acetonitrile	75-05-8
D	Dichloromethane	75-09-2
E	Carbon disulfide	75-15-0
F	Toluene	108-88-3
G	Diethylamine	109-89-7
Н	Tetrahydrofurane	109-99-9
T	Ethyl acetate	141-78-6
J	n-Heptane	142-82-5
К	Caustic soda 40 % (NaOH or sodium hydroxide)	1310-73-2
L	Sulphuric acid 96 %	7664-93-9
М	Nitric acid 65%	7697-37-2
N	Acetic acid 99%	64-19-7
0	Ammonium hydroxide 25%	1336-21-6
Р	Hydrogen peroxide 30%	7722-84-1
S	Hydrofluoric acid 40%	7664-39-3
T	Formaldehyde 37%	50-00-0

PASSAGE TIME MEASURED (MN)	PERFORMANCE INDEX To permeation
> 10 mn	1
> 30 mn	2
> 60 mn	3
>120 mn	4
> 240 mn	5
> 480 mn	6




# EN ISO 374-5 ► AGAINST THE DANGERS OF MICRO-ORGANISMS

EN ISO 374-5 specifies the requirements and test methods for protective gloves intended to protect the user against microorganisms (mold and bacteria, potentially viruses).

**Penetration of molds and bacteria** (tested according to EN374-2): Test by which the water and airtightness of a glove is checked.

**Penetration of viruses** (tested according to method B of ISO 16604): Process that determines the resistance to penetration by blood-borne pathogens - Test method using Phi-X174 bacteriophage:

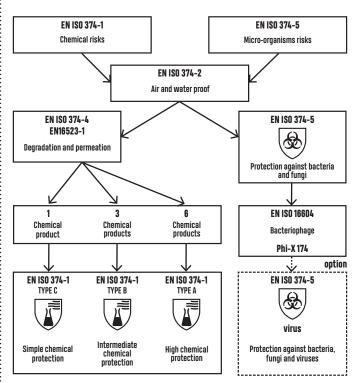

### Examples of application:

The field of use is decisive because, depending on the case, the glove may have to combine several properties in order to meet the necessary protection requirements. It is therefore very important to refer to the recommended areas of use and the results of the laboratory tests found in the instructions for use. However, it is recommended to check that the gloves are suitable for the intended purpose by carrying out tests beforehand, because the conditions at the workplace may differ from those of the standard test, depending on the temperature, abrasion and degradation.





## ISO 23 388 ► MECHANICAL RISKS

The EN388 standard applies to all types of protective gloves with respect to physical and mechanical aggression from abrasion, cutting from slicing, perforation and tearing. Since the 2016 version of the standard, new optional performances have appeared.

PERFORMANCE LEVELS REQUIREMENTS

1 to 5 1 to 4 1 to 4 A to F

> RESISTANCE TO IMPACT ON THE METACARPAL AREA Minimum attenuation of the impact force transmitted to the hand

RESISTANCE TO CUTTING BY BLADE (TDM

Force necessary for a straight blade to cut the sample on a movement of 20

RESISTANCE TO PERFORATION Force required to pierce the sample with a standardized punch.

RESISTANCE TO TEARING Maximum force required to tear the sample.

RESISTANCE TO CUTTING WITH A BLADE

Number of cycles required with a circular blade to cut the sample at constant speed.

ABRASION RESISTANCE

Number of cycles required to damage the sample at constant speed.

TEST	LEVEL 1	LEVEL 2	LEVEL 3	LEVEL 4	LEVEL 5
ABRASION RESISTANCE (number of cycles)	100	500	2 000	8 000	-
BLADE CUTTING RESISTANCE (index)	1,2	2,5	5,0	10,0	20
TEAR RESISTANCE (N)	10	25	50	75	-
PUNCTURE RESISTANCE (N)	20	60	100	150	-

Impact resistance on the metacarpal area: if this performance is claimed, the "P" mark appears.

### Marking example:



TEST RESISTANCE TO CUT IN ISO 13997 (TDM)	LEVEL A	LEVEL B	LEVEL C	LEVEL D	LEVEL E	LEVEL F
APPLIED FORCE (N)	2	5	10	15	22	30


### **Examples of marking:**



### Cut by blade, 2 test methods:

EN388 6.2.: For low to middle risks of cutting. A circular blade on which a constant force of 5 N is applied, moves back and forth until the sample is cut. It measures the number of completed cycles and is credited with the corresponding level.

EN ISO 13997: For materials that blunt the blade during the EN388 6.2 test and/ or are particularly resistant, for high risk of cutting. A straight blade makes a single movement of 20 mm with a force of 2N, the test is repeated with a different force as many times as necessary until the sample is cut. A level corresponding to the force required to cut the sample is assigned. This method better represents the usage situations that present a high risk of cutting.



ANSI ISEA (US American National Standards Institute) 105 Classification and specifications for the protection of the hand. Part 5.1.1. Cut resistance Weight necessary for a straight blade to cut the sample in a single movement.

Weight (g)	≥ 200	≥ 500	≥ 1000	≥ 1500	≥ 2200	≥ 3000	≥ 4000	≥ 5000	≥ 6000
2011 version - levels	1	2	3	4	5	-	-	-	-
2016 version - levels	A1	A2	А3	A4	A5	A6	A7	A8	A9





http://gloves.deltaplus.eu

### **CHEMICAL RESISTANCE TABLE**

This table provides only general information. Be careful! Glove resistance is influenced by other factors such as temperature, chemical product concentration, thickness, immersion time, and others.

For specific use conditions, we recommend testing the glove prior to use.

		*				
		latex	힅		<u>~</u>	
	n°CAS	Natural	Neoprene	Nitrile	PVC viny	
		,		臺	<u> </u>	
20% nitric acid 30% and 5% hydrochloric acid	7697-37-2 7647-01-0	**	**	***	**	
30% formaldehyde	50-00-0	***	***	***	***	
30% hydrofluoric acid	7664-39-3	**	***	***	**	
50% acetic anhydride acid 85% lactic acid	1	***	***	***	***	
85% triethanolamine	102-71-6	***	***	***	***	
90% formic acid	64-18-6		**	*	*	
Acetaldehyde Acetone	75-07-0 67-64-1	***	***	*		
Alcoholic beverages	/	***	***	***	***	
Ammonium acetate	631-61-8	***	***	***	***	
Ammonium carbonate	10361-29-2	***	***	***	***	
Ammonium chloride Amyl acetate	12125-02-9	***	***	***	***	
Amyl alcohol	71-41-0	***	***	***	***	
Aniline	62-53-3	**	**	*		
Animal fats	/	*	***	***		
Asphalt Beet-root	/	***	***	***	***	
Benzaldehyde	100-52-7	***	^^^	*	***	
Benzene	71-43-2			*		
Benzyl alcohol	100-51-6	*	**	**	**	
Bichromate of potash	7778-50-9	*	***	***	***	
Bleach Borax	1	***	***	***	***	
Brake oils (lockheed)	1	*	***	***	*	
Bromides	1	***	***	***		
Butter	/ /		***	***	*	
Butyl acetate Butyl alcohol (or n-butanol)	123-86-4 71-36-3	***	***	*	***	
Calcium acetate	62-54-4	***	***	***	***	
Calcium chloride	10043-52-4	***	***	***	***	
Calcium fluophosphate	/	***	***	***	***	
Calcium hydrate Calcium nitrate	1305-62-0 10124-37-5	***	***	***	***	
Carbolic acid	10124-07-0	*	**	**	**	
Carbon tetrachloride	56-23-5		*	**	*	
Castor oil			***	***		
Chlorinated lime	7778-54-3 7782-50-5	***	***	***	***	
Chlorine Chloroacetone	//02-30-3	***	***	XXX	XXX	
Chloroform	67-66-3		*	**		
Chromic acid	7738-94-5			*	**	
Citric acid Concentrated ammonia (aqueous solution)	77-92-9 1336-21-6	***	***	***	***	
Concentrated boric acid	10043-35-3	***	***	***	***	
Concentrated laundry potash	/	***	***	**	***	
Concentrated laundry soda	/	***	***	*	*	
Concentrated sulphuric acid Creosote	7664-93-9 8001-58-9	*	***	***	**	
Cresol	1319-77-3	*	***	***	***	
Crystallisable acetic acid	64-19-7	***	***	**	*	
Cutting oils	/		***	***	***	
Cyclohexane	110-82-7 108-93-0	***	***	**	***	
Cyclohexanol Cyclohexanon	108-94-1	*	*	XXX	***	
Diacetone alcohol	/	***	***		*	
Dibutyl ether	142-98-1		*	***		
Dibutyl phtalate	84-74-2 111-42-2	**	*	***	***	
Diehanolamine Diesel oils	IIINZZ	^^^	*	***	*	
Diluted sulfphuric acid (battery)	1	***	***	***	***	
Dioctylphtalate	117-81-7	**	***	***		
Dyes (hair dyes) Ethyl acetate	141-78-6	***	***	***	***	
Ethyl alcohol (or ethanol)	84-17-5	***	***	***	***	
Ethylamine	75-04-7	*	*	***	*	
Ethylaniline	/	*	***	***	*	
Ethylene dichloride	107-06-2	4.11	411	*	47.	
Ethylene glycol Fertilisers	107-21-1	***	***	***	***	
Fish and shellfish	1	*	***	***	*	
Fixing agents	1	***	***	***	***	
Fluorides Formaldehyde	50-00-0	***	***	***	***	
Fuel oil	50-00-0	^**	***	***	***	
Fuels	/		*	***	*	
Furol (furfural or furaldehyde)	98-01-1	***	**			
Gas-oil Gasoline	/		*	***	*	
Glycerin	56-81-5	***	**	***	***	
Glyceropthalic paint	/		*	***	*	
Glycols	107-21-1	***	***	***	***	
Hair bleaching agents	1	***	***	***	***	
Hair-curling products Hexane	/ 110-54-3	***	***	***	***	
Household detergents	110-04-3	**	***	***	**	
Hydraulic fluids (esters)	1	***	***	***	*	
Hydraulic oils (petrol)	/ 4000E 40 D		*	***	*	
Hydrobromic acid Hydrogen geroxide	10035-10-6	***	***	*	*	
Isobutyl alcohol (Isobutanol)	78-83-1	***	***	***	***	

	n°CAS	Natural k	Neoprene	Nitrile	PVC vinyl
Isobutyl ketone	1	***	***		
Kerosene Lard oil	/		*	***	*
Linseed oil	/		***	***	*
Lubricants oils	1		*	***	*
Magnesia	1309-48-4	***	***	***	***
Methyl alcohol (or methodol)	79-20-9	*	***	*	*
Methyl alcohol (or methanol) Methyl ethyl ketone	67-56-1	***	***	***	***
Methyl isobutyl ketone	1	**	*		
Methyl salicylate	119-36-8	***	***	***	***
Methylamine	74-89-5	***	**	***	***
Methylaniline Methylcyclopentane	100-61-8 96-37-7	*	*	***	***
Methylene chloride	75-09-2		*	*	*
Methylformiate	/	*	***	*	*
Milk and dairy products	1	*	***	***	
Mineral greases	/		*	***	*
Mono ethanol amine Naphta	141-43-5	***	***	***	***
Naphtalene	91-20-3		*	**	*
N-butylamine	109-73-9	***	***	***	***
Nickel chloride	7718-54-9	***	***	***	***
Nitrate of ammonium	6484-52-2	***	***	***	***
Nitrate of potassium	7757-79-1 98-95-3	***	***	***	***
Nitrobenzene Nitrohydrochloric acid	80-80-3		*	*	*
Nitropropane	/	***	**	*	
Non-alcoholic beverages	1	***	***	***	***
Octyl alcohol	111-87-5	*	***	***	*
Oleic acid	112-80-1	*	***	***	*
Olive oil Oxalic acid	144-62-7	***	***	***	***
Paraffin oil	/		*	***	*
Peanut oil	1		***	***	*
Perfumes and essences	/	***	***	***	***
Petroleum ether	1		**	***	
Petroleum products Petroleum spirit	/		*	**	*
Phenyl chloride	108-90-7		**	***	*
Phosphates of calcium	10103-46-5	***	***	***	***
Phosphoric acid	7664-38-2	***	***	***	***
Polyester resins	1		*	**	*
Potash flakes	/ /	***	***	**	***
Potassium acetate Potassium bicarbonate	127-08-2 298-14-6	***	***	***	***
Potassium carbonate	584-08-7	***	***	***	***
Potassium chloride	7447-40-7	***	***	***	***
Potassium cyanide	151-50-8	***	***	***	***
Potassium manganate	7722-64-7	***	***	***	***
Potassium phosphates Potassium sulphate	/ 7778-80-5	***	***	***	***
Poultry	///0-00-3	*	***	***	^^^
Propylene dichloride	78-87-5			*	
Quick lime	1	***	***	***	***
Shampoos	/	***	***	***	***
Silicates Slaked lime	/	***	***	***	***
Soda flakes	1	***	***	*	*
Sodium bicarbonate	144-55-8	***	***	***	***
Sodium bisulphite	7631-90-5	***	***	***	***
Sodium carbonate	497-19-8	***	***	***	***
Sodium chloride	7647-14-5 7681-52-9	***	***	***	***
Sodium chlorite Sodium nitrate	7631-99-4	***	***	***	***
Sodium phosphates	/03/354	***	***	***	***
Sodium sulphate	7757-82-8	***	***	***	***
Soybean oil	/		***	***	*
Stannic chloride	/ E711.4	*	***	***	***
Stearic acid Styrene	57-11-4 100-42-5	**	***	**	**
Sulphites, bisulphites, hyposulphites	100-42-0	***	***	***	***
Sulphuric ether (pharmacy)	1	*	***	***	*
Tartaric acid	/	***	***	***	***
Tetrachloroethylene	127-18-4		*	**	
THF = tetrahydrofurane	109-99-9	**	*		
Toluen Tributyl phosphate	108-88-3 126-73-8	*	*	**	*
Trichlorethylene	79-01-6		*	*	
Tricresyl phosphate	1330-78-5	***	**	***	**
Trinitrobenzene	1		*	**	*
Trinitrotoluol	115 00 0		*	**	*
Triphenyl phosphate Turbine oils	115-86-6	*	***	***	*
Turnipseed oil	1		*	***	
Turpentine	/		*	***	*
Vinegar and condiments	/	***	***	***	**
Washing powders	/	***	***	***	***
Water paint Weed killers	/	***	***	***	***
Wood turpentine	/		*	***	*
Xylene	/		*	**	
Xylophene	/		*	***	*
7inc sulphate	7733-02-0	444	444	444	444

Not recommended Average \* Good \*\* Very good \*\*\*



### **FOOD COMPATIBILITY**



### **▶** FOOD COMPATIBILITY **IS GOVERNED BY:**

Regulation (EC) N° 1935/2004 of the European Parliament and of the Council of 27th October 2004 on materials and articles intended to come into contact with foodstuffs.

Materials and articles must be manufactured in compliance with good manufacturing practice so that, under normal or foreseeable conditions of use, they do not transfer their constituents to food in quantities which could:

- Endanger human health;
- Bring about an unacceptable change in the composition of the food or a deterioration in the organoleptic characteristics thereof.

### Food contact of plastic materials is governed by Regulation (EU) No 10/2011 and the related requirements.

Materials PVC/Vinyl or even Latex/Nitrile gloves (unless local legislation exists) are directly subject to these regulations.

They define:

- Positives lists of authorized constituents;
- The purity criteria applicable to some of these constituents ;
- Special migration limits in foodstuffs for certain constituents;
- Maximum residual quantities of some constituents in the material;
- An overall migration limit in foods.
- A limit of metal content for plastic materials and objects.

### Annex III of Regulation (EU) 10/2011 provides the list of stimulants to be used for testing migration of constituents of plastic materials and articles intended to come into contact with foodstuffs:

- Aqueous foods (pH > 4.5): Simulants A, B and C.
- Acid food (pH ≤ 4.5): Simulant B;
- Alcoholic foods(≤ 20%): Simulant C;
- Alcoholic foods (> 20%): Simulant D1.
- Fatty foods: Simulants D1 and D2.
- Foods containing free surface fats: Simulant D2.
- Dry foods: Stimulant E.

### **DISPOSABLE GLOVES**

Standard EN455 defines the quality requirements for non-reusable medical gloves.

- 1 Detection of holes: Airtightness test.
- 2 Physical properties: Verification of the size, thickness and strength of the glove.
- 3 Biological evaluation: Verification of the conformity of the materials.

### INTERNATIONAL MAINTENANCE **CODE FOR ARTICLES**

TEXTILE							
$\sim$	No treatment.						
	Moderate treatment.						
=	Very light treatment.						
	WASHING						
40	Maximum temperature 40°C. Normal mechanical treatment. Normal temperature rinsing. Normal spinning.						
40	Maximum temperature 40°C. Reduced mechanical treatment. Rinse at gradually decreasing temperature. Reduced spinning.						
Zunt	Wash by hand. No machine washing. Maximum temperature 40°C. Treat with care.						
×	Do not wash. Treat with care when wet.						
	DRYING						
$\odot$	Can be dried in rotating drum dryer. Normal program.						
$\odot$	Can be dried in rotating drum dryer. Moderate, low temperature program.						
<b>8</b>	Do not dry in rotating drum dryer.						
	CHLORINATION						
	Chlorination (chlorine bleach).						
CI	Chlorination possible solely in cold, diluted solution.						
*	No chlorination.						
	IRONING						
•••	Iron at the maximum iron sole plate temperature of 200°C.						
	Iron at the maximum iron sole plate temperature of 150°C.						
	Iron at maximum iron sole plate temperature of 110°C. Steam treatment presents risks.						
<u>X</u>	Do not iron. Steam treatment is forbidden.						
	DRY-CLEANING						
0	Dry cleaning. The circle stands for dry-cleaning for textile articles (Leather and fur articles are excluded). It contains information on the various dry cleaning treatments.						

Dry-cleaning prohibited



# CHEMICAL PROTECTIVE CLOTHING



### EN14126

### PROTECTION PROTECTIVE CLOTHING AGAINST INFECTIVE AGENTS

This standard specifies the requirements and test methods concerning reusable protective clothing for limited use providing protection against infective agents. Associated with standards for protective clothing against chemical products, the letter B is added after the garment type.

Examples: TYPE 6-B / TYPE 5-B / TYPE 4-B / TYPE 3-B

This standard sets out the minimum requirements for the following types of limited use and re-useable chemical protective clothing:

- -Clothing protecting the full body with liquid-tight connections between the various clothing parts (Type 3: liquid-tight clothing);
- Clothing protecting the full body with spray-tight connections between the various clothing parts (Type 4: spray-tight clothing);

Note: These standards were formerly entitled EN1512 (Type 4) and EN1511 (Type 3).



### EN13034 TYPE 6

### PROTECTIVE CLOTHING AGAINST LIQUID CHEMICALS

Requirements for chemical protection clothing offering limited performance against liquid chemical products (type 6 equipment), including clothing for partial body protection (Type PB [6]).

This standard sets out the minimum requirements for limited use and reusable limited performance chemical protective clothing. Limited use chemical protective clothing is intended for use in cases of a potential exposure to **light sprays**, liquid **aerosols** or low-pressure, **low-volume splashes**, against which a complete liquid permeation barrier (at the molecular level) is not required.

STANDARD	TYPE Chemical	PROTECTION
EN13034	6	Against splashes
EN13982-1	5	Against dust (asbestos)
EN14605	4	Against mists
EN14605	3	Against sprays



# **EN13982-1** TYPE 5

### PROTECTIVE CLOTHING FOR USE AGAINST SOLID PARTICLES

Performance requirements for protective clothing against chemical products offering full body protection against air-borne solid particulates (type 5 clothing). This standard sets out the minimum requirements for chemical protection clothing resisting penetration of solid particulates suspended in air (type 5). This clothing offers full body protection, including the torso, arms and legs, such as one or two-piece coveralls, with or without hood or face-shield, with or without foot protection.



EN14605 TYPE 4 TYPE 3

### ▶ PROTECTIVE CLOTHING AGAINST LIQUID CHEMICALS

Requirements for chemical protection clothing with liquid-tight (type 3) or spraytight (type 4) connections, including items providing only partial body protection (types PB [3] and PB [4]).

EXAMPLES OF APPLICATIONS							
Applications	Level of protection						
Work / Maintenance	Fouling	Category I / Non PPE					
Industrial cleaning	Exposure to hazardous chemical substances and particles	Type 6 Type 5					
Asbestos abatement / removal (dust > 1 micron)	Contact with particles or fibres	Type 5					
Agriculture and horticulture (Handling of herbicides / pesticides / fungicides / fertilizers)	Contact with harmful elements	Туре 4					
Paint spraying (Solvents)	Contact with low-concentrate aerosols	Туре 4					
Paint spraying (Preparation / Mixing)	Contact with high concentrate aerosols	Туре 3					
Laboratories / Chemical Industries	Projection of chemical products	Туре 3					
Emergency / Rescue Personnel	Bacteriological contamination	Type 4-B Type 3-B					

TESTS									
General	Tools Consider and Survey	Level of protection							
performance	Tests & Specific performance		1b	1c	2	<b>3</b> ª	<b>4</b> a	5	6ª
	Internal pressure	Х	Х	Х	-	-	-	-	-
	Leak to interior	-	Χp	Х	Х	-	-	-	-
	Penetration by a jet of liquid	-	-	-	-	Х	-	-	-
Performance requirements for the whole garment	Penetration by a spray	-	-	-	-	Х	Х	-	-
	Against solid particles	-	-	-	-	-	-	Х	-
	Penetration by a spray	-	-	-	-	-	-	-	Х
	Abrasion / Tearing / Perforation / Seams	Х	Х	Х	Х	Х	Х	Х	Х
	Resistance to tensile strength	Х	Х	Х	Х	Х	Х	-	Х
	Resistance to flame	Х	Х	Х	Х	Х	Х	Х	Х
Performance requirements	Resistance to cracking by bending	Х	Х	Х	Х	Х	Х	Х	-
for the constituent materials of the garment	Resistance to cracking by bending at -30°C	Х	Х	Х	Х	Х	Х	-	-
the yannent	Resistance to permeation	Х	Х	Х	Х	Х	Х	-	-
	Resistance to penetration by liquids	-	-	-	-	-	-	-	Х
	Impermeability to liquids (repulsion)	-	-	-	-	-	-	-	Х

- a When the protection equipment only protects certain parts of the body (torso, arms, legs), only the performance requirements for the constituent materials of the garment are required (type 6, 4 and 3).
- b Applicable for suits whose respiratory mask is separate and removable.

### HEAT PROTECTIVE CLOTHING





A1 Class 2

### ► PROTECTION USED IN WELDING AND ALLIED PROCESSES

This standard sets out the performance requirements for protective clothing for use by operators in welding and allied processes with comparable risks.

This type of protective clothing is intended to protect the wearer against molten metal splash, short contact

with flame and UV radiation. It is intended to be worn at ambient temperature, continuously for up to 8 hours.

### EN14116



3 / 501 /75

Indice: 1 / 2 or 3
Nb: Number of washes
I: Industrial wash
T0: Service temperature

### PROTECTION AGAINST HEAT AND FLAME

This standard sets out the performance requirements for limited flame spread materials and material assemblies used in protective clothing. Limited flame spread materials and material assemblies are used to make protective clothing in order to reduce the risks of flammability of the garment and the dangers it may cause. They are suitable for protection against accidental contact with small igniting flames, in conditions with no significant heat danger.

Class 1

protection against low risks during welding techniques and situations producing fewer projections and low radiant heat.

Class 2

protection against higher risks during welding techniques and situations producing more projections and a higher radiant heat.



# TECHNICAL PROTECTIVE CLOTHING

#### **EN ISO 13688**

### **▶** GENERAL REOUIREMENTS

Reference standard, not for use alone, but only in association with another standard containing the protection performance requirements.

This standard specifies general performance requirements for ergonomics, innocuousness, size designation, durability, ageing, compatibility and marking of protective clothing and the information to be supplied by the manufacturer with the protective clothing.



## EN1149-5

# PROTECTIVE CLOTHING TO DISSIPATE STATIC ELECTRICITY

This European Standard specifies requirements for materials and the design of protective electrostatic dissipation clothing used in conjunction with a grounded system in order to prevent incendiary discharges. WARNING: These requirements may be insufficient in oxygen enriched flammable environments. This standard is not applicable for protection against mains voltages.

The control of undesirable static electricity on the person is often necessary.

The electrostatic potential may, indeed, have serious consequences on the charged individual, because it can be high enough to cause dangerous sparks.

After a risk assessment, the wearing of protective electrical dissipation clothing may be necessary. The use of clothing certified according to EN1149-5 is then adapted

The ATEX Directive 1999/92/EC, in its Annex II-A-2.3, requests that workers be equipped with work clothes made of materials that do not produce electrostatic discharges that can ignite explosive environments.

The electrostatic potential can also affect equipment sensitive to electric discharge. And antistatic clothing are often used on electronic manufacturing sites, assembling semiconductors for example. Finally, they are used on sites with controlled atmospheres such as automotive paint workshops, to avoid the emission of particles that may be deposited on the body paint.

The antistatic charge dissipation can be provided by a process limiting the build up of charge, or by adding carbon or metal wires. People wearing protective electrostatic charge dissipation clothing must always be grounded with a resistance of less than  $10^8 \Omega$ , for example, by wearing appropriate footwear such as the safety shoes stated in EN ISO 20345, or by other suitable means.



### **EN381**

### PROTECTION FOR USERS OF HAND-HELD CHAINSAWS

This standard specifies the requirements to be used to assess the resistance of protective clothing to cutting by hand-held chainsaws. It is divided into several parts:

EN381-5 Specifies the requirements for leg protectors.
 EN381-7 Specifies the requirements for protective gloves.
 EN381-9 Specifies the requirements for protective gaiters.
 EN381-11 Specifies the requirements for upper body protectors.

The cut tests are conducted using 4 chain speeds:

16 m/s	Class 0
20 m/s	Class 1
24 m/s	Class 2
28 m/s	Class 3

The protective zone on leg protectors is coded using three letters A, B or C, corresponding to the coverage surface of the cut-proof material (Type A, Type B or Type C).

### Marking:

EPICEA 3	MELEZE 3
EN381-11	EN381-5
	**************************************
Class 0	Type A - Class 1



### EN1073-2

### ► PROTECTIVE CLOTHING AGAINST RADIOACTIVE CONTAMINATION

This standard specifies the requirements and test methods for non-ventilated protective clothing against radioactive contamination in the form of particles. Clothing of this type is designed only to protect the body, the arms and the legs of the wearer, but it may be used with accessories that protect other parts of the wearer's body (for example, boots, gloves, respiratory protective device - APR).

The garments are classified according to their nominal protection factor (ratio between the concentration of test particles in the ambient atmosphere and the concentration of test particles inside the garment), determined in relation to the total inward leakage (ratio between the concentrations of test particles insider the garment and inside the test chamber).

The classes are as follows:

CLASS	NOMINAL PROTECTION FACTOR
3	500
2	50
1	5



### EN ISO 20471

# ► HIGH VISIBILITY CLOTHING

This standard specifies the requirements for protective clothing aiming to signal the presence of the wearer visually, so that he may be detected and seen in hazardous situations, in all conditions of daylight, and night under illumination of car headlights.

There are three classes of high-visibility clothing. Each class must have minimum surfaces of visible material constituting the garment; the higher the class, the more visible the garment:

	CLASS 3	CLASS 2	CLASS 1
Background material (Fluorescent)	0,80 m²	0,50 m²	0,14 m²
Retroreflective material (Bands)	0,20 m <sup>2</sup>	0,13 m²	0,10 m²

### Marking:

X: Class of high visibility surface (from 1 to 3)

### EN ISO 20471



Z

### EN ISO 20471

2: Class of the visibility surface (1 to 3)
Max. 25x: Optional marking, number of maximum
washes authorized for the model.
On this example: 25 washes maximum
(see indication of service temperature on the
garment tag).

Max. 25x

# EN13356 VISUAL ACCESSORIES FOR NON PROFESSIONAL USE

This standard specifies optical performance requirements for accessories that are worn, attached to, or carried by individuals and designed for non-professional use. The visualization accessories conforming to this standard are intended to visually indicate the presence of the user when illuminated by vehicle headlights on unlit roads. This standard does not apply to clothing.

# FOUL WEATHER PROTECTIVE CLOTHING



### EN342

### PROTECTIVE CLOTHING AGAINST COLD

This standard specifies the requirements and performance test methods for protective clothing against cold **at temperatures lower than -5°C** (cold store / extreme cold workers).

There are two types of garment:

**Garments:** covering part of the body, e.g. parka, jacket, coat.

**Suits:** covering the whole body (trunk + legs), e.g. coveralls, parka & dungarees.

**X (undergarment B/C/R):**  $I_{cler}$  of the garment

X: Class of air permeability, AP

X: Class of resistance to water penetration WP (Optional)





### EN14058

### PROTECTIVE CLOTHING AGAINST COOL ENVIRONMENTS

This standard specifies the requirements and performance test methods for protective garments (vests, jackets, coats, trousers) against cool environments.

These garments are for use in moderate low temperatures (-5°C and over) to protect against local body cooling and are not only for outdoor use such as in the construction industry, but may also be used for indoor activities, such as in the food processing industry.

These garments are not always necessarily made of air impermeable or watertight materials. Therefore, in this European standard, these requirements are optional.

X: Class of heat resistance, R<sub>et</sub>

X: Class of air permeability, AP

**X**: /<sub>cler</sub> of the garment (Optional)

X: Class of resistance to water penetration

WP (Optional)





### **EN343**

# PROTECTIVE CLOTHING AGAINST RAIN

This standard specifies the requirements and test methods applicable to the materials and seams of protective clothing against foul weather (for example precipitation in the form of rain or snow), fog and ground humidity.

TESTS									
	Code	EN343	EN342	EN14058					
Class of thermal resistance (in m².K/W)	R <sub>ct</sub>	-	-	Х					
Class of water vapour resistance (in (m².Pa)/W)	R <sub>et</sub>	Х	-	-					
Class of air permeability (in mm/s)	АР	-	Х	Х					
Resistance to water penetration (in Pa)	WP	Х	X (optional)	X (optional)					
Resultant effective thermal insulation (in m².K/W) Measured on a moving manikin	/ <sub>cler</sub>	-	Х	Х					

X: Resistance to water penetration, Wp

X: Water vapour resistance, R<sub>et</sub>

OTAKE

EN343

3
1



### • THERMAL RESISTANCE (R,,) IN M2.K/W:

Measurement of the thermal insulation provided.
Divided into 4 classes (from 1 to 4) from the least insulating to the most insulating.
The higher the value, the greater the thermal insulation.

### • WATER VAPOUR RESISTANCE (R,) IN (M2.PA)/W:

Measures the evaporative resistance, i.e. the product's obstacle to the passage of water vapour, or the barrier it offers to evaporation of transpiration on the surface of the skin. The higher a product's water vapour resistance, the greater this product's barrier to the passage of water vapour. A breathing product has a low water vapour resistance.

Divided into 3 classes (from 1 to 3) from the least breathable to the most breathable.

### • AIR PERMEABILITY (AP) IN mm/s:

Determines the complex's permeability to air.
Divided into 3 classes (from 1 to 3) from the least airtight to the most airtight.

### • RESISTANCE TO WATER PENETRATION (WP) IN PASCAL:

Measurement of the outer material and seams' resistance to water penetration under a water pressure of (980+/-50) Pa/min.

Divided into 3 levels (1 to 3) from the least impermeable to the most impermeable.

### • RESULTANT EFFECTIVE THERMAL INSULATION:

Measured on moving dummy  $(/_{clor})$ .

The thermal insulation coefficient, expressed in m<sup>2</sup>.K/W, is used to determine the optimum usage temperature of the garment in relation to the individual's activity and his exposure time.

Thermal insulation is measured with undergarments of type:

- **(B) for ensembles** (Undershirt with long sleeves, long underpants, socks, bootee + thermojacket, thermopants, knitted gloves, balaclava)
- **(R) for garments** (Undershirt with long sleeves, long underpants, socks, bootees, jacket, trousers, shirt, knitted gloves, balaclava)
- (C) provided by the manufacturer

AMBIENT TEMPERATURE CONDITIONS FOR HEAT BALANCE FOR DIFFERENT LEVELS OF ACTIVITY AND EXPOSURE DURATIONS									
				ACTIVITY					
Standard applicable	Insulation m².K/W		onary standing I/m²				oving medium ) W/m²		
	/ <sub>cler</sub>	8h	1h	8h	1h	8h	1h		
EN14058	0,170	19°C	11°C	11°C	2℃	0°C	-9℃		
EN14058	0,230	15°C	5°C	5°C	-5°C	-8°C	-19°C		
EN342	0,310	11°C	-2°C	-1℃	-15°C	-19°C	-32℃		
EN342	0,390	7℃	-10°C	-8°C	-25°C	-28°C	-45°C		
EN342	0,470	3℃	-17°C	-15°C	-35°C	-38°C	-58°C		
EN342	0,540	-3℃	-25°C	-22°C	-44°C	-49°C	-70°C		
EN342	0,620	-7℃	-32°C	-29°C	-54°C	-60°C	-83℃		

### EN14404 ► KNEE PROTECTION

This European Standard provides the requirements and test methods for protective knee devices used by people that have kneel to carry out their work. This standard does not apply to the knee protection that are medical devices and are designed for sport.

KNEE PROTECTION					
Type 1	Knee protection independent of other product and attached around the leg				
Type 2	Plastic foam or other padding inserted in the pockets of trousers or permanently attached to the trousers				
Type 3	Devices that are not attached to the body but implemented during the movement of the user. They can be provided for each knee or both knees together				
Type 4	Protection of one or both knees, part of devices with additional functions, such as helping to stand or kneel. The knees protection can be worn on the body or independently				

### **SAFETY SHOES-BOOTS**

### **STANDARDS**

### **EN ISO 20344**

This standard defines the test methods for safety footwear, protective footwear, and occupational shoes.

It may be used only in conjunction with standards EN ISO 20345 and EN ISO 20347, which specify the requirements for the shoes as a function of specific levels of risk involved.

# EN ISO 20345 SPECIFICATION FOR SAFETY FOOTWEAR FOR THE WORKPLACE.

In reference to standard EN ISO 20344, this European standard defines the basic and the additional (optional) requirements for safety footwear for the workplace, marked «S». The safety shoe is equipped with safety toe caps designed to withstand a maximum impact of 200 joules and crushing up to 15 kN.

# EN ISO 20347 SPECIFICATION FOR OCCUPATION

FOR OCCUPATIONAL SHOES MARKED «O».

These shoes are different from safety/protective footwear in that they have no protective toe cap for impact and crushing.

### EN ISO 61340-4-3

This standard specifies the requirements and tests for electrostatic shoes with specific applications. It describes the test methods used to determine the electrical resistance of shoes used to control the electrostatic potential of the user's workstation.

### EN ISO 20349-1 EN ISO 20349-2

This standard specifies the requirements and tests for protective shoes against heat risks and molten metal splashes as in foundries or welding.

### THE PARTS OF A SHOE





SIZE CORRESPONDANCE TABLE														
EU	35	36	37	38	39	40	41	42	43	44	45	46	47	48
UK	2	3	4	5	6	6.5	7	8	9	10	10.5	11	12	13
US	3	4	5	6	7	7.5	8	9	10	11	11.5	12	13	14
cm	23.1	23.7	24.4	25.1	25.7	26.4	27.1	27.8	28.4	29.1	29.7	30.3	31	31.6
mm	231	237	244	251	257	264	271	278	284	291	297	303	310	316

• SB OR S1 TO S5 OR SBH (SAFETY FOOTWEAR) • OB OR 01 TO 05 OR OBH (OCCUPATIONAL SHOES)					
CLASS 1 or 2	EN ISO 20345	EN ISO 20347			
ALL MATERIALS	SB: basic properties	<b>OB</b> : basic properties			
CLASS 1 Leather shoes and other materials, except rubber or polymer shoes	\$1: basic properties plus: - closed back - anti-static - energy absorbing heel - outsole resistance against hydrocarbons	Ot: basic properties plus: - closed back - hydrocarbon-resistant sole - anti-static - energy absorbing heel			
	\$2: the same as \$1 plus: - waterproof	02: the same as 01 plus: - waterproof			
	\$3: the same as \$2 plus: - puncture resistant sole - studded sole	03: the same as 02 plus: - puncture resistant sole - studded sole			
CLASS 2 All rubber shoes (fully cured*) or all polymer (fully moulded)	\$4: basic properties plus: - closed back - anti-static - energy absorbing heel - outsole resistance against hydrocarbons	O4: basic properties plus: - anti-static - energy absorbing heel			
	\$5: the same as S4 plus: - puncture resistant sole - studded sole	05: the same as 04 plus: - puncture resistant sole - studded sole			
HYBRID SHOES Rubber foot (fully cured) or all polymer (fully moulded) / Top leather upper and other materials	SBH: properties specific to hybrid safety shoes	<b>OBH</b> : properties specific to hybrid work shoes			

SYMBOLS FOR INDIVIDUAL SPECIFICATIONS En ISO 20345					
	Puncture resistant sole	Р			
	Electrical properties:				
	Conductive shoe	С			
	Antistatic shoe	А			
	Insulating shoe	See EN50321			
Whole shoe	Resistance to aggressive environments:				
WHOLE SHOE	Heat-insulated sole	HI			
	Sole insulated against cold	CI			
	Energy absorbing heel	E			
	Water-resistant of the whole shoe (waterproof shoes in leather and other materials, class 1)	WR			
	Metatarsal impact protection	М			
	Ankle protection	AN			
	Cut-resistant upper	CR			
Upper	Resistance of the rod penetration and water absorption (shoes in leather and other materials, class 1)	WRU			
	Contact-heat resistant outsole	HRO			
Outsole	Oil-resistant outsole	FO			
	Isolation of the sole against heat. Sandbox test 150°C, 30 minutes of exposure (HI-1)	HI			

SYMBOLS FOR INDIVIDUAL SPECIFICATIONS En ISO 20349-1 • En ISO 20349-2					
Floor types Symbols	Symbols				
Resistance to molten metal splashes, with use of aluminum as molten metal during the test (EN ISO 20349-1)	AL				
Resistance to molten metal splashes, with use of cast-iron as molten metal during the test (EN ISO 20349-1).	FE				
250°C sandbox test, 40 minutes of exposure (HI-3). (EN ISO 20349-1)	НІ				
WG indicates that the footwear complies with the requirements defined for welding footwear. (EN ISO 20349-2)	WG				


RESISTANCE TO SLIPPING				
Floor types	Symbols			
Hard industrial floors, for indoor use (such as food industry tiled flooring)	SRA			
Hard industrial type floors for indoor or outdoor uses (paint or resin type flooring in industry)	SRB			
All types of hard floors for multiple uses indoors or outdoors	SRC			





### PERFECT SAFETY

Fall arrest equipment includes different products which have to be adapted for each risk to ensure the necessary protection.



### ANTI-FALL SYSTEM

Is comprised of at least three elements

**HARNESS** 

**FALL ARRESTER** 

**ANCHORAGE POINTS** 







### THE HARMONIZED EUROPEAN STANDARDS

All protective equipment against falls from a height are submit to European standards. You will find, below, a summed up presentation of every standard.

### **GENERAL STANDARDS**

#### **EN363** ► FALL ARREST EOUIPMENT

Set of personal protective equipment against falls from height, linked to one another and intended to stop a fall. A fall arrest equipment must contain at least a full body harness and a fall arrest equipment.

#### TEST METHOD **EN364**

Describes the different test methods of the various PPE against falls from height, as well as the test equipment.

#### GENERAL REQUIREMENTS FOR THE INSTRUCTIONS **EN365** FOR USE AND THE MARKING

Description of the marking that must figure on the PPE against falls from height and of the information which must appear on the instructions for use. Instructions for periodic inspections shall include inter alia:

- A recommendation for the frequency of periodic inspections, taking into account factors such as regulation, the type of equipment, frequency of use, and environmental conditions. This recommendation shall include a clause stating that the periodic inspection should be conducted at least once every twelve months; - A warning to emphasise that periodic inspections should be only carried out by a competent person in strict compliance with the manufacturer periodic inspection procedures.

### **VISUAL INSPECTION FOR:**

Harnesses, belts, lanyards, ropes, energy absorbers, self retractable devices that canno't be dismantled (e.g. AN102), connectors, our kit components (except ELARA270), temporary anchors (tripod, LV201 ...)

### **MECHANICAL INSPECTION FOR:**

Self retractable devices that can be dismantled, rescue equipment (e.g. TC013)

### **SPECIFIC STANDARDS**

#### EN361 FULL BODY HARNESS

Body securing device intended to stop falls. The full body harness can be made of straps, buckles and other elements; set and adjusted in a right way on the body of an individual to secure him during a fall and afterwards.

### MOBILE FALL ARRESTER ON RIGID ANCHORAGE LINE

Equipment consisting of a mobile fall arrester with self-locking, integral with its rigid anchorage line (rail, cable...). An energy reducer can be built-in on the equipment.

#### MOBILE FALL ARRESTER ON FLEXIBLE ANCHORAGE EN353-2 LINE

Equipment consisting of a mobile fall arrester with self-locking, integral with its flexible anchorage line (rope, cable...). An energy reducer (absorber) can be built-in in the equipment.

#### **EN355 ENERGY ABSORBER**

Component of a fall arrest equipment, which quarantees the stop of a fall from a height in safety by reducing the impact of the shock.

WARNING: If we associate a lanyard energy absorber, the total length of the entire device must not exceed 2 m.

#### EN360 SELF-RETRACTABLE FALL

Fall arrester with self-locking device and a self-retractable system for the lanyard. An energy reducer (absorber) can be built-in in the equipment.



### EN362 ► CONNECTOR

Connection element or equipment component. A connector can be karabiner or a snap hook.

Class A: Anchorage connector, automatic lock used as the component and designed to be connected directly to a specific type of anchorage.

Class B: Primary connector with automatic lock used as the component.

Class M: Multi-purpose connector, primary or quick opening, used as a component, which can be loaded along its major axis or minor axis.

Class 0: Ouick opening connector used in long-term or permanent applications, screw lock. When completely screwed this part is a supporting part of the connector.

Class T: Manufactured end connector, automatic lock, designed as part of a subsystem for attachment so that the load is carried in a predetermined direction.

### EN354 ► LANYARDS

Connection elements or equipment component. A lanyard can be in rope made of synthetic fibres, in metallic rope, in strap or in chain.

**CAUTION:** A lanyard without energy absorber must not be used as a fall arrest equipment.

### **EN358** WORK POSITIONING SYSTEM

A work positioning system consists of components (work positioning belt and lanyard) linked to one another to form a complete equipment.

### **EN813** ► SEAT HARNESSES

# EN1891 SHEATHED BRAIDED ROPE WITH A LOW COEFFICIENT OF ELONGATION (STATIC ROPES)

### EN12841 ► ROPE ACCESS SYSTEM

A rope device for work positioning. There are several types of device:

Type A: Rope adjuster device for safety support that accompanies the user during his changes in position and/or to adjust the safety support length and which automatically locks on the safety support under a static or dynamic load action.

Type B: Ascent device for work support, manually operated rope adjustment device which, when attached to a safety support, locks under the action of a load in one direction and slides freely in the opposite direction. A type B device must be used in conjunction with a type A device connected to a separate safety support.

Type C: Descending device for work support, manually operated rope adjustment device with friction which allows the user to perform a controlled downward movement and to stop, by releasing, anywhere on the safety support. A type C device must be used in conjunction with a type A device connected to a separate safety support.

### EN1496 ► RESCUE EOUIPMENT

Rescue lifting devices. There are several device classes:

Class A: Component or subset of a rescue equipment for the lifting of a person with the help of a rescuer, or on its own from a low point to a high point.

Class B: Analogue device of class A device, but with an additional function of manual control for descent to lower a person over a limited distance of

# EN567 ► EQUIPMENT FOR MOUNTAINEERING AND CLIMBING

Safety requirements and test methods for blockers.

# EN12275 ► MOUNTAINEERING AND CLIMBING EQUIPMENT

Safety requirements and test methods for connectors.

Type B: Primary connector with automatic lock with enough strength to

be used anywhere on a safety system.

Type H: HMS self-closing connector, usually pear-shaped, used to

link a mountaineer to a Via Ferrata anchoring system.

Type K: Via Ferrata self-closing connector, used primarily for

dynamic belaying, HMS type.

Type D: Directional connector or combination of one or more

connectors with automatic lock and straps, used to ensure

that the load is carried in a predetermined direction.

Type A: Special anchorage automatic lock connector only used to be

directly connected to a special type of anchorage.

Type () (Quicklink): Connector with screw lock. When completely screwed this

part is a supporting part of the connector.

# EN12278 MOUNTAINEERING AND CLIMBING EQUIPMENT

Safety requirements and test methods for pulleys.

### **EN341** ▶ PPE AGAINST FALLS FROM HEIGHT

Descending devices, classified according to the following data

Class A: Descent energy W up to 7.5 x 10<sup>6</sup> J
Class B: Descent energy W up to 1.5 x 10<sup>6</sup> J
Class C: Descent energy W up to 0.5 x 10<sup>6</sup> J

Class D: For a single descent. The descent energy depends on the maximum

descent height and the maximum nominal load.

### **EN795 2012** ► ANCHORAGE DEVICES

Element to which a personal protective equipment can be fastened.

Type A - NON PPE: Anchor device with one or more stationary anchor points with

the need of a structural anchor.

Type B: Anchor device with one or more stationary anchor points

without the need of a structural anchor.

Type C - NON PPE: Anchor device employing a flexible anchor line with maximum

deviation of 15°.

Type D - NON PPE: Anchor device employing a rigid anchor line with maximum

deviation of 15°.

Type E: Anchor device for use on surfaces with a maximum slope of

b°.

### **CEN/TS 16415**

It is not a standard but a recommendation to test the anchors used by 2 or more persons. This technical specification was approved by CEN (European Committee for Standardisation) on July 30, 2012 for a provisional application and allows the use of an anchor by several persons simultaneously.

### OTHER Standards

EN1498

RESCUE STRAP

Directive 2006/42/CE

FOR THE MACHINES OR EQUIPMENTS WITH MOBILE FUNCTION.

EN13463-1

NON-ELECTRICAL EQUIPMENT FOR POTENTIALLY EXPLOSIVE ATMOSPHERES

Basic method and requirements (risk analysis).

EN13463-5

NON-ELECTRICAL EQUIPMENT FOR POTENTIALLY EXPLOSIVE ATMOSPHERES

Protection constructional safety "c" regarding the main mechanical devices; joints, bearings, gears, belts, clutch chains, brakes, coupling devices, conveyor belts. It sets out the requirements to be respected for the design and maintenance instructions.

It sets out the requirements and tests to be conducted according to the type of component.

DIRECTIVE 93/42/EEC EU REGULATION 2017/745

Þ

FOR THE MEDICAL DEVICES OR ACCESSORIES.

### EN60529:1991 +A1:2000 + A2:2013

The protection index (IP) Classifies the level of protection offered by a material from solid and liquid intrusion. The index format is IPxx where the 1st digit indicates the protection from dust, the 2nd digit the protection from water intrusion.



# **GLOSSARY**



### Α

### **ABRASION**

Abrasion means wear through the action of friction. For the mechanical standard EN388 for gloves, EN343 for clothing and EN ISO20344 for shoes, the test consists of knowing when the product will deteriorate. The level is thus used to provide an indication of resistance and longevity.

### ABS

Acrylonitrile Butadiene Styrene (ABS) is a thermoplastic used by the industry for rigid, light and molded products. This material is used for the construction of the hull of hard hats and for the casing of self-retracting fall arresters

### ACCOMMODATIVE (REFLEX)

The cristallin acts as a lens enabling focusing in distance thanks to a muscle. Presbyopia (near-sightedness) is caused when it does not work properly. The accomodative reflex ensures clear vision.

### **ACETATE**

A fibre obtained by the action of artificial resins on cellulose and with: low weight, excellent optical properties, heat stability, good resistance to most chemical products. It does have some disadvantages however: low resistance to abrasion and scratching, risk of ignition near a heat source greater than 100°C.

### **ACRYLIC**

Synthetic fibre often resembling wool: Very high elasticity (so does not crease) - Very lightweight - Heat insulation equal to wool - Very high resistance to abrasion and traction. It is thermoplastic, has low absorbent power and dries very quickly.

### **ACTIVATED CARBON**

Activated carbon, or absorbent carbon or medicinal carbon, is carbon which has been treated by pyrolysis to increase its absorbency. The basic material used is often coconut, but it can be wood, bone or some other carbon.

A grain of activated carbon has a network of pores and channels similar in dimension to molecules. Activated carbon creates a chemical principle enabling toxic gas / vapour molecules to be captured.

### **AEROFRESH CONTROL**

System developed by Delta Plus, used to ventilate the shoe at the instep and ankle by means of an air vent.

### **AEROSOLS**

In chemistry, an aerosol is a set of solid or liquid particles, in suspension in a gaseous medium. An aerosol is a suspension of very fine particle (colloidal size) in a gas (risk of contamination of the air ways).

A cloud is an example of an aerosol. Other examples are mist, smoke or the cloud of dust given off when you shake out a rug.

### **AEROSOLS AND AQUEOUS FOGS**

Small droplets produced during pulverization.

### **ALUMINISED (LINING)**

The DELTALU aluminised lining combines heat insulation performance with lightness; polyester wad on aluminium foil batting (perforated). It is a real barrier inside garments protecting against the cold and the wind.

### ANCHOR LINE

Element on which a sliding fall arrester moves. The anchor line can be a rope, a cable or a rail

### ANCHORAGE POINT

Element to which a fall arrest system can be connected.

### ANTI-MIST (AB)

Surface treatment for lenses realized by dip coating the lens to prevent the formation of mist. This treatment is incompatible with mirror treatment of the lens itself.

### ANTI-SCRATCH (AR)

Surface treatment of lenses to prevent superficial scratches. This treatment is obtained by dipping the lens in a «silicone» based solvent. It is colourless on the lense and does not alter vision.

### **ANTISTATIC**

Property of a product, which prevents or limit the formation of static electricity. It is often requested in industrial environments for the risks of electrical discharge. Antistatic protective clothing are mainly used in explosive risk environments such as: chemical plants, refineries, weapons factories, mines.

They are also widely used to protect materials sensitive to electrical discharge such as on electronics manufacturing or semi-conductor assembly sites. Finally, they are used in controlled-atmosphere sites such as automobile paint workshops, the aim being to prevent the emission of particles which may be deposited on bodywork paint.

### APV

Assumed Protection Value: complete and precise method for mesuring the hearing protector attenuation

- Attenuation per frequency (63Hz, 125Hz, 250Hz, 500Hz, 1000Hz, 2000Hz, 4000Hz & 8000Hz).
- Mean Attentuation: mean attentuation every 16 people tested.
- Standard Deviation: statistical presentation of the results.
- Assumed Protection: minimum attentuation at each Frequency level.

It is computed by subtracting the standard deviation from the mean attenuation for each considered frequency.

### APF

Assigned Protection Factor.

Formula used to define the level of protection achieved in the workplace by 95% of operators trained in the wearing of respiratory protective devices or RPD and properly using after control a well maintained and adjusted device. Maximal concentration allowed corresponds to: NPF x OEL.

### ΔΝΙ

Initials which mean «Average Quality Level». The standard ISO N° ISO2859 determines sampling for controls batch by batch, the AQL thus gives the maximum number of gloves with defects on 100.

# **GLOSSARY**

### **ARAMIDES**

Thermostable fibres used mainly in heat-proof applications. There are two types: para-aramides such as Kevlar® (anti-cut & resistant to flame and heat) and meta-aramides such as Nomex® (antistatic & resistant to flame and heat).

### ARCH SUPPORT SYSTEM

This is an anatomical piece which provides rigidity to the instep and gives greater stability to the foot.

### **ARMBAND**

Armbands are pieces of fabric worn around the arm. Fluorescent armbands are accessories, used for greater visibility. Attention these are not PPE.

### **ASSEMBLY**

Assembly is the stage which consists of assembling the shoe upper on the form with the insole. Manufacturing occurs when this is assembled to the various midsoles and outsoles.

### **ATTACHMENT**

(DORSAL) Connection point of a fall arrester on a harness.

(STERNAL) Connection point of a fall arrester on a harness.

(LATERAL) Connection point of a work restraint system or work positionning. (VENTRAL) Connection point of a work restraint system or work positionning.

1

### **BACK PAD**

Element of a harness used to cross the straps at the back and position the D-ring at the correct height.

### **BIAS (FABRIC ON THE)**

It is the use of a fabric part in its transversality (angle 45°) in order to obtain a flexible and deformable part. Examples of applications: strips or ribbons to be adapted to rounded forms (edge of a cuff, inside belt of trousers, etc.).

### **BLOUSON**

A blouson is a short garment which only covers the torso and hugs the waist. A long jacket is an alternative between a blouson and a parka.

### **BLUE (LIGHT)**

Harmful light emitted between 380 and more than 500 nanometres. Examples: intense sunlight, light used for the sedimentation of ceramics in dentistry, etc.

### **BRUSHED**

Fabric on which one or both sides have a furry aspect obtained by the brushing operation.

The operation consists of passing the fabric over a rotating drum fitted with metal teasels. This treatment gives the article a soft, thick feel, making it warmer and bulkier, but removes toughness.

### **BUMP CAP**

Bump cap and anti-scalp (EN812 standard). It is a PPE widely used in industry, especially for indoor use to protect the skull against shock contact with hard surfaces that could cause minor injuries.

It can not replace the helmet, in case it is required to wear a helmet with EN397 standard.

### **BUMPER CAP**

Protective toecap designed to protect against premature wear on the front of the sole.

### **BURSITIS**

Bursitis is an occupational illness of the knee, often occuring in tile layers, welders, floor covering layers, etc...

It comes in form of a gradual and slow increase in the volume of a bursa due to repeated microtraumas.

### **BUTT (LEATHER)**

Part corresponding to the croup of the animal at the bottom of the skin (grain).

### **CANVAS (WEAVE)**

The plain weave, is the basic fabric weave, and is characterised by inversed and alternating arrangement of the warp yarns on the weft yarns. There is no difference between the right and wrong sides of the fabric. This weave is particularly resistant to abrasion and very easy to waterproof.

### CARBON (FIBRE)

The carbon fibre is used in materials for its anti-static properties.

### **CARROUSEL (INJECTION)**

It's a machine with several injection stations (12 18 24 30 36) used to make soles.

### **CEMENTED (ASSEMBLY)**

The most widely used manufacturing process for shoes in general: it consists of gluing the sole to the insole.

### **CEMENTED (SEAM)**

Assembly procedure for seams by hot gluing to guarantee the sealing of seams for coated materials.

### **CHEST STRAP**

Strap used in the design of a harness with the role of maintaining the position of the harness straps on the shoulders in order to prevent any risk of losing the harness in the event of a fall. The chest strap is not obligatory on a harness.

### **CHIN STRAP**

Element used to prevent a safety helmet from falling. It may be simple or with a chin-cup, with two or four fastening points used for work at height.



### **CHLORINATED (GLOVE)**

A washing process for the latex glove, washed in chlorinated water to produce unpowdered gloves. The advantages of unpowdered glove is: it is easier to put the glove on (a velvety contact), improves comfort and reduces the allergenic effect of the natural latex proteins carried by the powder.

### **CLEARANCE**

The clearance is the height between the foot of a person equiped with a fall arrest system and the nearest obstacle.

### **CLOGGING**

Phenomenon of dust filtre saturation. As respiratory protection is provided by a mechanical barrier (interlacing of fibres and electromagnetic reaction), when the filter is saturated, clogging occurs; the user feels difficulty in breathing.

### **CLOSING**

This is the step during which the various parts of the upper, collar, vamp, quarters, qussets are assembled.

### **COATING**

Coating is the operation by which the surface of a textile or leather is coated with a layer of chemical product with the aim of giving it properties of chemical resistance, or to enhance its mechanical resistance. They are mainly found in the form of polyvinyl chloride (PVC), polyurethane (PU), and natural (Latex) or synthetic (Nitrile, Neopren) elastomer. There are many applications, from tarpaulins to imitation leather including proofing of protective clothing.

### **CONCENTRATION**

Ouantities of chemical products in the air breathed by a worker at his workstation, and which may adversely affect his health. Hence the need to have concentration limits below which the risks of intoxication are low or non-existant (TLV/STEL).

### **CONFINED SPACE**

A confined space is characterized by a volume/ dimension ratio such as the natural exchange of indoor air with outdoor air being reduced and able to cause asphyxiation, intoxication, fire or explosion. In these areas, the risks are increased by various gas or smoke fumes. Examples: wells, tanks, sewers, ditches, accessible collectors, valve chambers, tanks...

### CONNECTOR

Connecting element. A connector can be a carabiner or a hook.

### COTTON

Natural textile fibre made of silky filaments surrounding the cotton seed: it is comprised of about 94% cellulose. Comfort, easy cleaning and good absorbency are its main properties.

### **CUFF**

15 cm gauntlet found on welding gloves to protect wrist and forearm against molten metal splash.

#### ı

### **DECIBELS**

Acoustic pressure, in other words the intensity or amplitude of sounds and noises, expressed in decibels (dB), and determines the danger to humans. The safety level has been fixed at 85 dB: above this, pain occurs, and injuries appear.

Decibels are usually measured using a sound meter which converts the sound signal into an electric current.

### **DEFLECTOR**

This is the role played by the helmet because of its rounded shape, it deflects the trajectory of a moving object, without stopping it suddenly, preventing a violent impact.

### **DERMIS**

The skin of the animal, comprised of two layers: the grain (external part of the dermis) and the flesh split (internal part of the dermis). Using the tanning process, the dermis is transformed into leather.

### **DESCENDER**

A descent / rescue device for lowering Vertically at a limited speed from a raised to a lower point. For use for one or more people.

### **DESIGNER**

Person in charge of creating the shoe design integrating all the technical design elements.

### **DIELECTRIC (harnesses and absorbers)**

Dielectric harness and absorber, non-conductive renderings. Insulated thanks to the plastic coating of all the metal buckles.

### DIOPTER

Unit of power of optical systems used to determine the measurement of refraction, i.e. the ability of a medium or an object to deflect light rays. Unit of power equal to the inverse of the focal distance, expressed in metres. The focal distance is the distance between the lens or the refracting medium, and the point at which these rays converge (where they meet). The human visual system is 60 diopters (40 for the cornea and 20 for the cristallin).

### DIPPED (GLOVE)

Glove manufacturing process by dipping the form of a ceramic hand in baths of various compositions depending on the material used. The next step is firing in ovens (vulcanisation).



# **GLOSSARY**

### **DIRECTIVE (ATEX)**

This European regulation, which aims to improve the health and safety of workers at risk from explosive environments, is the result of the application of 2 directives:

- Directive 1999/92/EC for the protection of workers potentially at risk from explosive environments.
- Directive EU 2014/34 for machines intended for use in explosive environments.

PPE are not governed by these two directives, they are even explicitly excluded from the Directive EU 2014/34 (Chapter I, Section 4 1,2,d). They may be used in ATEX regulated zones as part of an overall explosion risk prevention system. The EU 2016/425 regulation for PPE takes into account the risks of explosion in Annex II, paragraph 2.6.: "PPE for use in explosive environments.

PPE for use in explosive environments must be designed and manufactured in such a way that it cannot be the seat of an electric or electrostatic arc or result from an impact, capable of igniting an explosive mixture."

### **DMF**

Dimethylformamide N or N-dimethylformamide is a common solvent used in organic chemistry. DMF may be a carcinogenic substance, although the EPA (Environmental Protection Agency) does not consider it a cancer risk. The new innovative manufacturing process, also called PU Water, is 100% based on water. No solvents, such as DMF, are used, strengthening innocuousness.

### DOLOMIA

Dolomia is a sedimentary carbonate rock comprised of at least 50% dolomite. It is a double calcium and magnesium carbonate, which crystallizes into lozenge-shaped prisms (rhombohedrons). Dolomia is a sedimentary rock comprised mainly of the mineral dolomite (between 90 and 100%) and calcite, which do not have the same density (dolomite: 2.87; calcite: 2.71), playing a fundamental role in rock erosion.

The Dolomia test, conducted using Dolomia dust, is an optional test for filtering face pieces (EN149:2001 A1:2009) guaranteeing longer lasting performances of resistance to penetration.

### **DRILEX®**

Drilex® is a technical lining found in top of the range sports shoes. This lining is comprised of 2 fibres and enables absorption of perspiration and evacuation of humidity to the outside (antibacterial and anti-odour).

### **DUAL GRIP**

Name of an outsole offering a grip system suited to smooth or friable surfaces, with a large contact tread pattern, and central channels to evacuate liquids.

### **DUAL-DENSITY (SOLE)**

Dual-density means the sole is made of 2 superimposed parts; the underpart in contact with the ground is more rigid whereas the upper part is more flexible and shock absorbent.

### **DUNGAREE**

Dungaree are work garments comprised of trousers and a bib on the chest with shoulder straps. More commonly known as dungarees.

### DUSTS

Solid particles suspended in the air.

#### F

### **EAR DEFENDER**

Element of ear defenders (with the headband and the foam) which provides the sound attenuating effect.

### **EARPLUGS**

Disposable or reusable ear defenders (EN352-2): inserted in the ear canal to plug the conduit. Usually made of polyurethane or PVC, they can also come with a cord, a headband and a detectable metal insert (for use in the food processing industry).

### **ECO-DESIGNED**

Delta Plus develops eco-designed products whose environmental impacts are reduced to a minimum. Thus, throughout the lifespan of the product, the use of energy is minimized, the use of raw materials such as organic cotton and reduced packaging are given priority.

### **EDGED (SEAM)**

Seam consisting of covering another seam with a band of fabric compatible with that of the garment to provide better sealing.

### **ELASTANE**

Extensible fibre made of synthetic elastomer yarns. Elastane is always mixed with other fibres to give the fabric its properties: suppleness, elasticity and crease-proofing.

### **ELECTRIC ARC**

An electric arc is a visible electric current in a nonconductive media (gas, air vacuum.)

The arc is created when the non-conductive material ionizes, which occurs more easily when conducting surfaces are nearby. The position of an electric arc is stable: once it has found the shortest path, it remains there (minimum energy principle). The whole difficulty for arc welding is therefore to master the arc using a continuous movement so that it keeps the desired form despite the fact that the emitting surface (or more rarely the receiving surface) is sometimes an acute angle.

Electrical arc welding produces a huge quantity of localized heat generating the fusion of materials, making strong joins that remain after cooling.

### **ELECTRIC FLASHOVER**

Electric flashovers are electrical burns without the current passing through the body. In low voltage, following an electric arc, the skin injuries are superficial and mainly affect the hands and face.

Protection is provided by the polycarbonate of a thickness >1.4mm. The best protection is provided by a face shield.

### **ENERGY ABSORBER**

Fall arrester composed of a lanyard with an energy dissipating device, which quarantees to stop a fall from height safely under normal conditions of use.

### **ENERGY DISSIPATOR**

Component of a fall arrester designed to dissipate the kinetic energy accumulated during the fall.



### **ERGONOMICS**

Studies and research into the methodical organisation of work and the arrangement of protective equipment according to the anatomical possibilities of people.

### **ESD**

ELECTROSTATIC DISCHARGE, electrostatic discharge.

Any contact and any physical separation of solid materials may generate electrostatic charge. A person, or a garment worn by the person, may be electrically charged. Where appropriate, the ESD can cause damage, if the charged person or object comes into contact with an ESD sensitive device (microchips, semiconductors, printed circuit boards...).

EN 61340-5-1 (Protection of electronic devices against electrostatic phenomena) defines the general requirements of the areas protected against ESD, EPA (ESD Protected Areas).

To be admitted into an EPA area, depending on the configuration of the workstation, clothing and footwear must be subjected to specific electrical charge dissipation tests determined by European and American standards. Based on the results of these tests, the product will have the special ESD marking. Other PPE (gloves, head protection and fall arrest system) are not mentioned in this standard.

### 1

### **FABRIC**

Any material obtained by interlacing of the warp and weft yarns, and made on a loom or weaving machine. Fabric with a plain weave structure is usually called plain weave.

### **FALL ARREST HARNESS**

Body harness system designed to stop falls, a harness is one element in a fall arrest system. It should be designed to hold the individual during and after the fall with an angle of 50° from the vertical.

### **FALL ARREST SYSTEM**

Protective equipment against falls from height or fall-arrest systems are comprised of 3 elements:

- a body holding system designed to stop falls (fall arrest harness).
- a linking sub-system designed to stop a fall from height (self-retracting fallarrester, sliding fall-arrester or energy absorbing lanyard).
- a safe anchorage point.

### FALL INDICATOR

Mechanical and visual device that allow to identify if a fall arrester suffered a drop impact.

### **FILTERING MEDIA**

Type of respiratory protection device used either in positive pressure (assisted ventilation) or in negative pressure (free ventilation).

### **FINISH**

Finishes are treatments used on some fabrics or yarns, to give them special properties, such as flame proofing, antistatic, water repellent, etc.

### FLAME PROOFING

Treatment of textile materials with non flammable substances to reduce the risks of fire or slow flame spread.

### FLANNEL

Lightly brushed fabric, soft and fluffy to the touch, originally made of wool.

### FLAP

See valve.

### FLASH

Surface treatment of a lens giving it a mirrorer aspect. The mirror effect on lens reflects the intensity of the light and heat to reduce eye strain during exposure to bright light, and to limit headaches resulting from this exposure. This treatment is not acompatible with anti-fog treatment. The colour of the treatment can be gold or other.

### FLEECE

Thick, soft fabric, brushed on both sides.

### FLOCK (GLOVE)

Cotton fibers deposited as a finishing process. Flocking provides a pleasant and soft contact and reduces perspiration.

### **FLUCTUATING**

Noise whose fluctuations are greater than 5dB during the period of measurement.

### **FOAM**

Element of ear defenders (with the headband and the ear cups) which attenuates the noise and provides comfort. It's inside the ear cups.

### FOOD (SOLE)

White or light-coloured sole to prevent marks on the floor, anti-slip sole as it is used on very slippery surfaces.

### **FREQUENCY**

Frequency is expressed in hertz. Only sounds with frequencies of between 20 and 20 000 Hz are audible.

At a frequency of between 20 and 200 Hz, the audible sound is lowpitched. Below that, they are infrasounds.

At a frequency of between 2000 and 20 000 Hz, the audible sound is highpitched. Above that, they are ultasounds.

### FIIMF:

Small particles suspended in the air (aerosols).



G

### **GAUGE**

This is the width of the stitch. It corresponds to the number of needles used in 1 English inch (2.54 cm). Example: gauge 7 corresponds to 7 needles in 1 inch. The higher the gauge, the finer the stitch. Gauges are 7, 10, 13, 14.

### **GLASS FIBRE**

Glass fibre is a very fine filament of glass. By extension, composite materials strengthened with this fibre (usually associated with polymers) are also called glass fibre.

Monolithic glass is a very fragile material but when spun to a diameter less than one tenth of a millimetre, it loses its fragility and becomes a highly mechanically resistant material.

### **GRAIN LEATHER**

External part of the dermis, with no mechanical modifications. This is the most supple and resistant part of leather.

### **GUSSET**

It is the part of the shoe on either side of the tongue. It protects and seals the closure.

ı

### HACCP

Hazard Analysis Critical Control Point. This a method of quality control in the food industry, used to:

- identify and analyse the risks associated with various stages in the production process of a foodstuff.
- define the means required to control them.
- ensure that these means are implemented effectively and efficiently. It is a systematic and rational approach to controlling microbiological, physical and chemical hazards in food.

### **HARNESS**

An element of the harness. The most of arm webbing are starshape with 4 or 6 arms. Webbing with 6 fixing points or more, ensure better distribution of the force exerted on the helmet. Webbing can be made of polyethylene, or textile for better absorption of perspiration.

### HARNESS (SAFETY HELMET)

It can be made of textile material or polyethylene. Its role is to absorb the impact of a falling object. It is comprised of two elements: the headband and the webbing.

### HEADBAND

Element of ear defenders (with the muffs and the foam), it maintains the pressure of the protection on the ears.

### HEADGEAR

It is one of the elements of the harness of safety helmet. It is often made of low density polyethylene (LDPE). It is adjusted by a tightening system with rack (ratchet), or by a sliding system (tightening straps with notches).

### **HEAT SEALED (SEAM)**

Seams covered on one side with a band of fabric compatible with that of the garment and hot-welded for increased protection and sealing.

#### HMI

High Medium Low: 3 levels of frequency measurement.

### **HYDROPHILIC**

A hydrophilic fabric is comprised of water-absorbent materials (e.g. cotton, wool. etc.).

### **HYDROPHOBIC**

A hydrophobic fabric is comprised of materials that do not absorb water. (e.g. polyamide, acrylic, polyester...).

### IMPACT FORCE

This is the force subjected to the body at the moment of the fall, expressed in daN (decaNewton).

### **IMPERMEABLE**

An impermeable fabric is used to make products which is completely water and air tight.

Water proofing is usually done by the application of a coating. The coating is a deposit of a plastic film (PVC, polyurethane or acrylic) on the surface of a textile. For example, rain suits with their polyurethane or PVC coatings, boots in PVC or dipped glove.

### **IMPULSE**

Noise the sound level of which increases considerably almost instantaneously.

### **IMPUTRESCIBLE (LEATHER)**

After the tanning process, the leather becomes imputrescible, meaning it cannot rot.

### **INFRARED**

Infrared (IR) radiation is electromagnetic radiation of a wavelength longer than that of visible light, but shorter than that of microwaves. Infrared radiation has wavelengths between about 750 nm and 1 mm, spanning five orders of magnitude.

### **INFRASOUNDS**

Sounds of a frequency to low to be heard by humans (< 20 Hz). The average human ear only hears sounds within a certain range of frequencies between about 30 Hz (below that the sounds are called infrasounds) and 15 kHz (above which the sounds are called ultrasounds). Some physiologists even extend the limits of this range from 20 Hz to 20 kHz.

### INJECTION (SOLE)

Sole or zip manufacturing system, liquid material is injected into a mould, this material then solidifies and takes the form of the mould.

### **INJECTION POINT**

Point through which the press injects polyethylene into the mould and which is cut on removal from the mould.



#### **INNOCUOUSNESS**

The innocuousness of a product guarantees the fact that it contains no materials which may cause allergies to sensitive people. Innocuousness is an integral part of the basic requirements of protective clothing in EN340 or gloves in EN420. Usually, the pH of materials, the chromium VI content of leathers, the nickel emission of metallic materials, azoic dyes and the solidity of the dyes are tested.

#### **INSOLE**

This is the sole inside the shoe, in contact with the sole of the foot.

#### INTERLOCK

Basic knitting weave, each side are the same.

Interlock has good dimensional stability which doesn't ladder too much. Widely used to make sports clothing.

#### INTERMITTENT

Noise whose fluctuations fall to the ambient level several times.

#### ΙP

The IP protection rating is a standard defined by the CE 60529 standard. This index classifies the degree of protection against intrusions of Solid bodies (dust for example) and liquids (water, oil, etc.). The first figure corresponds to the effective protection against solid bodies. The Second digit corresponds to the effective protection against Liquid bodies. The IP66 rating therefore corresponds to being totally Dustproof and splash-resistant.

## **JACKET**

A jacket is a garment with sleeves, closed in the front, covering the torso to the waist or hips.

#### **JERSEY**

Light and supple knits with a different right and reverse side. Widely used to make t-shirts and undergarments. The advantages of jersey are suppleness and comfort.

#### **KEVLAR®**

Para-aramide fibre manufactured by DuPont de Nemours. It combines lightness and resistance. For equal weight, Kevlar® is five times tougher than steel. Its properties: very resistant to cutting, carbonises between 425°C and 475°C; does not melt; self-extinguishing; dimensional stability; chemical stability; alteration of colour under UV.LL

#### **KINETIC ENERGY**

Energy that a body has as a result of its motion.

#### KNIT

All fabrics made of stitches or interlaced loops, made using needles or hooks. Knits are extensible. The basic fabrics are: rib, interlock, jersey.

#### **KNITTED CUFF**

Flexible, elastic knitted band finishing a collar, sleeves, legs, bottom of some garments.

Used to tighten wrists, collars, etc.

- Integrated cuff (knitted at the same time as the main piece).
- Pieced-cuff (knitted separately and stitched).

#### LAMINATED (FABRIC)

A laminated fabric is a complex of several layers of woven, knit or non-wovens assembled to enhance their performances.

2-layer laminate is used to describe a fabric laminated on 2 layers with a waterproof fibre usually on the outer layer. The inner layer is usually thicker and softer for greater comfort against the skin.

3-layer laminate is a fabric laminated in 3 layers, usually with waterproofing on the outer layer, comfortable fabric on the inner layer and sandwiched between the two, a waterproof- breathable membrane.

#### LANYARD

Generic term, a lanyard can be made of synthetic fibre rope, metal cable, webbing or a chain. A lanyard may not exceed 2 m in length.

#### LAST

The last is the basis for any study of the shoe which determines the general look, the volume and fit. It is made of wood for the study and then in plastic for production. The length of the foot, perimeter at the joint, foot width, and instep height are used to determine the size of a shoe and make the basic last.

#### LIFELINE

This is an anchor line to which a fall arrest system is connected to safeguard the horizontal movements of a person working at height. The anchor line can be a rope, a strap, a cable or a rail.

#### LINING

This is the part in contact with the foot. Often made of leather or textile, it improves the solidity of the shoe and acts like a second skin for comfort.

#### **LOOSE SOIL**

Irregular, uneven surface.

#### MANUAL ADJUSTMENT

Tightening system for safety helmets, using a sliding plastic strap. This system differs from the rack and ratchet system.

#### **MECHANICAL REVISION**

Class III mechanical fall protection PPE must be inspected at least once a year to ensure the proper functioning of the PPE. This inspection is also mandatory after a possible fall stop.





#### MEMBRANE

This is a thin polymer film (PU or polyester) applied to the inner surface of a fabric to enhance waterproofing and breathability.

#### MESH

An alveolar fibre, used to enable air circulation and evacuate perspiration.

#### **MICROFIBRE**

Light, very fine and soft synthetic textile fibre with soft touch, skin of peach aspect.

#### MIDSOLE

The midsole is also called the comfort sole, whereas the outsole is in contact with the ground; together they make up the two parts of a shoe sole.

#### MIG/MAG (WELDING)

MIG (Metal-arc Inert Gas) or MAG (Metal-arc Active Gas) welding (the only difference between the two is the gas used to protect the welding bath), both indicated in AWS terminology as GMAW (Gas Metal Arc Welding), is a semi-automatic welding process.

The metals are melted by the heat energy released by an electric arc which erupts in a protected atmosphere between a fuse electrode wire and the parts to be assembled.

#### MIRRORED

See flash

#### MOULDED

Moulding is a technique which consists of shaping an object using a mould which is hollow to hug the form of the desired object.

The moulded material must be able to change from the liquid to the solid state or be thick but sufficiently consistent to be able to be removed from the mould without deforming.

A wide range of materials can be moulded:

- metals
- plastics. The manufacturing process for frames is injection moulding.

A part production technique for large or very large production runs, this moulding can be in disk or in form.

#### Ν

#### **NANOMETRES**

Unit of measurement (1 millionth of a mm) used to calculate the wavelength of light. Maxwell in 1865 succeeded in demonstrating that light is an electromagentic wave whose field is measured in nanometres, with a visible and invisible spectrum. The wavelength determines the colour of the light. The human eye is only sensitive to wavelengths between 400 and 700 nm.

#### **NATURAL LATEX**

This is a natural polyisoprene from the Hevea braziliensis. It is part of the elastomer family, and is therefore elastic, supple and robust. It also has the properties of being impermeable to water, and resistant to detergents and some alcohols.

#### NBR (NITRILE)

This is a type of Nitrile: Nitrile Butadiene Rubber (NBR).

#### NFC

Near Field Communication is a recent technology that allows the user to establish communication between 2 compatible devices at short distance using a shortwave technique. The NFC is Available in most smartphones.

#### **NITRILE**

It is a synthetic latex. Its vulcanisation gives it properties similar to natural latex and many advantages (resistance to abrasion; excellent performance in oily and greasy environments; good resistance to chemical products).

#### NON WOVEN

Non-wovens are used to make numerous products: single-use garments, quilt padding, sleeping bags, cleaning cloths, baby's nappies, floor and wall coverings, reinforcements, garment padding, etc...

The three production processes for the lap of non-wovens are:

- dry spinning the fibres are used directly off the cards to make mattresses of fibres.
- by wet spinning a process similar to paper manufacture is used.
- by melt spinning the synthetic filaments are extruded in a current of hot air then lapped.

#### **NON-INVERTING DEVICE**

Element added to a sliding fall arrester to prevent installing it upside don on the anchor line.

#### **NOSE CLIP**

A flexible piece located at the top of single-use half-masks (on the nose), to adjust the face piece to the user's morphology.

#### NOTIFIED BODY

A Notified Body in the framework of the EU 2016/425 Regulation is a conformity assessment body, body that performs conformity assessment activities including calibration, testing, cerfication (Module B) ans inspection (Module C2 and D)

A notified body is inspected by the competent authorities of the Member States.

#### NPF

Nominal Protective Factor.

Formula used to define the level of protection provided by wearing a respiratory protective mask, and in standard test conditions: NPF = 100 / TIL (%).

The maximum exposure concentration corresponds to: NPF x MEV.

#### **NUBUCK (LEATHER)**

Grain leather the surface of which has been buffed, giving it a fine velvety and silky aspect.

#### NYLON

Registered trade name of DuPont de Nemours. It is a polyamide.



N

#### OIL-WATER REPELLENT

Leather treatment using mineral or synthetic oils or fluorinated resins, to make it resistant to water and/or oil penetration. This treatment gives the leather better mechanical performance for abrasion and increases the comfort (flexibility) of the glove, hence increased dexterity and lifespan.

#### OPTICAL BASE

This is the radius of curvature of the lens. The most curved optical base is 9; the least curved is 4; the most common is 6.

#### **OPTICAL CLASS**

Parameter which measures the optical quality of the lens. There are 3 classes of optical quality. The 1st corresponds to the best quality and is recommended for permanent wearing of glasses. The 2nd class is used for intermittent wearing and the 3rd only for very brief wearing.

#### OUTSOLE

The sole, also called the outsole, is the part of the shoe in contact with the ground. As a result, it must be as tough as possible. With the midsole, it comprises the two parts of the sole of a shoe.

#### OUTSOLE

The sole is the under part of the shoe. It is in contact with the ground. Several soles can be used to make up protective footwear. The materials used to make them, their sculpture and the manufacturing process will ensure the ergonomic performance required, i.e.: Grip, Anti-slip, Safety & Wearer comfort.

#### **OVERALL**

Single-piece garment covering the whole body.

## **OVERCAST (SEAM)**

Seams made using overcast stitch consisting of interlacing three threads around two edges of the fabric to be assembled.

#### **OVERGLASSES**

Protective glasses designed to be worn over spectacles.

#### **OXFORD**

Thick-yarned plain weave with a lustred finish similar to the Oxford weave of cotton shirts.

p

#### **PANOFLEX®**

Flexion zones integrated into the sole to enhance flexibility.

#### PANOSHOCK®

Delta Plus innovation: piece of expanded rubber which absorbs and reduces shock waves to the spinal column.

#### PARKA

A parka is by definition shorter than a coat, longer than a jacket or a blouson, and is impermeable.

#### PATTERN CUTTER

Person who makes the templates or patterns for garments: uppers for shoes, patterns for clothing, before cutting and assembly.

#### PERMEATION

Although the glove shows no porosity or imperfection, the chemical product may gradually pass through the glove, and come into contact with the skin. The standard EN374 assesses this performance: the time (in minutes) taken by the chemical substance to integrate and pass through the protective material is measured (1 mg/m²).

#### **PHYLON®**

PHYLON® is a synthetic materials, supple, ultra light, shock absorbent, used in running shoes by all the major sports brands; It is an EVA insert (Ethylene Vinyl Acetate) moulded, expanded.

## PIGMENTED (SPLIT LEATHER)

Split leather coated with a layer of pigment. This is an economical, quality and resistant shoe leather.

#### PIOUE EFFECT (STITCH)

Knitted fabric with a raised waffle texture.

#### **PLATING**

Knitting process consisting of obtained two different fabric sides, each with a different type of yarn. Also used to combine two advantages: comfort and resistance for example.

#### **POLAR FLEECE**

Stitch brushed on one or both sides to obtain an aspect as soft as velvet. Polar fleece provides unrivalled comfort thanks to its lightness, its softness, its breathability and its extensibility. As this stitch is not wind breaking, polar fleece complexes with microporous membranes have been developed.

#### POLO

Polos are originally sports shirts with a turned-down collar, more specifically of Jersey.

#### **POLYAMIDE**

Synthetic fibre resistant to traction and abrasion. This is an elastic fibre that recovers its original shape after deformation. It dries rapidly as it absorbs little water. It is insect-resistant (especially against mites).





#### POLYCARBONATE (PC)

Polycarbonate is a polymer (plastic) which has excellent mechanical properties and thermal resistance enabling it to be used at temperatures of up to 120°C. It has optimal shock resistance, hence its use in many sectors. It filters 99.9% of UV between 0 and 380 nm, UV 400 treatment extends this protection to 400 nm and absorbs part of the blue light in the light spectrum. Its sensitivity to chemical agents and to ultraviolet rays limits its use, however.

#### **POLYESTER**

Synthetic fibre with several advantages similar to those of polyamides: resistance to traction and friction; good elasticity; uncreasable; solidity of dyes; easy care; high resistance to abrasion, resistance to acids, bases and solvents, and to heat. It can be mixed with wool and cotton, which makes up for its inability to absorb transpiration, its rough texture and its tendency to pilling.

#### **POLYETHYLENE**

Polymer obtained by polymerisation of ethylene molecules. This is a material, with good chemical resistance, high stability, and easily recycled.

Polyethylenes (PE) are classified according to their density:

- LDPE (low density) is a supple plastic, used for helmet harnesses for example.
- HDPE (high density) is a hard plastic, used for the shell of helmets for example.

HSPE (high strength) provides good mechanical performances in particular against cutting, such as the fibre TAEKI for example.

#### POLYMER

A polymer is the name of a chain of molecules used to make synthetic filaments before being melted and transformed into yarns. The polymerization operation is a process to manufacture a polymer by connecting small molecules (monomer) into a molecular chain of multiple molecular weight (mass).

#### **POLYMERIZATION**

Chemical process by which resins or plastics are fixed to textile materials by means of heat to obtain canvas with coating.

#### POLYPROPYLENE (PP)

Belongs to polyolefin fibres, structurally very similar to polyethylene. Polypropylene can be used as a plastic (helmets) or as a fibre (woven or non woven)

This material is easily recyclable, resistant to friction (abrasion) and to traction. It is grease-resistant. Its melting point is higher than 160°.

#### **POLYTEXTURE**

Material effect by association of weaving. Example: Ripstop with a box-effect.

#### POLYURETHANE (PU)

Polyurethane is a polymer transformed into synthetic resin or foam used in coatings, in some membranes and in the manufacture of elastane yarns (Lycra®). Polyurethane is frequently used for coating, making fabrics waterproof. Garments made with such coatings are often breathable and very good alternative solutions to much more expensive products made using waterproof breathable membranes. It has very good mechanical resistance (wear, abrasion, tearing and micro-cuts).

#### **PONGEE**

Fabric with a silky, shiny finish.

#### **POPLIN**

Tightly woven cotton plain weave used primarily for shirts.

#### POWDERED (GLOVE)

Finishing process using a powder deposit (usually corn starch). The result is pleasant to the touch and soft which limits transpiration. For disposable gloves, the powdering facilitates donning and removal.

#### PPE

Personal Protective Equipment.

According to the EU 2016/425 Regulation, any equipment designed and manufactured to be worn or held by a person for protection against one or more risks to that person's health or safety, and any interchangeable components which are essential for the protective function of this equipment.

#### **PRE-FILTER**

Thin filter for protection against dust (P2 or P3), to be used on full and half-masks, associated with anti-gas filters (A/B/E/K) in order to obtain a combined gas and dust filter.

#### PU WATER (MANUFACTURING)

Innovative manufacturing process for PU coated gloves, 100% water-based, i.e. no solvents, such as DMF, are used to ensure the bonding of the polyurethane (PU) and the support. As well as limiting the environmental impact of manufacturing, this technology minimizes the quantity of coating that penetrates inside the glove, making the support softer and more comfortable, as it limits transpiration and the accumulation of heat.

#### **PUPILLARY (REFLEX)**

The eye's adaptation to light intensity: the pupil dilates or retracts.

#### **PVC**

Polyvinyl chloride is a polymer usually known by its abbreviation PVC. PVC resists many solvents, acids and chemical products (in particular hydrocarbons). Fabrics coated with PVC are real barriers against bad weather. However, they should be worn for a limited time depending on the temperature in the working environment.

ſ

## QUILTED

Insulating lining made by superimposing materials held together by decorative stitching (fleece + lining).



R

#### RAGLAN (SLEEVE)

Sleeve assembled on the bias, from the neck to the underarm. There are no shoulder or underarm seams, making for greater ease of movement.

#### **RATCHET**

Tightening system of the headband for safety helmet, for easier adjustment, using a ratchet.

#### REINFORCEMENT

Insert (often made of leather) stitched to the glove in the zones most exposed to the risks of abrasion and cutting (Palm reinforcement, Web reinforcement between the thumb and index finger) or lateral or in front of the shoes.

#### RESTRAINT (SYSTEM)

System designed to attach a person to an anchorage point so as to prevent any fall from height.

#### RETRO REFLECTIVE (BAND)

These are bands fixed to high-visibility garments. 3M Scotchlite™ uses 2 types of technologies, microprisms (better contrast, rigidity suited to some garments) and microbeads (resistant to washing, high flexibility), and offer several different types of bands (stitched or sealed). Retro reflective materials are used to reflect light by day and by night.

#### **REVERSE GRAIN**

Use of the inner part of the grain enabling considerable suppleness to be maintained, and significantly improving resistance to abrasion. Water-repellent treatment applied to reverse grain is ten times more effective than on the grain itself.

#### RIB

1x1 / 2x1 / 2x2 type knits (the first and the second figure respectively indicate the number of column in relief and column in hollow seen on the face place) used to make very elastic and reversible knits. Used mainly to make sweaters, cuffs and hose and undergarments.

#### RIPSTOP

This is a box-effect fabric weave (thicker yarn) that prevents tears from spreading while reducing the weight of the fabric.

#### **ROLLING**

Action of crushing leather on its whole surface with a roller to make it firmer and more flexible.

#### **RUBBER**

Synthetic elastomer made from oil and with elastic and resistance properties. The advantages of this material are to offer mechanical properties of good grip, good resistance to abrasion, contact heat and to oils and grease.

- {

#### SATIN (WEAVE)

A fabric with a «satin» type weave is characterised by a shiny and smooth aspect. The yarn density gives it the advantage of not igniting as easily as «plain» weave. With special treatments, such as Proban®, flame retardants, it is a flame resistant material widely used for PPE.

#### SCIVING

Operation to thin the leather to prevent over-thickness during assembly.

#### **SEAT STRAP**

Strap used in the design of a harness with the dual role of seat and force distribution in the event of a fall, hence preventing too violent a force between the legs and any resulting consequences. The seat strap is not obligatory on a harness.

#### **SELF-RELEASE (SYSTEM)**

Chinstrap mechanism, ensure proper operation. According to standard EN397: the system should be triggered by a force > 150 N and < 250 N.

#### **SELF-RETRACTABLE FALL ARRESTER**

Device with automatic blocking system and an automatic lanyard tensioning system.

#### SHANK

Used to support the instep. Very often made of wood, then steel, it is also now made of composite material. Its role is to maintain the instep, or arch of the foot.

#### SHELL (SAFETY HELMET)

The shell is one of the components in a safety helmet (external part). Its role is to limit injuries by contact impacts (crushing and penetration).

It is made by injection from two types of materials:

- HPDE (high density polyethylene), an efficient material, the most economical and widely used.
- ABS (acrylontrile butadiene styrene), a more rigid material.

#### SILICONE (FREE GLOVE)

Silicones are polymers derived from sand. They are present more or less everywhere, in the form of mastics, glues, joints, anti-foam additives for washing powders, cosmetics, medical equipment, electrical cable insulation sheaths, high-performance grease, etc...

A certified silicone-free glove has a considerable advantage in industries requiring the total absence of silicone in their manufacturing or assembly process, for example in the automobile industry to quarantee paint without marks.



#### SIZE

Half pelt cut from head to tail along the line of the backbone.

Set of measurements of the shoe volume, usually determined by the length and width of the foot, measured around the joint of the toes (toe width). Additional measurement tables, such as the height of the instep, determine the various sizes.

There are three main measurement systems in use in the world:

- french sizes (from 17 to 48).
- english sizes (1 to 13 feet).
- american sizes (equivalent to the English sizes + 0.5).

#### SLIDING FALL ARRESTER

Fall arrester with an automatic blocking function and a guidance system. The fall arrester moves along an anchor line. It accompanies the user in his movements with no manual intervention needed by him. In the event of a fall, the fall arrester automatically blocks on the anchor line.

#### SNR

Single Number Rating: a simple and widely used method to mesure the attenuantion noise, even if not really precise (measurement of decibels without taking account of frequencies).

#### SOFTSHELL

Soft shell materials are hybrid materials. Between the polar fleece and the windbreaker, «softshells» combine several advantages: keep in body heat, evacuate humidity and act as a barrier to external aggressions, mainly wind and fine rain. It may be laminated to enhance performances (breathable, water repellant).

#### **SOLVENT (FREE COATING)**

A solvent is a liquid that has the property of dissolving and diluting other substances without changing them chemically and without changing itself. The new innovative manufacturing process, also called PU Water, is 100% based on water. No solvent, such as DMF, is used to ensure the bond between the polyurethane (PU) and the support.

#### SOUND

A sound is an acoustic vibration, a movement of particles in an elastic medium; the air.

Sound is characterised by its intensity (amplitude of variations in air pressure): high or low which is expressed in decibels (dB). Sound is also characterised by its height: high or low-pitched (number of oscillations per second) which is expressed in Hertz (Hz).

#### **SPLICE**

The process of weaving one end of a stranded rope or cable into the other in order to create a loop.

#### **SPLIT**

Internal part of the dermis, obtained by splitting or any other operation to remove the outer layer. The resistance to abrasion and heat are split advantages (after heat treatment).

#### STABLE

Noise whose fluctuations do not exceed 1dB during the measurement period.

#### STEEL

Use for the anti-puncture sole for its resistance to a force of 1100N and use for safety shoe toecap for its resistance to 100 or 200 joules.

#### STEL

Short terme exposure limit.

Concentration measured in mg/m3 or in ppm over a maximum time of 15 minutes that it is advisable not to exceed

#### STIFFENER

A semi-rigid part inserted between the upper and the lining, located at the back of the shoe to prevent flattening and hold the heel in place.

#### STRAPS (MAIN)

The main straps are elements which are used in the design of a fall arrest harness. They should support a person's body during and after the fall. Other straps in the design of a harness are called secondary straps.

#### STROEBEL (STITCH)

This stitch is just the overstitch known to seamstresses; a single thread is chain-stitched to assemble the insole to the upper...

#### STRUCTURE

In knitting, the method of interlacing stitches is called the structure. The three basic knit structures are jersey, interlock and rib.

### STYLIST

Person in charge of creating the sketch for a product (shoe, garment, glasses...) integrating technical elements and design constraints.

#### SUEDE (LEATHER)

Split suede leather is made from the flesh and buffed to obtain the suede aspect, like Nubuck, but which is from the grain.

#### SUPPORTED (GLOVE)

The dipped form is covered (or not: non supported) with a jersey or interlock cotton knit glove. A supported glove has better mechanical protections and comfort than an unsupported glove.

#### **SWEATBAND**

Sheep or lambskin prepared by vegetable tanning, finished without dye and mainly used in linings.

#### SWIVELLING CONNECTOR

Element often added to a connector or a fall arrester enabling separate rotation of the two parts.

#### **SYNTHETICS**

Fibres of chemical origin: in this family are the polyesters, the polyamides, acrylics, para-aramides, polyethylenes, elasthanes, etc.



#### TAEKI® (FIBRE)

Synthetic fibre made of high-strength polyethylene (PEHT). It has exceptional mechanical properties, in particular against abrasion and cutting.  $2^{nd}$  generation TAEKI fibre is much softer than the 1st generation, thus providing greater comfort.

#### **TANNING**

Tanning transforms the raw hide into an unfinished tanned hide, making it rot-proof, receptive to finishing treatments and chemically stable.

There are different types of tanning:

- vegetable tanning (natural plant extract tannins).
- mineral tanning (usually with chromium salts).
- mixed tanning (vegetable tanning retanned with chromium).

#### MUISAT

Rough textured fabric. The very tight crossing of its fibres makes it a robust fabric

#### **THERMOFUSING**

Bonding operation using pressure and heat (high visibility strip on a garment, interlining in a collar...

#### THIMBLE

Element added inside an end loop to protect from wear generated by the friction.

## THINSULATE™

Registered trade mark of 3M. It is a web of synthetic insulting non-woven combining heat, comfort and finesse. It is water repellent.

#### THT (HEAT-PROOF LEATHER)

Treatment used to make the leather more resistant to contact heat and reduce shrinkage on contact with a flame. The leather remains supple despite contact with a heat source.

#### TIL

Total Inward Leakage.

It corresponds to the performance of the filtering face piece, and is expressed in %. The lower the %, the greater the protection performance.

FFP1: 22%

FFP2: 8%

FFP3: 2%

#### TOECAP (SAFETY)

Steel, aluminium or composite shell to protect against the risk of impact and crushing of the toes. Performance is measured at 100 or 200 joules. These are the two main tests; there is also rust resistance (metal toecap), resistance to heat, to hydrocarbons, and to cold for composite toecaps.

#### **TRIPOD**

Temporary and carrying anchorage device to be used for vertical movements in confilmed space.

#### T-SHIRT

T-shirts are cotton garments covering the torso, without a collar, most often short-sleeved, the shape of which is reminiscent of a T.

#### TWA

Time Weighted Average.

Concentration measured in mg/m3 or in ppm, for an exposure time equal to the work day (workday of 8 hours), corresponding to the toxic risk.

#### TWIII

A fabric with a «twill» weave is characterised by ribbing (diagonal relief ) on the rightside of the fabric, the underside is different. «Twill» weave is a weave that resists wear and traction

#### **TYVEK®**

The basic material in Tyvek® is polyethylene. Under the effects of pressure and heat (Flash spinning), a multitude of continuous filaments are obtained which are melt bonded to give a non-woven that is lightweight, flexible and resistant.



#### **ULTRASOUNDS**

Sounds of a frequency too high to be heard by humans (> 20 000Hz).

#### ULTRAVIOLET

Ultraviolet (UV) light is electromagnetic radiation with an intermediate wavelength between that of visible light and that of X-rays. Ultraviolet can be subdivided into near UV (380-200 nm wavelength) and extreme UV (200-10 nm). Sunburns are primarily due to UV-B. UV-A cause of sunburns during very long exposures. High intensity of UV-B (315-280 nm) are dangerous for eyes and can cause "welder's flash" or photokeratitis.

#### UNITS OF MEASUREMENT (YARNS)

The Tex, Decitex (Dtex), Denier (D) or Metric count (Nm) are units of measurement for yarns used to qualify their size also known as «Thread count».

#### **UPPER**

Top part of the shoe located above the sole, comprising the tongue, the collar and the quarters.



#### VALVE

Also called a flap, it provides additional comfort to the mask, by rapidly lowering its temperature at the moment of expiration and rejection of CO<sub>2</sub>. It is on disposable masks (product code V), half masks or full face masks.

#### VAMP

Front part at the level of the instep and on the sides.



#### VENTILATION

Holes located at the top of the shell to enable better evacuation of heat and

Ventilated helmets therefore do not pass the electric test (440 VAC), except for ventilations located at the bottom of the shell, as the test is conducted by immersing the shell to half-height.

#### VERIFICATION

Visual inspection of Class III fall-based PPE with textile base.

#### VEST

A vest is a short garment without sleeve, which covers top of the body.

#### VINYL

Synthetic thermoplastic polymer. It is used for disposable gloves. It is impermeable to water, alcohol and detergents, but it is not elastic.

#### **VISIBLE (LIGHT)**

Visible lightvisible spectrum or optical spectrum is the part of the electromagnetic spectrum which is visible to the human eve. There is no definite limit to the visible spectrum: the human eye adapting to light usually has maximum sensitivity at light of wavelength about 550 nm, which corresponds to a yellow-green colour.

#### **VULCANISATION**

Vulcanisation is a process invented by Goodyear, which consists of heating the rubber at high temperature to obtain its transformation. This process is used for dipped gloves, placed in an oven after dipping in materials.

#### WADDED (LINING)

Lining associated with a thickness of fleece to enhance the heat performance of the garment.

#### WARP

It is the vertical yarns of knitted fabric in opposite to horizontal yarns.

#### WATER REPELLENT (FABRIC)

Finish deposited on the fabric to give it the property of not letting droplets of water penetrate the fibre, but allowing them to slide off. It can be said that the drops of water are repelled. The fabric is not waterproof.

#### WATER REPELLENT (LEATHER)

Leather treatment using mineral or synthetic oils or fluorinated resins, to make it resistant to water penetration. This treatment gives the leather better mechanical performance for abrasion and increases the comfort (flexibility) of the glove, hence increased dexterity and lifespan.

#### WATERPROOF (SEAMS)

Seam on which a waterproof plastic film is applied to prevent water penetration by capillarity (passage of water by absorption of yarns and/or stitching holes) into an assembly. Assembly seam covered using thermofusing of a band of material compatible with that of the garment to prevent infiltration of water and waterproof the garment.

#### WEAVE

Method of interlacing warp and weft yarns in woven materials. Each weave has its own aesthetic and mechanical properties. The main fabric weaves are plain, serge, satin. The three basic knit weaves are jersey, interlock, rib. In knitting, the method of interlacing stitches is called the structure.

#### WEFT

These are the horizontal yarns in woven fabrics, as opposed to vertical warp varns.

#### WELDING

Glasses or hood with various shades of filters suitable for welding work; disposable masks with charcoal filter, welding goggles and helmets with special tinted filter, to protect the eyes and face during welding.

#### WINCH

Lifting device for lifting things (eg equipment) or people, according to the tyope of product, in rescue procedure

#### WORK POSITIONING (SYSTEM)

A system used to maintain a user at the workstation in a given position.

#### **WRIST CUFF**

Knitted finish of the glove wrist, to hold the glove on the wrist and prevent any penetration of dust and waste inside the glove.

#### ZIP (REVERSE STITCH)

Zip whose stitch is placed on the reverse so that only the ribbon can be seen. It is used for an aesthetic effect and to prevent friction.

#### ZIP (WATERTIGHT)

Reverse stitch zip covered with a PU membrane to ensure watertightness. It is used on waterproof and technical products.



#### **HEAD PROTECTION** AIR COLTAN 43 KILIMANDJARO CLEAR 19 MEIA YELLOW 17 ASD2 CLEAR 7 KILIMANDJARO CLEAR AB 19 ΜΕΝΤΔΙ ΡΗΔ *L*1 ASO2 SMOKE KILIMANDJARO SMOKE MILO CLEAR 17 7 19 BALBI 2 31 KISKA2 CLEAR 14 MILO SMOKE 17 BARRIER 2 MURIA 1 KISKA2 SMOKE 21 23 14 BARRIER PLATE 2 23 LIPARI2 CLEAR 15 NECKALPHA 41 BASALPHA LIPARI2 T5 ONYX 34 41 15 PACAYA CLEAR 10 BASEBALL DIAMOND V 36 M1100 58 PACAYA CLEAR LYVIZ 9 M1100V BASEBALL DIAMOND V UP 58 36 BASGAMMA 33 M1100VB 59 PACAYA CLEAR STRAP 10 PACAYA CLEAR STRAP LYVIZ 8 BASWELD 23 M1104 56 PACAYA SMOKE 10 **BLOW2 CLEAR** M1200 58 5 PACAYA SMOKE LYVIZ 8 BLOW2 LIGHT MIRROR 5 M1200V 58 PACAYA T5 10 **BLOW2 MIRROR** 5 M1200VB 59 PICO 2 31 BRAVA2 CLEAR 18 M1200VBW 59 PITON 2 CLEAR 19 BRAVA2 LIGHT MIRROR 18 M1200VP 59 PITON CLEAR 19 BRAVA2 MIRROR 18 M1200VPLUS 57 PIT-RADIO 3 45 BRAVA2 SMOKE 18 M1200VPW 59 OUARTZ I 40 BRAVA2 YELLOW M1200VW 58 18 QUARTZ UP III 38 CASOUD 3 25 M1204 56 QUARTZ UP IV 38 CASOUD2HE 25 M1204V 56 RIMFIRE CLEAR 6 COLTAN M13NNV 43 57 RIMFIRE MIRROR 6 CONIC DISPLAY 51 M1300V2 58 RIMFIRE POLARIZED 6 CONICO10 51 M1300VB 59 RUIZ 1 21 CONIC200 51 M1300VP 59 **RUIZ 1 ACETATE** 21 CONIC500 51 M1304V 56 SATAMA 21 CONICAPO1 50 M1304VW 56 SCREEN 24 CONICAPO1BR 50 M2FP2V 58 SCREEN PLATE 24 CONICCO200 51 M2FP2VPLW 57 SEPANG 2 47 CONICCOPLUS200 50 M2FP2VW 58 SILVERSTONE 2 47 CONICDE010 51 M2FP3V 57 SPA 3 48 CONICFIR010 49 M3FP1 58 SPINER REFILL FEP2 54 CONICFIR050 M6000 A1 49 65 SPIDER REFILL FFP2W 54 CONICFIRDE010 49 M6000 P2 65 SPIDER REFILL FFP3 54 CONICFITO10 M6000 P2 CLIP 49 65 SPIDERMASK P2 X5 54 CONICMOVE01 50 M6000 P3 65 SPIDERMASK P2W X5 54 CONICMOVE01BR 50 M6000E A2 65 SPIDERMASK P3 X5 54 CONICPLUS200 MROODE AREKT 50 65 SUPER QUARTZ 39 CONICSOF010 49 M6000E PREP2 65 SUZUKA 2 48 DEAR BOX 51 M6000E PREP3 65 THUNDER CLEAR 11 DYNAMIC JUGALPHA 41 M6100 JUPITER 64 THUNDER SMOKE 11 DYNAMIC JUGBETA 34 M6200 JUPITER 64 **TOBA 3 T5** 25 EGON CLEAR 16 M6400 CHEM KIT 65 VISONYXPR 34 EGON LIGHT MIRROR 16 M6400 JUPITER ß۵ VISOR FLASH 28 EGON SMOKE M6400 MARS KIT 65 16 VISOR HOLDER 31 EGON YELLOW M6400 SPRAY KIT 16 65 VISOR T-GUARD 27 EZ-COM 45 M9000 P3 61 VISOR TORIC CLEAR 27 FILM GOGGLE M9000E A2 20 61 VISOR TORIC T5 27 M9000E A2B2 FILTER 11 25 61 VISORG 30 FILTER-IN 25 M9000E A2B2E2 61 VISORG MINI 30 FORESTIER 3 39 M9000E A2B2E2K2 61 VISOR-H 31 **FUEGO** 14 M9000E A2B2E2K2HGP3 61 VISOR-HOLD MINI 31 FUJI2 CLEAR M9000E A2B2E2K2P3 61 11 VISORPC 30 FII112 GRADIENT 11 M9000F A2R2F2P3 61 VISORPC MINI 30 **GALERAS CLEAR** 20 M9000E A2B2P3 61 VISOR-U 31 GALERAS SMOKE 20 M9000E A2P3 61 VULCANO2 CLEAR 15 M9000E AX **GO-SPECS TEC CLEAR** 7 61 VIII CAND2 PHIS CLEAR 15 33 GRANITE PEAK M9000E AXP3 61 **VULCANO2 SMOKE** 15 GRANITE WIND M9000E B2 33 61 WINTER CAP ΔN HARNESS O 34 M9000F R2P3 61 YAS MARINA 46 HARNESS V M9000F F2 61 36 ZIRCON 1 40 M9000E E2P3 HEKLA2 CLEAR 16 61 HELIUM BLUE BLOCKER 13 M9000E K2 61 HELIUM DETECTABLE M9000E K2P3 12 61 HESTICKER M9200 - ROTOR GALAXY 62 41 INTERHYKIT 46 M9300 - STRAP GALAXY 62 INTERLAGOS MAGNY HELMET 2 48 46 JUGALPHA 41 MAGNY-COURS 2 48 JUGGAMMA 33 MEIA CLEAR 17

17

42

MEIA SMOKE

KAIZIO

# **INDEX**

		HAND PROTECT	ION		
	400	THU C	100	UFFREE	
50MAC	128	FB149	128	VE702P	87
51FEDF	128	FBF15	125	VE702PG	87
ALPHA VE905	116	FBF50	125	VE702PN	87
APOLLON VV733	101	FBN49	129	VE712GR	91
APOLLON WINTER CUT VV737	73	FC115	133	VE713	89
APOLLON WINTER VV735	100	FCN29	129	VE715GR	91
APOLLONIT VV734	88	FIB49	127	VE722	91
ATHOS VV902	97	FIBKV02	126	VE726	90
ATON VV731	100	FP159	129	VE727	90
BASF PVCC400	109	GFA115K	134	VE728	90
BASF PVCC600	109	GFBLE	128	VE729	90
BOREE VV901	97	HERCULE VV750	100	VE7300R	10
BOROK VV903	97	HESTIA VV702BC	86	VE733	10
BUCH520V	127	HESTIA VV702NO	86	VE799	10
CA515R	134	KCA15	135	VENICLEAN V1340	12
CA615K	134	KPG10	135	VENICUT D HEAT & CUT FOAM	76
CBHV2	127	LA500	103	VENICUT F XTREM CUT	73
HEMSAFE PLUS VV836	107	LA600	116	VENICUT F XTREM CUT TOUCH	72
HEMSAFE PLUS WINTER VV837	107	LAT50	112	VENICUT10	86
CHEMSAFE VV835	106	NEOCOLOR VE530	111	VENICUT20	83
:0131	137	NIO15	117	VENICUT30	83
COB40	137	NI150	117	VENICUT32	80
P149	137	NI155	117	VENICUT32 ESD	84
CRYOG	136	NI170	117	VENICUT33	83
CT402	129	NI175	117	VENICUT34	83
00103	130	NITREX VE801	115	VENICUT36GR	82
ICTHI	125	NITREX VE802	114	VENICUT41GN	78
DF132	125	NITREX VE803	114	VENICUT42GN	78
DPCBHV2	127	NITREX VE830	115	VENICUT43	79
DPCT402	129	NITREX VE840	114	VENICUT44	79
DPCT502	129	NITREX VE846	115	VENICUT47	78
DPDC103	130	NYSOS VV904	96	VENICUT50	76
PFBN49	129	PETRO ESD VE781	84	VENICUT52	76
DPLAT50	112	PETRO VE766	108	VENICUT53NO	75
DPNI015	117	PETRO VE780	108	VENICUT54BL	75
DPPVC7327	109	PICAFLOR VE240	118	VENICUT55	79
DPTC715	133	PM159	137	VENICUT56	79
DPV1371	123	PM160	137	VENICUT57G3	77
DPVE450	116	PVC7327	109	VENICUT58	77
PVE702P	87	PVC7335	109	VENICUT59	75
DPVE702PG	87	PVCGRIP35	109	VENICUT59 LIGHT PLUS	75
DPVE702PN	87	SAFE & STRONG VV811	88	VENICUT5M	79
PVE712GR	91		97		74
		SAFE & TOUCH VV905NO		VENICUT5X1	
IPVE715	91	SOFT-NIT VE470	113	VENIFISH VE990	11:
PVE716	91	TC716	133	VENIPLUS V1383	12
PVE727	90	TER250	133	VENIPLUS V1500	12
PVE730	102	TERK400	132	VENIPRO VE450	11
PVENICUT34	83	THEMIS VV792 ESD	84	VENITACTYL V1300B100	12
PVENICUT42GN	78	THRYM VV736	98	VENITACTYL V1310	12
PVV733	101	TIG15K	134	VENITACTYL V1371	12
PVV733E	101	TOUTRAVO VE509	110	VENITACTYL V1400B100	12
PVV735	100	TOUTRAVO VE510	110	VENITACTYL V1400PB100	12
PVV831	102	TOUTRAVO VE511	111	VENITACTYL V1450B100	12
IS202RP	130	TP169	137	VENIZETTE VE920	11
NUOCOLOR VE330	118	VE200	118	WET 6 DRY VV636BL	89
CONOCUT5M	77	VE200 VE440	116		
				XTREM HEAT TERK500	13
OS NOCUT VV910	92	VE630	103	ZEPHIR VE210	11
OS NOCUT WINTER VV913	92	VE631	103		
OS OBM VV911	94	VE702	87		



DISPOSABLE WEAR						
BLOUSPE	156	DT223	153	P0109	156	
BLOUSPO	156	DT250	148	P0110	157	
DT1111	159	DT300 DELTACHEM	146	P0111	157	
DT115	154	DT301 DELTACHEM	146	P0112	157	
DT115CV	154	DT302 DELTACHEM	146	P0115	157	
DT117	150	KITVI	159	SURCHPE	159	
DT119	149	MANCHBE	158	SURCHPLUS	159	
DT125	151	MANCHBL	158	SURCHPO	159	
DT215	154	MASQU	158	TABP002	156	
DT215CV	154	MASQUG	158	TABP004	156	
DT216	154	MASQUV	158	TOQUE	157	
DT221	152	P0106	156			
WORKWEAR						

			WORKWEAR			
AGRA	195	M2SA2	1	184	MCSA2	176
ATOLL	202	M2VE2	1	185	MCVE2	176
BADGE	202	M2VHV	1	198	METEOR	201
BALI	194	M5BE2	1	171	MOGI2	164
CEINTO4	202	M5C02	1	170	MOPA2	164
COMET	201	M5GI2	1	171	MSLPA	193
DMACHBER	181	M5PA2	1	168	NAPOLI	191
DMACHCOM	180	M5SA2	1	170	OFFSHORE	201
DMACHGIL	181	M5SGI	1	192	PALIGPA	193
DMACHPAN	181	M5SPA	1	192	PALIGVE	193
DMACHSAL	180	M5VE2	1	171	PANOSTRPA	190
DMACHVES	181	M6BER	1	189	PHBE2	200
GENOA	194	M6COM	1	188	PHPA2	200
LAZIO	195	M6GIL	1	189	PHVE2	200
LULEA2	191	M6PAN	1	189	ROMA	195
M2BE2	185	M6SAL	1	188	STAR	201
M2C02	184	M6VES	1	189	TURINO	195
M2CZ2	184	MAPOC	2	203	VERONA	202
M2GEN	203	MCCDZ	1	177	ZIMA	203
M2GI2	185	MCC02	1	176		
M2PA2	185	MCCOM	1	177		
M2PHV	198	MCPA2	1	174		

OUTDOOR WEAR						
304	243	GRANDERS	226	NATORI	225	
305	243	HALDEN	225	NEVE	237	
400	243	HELSINKI2	217	NEW DELTA	222	
850	242	HORTEN2	230	NORDIC	237	
ALASKA2	216	ISOLA	218	NORTHWOOD2	222	
ALMA	236	JURA	237	OTAKE	239	
ANZIO	235	KARA	237	RANDERS	223	
BEAVER	234	KOLDYPANTS	208	RENO	223	
BRIGHTON	233	KOLDYTOP	208	SHERMAN	233	
CARSON	214	KOPER	213	SIERRA2	227	
CHAMONIX	237	LECCO	235	SLIGO	240	
CLUSES2	227	LIDINGO	241	STOCKTON2	229	
DARWIN3	218	LITE	239	TATRY	212	
DMACHGIW	228	LULEA2	232	TOFINO	241	
DMACHPAW	228	M2PW2	229	TYPHOON	241	
DOON	221	MA400	243	VERNON	236	
EOLE	212	MARMOT	234	VIGO	213	
FIDJ12	224	MILTON2	210	YEMAN	211	
FINNMARK	215	MOOVE	220			
GALWAY	240	MOTION	221			
G-DOON	226	MYSEN2	232			
GOTEBORG	215	NAGOYA	234			


# **INDEX**

		TECUNICAL WE	ND.		
		TECHNICAL WE	4K		
208V2	256	FREEWAY HV	254	NORDLAND	262
604V2	256	GILP2	257	OFFSHORE	255
605V2	256	GILP4	257	OPTIMUM2	249
ALMA	264	ICEBERG	262	PHBE2	259
AUSTRAL II	263	IGLOO II	263	PHPA2	259
BALTIC	264	KOLDYPANTS	264	PHVE2	259
BAUCE2	257	KOLDYTOP	264	RENO HV	254
BRASSJA	257	KOMODO2	265	RUNWAY	250
CAFR1	265	KOMODO2HV	265	SSVFR	265
C0600	266	LAPONIE II	263	STAR	255
COMET	255	LEGA	252	STRADA 2	250
DOONHV	253	M2PHV	258	TABALPV	267
DOUGLAS 3	261	M2VHV	258	TABLIVE	267
EASYVIEW	251	MANCHB	267	TABNIT	267
EPICEA 3	261	MARMOTHV	253	TABPU	267
ERABLE 3	261	MELEZE 3	261	TARMAC	248
FARGO HV	251	METEOR	255	TASOUB	267
FIDJI HV	254	MOONLIGHT2	252		
		FOOT PROTECTION	ON .		
22180	307	GOULT II S1P SRC	286	PERTUIS3 S1P SRC	278
45400	307	JAVON 2 E	306	PHOCEA S3 SRC	279
46500	307	JET2 S1 SRC	289	PHOENIX S3 SRC	279
ARONA S1P SRC	300	JET2 S1P SRC	289	PRATO	307
ASTI S1P SRC	296	JET2 S3 SRC	288	PRISM S1P SRC	279
AURIBEAU3 S1P SRC	278	JOUCAS2 NO SRC	306	PROTON S1P SRC	279
BRISTOL S3 SRC	301	JOUCAS2 SRC	306	RICHMOND S1 SRC	301
BROOKLYN S3 SRC	292	JUMPER2 S1 SRC	289	RIMINI III S1P SRC	287
CADEROUSSE S3 SRC	281	JUMPER2 S1P SRC	289	ROBION3 S2 SRC	301
CALYPSO S3 SRC	280	JUMPER2 S3 BUMPER SRC	288	SAGA S3 SRC	274
CARAVELLE S3 SRC	274	JUMPER2 S3 FUR HC SRC	288	SAKHA S3 SRC	304
CAROMB S1P SRC	281	JUMPER2 S3 FUR SRC	288	SAMARA S3 SRC	304
CHAUSSETT	307	JUMPER2 S3 SRC	288	SAMY S3 SRC	276
CHAUSSON	307	LACET XL	307	SANTANA S3 SRC	280
COBRA4 S3 SRC	286	LAUTARET 3	305	SAULT2 S3 SRC	282
COMO S1P SRC	297	MAESTRO S3 SRC	280	SAULT2 S3 SRC ESD	284
CONCORDE S3 SRC	274	MANHATTAN S3 SRC	292	SMASH S1P SRC	294
DELTA FLY S1P SRC	290	MAUBEC 3 SBEA SRC	301	SUMMER S1P SRC	297
DELTA SPORT SIP SRC	292	MAZAN S1P SRC	281	TANGARA S1P SRC	287
D-SPIRIT SIP SRC	295	MIAMI SIP CAMO SRC	300	TW302 S3 SRC	272
D-SPIRIT S3 SRC	295	MIAMI S1P SRC	300	TW402 S3 SRC	272
D-STAR S1P SRC	295	MIAMI S2 SRC	301	VIAGI S1P SRC ESD	284
ECRINS S5 SRC	305	MIAMIXL S1P SRC	298	VIENS2 S4 SRC	306
ESKIMO SBHP SRC	302	MIWA S3 M SRC	286	VIRAGE S1P SRC	297
FENNECS ST SRC	287	MONTBRUN S3 SRC	281		
FENNEC3 S1P SRC	287	MORNAS SRC	305		
GARGAS II S1P SRC	286	NOMAD S3 SRC	276		
GIGNAC2 S5 SRC	306	OHIO3 S3 SRC	278		
		FALL PROTECTION	ON		
AMORONE		ANIOMADO		ANIOMADO O C C	
AM002X5	361	AN201200CC	340	AN211200CDD	340
AM007	356	AN201200CD	340	AN213100CDD	342
AM009	361	AN203100CC	342	AN213200CCC	341
AM018	361	AN203200CC	341	AN213200CDD	341
AM022X2	361	AN203200CD	341	AN218R2CDD	339
AM025X2	361	AN208R2CD	339	AN218S200CDD	339
AM027	361	AN208S200CD	339	AN230CD	338
AM030	361	AN211200CCC	340	AN235200CD	338



FALL PROTECTION					
AN235200PR	338	HA200	331	PROTECTOR METAL AN115F	348
AN240CDD	338	HA203	331	PROTECTOR METAL AN115T	348
AN245200CDD	338	HAPAD	331	PROTECTOR METAL AN116F	348
AN245200PRR	338	HAR11	328	PROTECTOR METAL AN116T	348
AN30010	353	HAR12	328	PROTECTOR METAL AN11730F	348
AN30020	353	HAR12GILNO	328	PROTECTOR METAL AN11730T	348
AN30030	353	HAR14	329	PROTECTOR TETRA AN14006F	346
AN401	352	HAR22H	327	PROTECTOR TETRA AN14006T	346
AN410	352	HAR23H	327	PROTECTOR TETRA AN14008F	346
AN420	352	HAR24H	326	PROTECTOR TETRA AN14008T	346
AN430	352	HAR25HA	326	PROTECTOR TETRA AN15006F	344
AN701	354	HAR42EL	325	PROTECTOR TETRA AN15006T	344
AN801	354	HAR44EL	325	PROTECTOR TETRA AN15010F	344
AN802	354	HARVESGI	331	PROTECTOR TETRA AN15010T	344
ANATOM HAR32	324	IPN LV130	356	PROTECTOR TETRA AN15015F	344
ASCAB ANO71	354	JAGUAR HAR36TCP	320	PROTECTOR TETRA AN15015T	344
ASCORD ANO65	353	L0005200	360	RA038_	371
ASDRISS2 ANO68	352	L0007100	360	RAH33	367
CABLE LIGNE LV301	359	L0007150	360	RESCUEHUB TC063	368
CAIMAN LV135	355	L0007150CD	360	ROPE ACCESS KIT TC039	370
CAMELEON ANO66	352	L0030100	356	SAFECORD TC007	362
CAMELEON ANOGGA	352	L0030150	356	SPEEDLINE LV201	358
DAYAK LV120G	355	L0030200	356	TC001	362
DESCENDER TC062	370	L0045200	360	TC002	362
DESCORD TC006	362	L0047100	360	TC003	362
ELARA130	337	L0047150	360	TC004	362
ELARA140	336	L0047150AD	360	TC005	363
ELARA150	335	L0147150	360	TC008	371
ELARA160	337	L0147150CDD	360	TC009	363
ELARA170	335	LV100	355	TC012	362
ELARA190	336	LV102050	331	TC015	363
ELARA270	334	LV102100	356	TC016	363
ELARA280	334	LV102150		TC022	367
			356		
ELARA320	333	LV105	355	TC025	363
ELARA340H	332	LV106	355	TC029 TC040	363 363
ELARA350H	332	LV400	357	TC044	362
ELARA390H	333	LV401	357	TC064	369
EOLIEN HAR35	324	LV402	357	TC102C	367
EOLIEN HAR35A	324	LV403	357	TC105	367
EX021	330	MAXIBLOC	349	TR003C	364
EX030200	330	MEDBLOC AN13006C	349	TR003K	364
EX030400	330	MINIBLOC AN102	350	TRA101	364
EX118	330	PROTECTOR ELEVATOR TR01720F	348	TRA102	364
EX120	328	PROTECTOR ELEVATOR TR01720T	348	TRA103	364
EX220	327	PROTECTOR ELEVATOR TR01730F	348	TRA20	364
FENNEC ANO6310	353	PROTECTOR ELEVATOR TR01730T	348	TRA22	364
FENNEC ANO6320	353	PROTECTOR EXTRA LARGE AN19040T	347	TRA30	364
FENNEC ANO6330	353	PROTECTOR EXTRA LARGE AN19060T	347	TRA32	364
FIXBLOC AN105	350	PROTECTOR LARGE AN18020T	347	TRBAG	364
GALAGO HAR35TC	322	PROTECTOR LARGE AN18030T	347	TRBAG3	364
GALAGO HAR35TCA	322	PROTECTOR LOAD AN517 - AN518	351	TRG01 TRG02	366 366
GIRAFE TRG20	366	PROTECTOR LOAD AN530	351	TRG03	366
					000



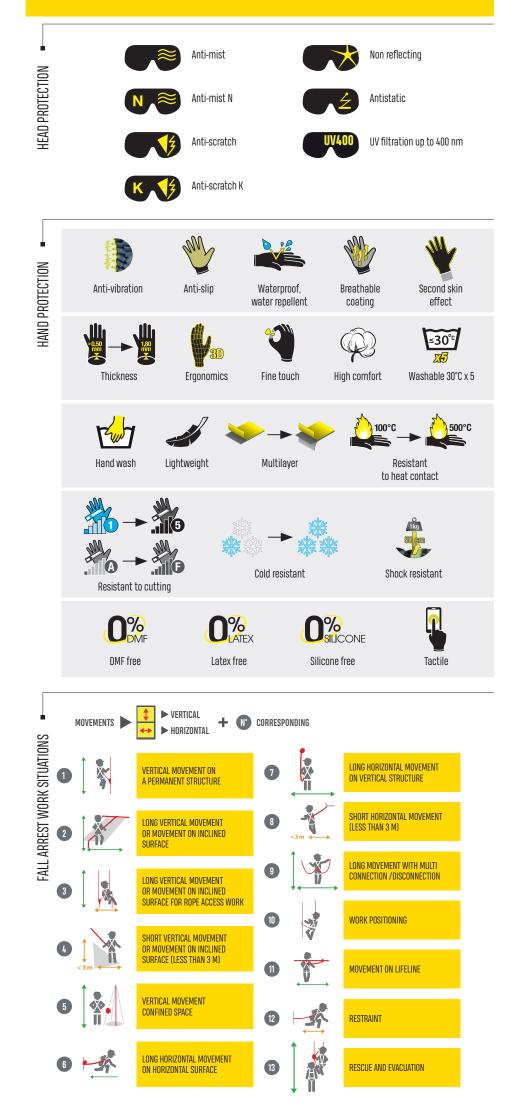



### Delta Plus UK & LH Safety

Premier Way, Walker Industrial Park, Blackburn, Lancashire, BB1 23U UNITED KINGDOM Tel.: +44 1254 686 100 - Fax: +44 1254 686 111 E-mail: enquiries@deltaplus.co.uk

#### **EXPORT DEPARTEMENT**

ZAC de La Peyrolière - B.P. 140 - 84405 APT Cedex - FRANCE Tél. : +33 (0)4 90 74 20 33 - Fax : +33 (0)4 90 74 32 59 E-mail : export@deltaplus.fr

#### **DELTA PLUS BALTIC & SCANDINAVIA**

Rozwojowa 21 - 41-103 Siemianowice Śląskie - POLAND Tel.: +48 32 29 64 764 - Fax: +48 32 29 64 768 E-mail: sales@deltaplus.com.pl

#### DELTA PLUS MIDDLE EAST FZE

A2 50/51, SAIF Zone - P.O. Box 121220 - Sharjah - UNITED ARAB EMIRATES Tel. : +971 6 5575004 - Fax : +971 6 5575006 E-mail : middle.east@deltaplus.eu

# www.deltaplus.eu

DELTA PLUS GROUP is listed on NYSE-EURONEXT PARIS, Compartment B (ISIN : FR0013283108 - Mnémo : DLTA).

09/2019 - GB - n°1609 - CATAGB1609 - Photos : Zbigniew Nadolny - Samuel Dhote Jerôme Kelagopian - Zebra - Laurent Bagnis (WORLDSKILLS France). DELTA PLUS is DELTA PLUS GROUP registered trademark. DELTA PLUS reserves the right to modify the characteristics and manufacturing of its products without prior notice. This is a non-contractual document subject to printing errors, reproduction is prohibited.





# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for delta plus manufacturer:

Other Similar products are found below:

JOUC2NO43 JOUC2NO44 MAGN2HENO COLTAAIGR GILP2ORXX INTERJAFL VECUT59LP09 DIAM5UPJAFL FBN4911
GILP4JAXX GRAWIBCFL GRAWIBLFL MONTBS3NO48 VECUT59LP07 ASTISPBE44 JOUC2NO39 JOUC2VE47 MIAMISPNO42
VECUT59LP10 DIAM5UPBCFL JOUC2NO40 JOUC2NO41 JOUC2NO42 JOUC2NO45 MIAMISPNO41 50MAC09 ASTISPBE43
GILP4ORXX MIAMISPGB41 MIAMISPNO44 QUARUP3OR BROOKS3NO45 GILP2ORGT GILP4ORGT QUARUP3JA ASTISPNO45
COMOSPBL39 COMOSPBL40 MIAMISPGB44 MIAMISPNO40 MIAMISPNO43 MIAMISPNO46 MIAMISPNO48 QUARUP3BC
QUARUP4JA SUMMESPBL45 ASTISPBE39 ASTISPBE40 GILP2JAGT MIAMISPNO37