
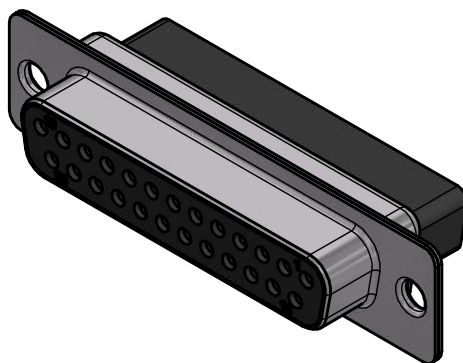
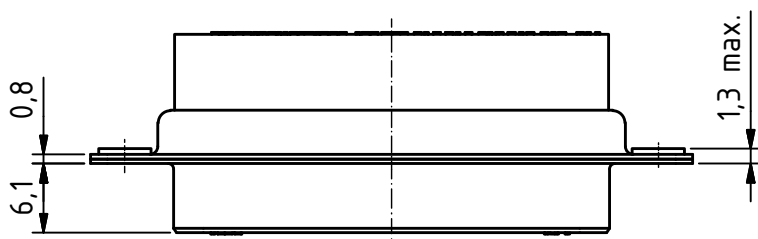



RoHS compliant

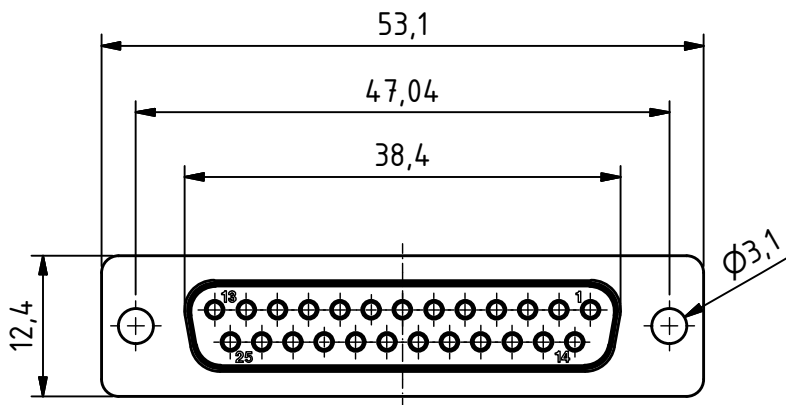

MATERIALS

- Insulator: Thermoplastic UL 94-V-0 black
- Shell: steel tin plated

CHARAKTERISTICS

- Insulation resistance: >5GΩ
- Temperature range: -55° to +125°C

General tolerances (Delttron standard)				
size in mm				
> 0.5	> 3	> 6	> 30	
up to 0.5	up to 3	up to 6	up to 30	up to 120
tolerances				
±0.1	±0.2	±0.2	±0.3	±0.3

modification	Rev.	Rev.	Rev.	DE002153		
	Rev.	Rev.	Rev.	part no.		
DTS25SX			1.5:1	drawn	19.02.2008	mr
			scale	checked		
				approved		
DELTRON CONNECT 2 CUSTOMIZE			Industrie Neuhof 8c CH-3422 Kirchberg www.d-sub.swiss			
			K050132 drawing no.			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [D-Sub Standard Connectors](#) ***category:***

Click to view products by [Deltron AG](#) ***manufacturer:***

Other Similar products are found below :

[56F721-015](#) [015-0341-000](#) [015-0349-000](#) [015-0350-000](#) [015-8755-001](#) [CT2-14S-2PCA34](#) [CT6-14S-2SC](#) [6STD15SCT99S40X](#) [7-135760-9](#)
[MDM-15SCBRM7-F222](#) [MDM96521-744](#) [MDVB1-21SL1](#) [FDL1XSRAA52X](#) [MIK0-1-7SH003](#) [MIKM0-7SH074](#) [MIKQ6-7SH076](#) [MIKQ7-](#)
[7PH11](#) [MIKQ7-7PH32](#) [MJSB-26PH003](#) [MJSV-28SL61](#) [PG-KV/PV-16-GROM-SEALING](#) [GDA15P](#) [GDAY15PB](#) [980-0000-587](#) [980-0000-](#)
[761](#) [980-2001-490](#) [980-2001-492](#) [995-0001-966](#) [120190-0184](#) [120190-0111](#) [121073-0200](#) [121073-0201](#) [121086-3207](#) [HDR-EA14LFYPG1-](#)
[SLE+](#) [121073-0157](#) [121073-0202](#) [121073-0211](#) [121086-0079](#) [121590-0063](#) [121668-0102](#) [127008-0283](#) [A-DD 09 A-4](#) [DA-15SF-T-N](#)
[DADA15P](#) [DAM53512-3013](#) [DAMAE-15S](#) [DAMM-15PE A101](#) [DAMM15SZ-A197](#) [DAMME15PF](#) [DAMMF-15PE](#)