



COLOR DRIVER 36 WITH DMX CONTROL CAPABILITY



FEATURES / BENEFITS

- ▲ 3 fully addressable constant current outputs to separately control and drive red, blue and green LED circuits, making infinite combinations of colors possible
- ▲ Drives up to 12 LEDs per channel, 36 total
- ▲ Digital dimming level from 0% to 100%
- ▲ On board DMX compliant control interface
- ▲ Dip switch programmable for DMX channel or standard color-changing program
- ▲ Short and open circuit protected
- ▲ Remote mountable up to 30 meters (95')
- ▲ Available Color Kinetics pass through license, consult factory for details

OPERATING CONDITIONS

- ▲ Operating Ambient temperature -10°C to +40°C (14°F to 104°F)
- ▲ Maximum case temperature 65°C (149°F)
- ▲ Input voltage 110-240 VAC / 50-60 Hz
- ▲ Power consumption, 6-54W
- ▲ Power factor = 0.95
- ▲ Output current = 350mA at 100%
- ▲ Dimming control = DMX512 or pre-programmed color changing sequence
- ▲ 505 addresses possible per system
- ▲ V_{out} : 4.8 - 48 VDC

MECHANICAL DIMENSIONS

310mm X 55mm X 45mm
(12.20" x 2.17" x 1.77")
2 Mounting slots for M3 screws

APPLICATION

- ▲ Appropriate driver for any Dialight-Lumidrives color engine or RGB LinkLED system.
- ▲ Dynamic RGB color mixing
- ▲ Decorative lighting
- ▲ Entertainment lighting
- ▲ Theme lighting

CONTROL/INTERFACE

- ▲ DMX input via RJ45 connector
- ▲ Dip switch programmable for DMX channel or standard color-changing program
- ▲ For standard color changing sequence, set dip switches to channel 511

PART NUMBER

CDU-L-3-35-DMX

Dialight reserves the right to make changes at any time in order to supply the best product possible.

Dialight Corporation
1501 Route 34 South • Farmingdale, NJ 07727 USA
Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778 • www.dialight.com





MDEXLUMCD36DMX_C

WIRING INFORMATION

Colordriver 36 Associated Cables

CT4-MLXM	4-way Conn to 8-way Molex male	
CT4-MLXF	4-way Conn to 8-way Molex female	
CT4-100	4-way link lead 100mm	
CT4-200	4-way link lead 200mm	
CT4-C	4-way common connector	
CDL-M3M	8-way Molex - male to male	
CDL-M3E	8-way Molex - male to wire end	

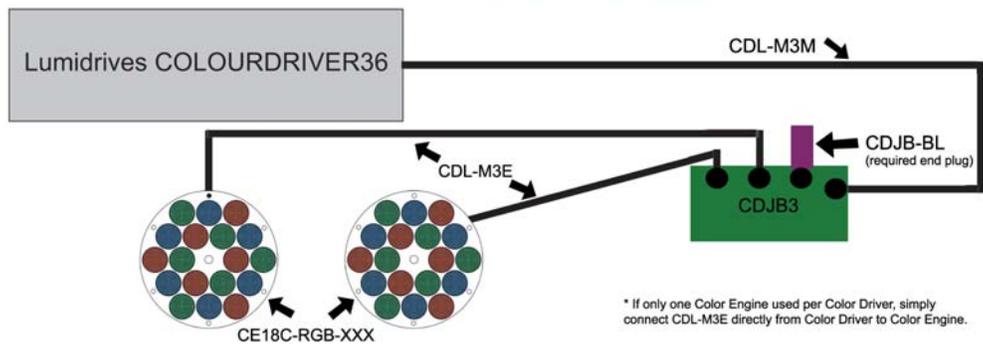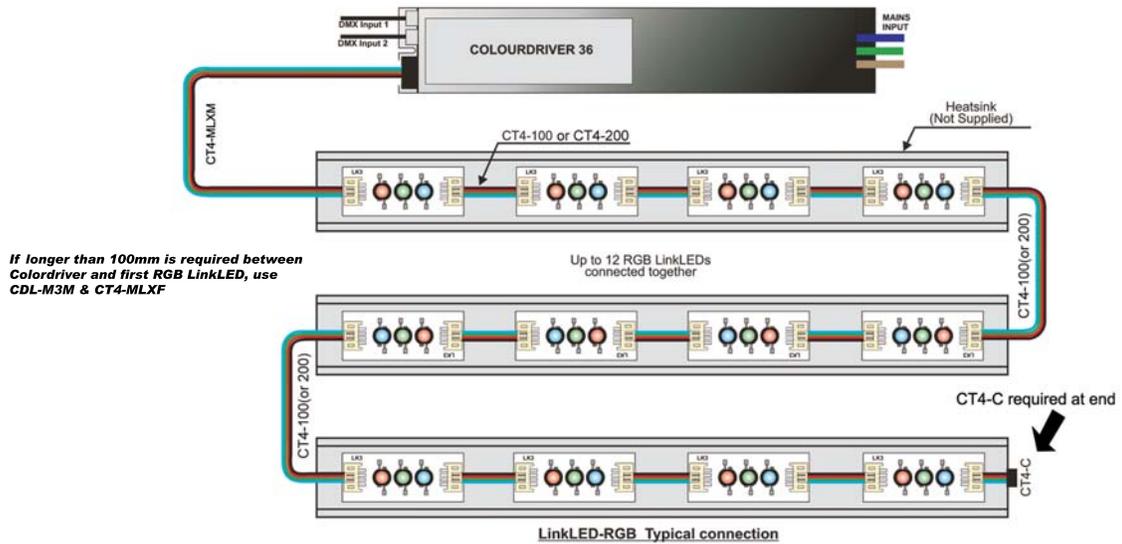

CDL-M3E is equipped with 8 individual colored wires. Each wire to be soldered onto indicated solder pad on color engine. For CE3C-RGB, cut off brown and purple leads.

Dialight reserves the right to make changes at any time in order to supply the best product possible.

Dialight Corporation
1501 Route 34 South • Farmingdale, NJ 07727 USA
Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778 • www.dialight.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Power Supplies](#) category:

Click to view products by [Dialight](#) manufacturer:

Other Similar products are found below :

[ESS015W-1000-12](#) [EUC-075S105DT](#) [PDA-WIFI](#) [PIFC-K250F](#) [PITB-K222A](#) [ALD-514012PJ134](#) [LB240S24KH](#) [LMH020-SPLC-0000-0000001](#) [LMD600-0100-C1A7-7030000](#) [79534](#) [79535](#) [EUG-200S210DT](#) [ESS030W-1050-21](#) [ESS030W-0900-32](#) [BPOXL 4-12-035](#) [SLM160W-3.9-40-ZA](#) [ESS010W-0180-42](#) [ESS010W-0350-24](#) [ESS010W-0200-42](#) [PDA080B-1A0G](#) [ESS010W-0500-12](#) [PDA150B-S1A5G](#) [ZPS-20](#) [SLM140W-1.05-130-ZA](#) [ESS040W-1400-27](#) [ESS015W-0700-18](#) [ESS010E-0250-42](#) [EVM120W-2700-42-ECN2](#) [EDC-100S105SV-0007](#) [79278](#) [EUD-150S350DVA](#) [LWA320-C420-ARK-B](#) [50304](#) [HVG-320-36AB](#) [HVG-320-54AB](#) [OT FIT 50/220-240/300 D L](#) [OT FIT 35/220-240/350 D CS L](#) [OT FIT 65/220-240/350 D CS L](#) [ELEMENT 30/220-240/700 S](#) [LC 75W 100-400MA 1-10V LP EXC](#) [LCA 35W 150-700MA ONE4ALL LP PRE](#) [LCA 50W 100-400MA ONE4ALL LP PRE](#) [LCA 50W 350-1050MA ONE4ALL LP PRE](#) [LCA 50W 350-1050MA 2XCH LP PRE](#) [LCI 150/325-1050/300 O4A SL PRE](#) [LCA 75W 100-400MA ONE4ALL LP PRE](#) [LCA 45W 500-1400MA ONE4ALL SC PRE](#) [LC 50W 100-400MA FLEXC LP EXC](#) [LC 50W 350-1050MA FLEXC LP EXC](#) [LC 75W 350-1050MA FLEXC LP EXC](#)