


Product Summary

V_{RRM} (V)	I_F (A)	V_F Max (V) @ $I_F = 7.5A$	I_R Max (μA)
600, 800, 1000	15	1.1	5

Mechanical Data

- Package: GBU
- Package Material: Plastic Material, UL Flammability Classification 94V-0
- Terminals: Finish – Matte Tin Plated Leads, Solderable per MIL-STD-202, Method 208 
- Polarity Indicator: As Marked on The Body
- Weight: 4.0 grams (Approximate)
- Mounting Position: Any



Features

- Glass Passivated Die Construction
- Rating to 1000V PRV
- Ideal for Printed Circuit Board
- Reliable Low-Cost Construction Utilizing Molded Plastic Technique
- UL Recognized File # E94661
- Lead-Free Finish; RoHS Compliant (Notes 1 & 2)**
- Halogen and Antimony Free. "Green" Device (Note 3)**
- For automotive applications requiring specific change control (i.e. parts qualified to AEC-Q100/101/104/200, PPAP capable, and manufactured in IATF 16949 certified facilities), please [contact us](https://www.diodes.com/quality/product-definitions/) or your local Diodes representative.**


<https://www.diodes.com/quality/product-definitions/>

Ordering Information (Note 4)

Part Number	Package	Packing	
		Qty.	Carrier
GBU1506-TU	GBU	20pcs	Tube
GBU1508-TU	GBU	20pcs	Tube
GBU1510-TU	GBU	20pcs	Tube

- Notes:
- EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant. All applicable RoHS exemptions applied.
 - See <https://www.diodes.com/quality/lead-free/> for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
 - Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.
 - For packaging details, go to our website at <https://www.diodes.com/design/support/packaging/diodes-packaging/>.

Marking Information



GBU15xx = Product Type Marking Code
 J = Manufacturer's Code Marking
 YWW = Date Code Marking
 Y = Last Digit of Year (ex: 3 = 2023)
 WW = Week Code (01 to 53)

Maximum Ratings (@T_A = +25°C, unless otherwise specified.)

Characteristic	Symbol	GBU1506	GBU1508	GBU1510	Unit
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	600	800	1000	V
Maximum DC Blocking Voltage	V _{DC}	600	800	1000	V
Average Rectified Output Current @T _C = +100°C	I _{F(AV)}	With Heatsink Without Heatsink 15 3.2			A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave T _J = +25°C	I _{FSM}	200			A
I ² t Rating for Fusing (t = 8.3ms)	I ² t	166			A ² s
Mounting Torque (Recommended Torque: 0.5 N.m)	T _{OR}	0.8			N.m
Operating Junction Temperature Range	T _J , T _{STG}	-55 to +150			°C

Electrical Characteristics (@T_A = +25°C, unless otherwise specified.)

Characteristic	Test Condition	Symbol	Max.	Unit
Forward Voltage	I _F = 7.5A T _J = +25°C	V _F	1.1	V
Leakage Current	V _R at Rated T _J = +25°C T _J = +125°C	I _R	5 500	μA
Typical Junction Capacitance (Note 5)		C _T	50	pF

Thermal Characteristics

Characteristic	Symbol	Typ.	Unit
Typical Thermal Resistance (Note 6)	R _{θJC}	2	°C/W

Notes: 5. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.
 6. Device mounted on 200mm * 200mm * 5mm AL plate heatsink.

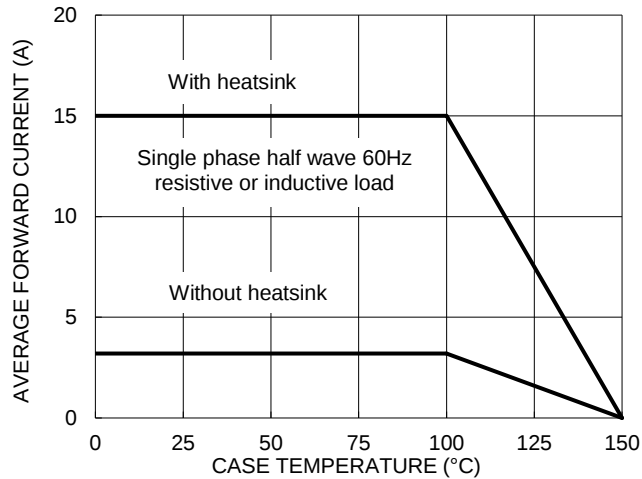


Figure 1. Forward Current Derating Curve

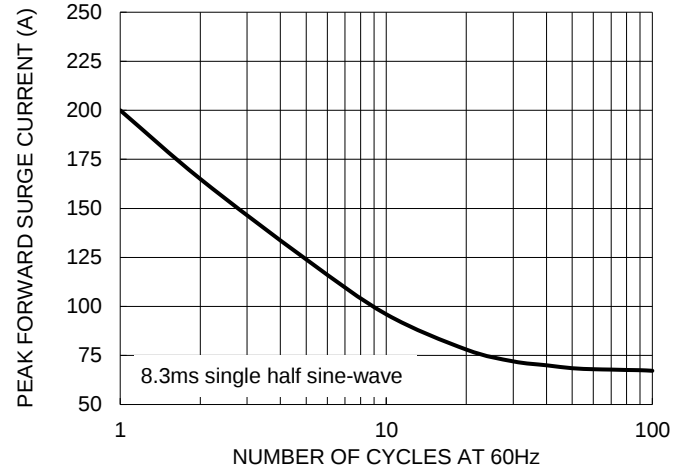


Figure 2. Maximum Non-repetitive Surge Current

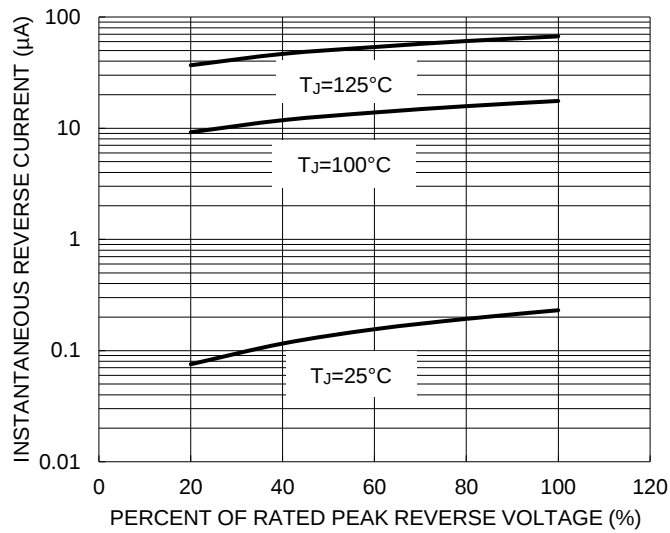


Figure 3. Typical Reverse Characteristics

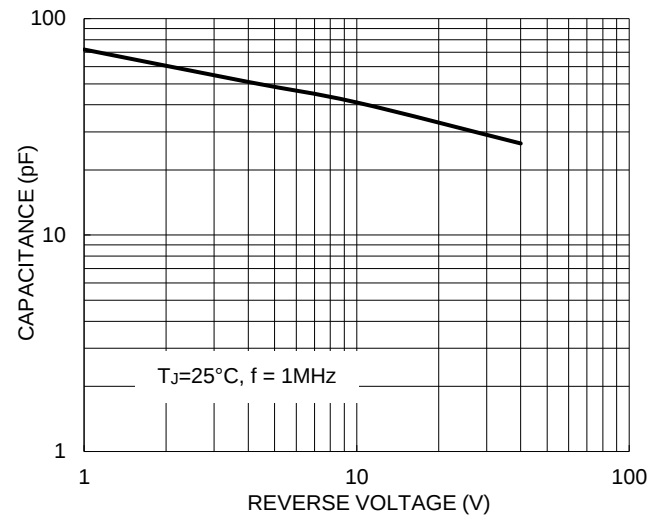


Figure 4. Typical Junction Capacitance


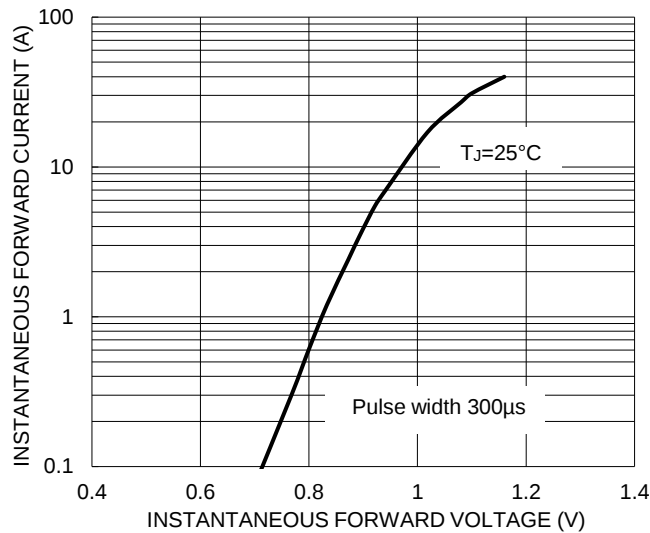


Figure 5. Typical Forward Characteristics

Package Outline Dimensions

Please see <http://www.diodes.com/package-outlines.html> for the latest version.

GBU

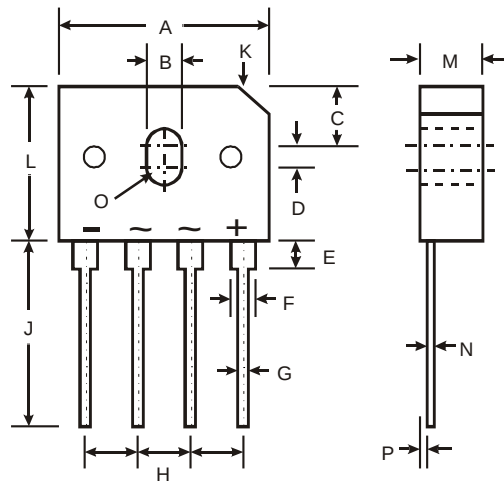

GBU		
Dim	Min	Max
A	21.8	22.3
B	3.5	4.1
C	7.4	7.9
D	1.65	2.16
E	2.25	2.75
F	1.95	2.35
G	1.02	1.27
H	4.83	5.33
J	17.5	18.0
K	3.2 X 45°	
L	18.3	18.8
M	3.30	3.56
N	0.46	0.56
O	1.90R	
P	0.76	1.0
All Dimensions in mm		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bridge Rectifiers](#) category:

Click to view products by [Diodes Incorporated](#) manufacturer:

Other Similar products are found below :

[07641080 SKDM 60/16 A1](#) [12M10](#) [1N5406](#) [1SMZG10GP TR](#) [26MB100A](#) [2KBP06M_BO_10001](#) [2W005G-E4/51](#) [2W01](#) [2W01G-E4/51](#)
[2W02](#) [2W02G-E4/51](#) [2W04](#) [2W04G-E4/51](#) [2W06](#) [2W06](#) [2W06G-E4/51](#) [2W08G-E4/51](#) [2W10](#) [2W10](#) [2W10](#) [2W10](#) [2W10](#) [2W10G-E4/51](#)
[2W10M](#) [2W10M](#) [2W10M](#) [3PB2516](#) [3PB3516](#) [AB05S](#) [AB10S](#) [AB1S](#) [AB24S](#) [AB310S](#) [AB34S](#) [AB34S](#) [AB4S](#) [AB510S](#) [AB54S](#) [AB8S](#)
[ABF10-12](#) [ABF10-50 ABF](#) [ABF10 ABF](#) [ABF210](#) [ABS06](#) [ABS06A](#) [ABS08](#) [ABS10](#) [ABS10](#) [ABS10](#) [ABS10](#)