

Product Summary (@T_A = +25°C)

P _{PK}	V _{RWM}
600W	5V to 170V

Description and Applications

Suitable to protect sensitive automotive circuits against surges defined in ISO7637-2 and against electrostatic discharges according to ISO10605.

Compliance with the following standards:

- ISO10605, C = 150pF, R = 330Ω:
 - 30kV (Air Discharge)
 - 30kV (Contact Discharge)
- ISO7637-2 (Note 4)
 - Pulse 1: V_s = -150V
 - Pulse 2a: V_s = +112V
 - Pulse 3a: V_s = -220V
 - Pulse 3b: V_s = +150V

Features and Benefits


- 600W Peak Pulse Power Dissipation
- 5V to 170V Standoff Voltages
- Glass Passivated Die Construction
- Bi-directional Versions Available
- Excellent Clamping Capability
- Lead-Free Finish; RoHS Compliant (Notes 1 & 2)
- Halogen and Antimony Free. "Green" Device (Note 3)
- The SMA6J5.0(C)AQ–SMA6J170(C)AQ are suitable for automotive applications requiring specific change control; these parts are AEC-Q101 qualified, PPAP capable, and manufactured in IATF 16949 certified facilities.

<https://www.diodes.com/quality/product-definitions/>


Mechanical Data

- Package: SMA
- Package Material: Molded Plastic.
- UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Lead Free Plating (Matte Tin Finish). Solderable per MIL-STD-202, Method 208 (63)
- Weight: 0.062 grams (Approximate)

SMA



Top View



Bottom View

Ordering Information (Note 5)


Orderable Part Number	Package	Packing	
		Qty.	Carrier
SMA6JX.X(C)AQ-13	SMA	5,000	Tape & Reel
SMA6JXX(C)AQ-13	SMA	5,000	Tape & Reel
SMA6JXXX(C)AQ-13	SMA	5,000	Tape & Reel

*X = Device Voltage, e.g., SMA6J15CAQ-13.

- Notes:
- EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant. All applicable RoHS exemptions applied.
 - See <https://www.diodes.com/quality/lead-free/> for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
 - Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.
 - Not applicable to parts with standoff voltage lower than the average battery voltage (13.5V).
 - For packaging details, go to our website at <https://www.diodes.com/design/support/packaging/diodes-packaging/>.


Marking Information

Cathode Band for Uni-Directional Device



Cathode —> Anode
Uni-directional

Bi-Directional Device



Bi-directional

xxx = Product Type Marking Code (See Page 3)

D11 = Manufacturers' Marking

YWW = Date Code Marking

Y = Last Digit of Year (ex: 5 for 2025)

WW = Week Code (01 to 53)

Maximum Ratings (@T_A = +25°C, unless otherwise specified.)

Characteristic	Symbol	Value	Unit
Peak Pulse Power Dissipation (Non-Repetitive Current Pulse Derated Above T _A = +25°C) (Note 6)	P _{PK}	600	W
Peak Power Derating Above +25°C	P _{DER}	4.8	W/°C

Thermal Characteristics





Characteristic	Symbol	Value	Unit
Operating Temperature Range	T _J	-55 to +175	°C
Storage Temperature Range	T _{STG}	-55 to +175	°C

Note: 6. Valid provided that terminals are kept at ambient temperature.

Electrical Characteristics (@T_A = +25°C, unless otherwise specified.)

Part Number (Note 7)	Reverse Standoff Voltage	Breakdown Voltage V _{BR} @ I _T (Note 8)		Test Current	Max Reverse Leakage @ V _{RWM} (Note 10)	Max Clamping Voltage @ I _{PP} (Note 9)	Max Peak Pulse Current	Marking Code	
	V _{RWM} (V)	Min (V)	Max (V)	I _T (mA)	I _R (μA)	V _C (V)	I _{PP} (A)	BI-	UNI-
SMA6J5.0(C)AQ	5.0	6.40	7.07	10	1600	9.2	65.2	AET	KET
SMA6J6.0(C)AQ	6.0	6.67	7.37	10	800	10.3	58.3	AGT	KGT
SMA6J6.5(C)AQ	6.5	7.22	7.98	10	500	11.2	53.6	ATT	KTT
SMA6J7.0(C)AQ	7.0	7.78	8.6	10	200	12.0	50.0	AMT	KMT
SMA6J7.5(C)AQ	7.5	8.33	9.21	1.0	100	12.9	46.5	APT	KPT
SMA6J8.0(C)AQ	8.0	8.89	9.83	1.0	50	13.6	44.1	ART	KRT
SMA6J8.5(C)AQ	8.5	9.44	10.4	1.0	20	14.4	41.7	AIT	KIT
SMA6J10(C)AQ	10.0	11.10	12.3	1.0	10	17.0	35.3	AXT	KXT
SMA6J13(C)AQ	13.0	14.40	15.9	1.0	0.5	21.5	27.9	BGT	LGT
SMA6J15(C)AQ	15.0	16.70	18.5	1.0	0.5	24.4	24.0	BMT	LMT
SMA6J18(C)AQ	18.0	20.00	22.1	1.0	0.5	29.2	20.5	BTT	LTT
SMA6J20(C)AQ	20.0	22.20	24.5	1.0	0.5	32.4	18.5	BVT	LVT
SMA6J22(C)AQ	22.0	24.40	27.0	1.0	0.5	35.5	16.9	BXT	LXT
SMA6J24(C)AQ	24.0	26.70	29.5	1.0	0.5	38.9	15.4	BZT	LZT
SMA6J26(C)AQ	26.0	28.90	31.9	1.0	0.5	42.1	14.2	CET	MET
SMA6J28(C)AQ	28.0	31.10	34.4	1.0	0.5	45.4	13.2	CGT	MGT
SMA6J30(C)AQ	30.0	33.30	36.8	1.0	0.5	48.4	12.4	CKT	MKT
SMA6J33(C)AQ	33.0	36.70	40.6	1.0	0.5	53.3	11.3	CMT	MMT
SMA6J36(C)AQ	36.0	40.00	44.2	1.0	0.5	58.1	10.3	CPT	MPT
SMA6J40(C)AQ	40.0	44.40	49.1	1.0	0.5	64.5	9.3	CRT	MRT
SMA6J43(C)AQ	43.0	47.80	52.8	1.0	0.5	69.4	8.6	CTT	MTT
SMA6J45(C)AQ	45.0	50.00	55.3	1.0	0.5	72.7	8.3	CVT	MVT
SMA6J48(C)AQ	48.0	53.30	58.9	1.0	0.5	77.4	7.7	CXT	MXT
SMA6J51(C)AQ	51.0	56.70	62.7	1.0	0.5	82.4	7.3	CZT	MZT
SMA6J54(C)AQ	54.0	60.00	66.3	1.0	0.5	87.1	6.9	DET	NET
SMA6J58(C)AQ	58.0	64.40	71.2	1.0	0.5	93.6	6.4	DGT	NGT
SMA6J60(C)AQ	60.0	66.70	73.7	1.0	0.5	96.8	6.2	DKT	NKT
SMA6J64(C)AQ	64.0	71.10	78.6	1.0	0.5	103.0	5.8	DNT	NNT
SMA6J70(C)AQ	70.0	77.80	86.0	1.0	0.5	113.0	5.3	DPT	NPT
SMA6J75(C)AQ	75.0	83.30	92.1	1.0	0.5	121.0	4.9	DRT	NRT
SMA6J78(C)AQ	78.0	86.70	95.8	1.0	0.5	126.0	4.7	DTT	NTT
SMA6J85(C)AQ	85.0	94.40	104	1.0	0.5	137.0	4.4	DVT	NVT
SMA6J90(C)AQ	90.0	100.0	111	1.0	0.5	146.0	4.1	DXT	NXT
SMA6J100(C)AQ	100.0	111.0	123	1.0	0.5	162.0	3.7	DZT	NZT
SMA6J110(C)AQ	110.0	122.0	135	1.0	0.5	177.0	3.4	EET	PET
SMA6J120(C)AQ	120.0	133.0	147	1.0	0.5	193.0	3.1	EGT	PGT
SMA6J130(C)AQ	130.0	144.0	159	1.0	0.5	209.0	2.9	EKT	PKT
SMA6J150(C)AQ	150.0	167.0	185	1.0	0.5	243.0	2.5	EPT	PPT
SMA6J160(C)AQ	160.0	178.0	197	1.0	0.5	259.0	2.3	ERT	PRT
SMA6J170(C)AQ	170.0	189.0	209	1.0	0.5	275.0	2.2	ETT	PTT


- Notes:
- Suffix C denotes bi-directional devices.
 - V_{BR} measured with I_T current pulse = 10ms to 15ms.
 - Per 10 × 1000μs waveform. See Figure 4.
 - The I_R limit is double for bi-directional devices.

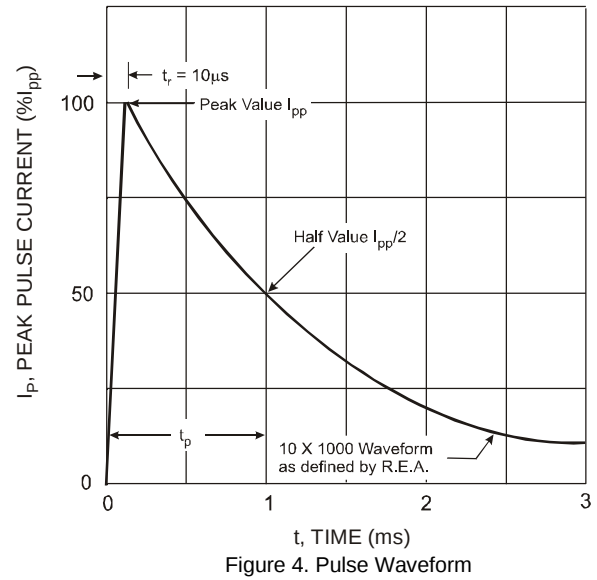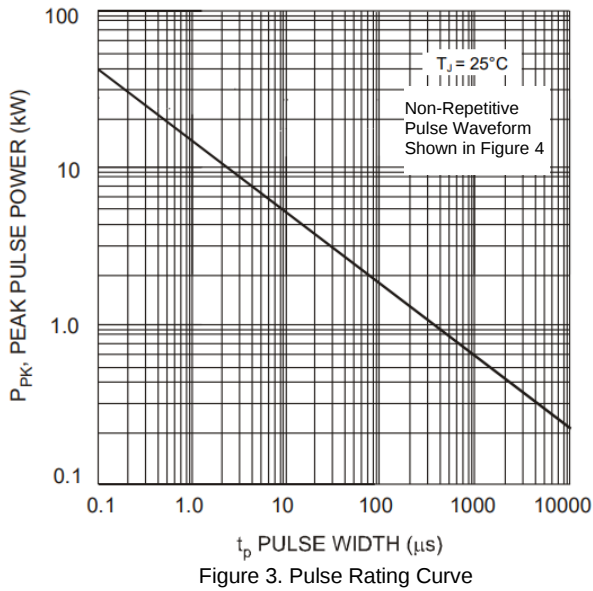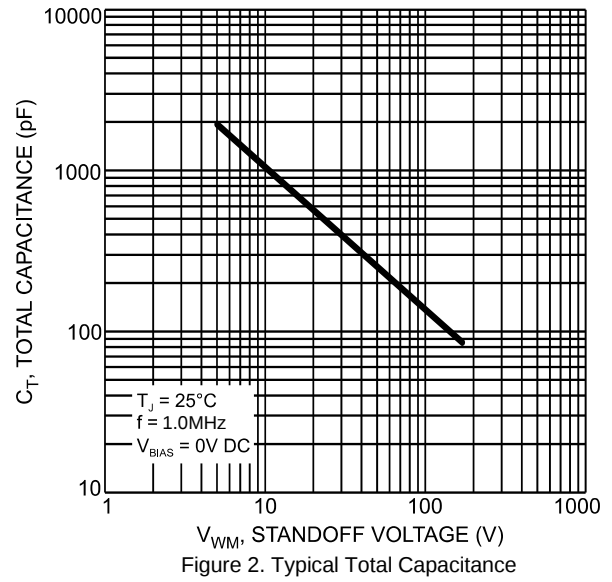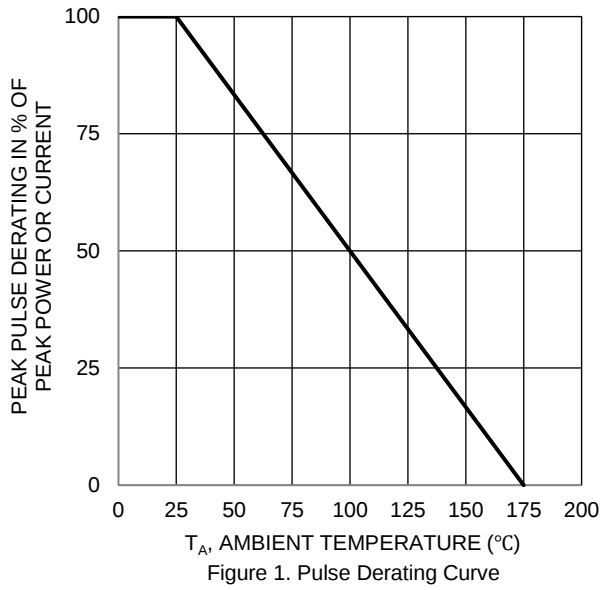

Package Outline Dimensions

Please see <http://www.diodes.com/package-outlines.html> for the latest version.

SMA

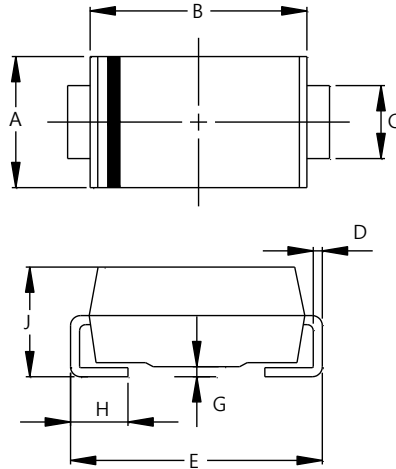


SMA		
Dim	Min	Max
A	2.29	2.92
B	4.00	4.60
C	1.27	1.63
D	0.15	0.31
E	4.80	5.59
G	0.05	0.20
H	0.76	1.52
J	1.96	2.40
All Dimensions in mm		

Suggested Pad Layout

Please see <http://www.diodes.com/package-outlines.html> for the latest version.

SMA

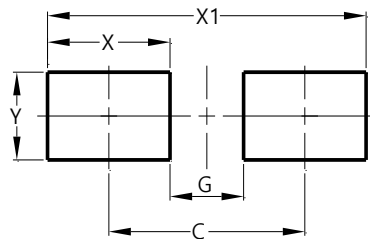

Dimensions	Value (in mm)
C	4.00
G	1.50
X	2.50
X1	6.50
Y	1.70

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Protection Diodes / TVS Diodes](#) ***category:***

Click to view products by [Diodes Incorporated](#) ***manufacturer:***

Other Similar products are found below :

[60KS200C](#) [D5V0F4U5P5-7](#) [P4KE27CA](#) [P6KE11CA](#) [JAN1N6461](#) [P6KE8.2A](#) [JANTX1N6475](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#)
[SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD112-B1-02EL E6327](#) [CPDT-5V0USP-HF](#) [HSPC16701B02TP](#) [JANTX1N6052A](#)
[D3V3Q1B2DLP3-7](#) [SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [CEN955 W/DATA](#) [ESD101-B1-02EL E6327](#) [5KP48A](#) [5KP90A](#)
[15KPA36A-LF](#) [P4KE56CA](#) [P4KE68A](#) [P6KE13CA](#) [P6KE43CA](#) [P6SMBJ20CA](#) [JANTX1N6072A](#) [SR2835ESKG](#) [SA90CA](#) [SA8.5A](#) [SA18A](#)
[SA11CA](#) [SMCJ78CA](#) [SMBJ51CA](#) [JANTX1N5650A](#) [SMDA05LC-LF](#) [30KPA48A-LF](#) [GPZ1275](#) [P4KE6.8A](#) [CPDQC12VE-HF](#)
[GRPADATAJANTX1N6041A](#) [DSILC6-4SC6](#) [5KP45A-TP](#) [SMLJ26A-TP](#) [D5V0Q1B2CSP-7](#) [NSPM3042MXT5G](#)