


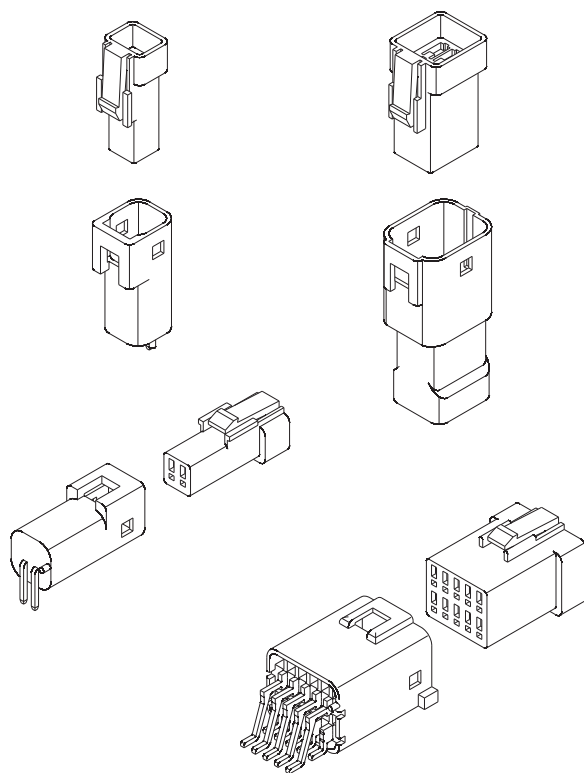

### 技术特性/Specifications:

额定电压 Rated voltage: 100V AC, DC  
额定电流 Rated current: 3A AC, DC  
接触电阻 Contact resistance: 20m $\Omega$  max  
绝缘电阻 Insulation resistance: 1000M $\Omega$  min  
耐压 Withstand voltage: 1000V AC/minute  
环境温度 Ambient temperature: -40℃~+105℃  
适用线规 Wire range: AWG#26~#22

A





B

C


D

E

F

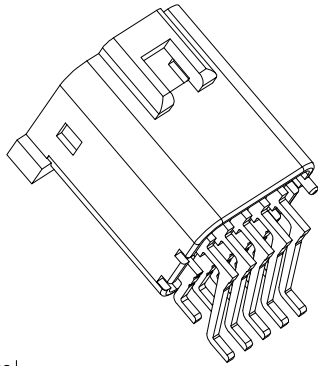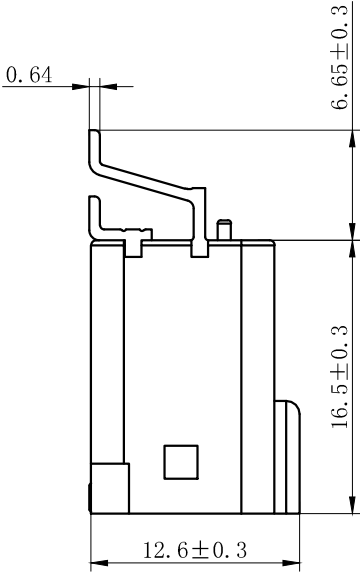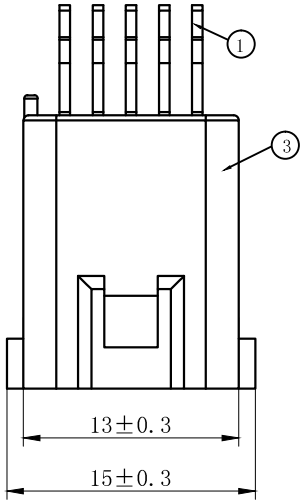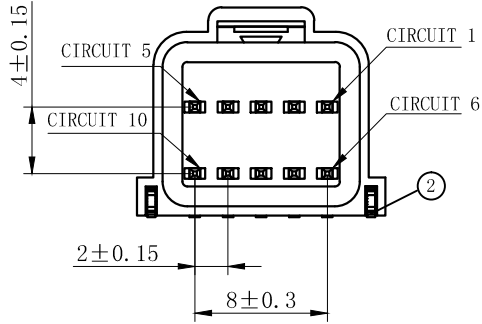

| REV. | REVISION DESCRIPTION | DATE     | APPD  |
|------|----------------------|----------|-------|
| B    | 外形尺寸作调整              | 22. 7. 4 | Wuhui |

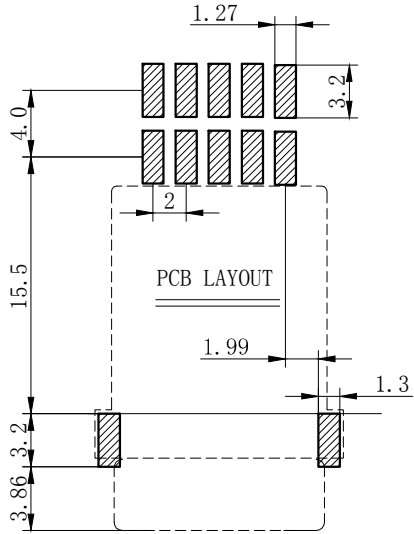

## NOTES

Available in 10 Circuits.

Mates with DL20023-Y Series Housing.

Material : LCP UL94V-0.

Pin Material : Brass.Tin-plated .

Green Material RoHS Compliant.

|    |    |     |     |    |         |
|----|----|-----|-----|----|---------|
| 3  | ③  | 基座  | LCP | 1  | UL94V-0 |
| 2  | ②  | 焊片  | 黄铜  | 2  | 镀锡      |
| 1  | ①  | 接触件 | 黄铜  | N* | 镀锡      |
| 序号 | 图号 | 名称  | 材料  | 数量 | 附件      |

| GENERAL TOLERANCES<br>(UNLESS SPECIFIED)   |                | ZHE JIANG DELI CONNECTORS CO ., LTD                |               |
|--------------------------------------------|----------------|----------------------------------------------------|---------------|
| . X: ± 0.30                                | X° : ± 3.0°    | PRODUCT NAME:<br>DL20023-10AWB                     |               |
| . XX: ± 0.15                               | . X° : ± 2.0°  | TITLE:<br>2.00 mm Pitch<br>Wire To Board SMT Wafer |               |
| . XXX: ± 0.01                              | . XX° : ± 1.0° | DR:Chen Quan Long                                  | DATE:22.05.19 |
| FINISH:                                    |                | CHKD: Wu Hui                                       | DATE:22.05.19 |
| DRAWING NO:<br>GC-DL20023-XXWB-XXX-XX-X-XX |                | APPD: Ren An De                                    | DATE:22.05.19 |
|                                            |                | PART NO:<br>DL20023-XXWB-XXX-XX-X-XX               |               |
|                                            |                | SCALE: N/A                                         | PAGE:1/1      |
|                                            |                | UNITS: mm                                          | REV. : B      |

A

B


C

D


E

F


1 2 3 4 5 6 7 8

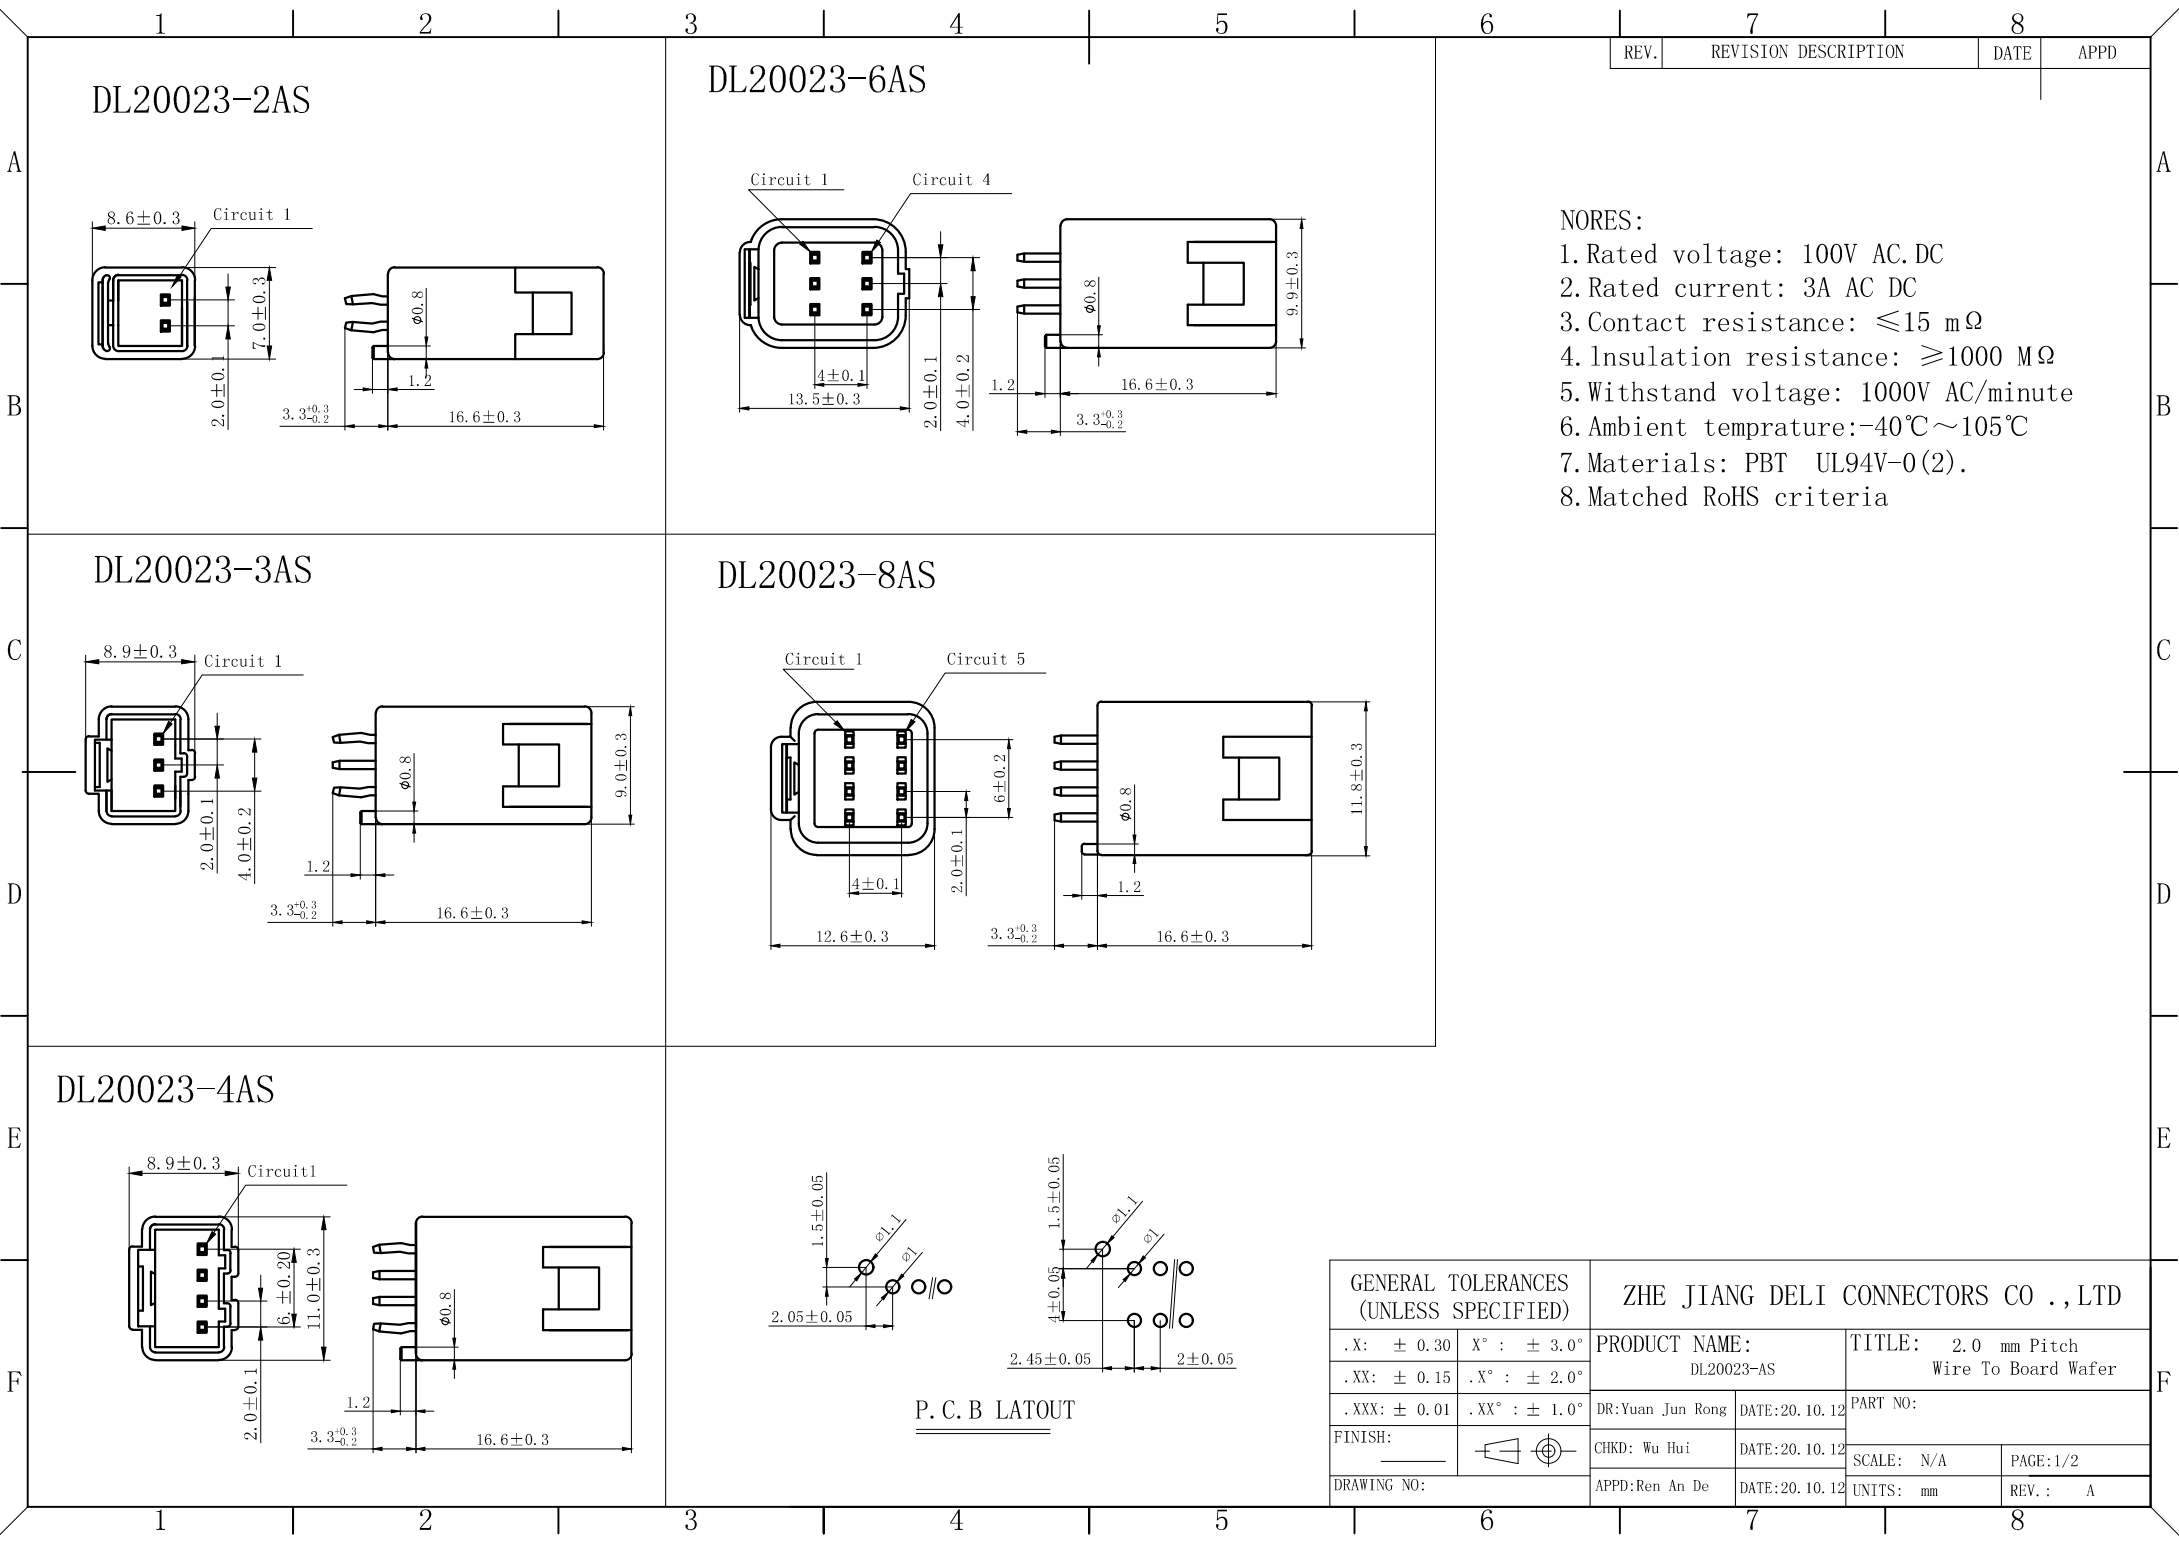


DL20023-2AS

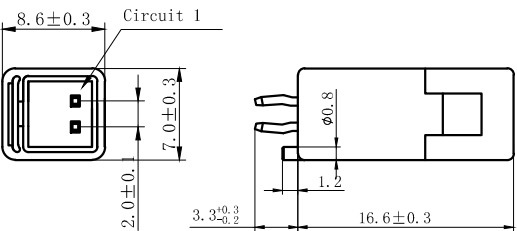


DL20023-6AS

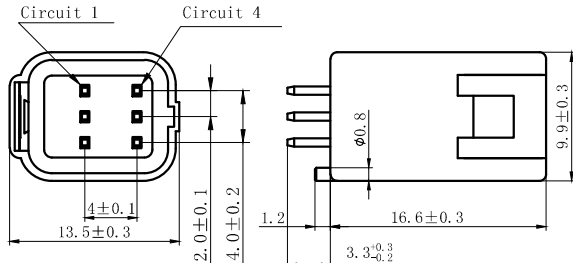



DL20023-3AS

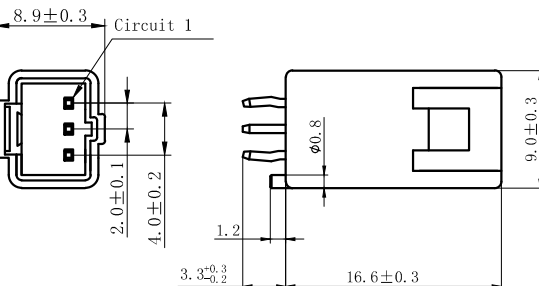

DL20023-8AS

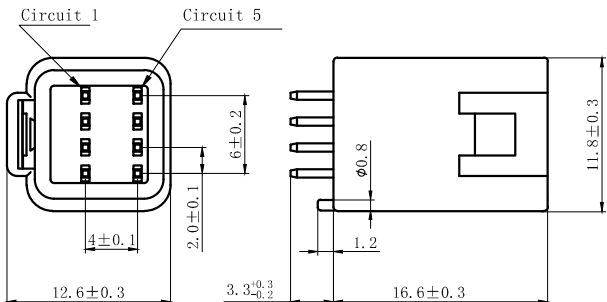

DL20023-4AS

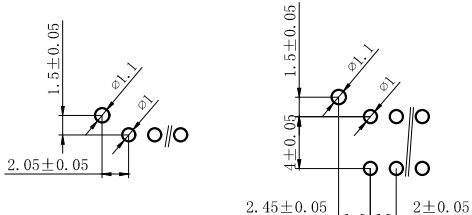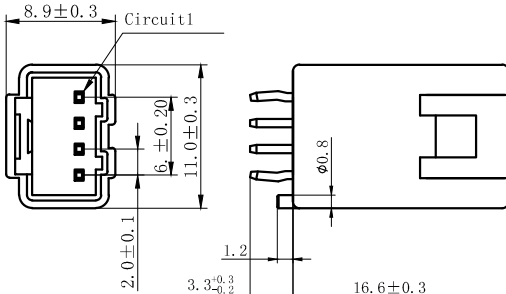


P.C.B LATOUT

NORES:

- 1. Rated voltage: 100V AC.DC
- 2. Rated current: 3A AC DC
- 3. Contact resistance:  $\leq 15 \text{ m}\Omega$
- 4. Insulation resistance:  $\geq 1000 \text{ M}\Omega$
- 5. Withstand voltage: 1000V AC/minute
- 6. Ambient temprature:  $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$
- 7. Materials: PBT UL94V-0(2).
- 8. Matched RoHS criteria

| GENERAL TOLERANCES<br>(UNLESS SPECIFIED) |                         | ZHE JIANG DELI CONNECTORS CO.,LTD |  |                                            |  |
|------------------------------------------|-------------------------|-----------------------------------|--|--------------------------------------------|--|
| .X: $\pm 0.30$                           | X°: $\pm 3.0^{\circ}$   | PRODUCT NAME:<br>DL20023-AS       |  | TITLE: 2.0 mm Pitch<br>Wire To Board Wafer |  |
| .XX: $\pm 0.15$                          | .X°: $\pm 2.0^{\circ}$  | DR:Yuan Jun Rong                  |  | DATE:20.10.12                              |  |
| .XXX: $\pm 0.01$                         | .XX°: $\pm 1.0^{\circ}$ | DATE:20.10.12                     |  | PART NO:                                   |  |
| FINISH:                                  |                         | CHKD: Wu Hui                      |  | SCALE: N/A                                 |  |
| DRAWING NO:                              |                         | APPD:Ren An De                    |  | DATE:20.10.12                              |  |
|                                          |                         | UNITS: mm                         |  | PAGE:1/2                                   |  |
|                                          |                         | REV.: A                           |  |                                            |  |

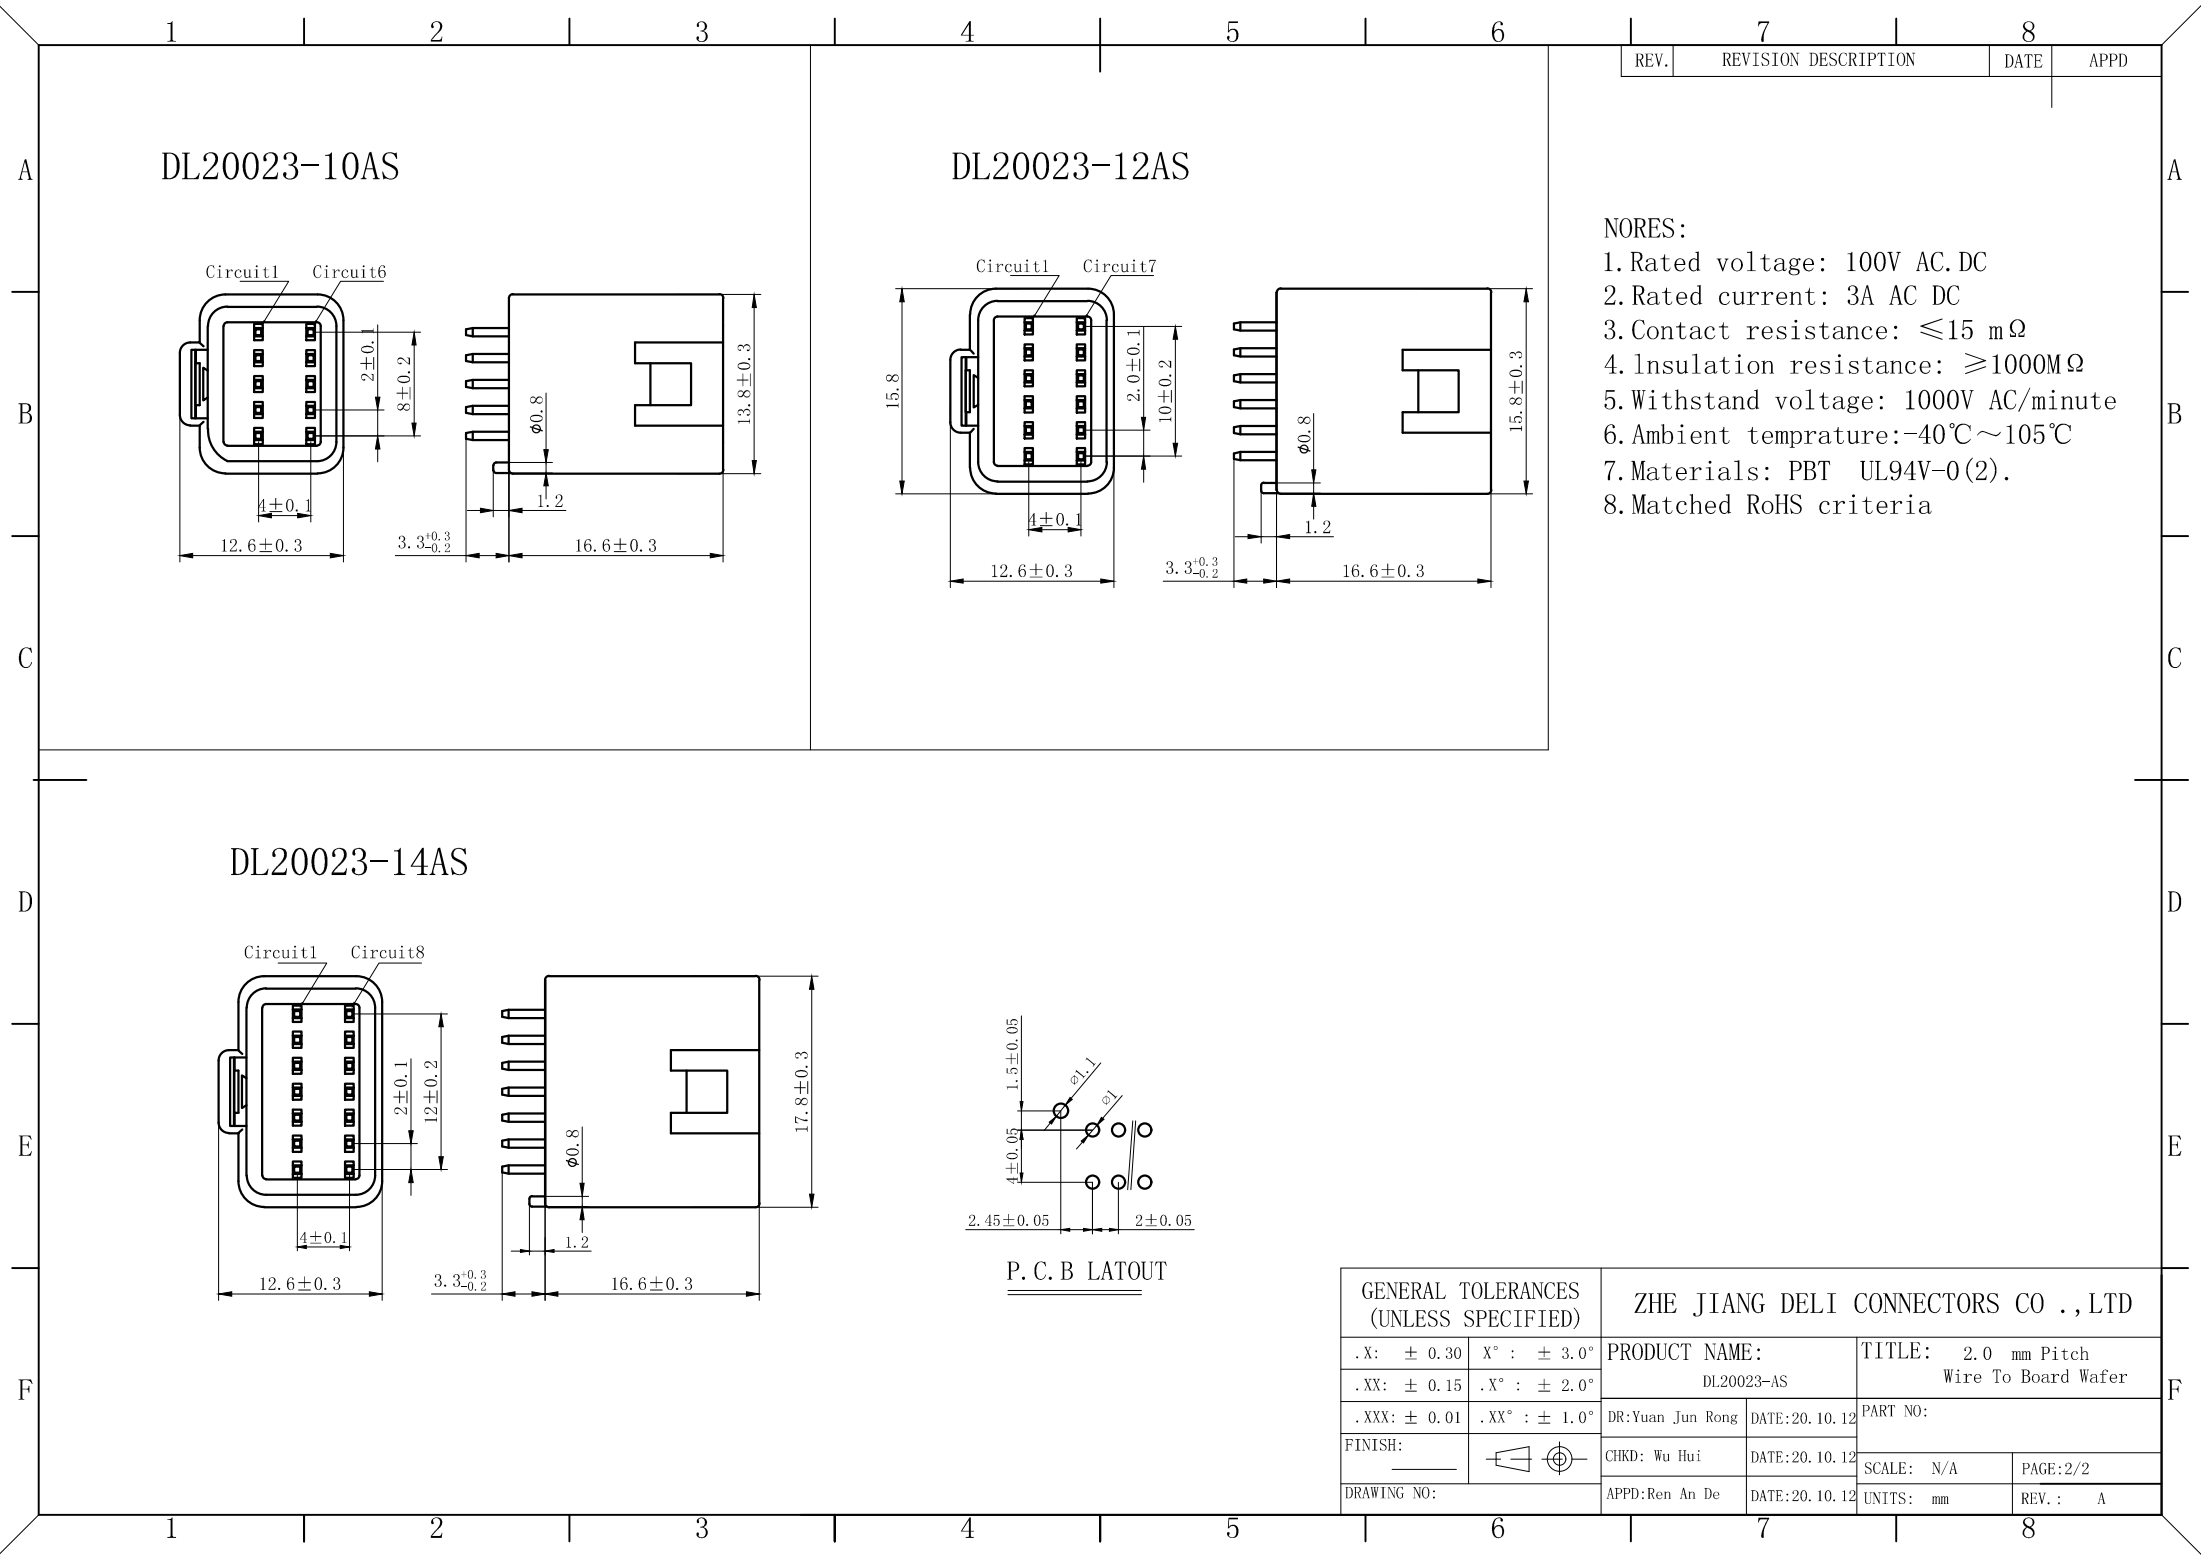

| REV. | REVISION DESCRIPTION | DATE | APPD |
|------|----------------------|------|------|
|------|----------------------|------|------|

- NORES:
1. Rated voltage: 100V AC.DC
  2. Rated current: 3A AC DC
  3. Contact resistance:  $\leq 15\text{ m}\Omega$
  4. Insulation resistance:  $\geq 1000\text{M}\Omega$
  5. Withstand voltage: 1000V AC/minute
  6. Ambient temprature:  $-40^{\circ}\text{C}\sim 105^{\circ}\text{C}$
  7. Materials: PBT UL94V-0(2).
  8. Matched RoHS criteria

| GENERAL TOLERANCES<br>(UNLESS SPECIFIED) |                          | ZHE JIANG DELI CONNECTORS CO .,LTD |               |                                            |
|------------------------------------------|--------------------------|------------------------------------|---------------|--------------------------------------------|
| .X: $\pm 0.30$                           | X° : $\pm 3.0^{\circ}$   | PRODUCT NAME:<br>DL20023-AS        |               | TITLE: 2.0 mm Pitch<br>Wire To Board Wafer |
| .XX: $\pm 0.15$                          | .X° : $\pm 2.0^{\circ}$  | DR:Yuan Jun Rong                   | DATE:20.10.12 | PART NO:                                   |
| .XXX: $\pm 0.01$                         | .XX° : $\pm 1.0^{\circ}$ | CHKD: Wu Hui                       | DATE:20.10.12 | SCALE: N/A                                 |
| FINISH:<br>_____                         |                          | APPD:Ren An De                     | DATE:20.10.12 | PAGE:2/2                                   |
| DRAWING NO:                              |                          |                                    | UNITS: mm     | REV. : A                                   |

A

B

C

D

E

F

A

B


C

D


E

F

DL20023-2AWS


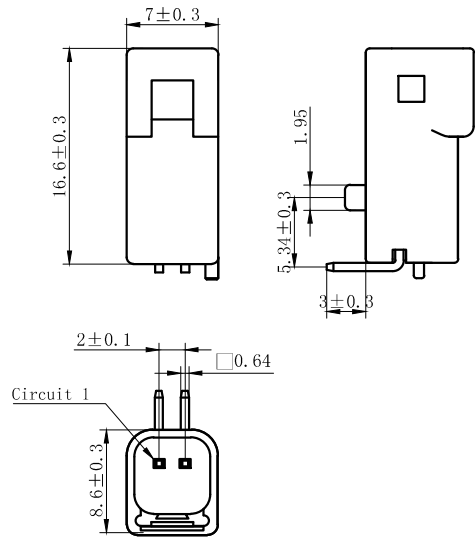


DL20023-3AWS

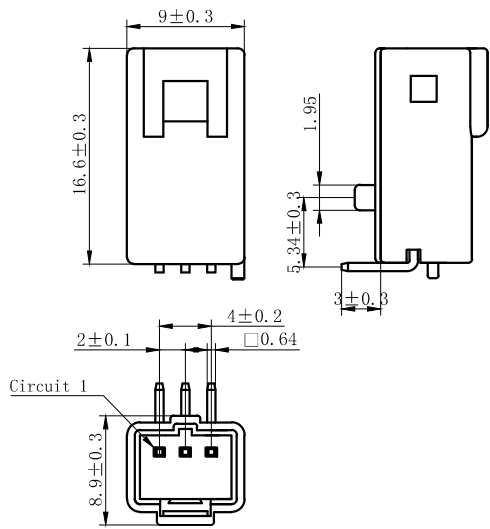


- NORES:
- 1. Rated voltage: 100V AC.DC
  - 2. Rated current: 3A AC DC
  - 3. Contact resistance:  $\leq 15 \text{ m}\Omega$
  - 4. Insulation resistance:  $\geq 1000 \text{ M}\Omega$
  - 5. Withstand voltage: 1000V AC/minute
  - 6. Ambient temprature:  $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$
  - 7. Materials: PBT UL94V-0(2).
  - 8. Matched RoHS criteria

DL20023-4AWS

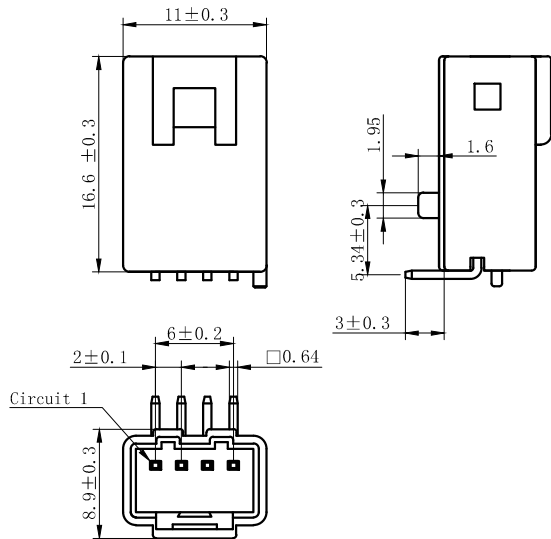

| GENERAL TOLERANCES<br>(UNLESS SPECIFIED) |                          | ZHE JIANG DELI CONNECTORS CO .,LTD |               |                                            |          |
|------------------------------------------|--------------------------|------------------------------------|---------------|--------------------------------------------|----------|
| .X: $\pm 0.30$                           | X° : $\pm 3.0^{\circ}$   | PRODUCT NAME:<br>DL20023-AWS       |               | TITLE: 2.0 mm Pitch<br>Wire To Board Wafer |          |
| .XX: $\pm 0.15$                          | .X° : $\pm 2.0^{\circ}$  | DR:Yuan Jun Rong                   | DATE:20.10.12 | PART NO:                                   |          |
| .XXX: $\pm 0.01$                         | .XX° : $\pm 1.0^{\circ}$ | CHKD: Wu Hui                       | DATE:20.10.12 | SCALE: N/A                                 | PAGE:1/3 |
| DRAWING NO:                              |                          | APPD:Ren An De                     | DATE:20.10.12 | UNITS: mm                                  | REV. : A |

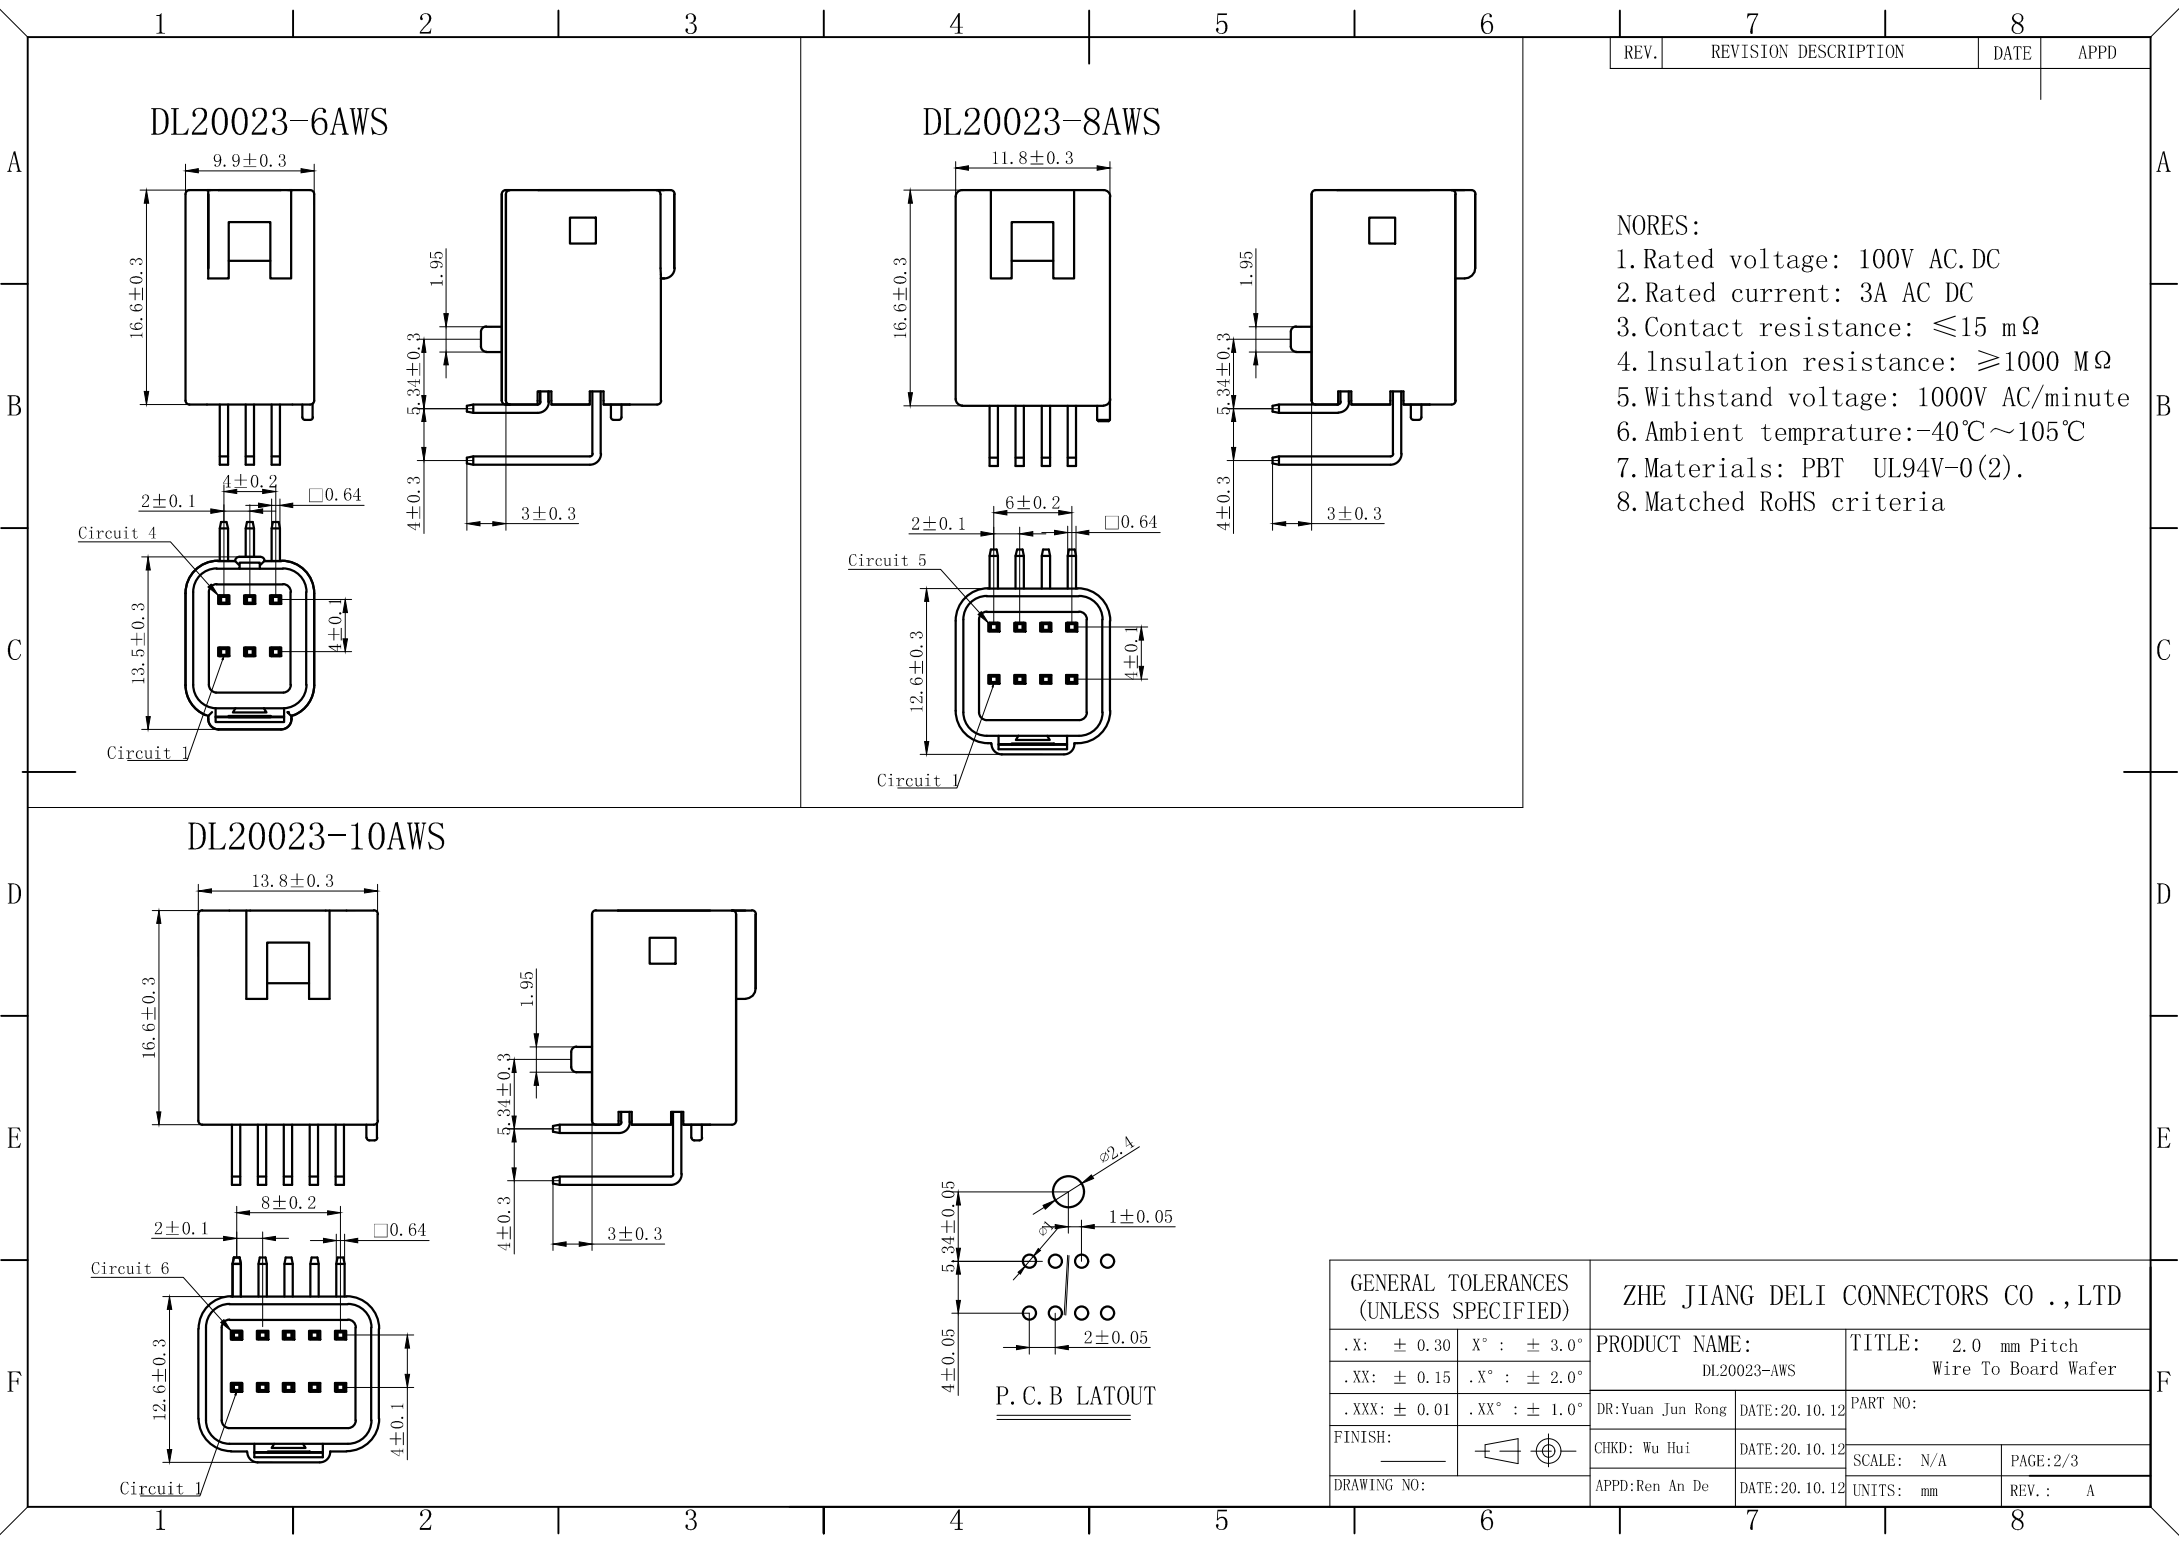

| REV. | REVISION DESCRIPTION | DATE | APPD |
|------|----------------------|------|------|
|------|----------------------|------|------|

- NORES:
1. Rated voltage: 100V AC.DC
  2. Rated current: 3A AC DC
  3. Contact resistance:  $\leq 15\text{ m}\Omega$
  4. Insulation resistance:  $\geq 1000\text{ M}\Omega$
  5. Withstand voltage: 1000V AC/minute
  6. Ambient temperature:  $-40^{\circ}\text{C}\sim 105^{\circ}\text{C}$
  7. Materials: PBT UL94V-0(2).
  8. Matched RoHS criteria

| GENERAL TOLERANCES<br>(UNLESS SPECIFIED) |                                                                                       | ZHE JIANG DELI CONNECTORS CO .,LTD |               |                     |          |
|------------------------------------------|---------------------------------------------------------------------------------------|------------------------------------|---------------|---------------------|----------|
| .X: ± 0.30                               | X° : ± 3.0°                                                                           | PRODUCT NAME:                      |               | TITLE: 2.0 mm Pitch |          |
| .XX: ± 0.15                              | .X° : ± 2.0°                                                                          | DL20023-AWS                        |               | Wire To Board Wafer |          |
| .XXX: ± 0.01                             | .XX° : ± 1.0°                                                                         | DR:Yuan Jun Rong                   | DATE:20.10.12 | PART NO:            |          |
| FINISH:<br>_____                         |  | CHKD: Wu Hui                       | DATE:20.10.12 | SCALE: N/A          | PAGE:2/3 |
| DRAWING NO:                              |                                                                                       | APPD:Ren An De                     | DATE:20.10.12 | UNITS: mm           | REV.: A  |

A

B

C

D

E

F

A

B

C



D

E


F

DL20023-12AWS

DL20023-14AWS

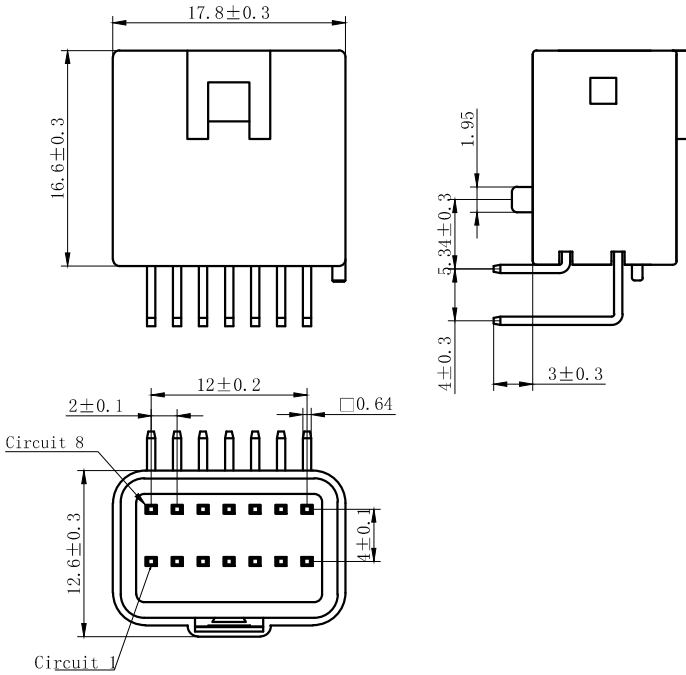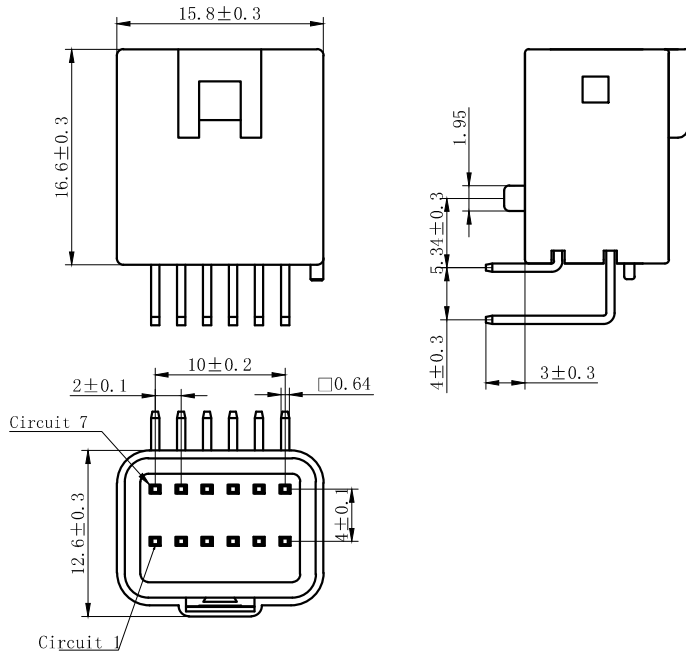


- NORES:
- 1. Rated voltage: 100V AC.DC
  - 2. Rated current: 3A AC DC
  - 3. Contact resistance:  $\leq 15 \text{ m}\Omega$
  - 4. Insulation resistance:  $\geq 1000 \text{ M}\Omega$
  - 5. Withstand voltage: 1000V AC/minute
  - 6. Ambient temprature:  $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$
  - 7. Materials: PBT UL94V-0(2).
  - 8. Matched RoHS criteria




| GENERAL TOLERANCES<br>(UNLESS SPECIFIED) |                         | ZHE JIANG DELI CONNECTORS CO.,LTD |               |                                            |          |
|------------------------------------------|-------------------------|-----------------------------------|---------------|--------------------------------------------|----------|
| .X: $\pm 0.30$                           | X°: $\pm 3.0^{\circ}$   | PRODUCT NAME:<br>DL20023-AWS      |               | TITLE: 2.0 mm Pitch<br>Wire To Board Wafer |          |
| .XX: $\pm 0.15$                          | .X°: $\pm 2.0^{\circ}$  | DR:Yuan Jun Rong                  | DATE:20.10.12 | PART NO:                                   |          |
| .XXX: $\pm 0.01$                         | .XX°: $\pm 1.0^{\circ}$ | CHKD: Wu Hui                      | DATE:20.10.12 | SCALE: N/A                                 | PAGE:3/3 |
| FINISH:<br>_____                         |                         | APPD:Ren An De                    | DATE:20.10.12 | UNITS: mm                                  | REV.: A  |
| DRAWING NO:                              |                         |                                   |               |                                            |          |


DL20023-2Y

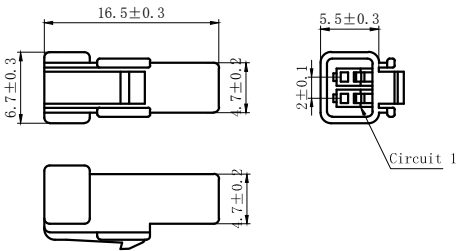


DL20023-3Y

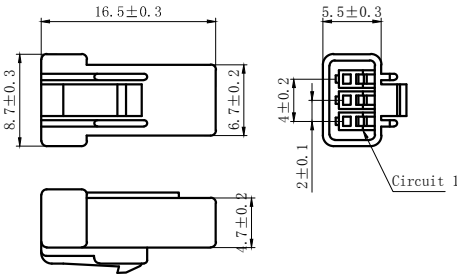


DL20023-8Y

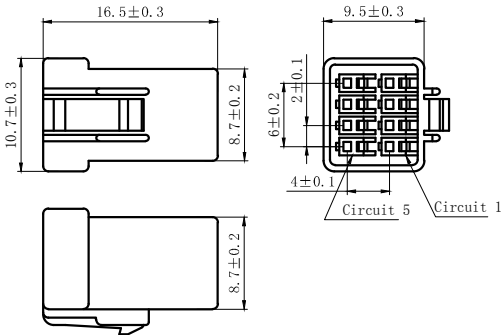

DL20023-4Y

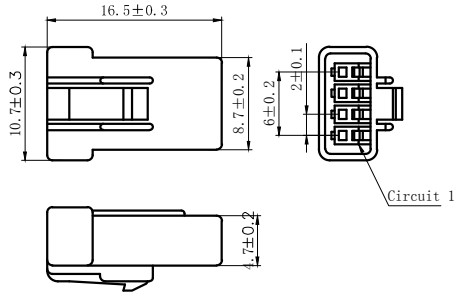

DL20023-6Y

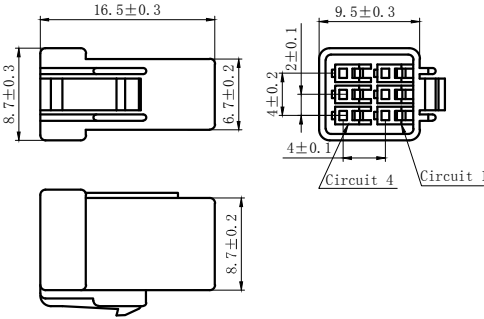

NOTES

Available in 02.03.04.06.08 Circuits.  
Mates with DL20023 Series Housing.  
Material : PBT UL94V-0(2).  
Accepts DL20023-T Crimp Terminal.  
Green Material RoHS Compliant.

| REV. | REVISION DESCRIPTION | DATE | APPD |
|------|----------------------|------|------|
|      |                      |      |      |

| GENERAL TOLERANCES<br>(UNLESS SPECIFIED) |                      | ZHE JIANG DELI CONNECTORS CO.,LTD |               |                                |          |
|------------------------------------------|----------------------|-----------------------------------|---------------|--------------------------------|----------|
| . X: $\pm 0.30$                          | X° $\pm 3.0^\circ$   | PRODUCT NAME:<br>DL20023-Y        |               | TITLE:<br>2.0 mm Pitch Housing |          |
| . XX: $\pm 0.15$                         | . X° $\pm 2.0^\circ$ | DR:Chen Quan Long                 | DATE:21/08/01 | PART NO:                       |          |
| . XXX: $\pm 0.01$                        | . X° $\pm 1.0^\circ$ |                                   |               | SCALE: N/A                     |          |
| FINISH:<br>_____                         |                      | CHKD:Wu Hui                       | DATE:21/08/01 | PAGE:1/2                       |          |
| DRAWING NO:                              |                      | APPD:Ren An De                    | DATE:21/08/01 | UNITS: mm                      | REV. : A |

A

B


C

D


E

F


DL20023-10Y

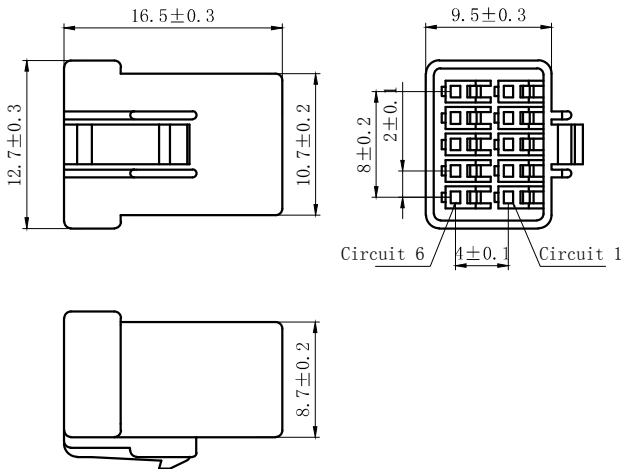

DL20023-12Y

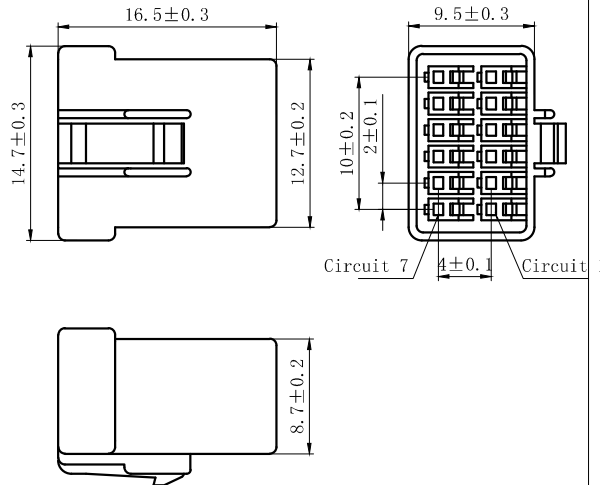

DL20023-14Y

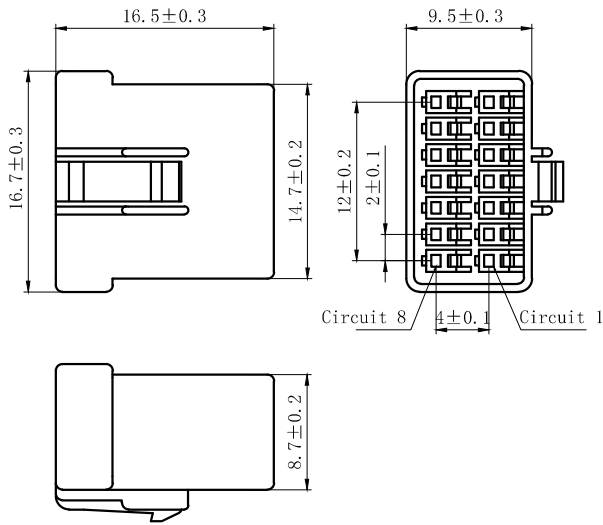


NOTES


Available in 10.12.14 Circuits.  
Mates with DL20023 Series Housing.  
Material : PBT UL94V-0(2).  
Accepts DL20023-T Crimp Terminal.  
Green Material RoHS Compliant.

| GENERAL TOLERANCES<br>(UNLESS SPECIFIED) |                     | ZHE JIANG DELI CONNECTORS CO.,LTD |               |                                |          |
|------------------------------------------|---------------------|-----------------------------------|---------------|--------------------------------|----------|
| .X: $\pm 0.30$                           | X° $\pm 3.0^\circ$  | PRODUCT NAME:<br>DL20023-Y        |               | TITLE:<br>2.0 mm Pitch Housing |          |
| .XX: $\pm 0.15$                          | .X° $\pm 2.0^\circ$ | DR:Chen Quan Long                 | DATE:21/08/01 | PART NO:                       |          |
| .XXX: $\pm 0.01$                         | .X° $\pm 1.0^\circ$ |                                   | DATE:21/08/01 | SCALE: N/A                     | PAGE:2/2 |
| FINISH:<br>_____                         |                     | CHKD:Wu Hui                       | DATE:21/08/01 | UNITS: mm                      | REV.: A  |
| DRAWING NO:                              |                     | APPD:Ren An De                    | DATE:21/08/01 |                                |          |


DL20023-2Y-0.75

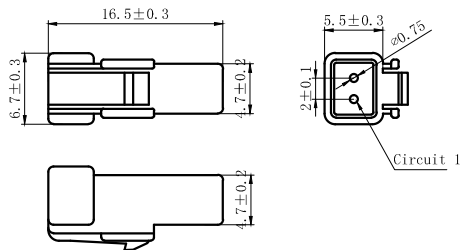


DL20023-3Y-0.75

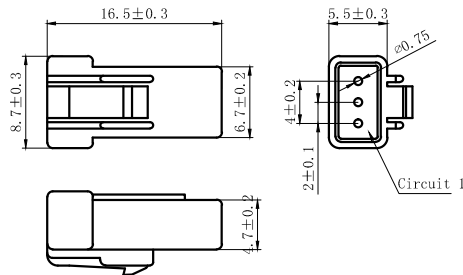


DL20023-8Y-0.75

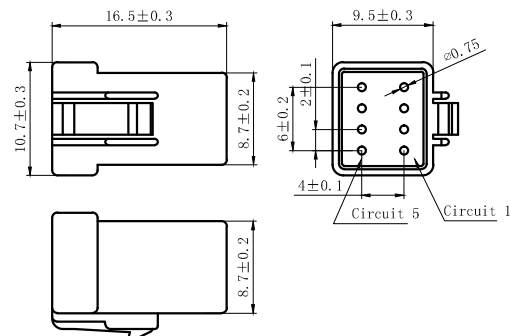

DL20023-4Y-0.75

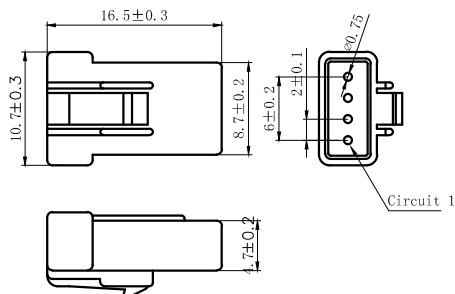

DL20023-6Y-0.75

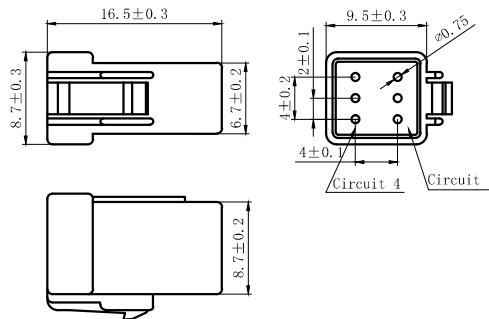

## NOTES

Available in 02.03.04.06.08 Circuits.

Mates with DL20023 Series Housing.

Material : PBT UL94V-0(2).

Accepts DL20023-T Crimp Terminal.

Green Material RoHS Compliant.

| GENERAL TOLERANCES<br>(UNLESS SPECIFIED) |            | ZHE JIANG DELI CONNECTORS CO.,LTD |                                |
|------------------------------------------|------------|-----------------------------------|--------------------------------|
| .X: ± 0.30                               | X° ± 3.0°  | PRODUCT NAME:<br>DL20023-Y-0.75   | TITLE:<br>2.0 mm Pitch Housing |
| .XX: ± 0.15                              | .X° ± 2.0° | DR:Chen Quan Long                 | DATE:21/08/01                  |
| .XXX: ± 0.01                             | .X° ± 1.0° | CHKD:Wu Hui                       | DATE:21/08/01                  |
| FINISH:<br>_____                         |            | APPD:Ren An De                    | DATE:21/08/01                  |
| DRAWING NO:                              |            |                                   |                                |

A

B

C

D

E

F

A

B



C

D



E

F



DL20023-10R-0.75

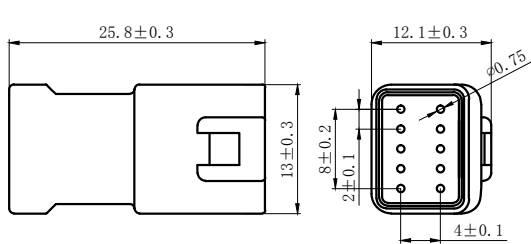

DL20023-12R-0.75

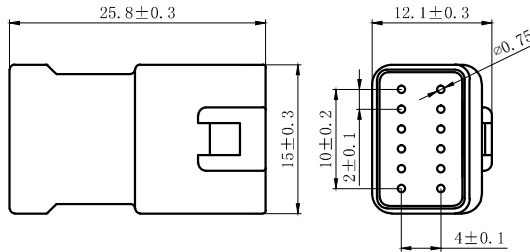


DL20023-14R-0.75

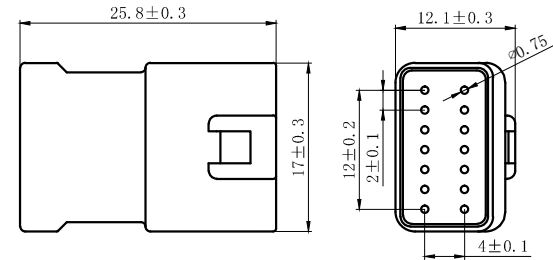


NOTES

- Available in 10.12.14 Circuits.
- Mates with DL20023-Y Series Housing.
- Material : PBT UL94V-0(2).
- Accepts DL20023-RT Crimp Terminal.
- Green Material RoHS Compliant.

| GENERAL TOLERANCES<br>(UNLESS SPECIFIED) |                        | ZHE JIANG DELI CONNECTORS CO.,LTD |               |                                                 |          |
|------------------------------------------|------------------------|-----------------------------------|---------------|-------------------------------------------------|----------|
| .X: $\pm 0.30$                           | X° : $\pm 3.0^\circ$   | PRODUCT NAME:                     |               | TITLE:                                          |          |
| .XX: $\pm 0.15$                          | .X° : $\pm 2.0^\circ$  | DL20023-R-0.75                    |               | 2.0 mm Pitch<br>Wire To Wire Receptacle Housing |          |
| .XXX: $\pm 0.01$                         | .XX° : $\pm 1.0^\circ$ | DR:Chen Quan Long                 | DATE:21/08/01 | PART NO:                                        |          |
| FINISH:                                  |                        | CHKD:Wu Hui                       | DATE:21/08/01 | SCALE: N/A                                      | PAGE:2/2 |
| DRAWING NO:                              |                        | APPD:Ren An De                    | DATE:21/08/01 | UNITS: mm                                       | REV. : A |

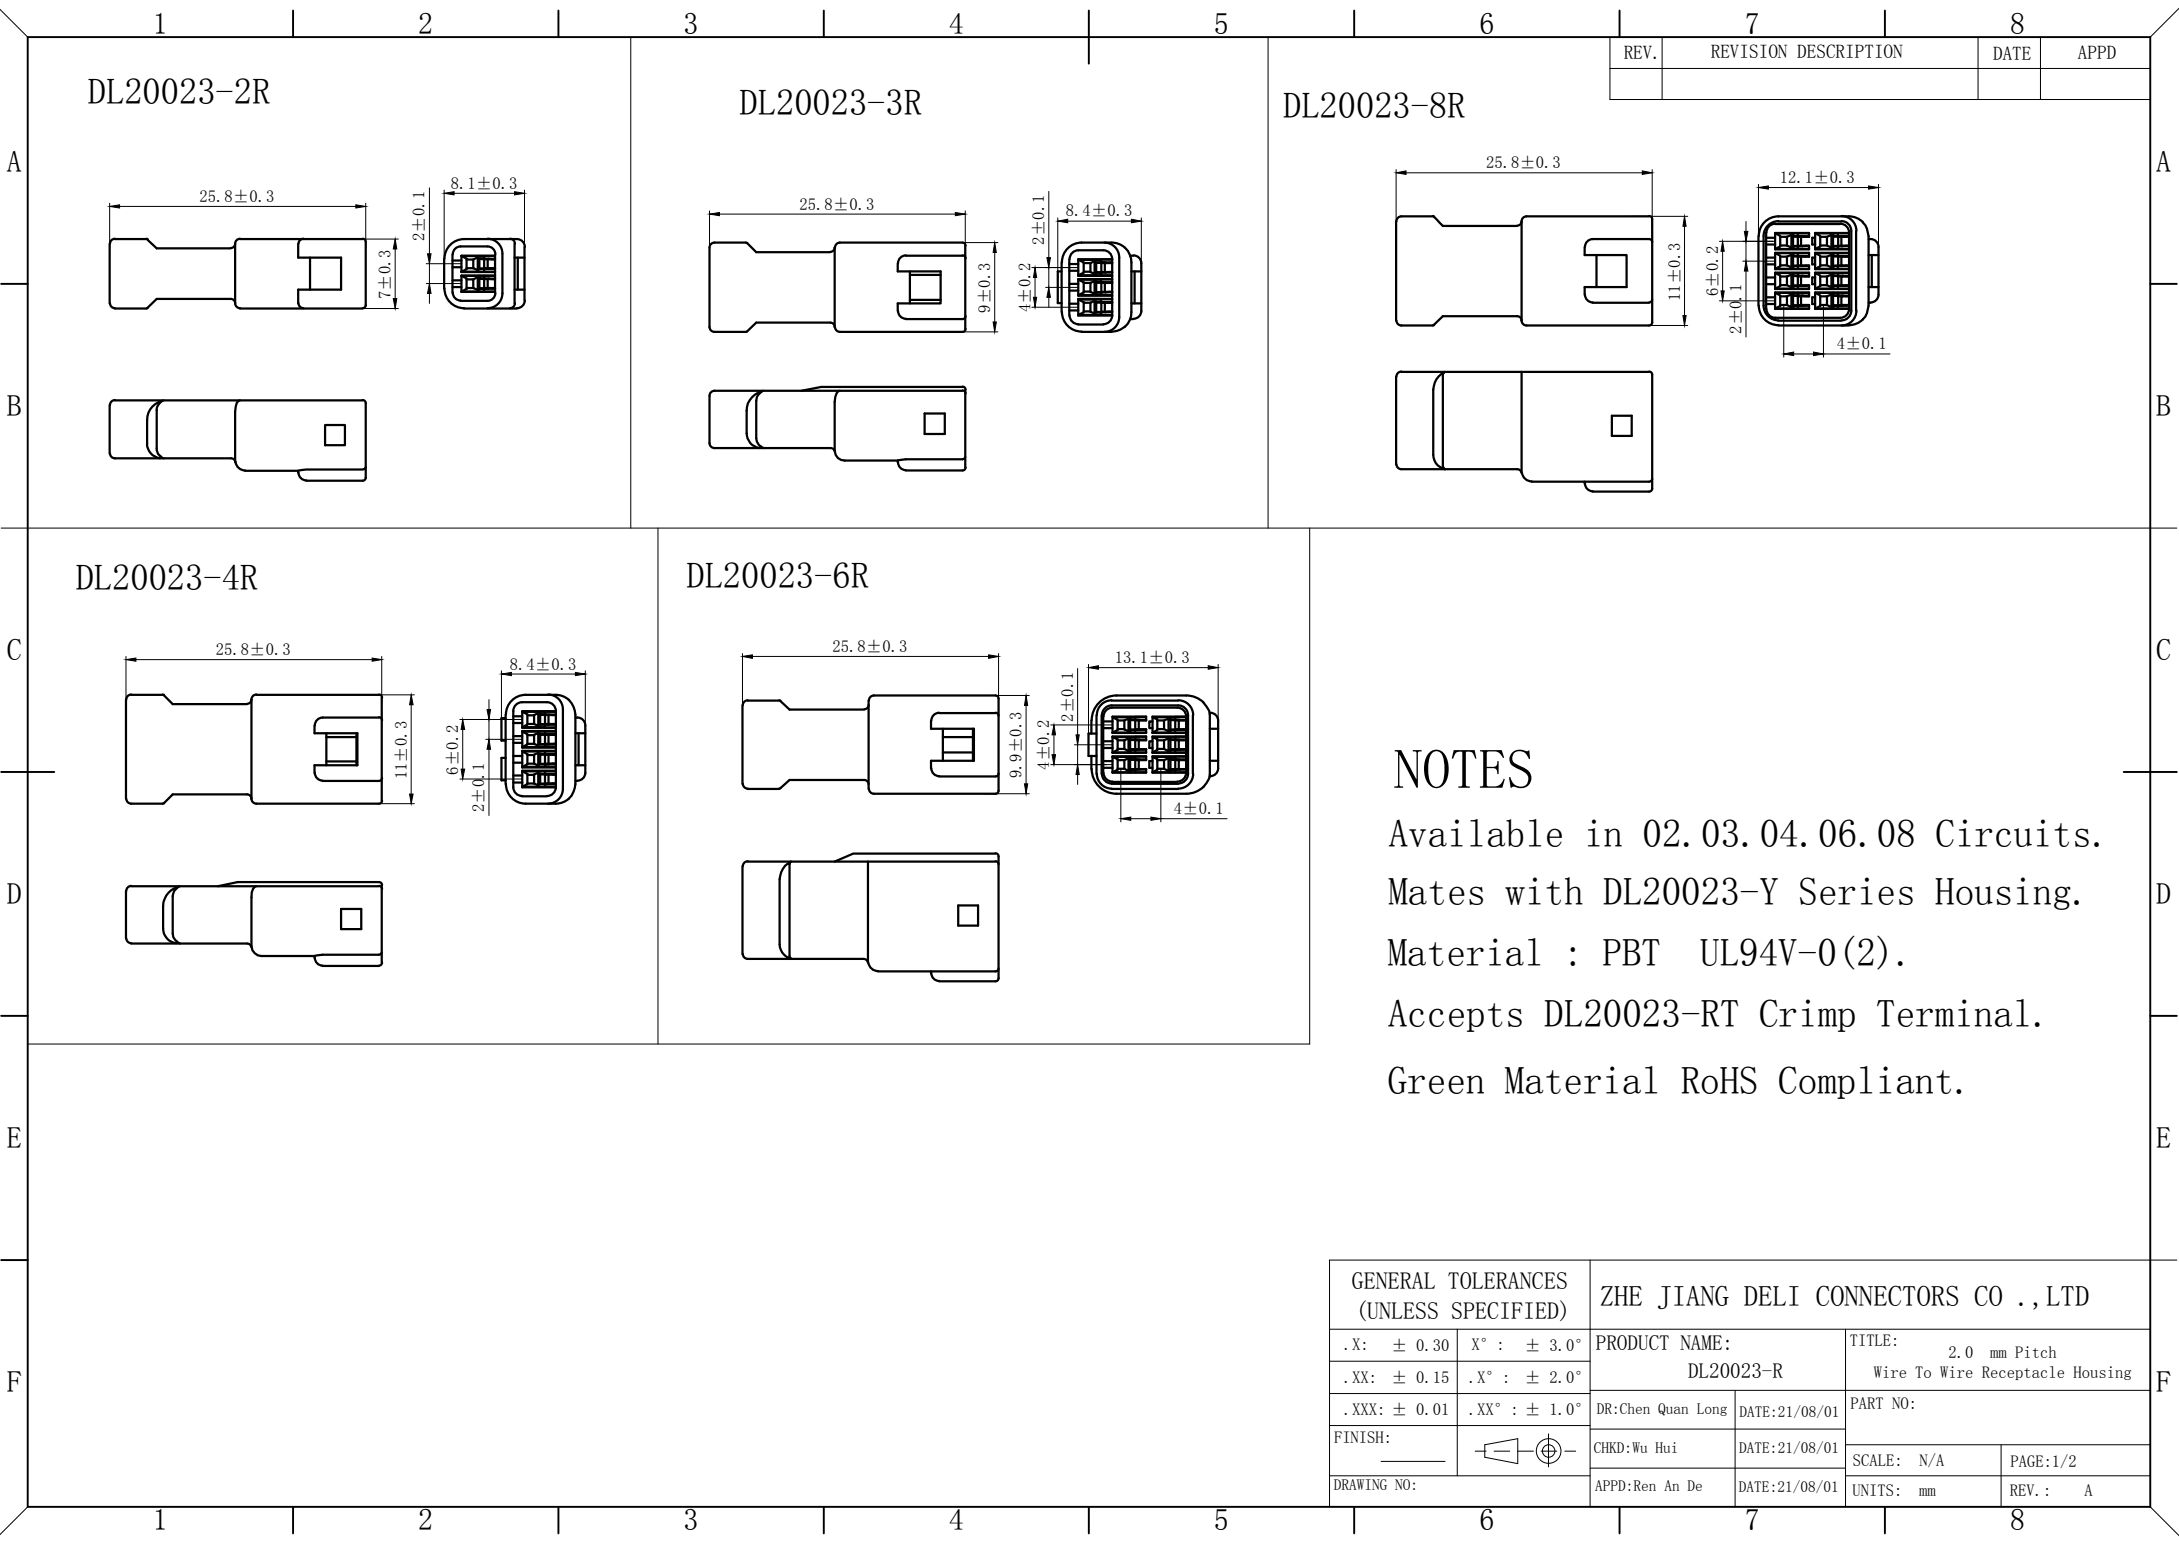


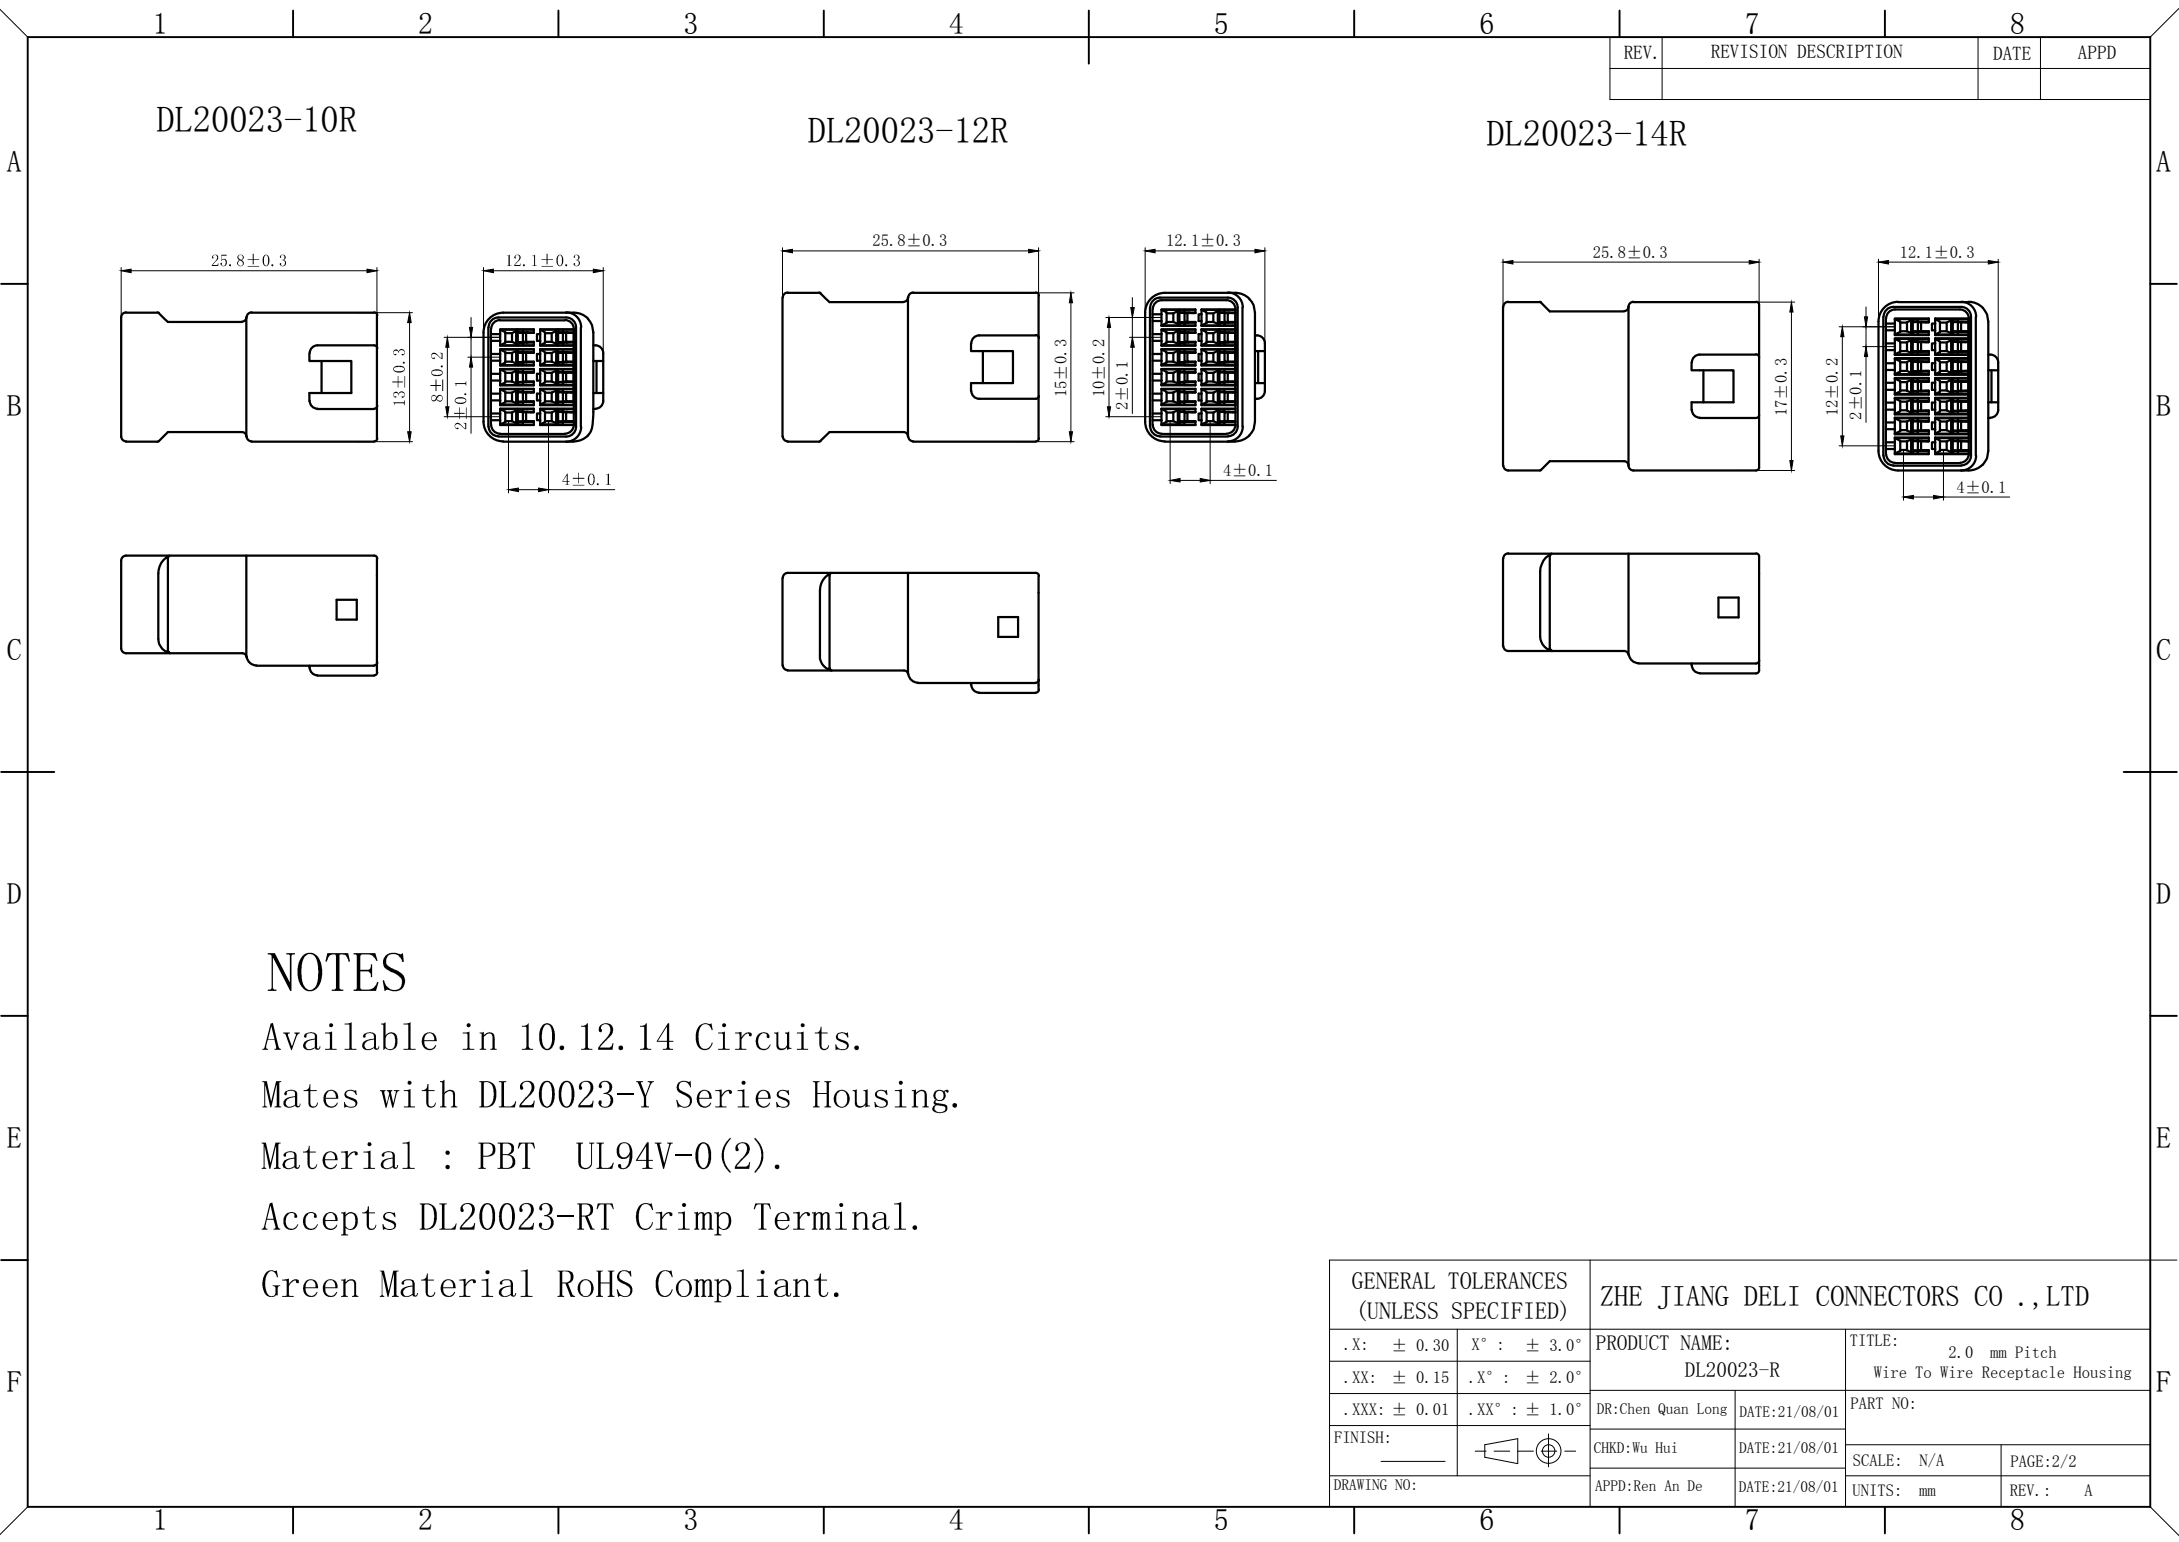

NOTES

Available in 10.12.14 Circuits.  
Mates with DL20023-Y Series Housing.  
Material : PBT UL94V-0(2).  
Accepts DL20023-RT Crimp Terminal.  
Green Material RoHS Compliant.

| GENERAL TOLERANCES<br>(UNLESS SPECIFIED) |               | ZHE JIANG DELI CONNECTORS CO.,LTD |               |                                                           |          |
|------------------------------------------|---------------|-----------------------------------|---------------|-----------------------------------------------------------|----------|
| .X: ± 0.30                               | X° : ± 3.0°   | PRODUCT NAME:<br>DL20023-R        |               | TITLE:<br>2.0 mm Pitch<br>Wire To Wire Receptacle Housing |          |
| .XX: ± 0.15                              | .X° : ± 2.0°  |                                   |               | PART NO:                                                  |          |
| .XXX: ± 0.01                             | .XX° : ± 1.0° | DR:Chen Quan Long                 | DATE:21/08/01 | SCALE: N/A      PAGE:2/2                                  |          |
| FINISH:<br>_____                         |               | CHKD:Wu Hui                       | DATE:21/08/01 |                                                           |          |
| DRAWING NO:                              |               | APPD:Ren An De                    | DATE:21/08/01 | UNITS: mm                                                 | REV. : A |

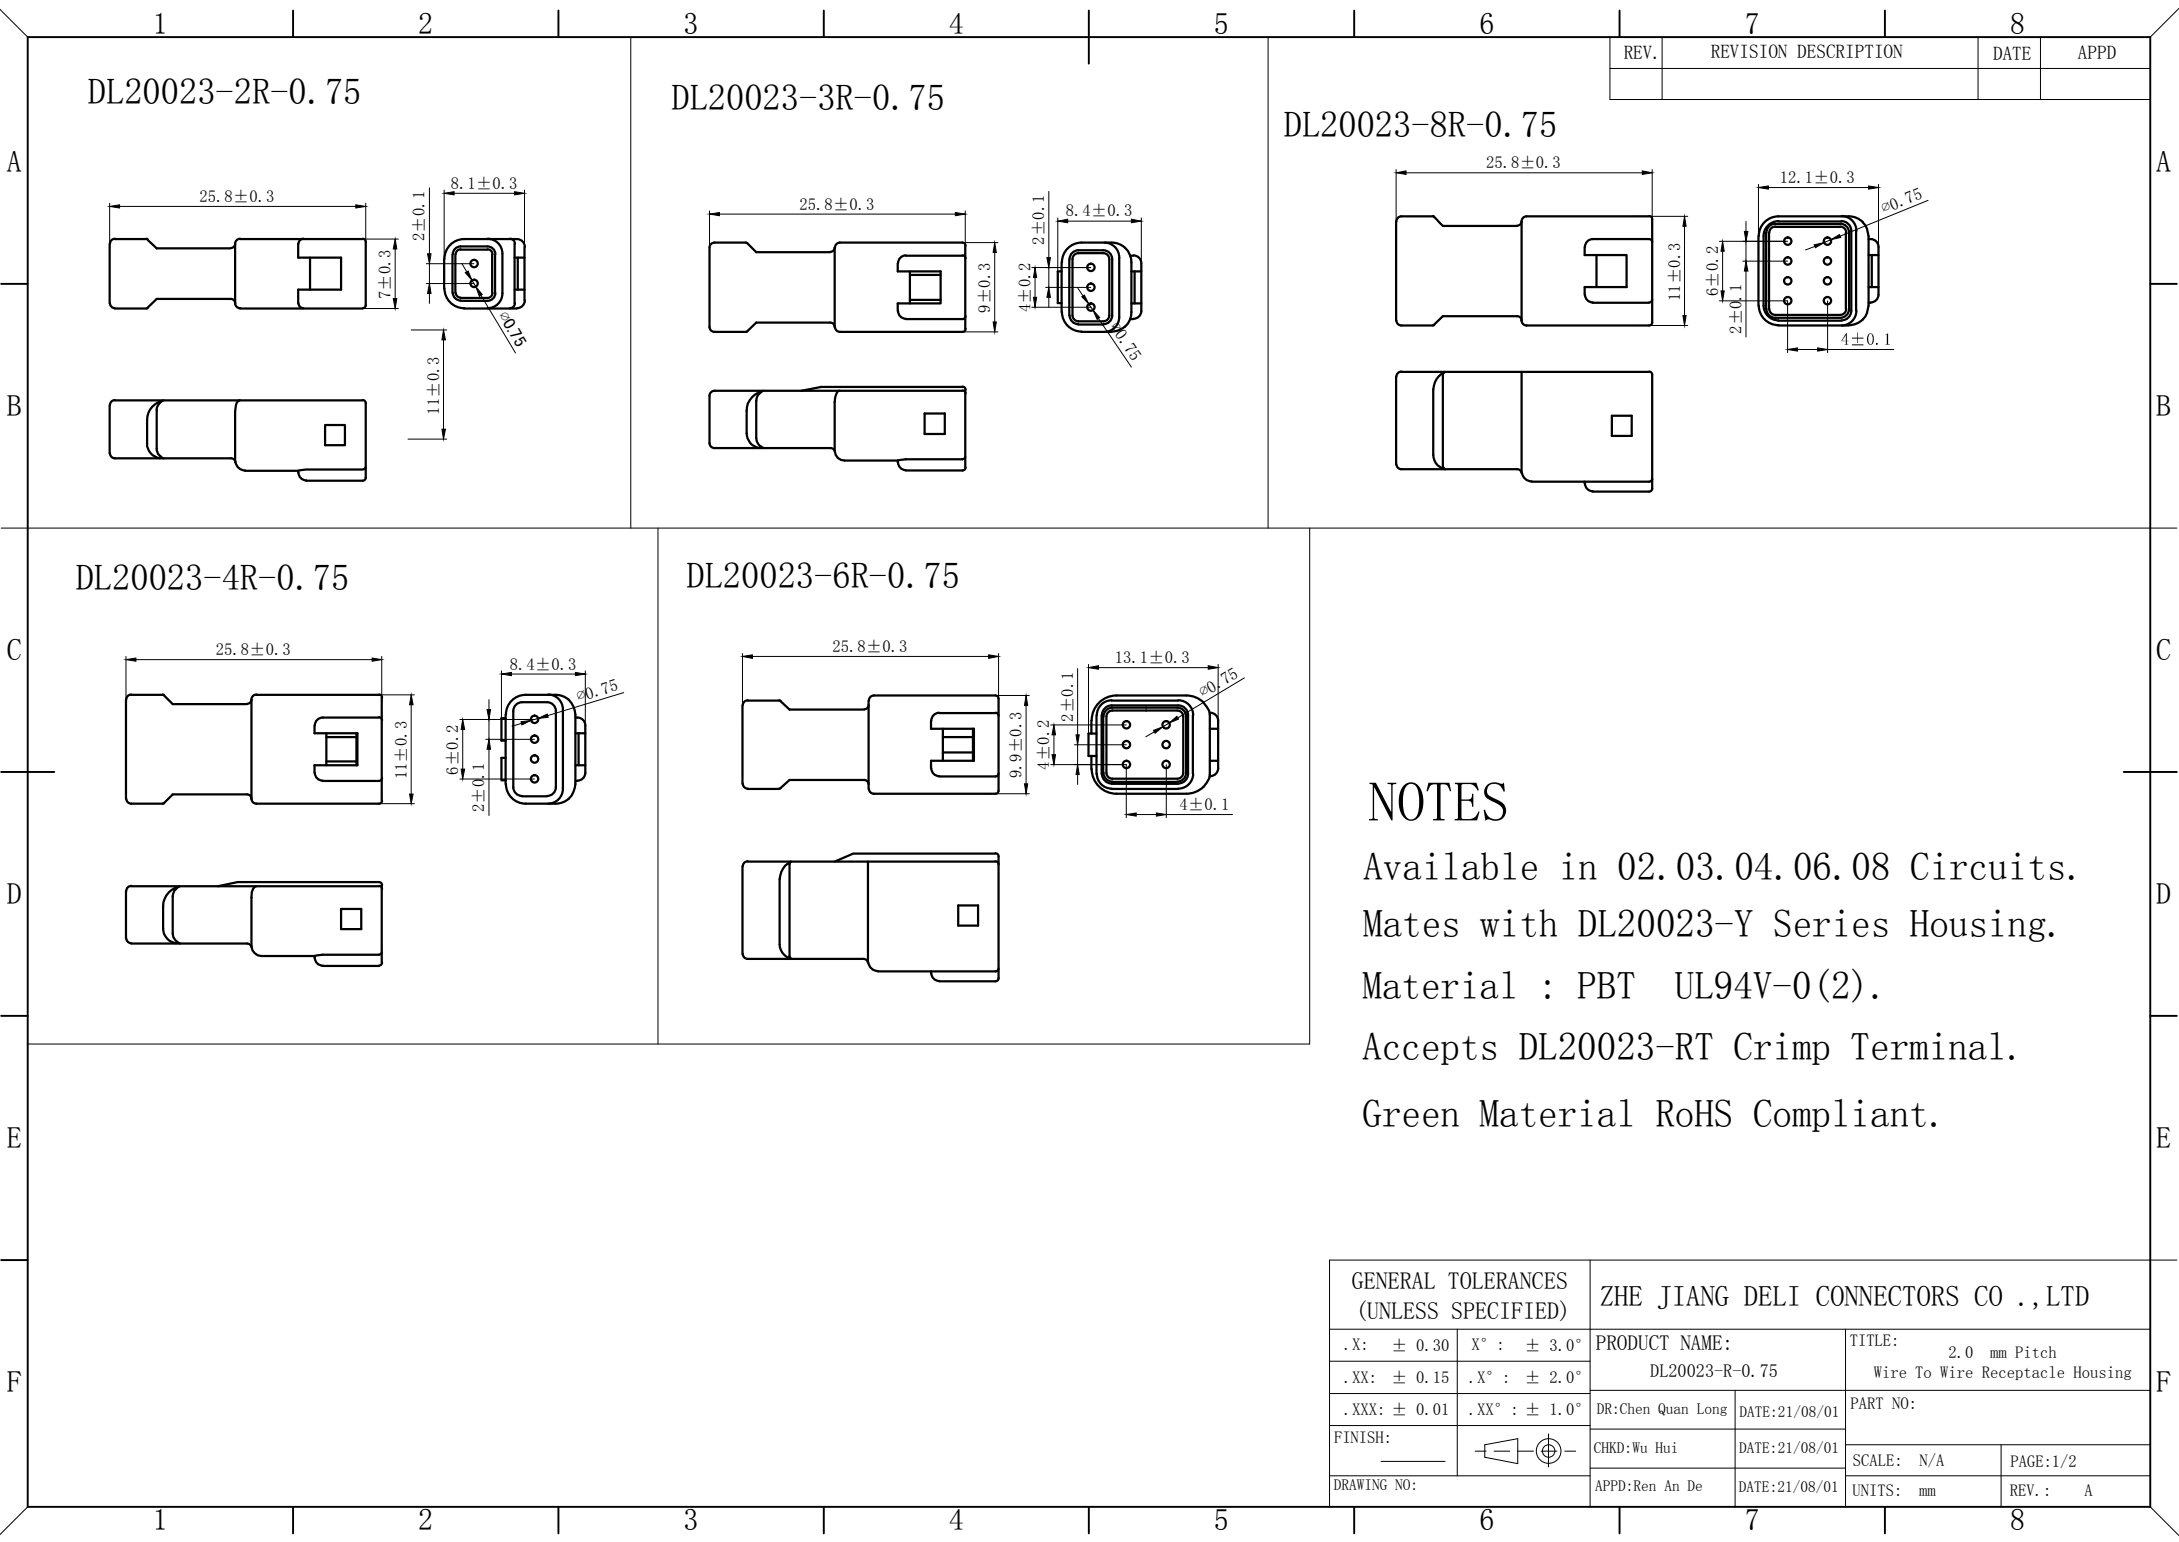

DL20023-2R-0.75

DL20023-3R-0.75

DL20023-8R-0.75

DL20023-4R-0.75


DL20023-6R-0.75

## NOTES


Available in 02.03.04.06.08 Circuits.  
Mates with DL20023-Y Series Housing.  
Material : PBT UL94V-0(2).  
Accepts DL20023-RT Crimp Terminal.  
Green Material RoHS Compliant.

| GENERAL TOLERANCES<br>(UNLESS SPECIFIED) |               | ZHE JIANG DELI CONNECTORS CO.,LTD |               |                                                           |         |
|------------------------------------------|---------------|-----------------------------------|---------------|-----------------------------------------------------------|---------|
| .X: ± 0.30                               | X° : ± 3.0°   | PRODUCT NAME:<br>DL20023-R-0.75   |               | TITLE:<br>2.0 mm Pitch<br>Wire To Wire Receptacle Housing |         |
| .XX: ± 0.15                              | .X° : ± 2.0°  |                                   |               | PART NO:                                                  |         |
| .XXX: ± 0.01                             | .XX° : ± 1.0° | DR:Chen Quan Long                 | DATE:21/08/01 | SCALE: N/A                                                |         |
| FINISH:<br>_____                         |               | CHKD:Wu Hui                       | DATE:21/08/01 | PAGE:1/2                                                  |         |
| DRAWING NO:                              |               | APPD:Ren An De                    | DATE:21/08/01 | UNITS: mm                                                 | REV.: A |


DL20023-10Y-0.75

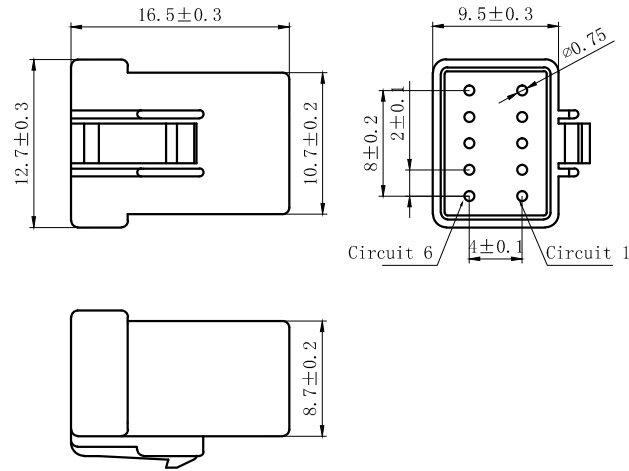

DL20023-12Y-0.75

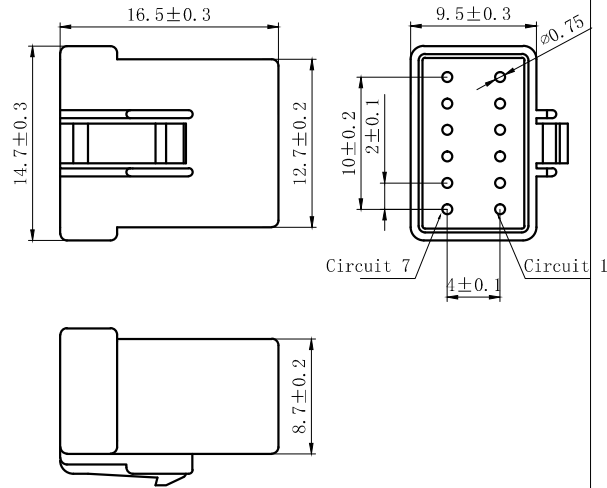

DL20023-14Y-0.75

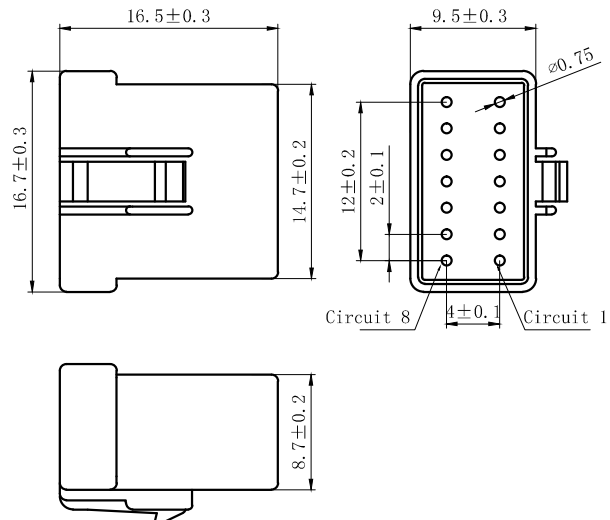


## NOTES

Available in 10.12.14 Circuits.  
Mates with DL20023 Series Housing.  
Material : PBT UL94V-0(2).  
Accepts DL20023-T Crimp Terminal.  
Green Material RoHS Compliant.

### GENERAL TOLERANCES (UNLESS SPECIFIED)

|                  |                     |
|------------------|---------------------|
| .X: $\pm 0.30$   | X° $\pm 3.0^\circ$  |
| .XX: $\pm 0.15$  | .X° $\pm 2.0^\circ$ |
| .XXX: $\pm 0.01$ | .X° $\pm 1.0^\circ$ |

FINISH: 

DRAWING NO:


ZHE JIANG DELI CONNECTORS CO.,LTD

PRODUCT NAME: DL20023-Y-0.75  
TITLE: 2.0 mm Pitch Housing

DR:Chen Quan Long DATE:21/08/01  
PART NO:

CHKD:Wu Hui DATE:21/08/01  
SCALE: N/A PAGE:2/2

APPD:Ren An De DATE:21/08/01  
UNITS: mm REV.: A

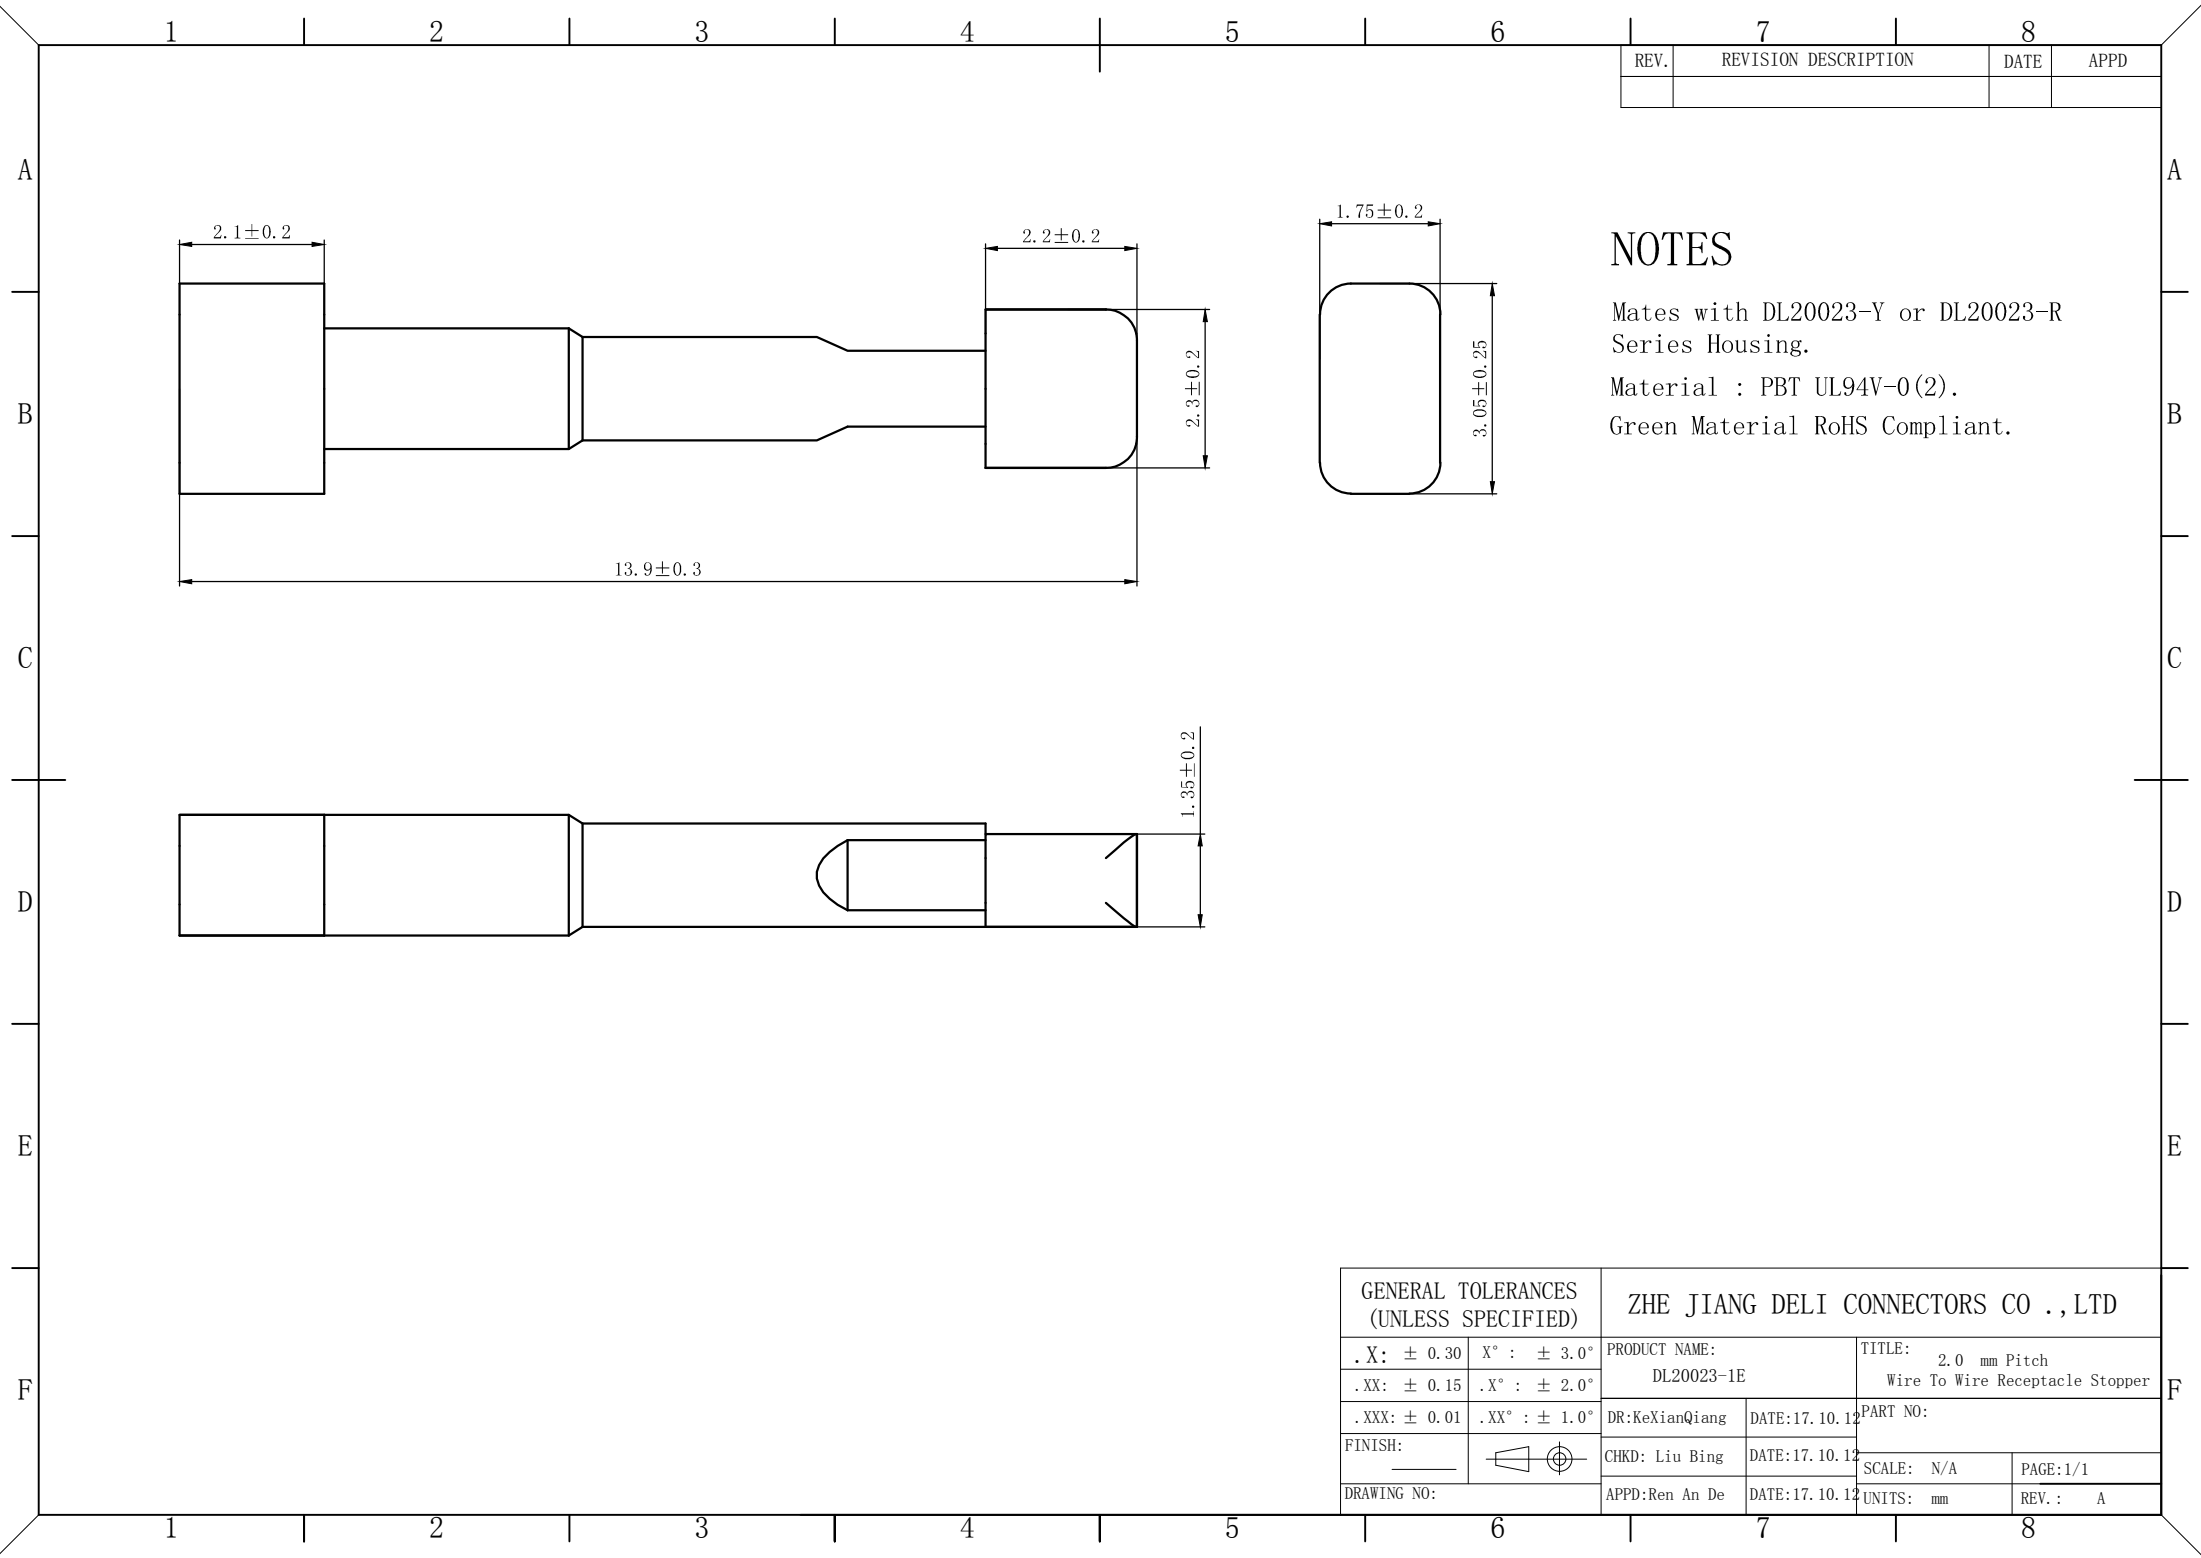

| REV. | REVISION DESCRIPTION | DATE | APPD |
|------|----------------------|------|------|
|      |                      |      |      |

NOTES

Mates with DL20023-Y or DL20023-R Series Housing.

Material : PBT UL94V-0(2).  
Green Material RoHS Compliant.

| GENERAL TOLERANCES (UNLESS SPECIFIED) |               | ZHE JIANG DELI CONNECTORS CO ., LTD |               |                                                           |          |
|---------------------------------------|---------------|-------------------------------------|---------------|-----------------------------------------------------------|----------|
| .X: ± 0.30                            | X° : ± 3.0°   | PRODUCT NAME:<br>DL20023-1E         |               | TITLE:<br>2.0 mm Pitch<br>Wire To Wire Receptacle Stopper |          |
| .XX: ± 0.15                           | .X° : ± 2.0°  | DR:KeXianQiang                      | DATE:17.10.12 | PART NO:                                                  |          |
| .XXX: ± 0.01                          | .XX° : ± 1.0° |                                     |               | SCALE: N/A                                                |          |
| FINISH:<br>_____                      |               | CHKD: Liu Bing                      | DATE:17.10.12 | PAGE:1/1                                                  |          |
| DRAWING NO:                           |               | APPD:Ren An De                      | DATE:17.10.12 | UNITS: mm                                                 | REV. : A |

| REV. | REVISION DESCRIPTION | DATE | APPD |
|------|----------------------|------|------|
|      |                      |      |      |

NOTES

Used in DL20023-Y Series Housing.

Accepts AWG #26~22 Wire Range.

0.13~ 0.33 mm<sup>2</sup> .

Insulation O.D.=1.4~1.7mm.



Material : Phosphor Bronze .

Finish: Tin plated.


Qty/Reel: 10,000 PCS.

Thickness: 0.25 mm.


|                                          |                                                                                       |                                    |               |                                           |          |
|------------------------------------------|---------------------------------------------------------------------------------------|------------------------------------|---------------|-------------------------------------------|----------|
| GENERAL TOLERANCES<br>(UNLESS SPECIFIED) |                                                                                       | ZHE JIANG DELI CONNECTORS CO .,LTD |               |                                           |          |
| .X: ± 0.25                               | X° : ± 3.0°                                                                           | PRODUCT NAME:<br>DL20023-T         |               | TITLE:<br>2.00 mm Pitch<br>Crimp Terminal |          |
| .XX: ± 0.15                              | .X° : ± 2.0°                                                                          | DR:Chen Quan Long                  | DATE:20/12/23 | PART NO:                                  |          |
| .XXX: ± 0.01                             | .XX° : ± 1.0°                                                                         | CHKD:Wu Hui                        | DATE:20/12/23 | SCALE: N/A                                |          |
| FINISH:<br>_____                         |  | APPD:Ren An De                     | DATE:20/12/23 | PAGE: 1/1                                 |          |
| DRAWING NO:                              |                                                                                       | APPD:Ren An De                     | DATE:20/12/23 | UNITS: mm                                 | REV. : A |

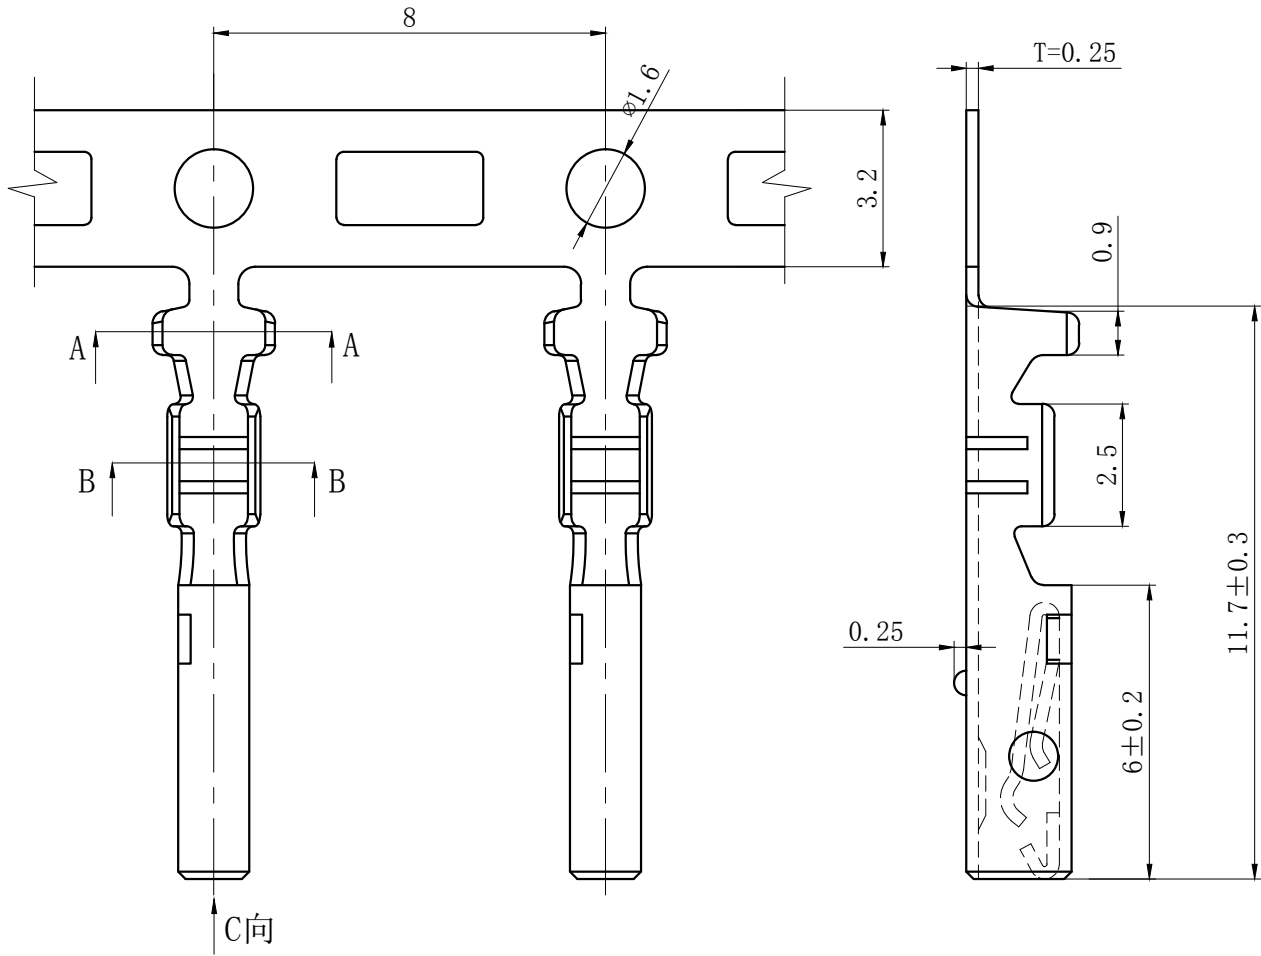


SECTION A-A



SECTION B-B



SECTION C-C

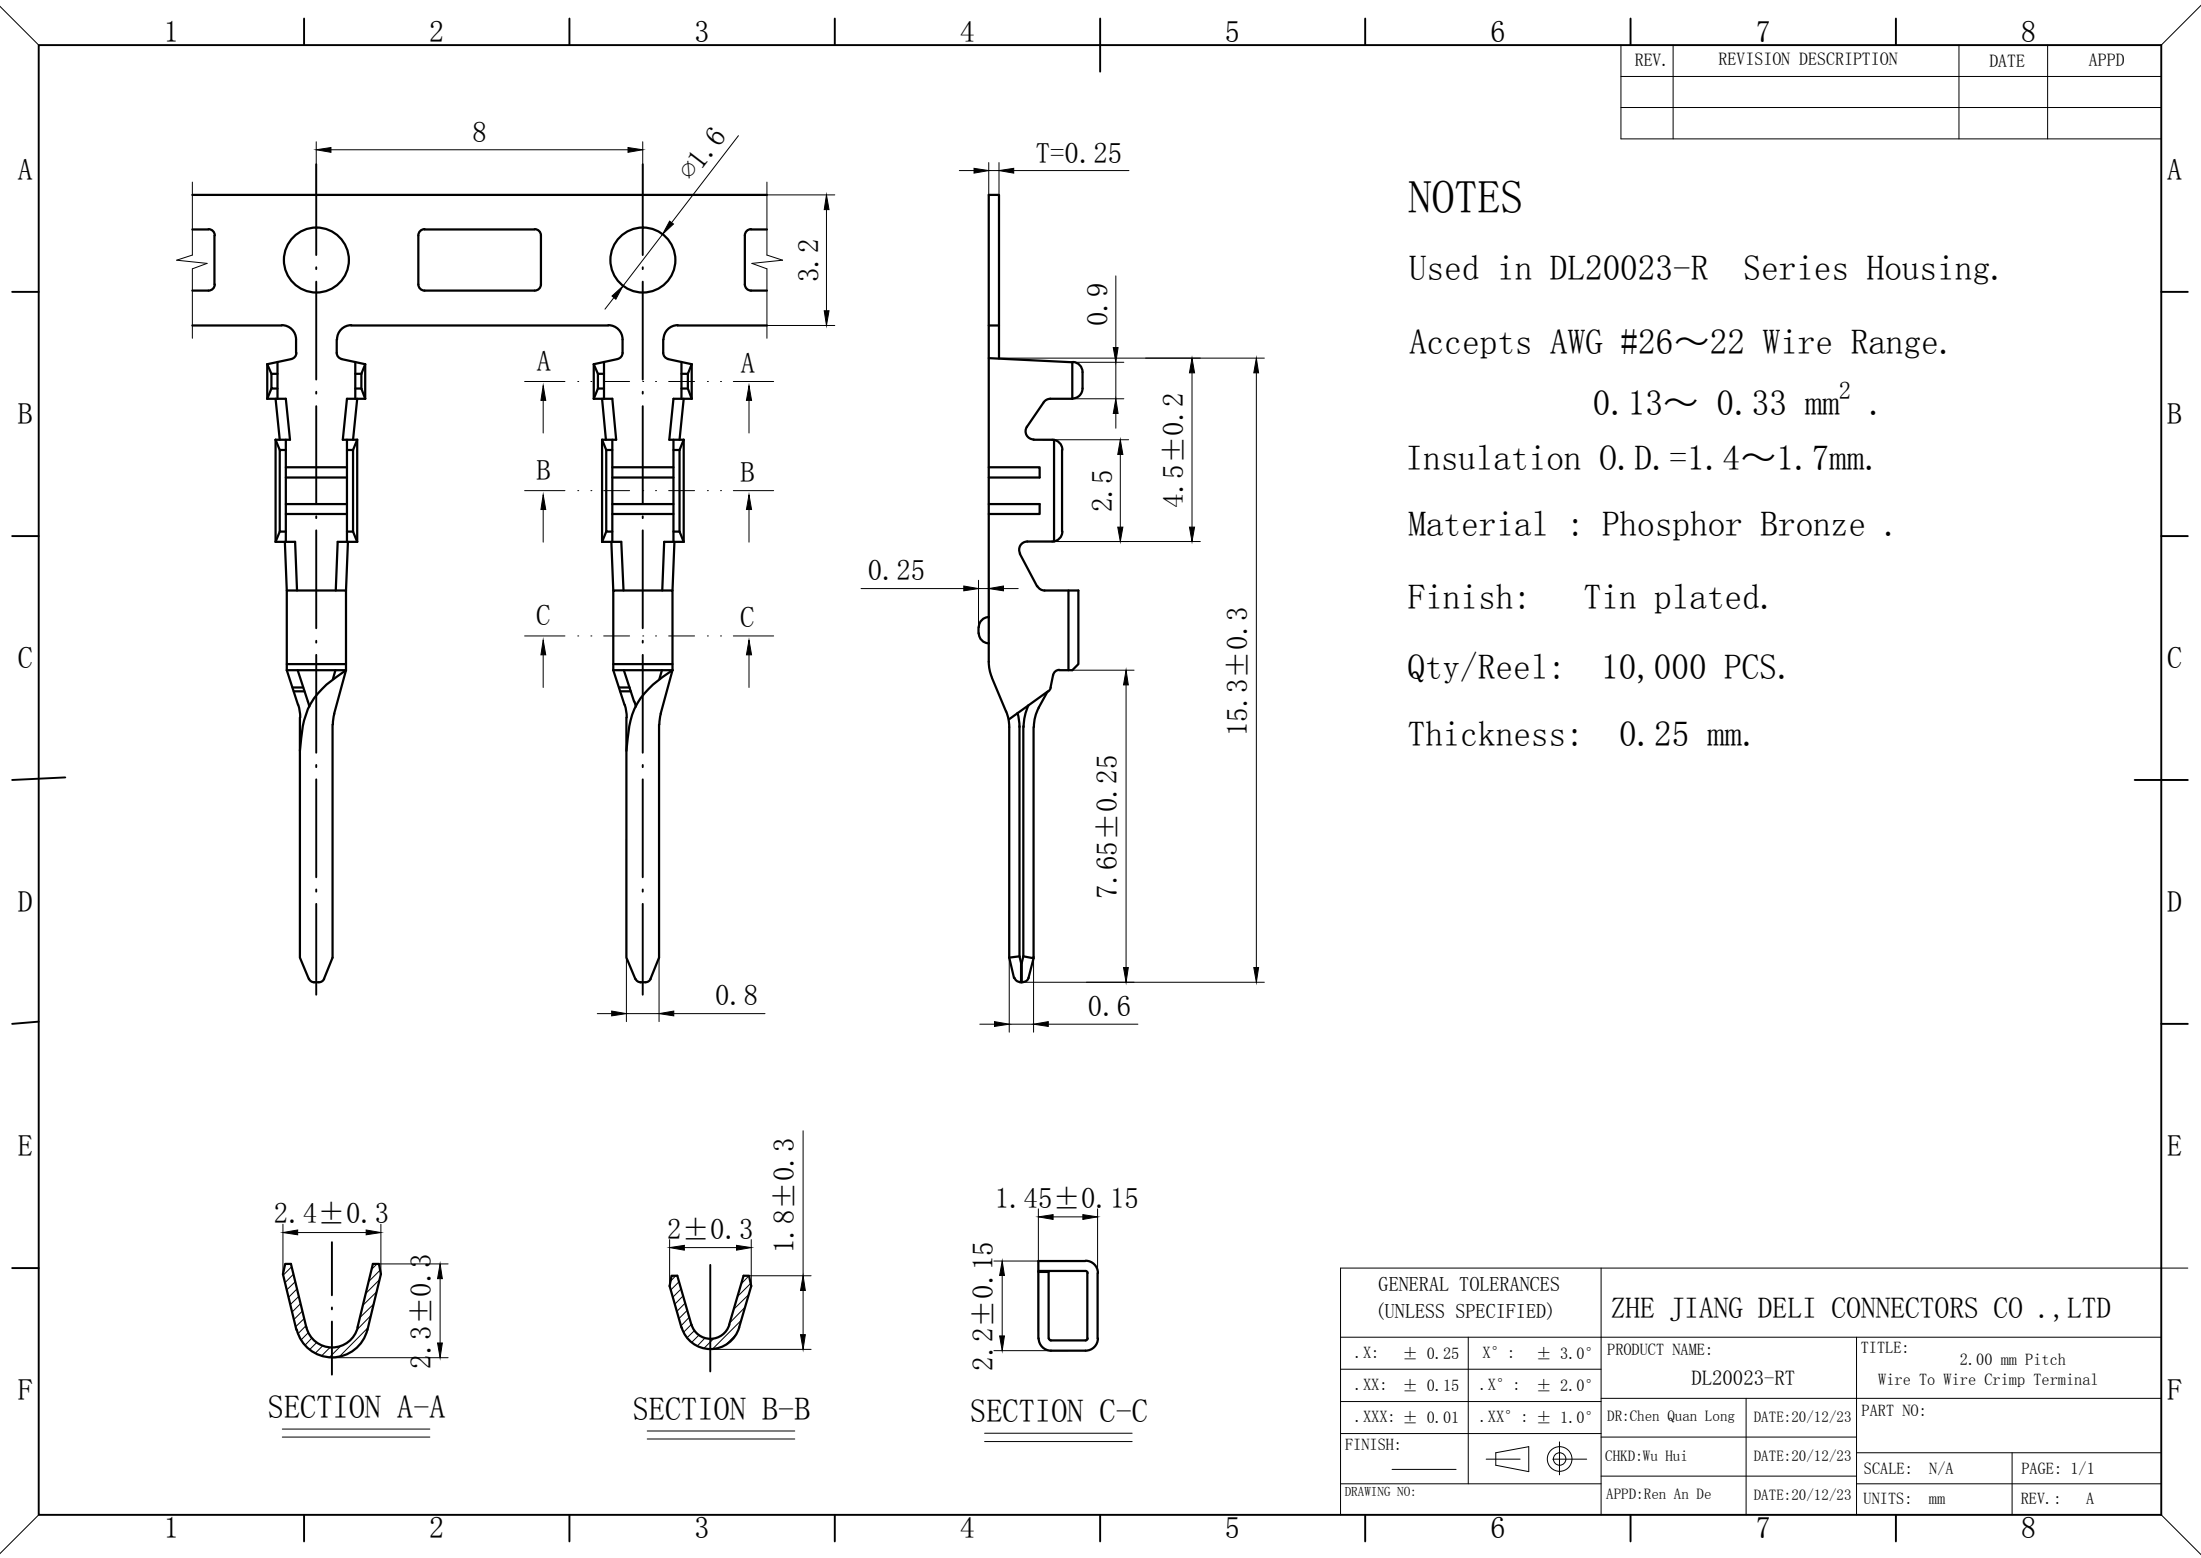

| REV. | REVISION DESCRIPTION | DATE | APPD |
|------|----------------------|------|------|
|      |                      |      |      |
|      |                      |      |      |

NOTES

Used in DL20023-R Series Housing.

Accepts AWG #26~22 Wire Range.

0.13~ 0.33 mm<sup>2</sup> .

Insulation O.D.=1.4~1.7mm.

Material : Phosphor Bronze .

Finish: Tin plated.

Qty/Reel: 10,000 PCS.

Thickness: 0.25 mm.

| GENERAL TOLERANCES<br>(UNLESS SPECIFIED) |               | ZHE JIANG DELI CONNECTORS CO.,LTD |                      |
|------------------------------------------|---------------|-----------------------------------|----------------------|
| .X: ± 0.25                               | X° : ± 3.0°   | PRODUCT NAME:                     | TITLE: 2.00 mm Pitch |
| .XX: ± 0.15                              | .X° : ± 2.0°  | DL20023-RT                        |                      |
| .XXX: ± 0.01                             | .XX° : ± 1.0° | DR:Chen Quan Long                 | DATE:20/12/23        |
| FINISH:                                  |               | CHKD:Wu Hui                       | DATE:20/12/23        |
| DRAWING NO:                              |               | APPD:Ren An De                    | DATE:20/12/23        |
|                                          |               | PART NO:                          |                      |
|                                          |               | SCALE: N/A                        | PAGE: 1/1            |
|                                          |               | UNITS: mm                         | REV.: A              |

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Automotive Connectors](#) category:*

*Click to view products by [DLL](#) manufacturer:*

Other Similar products are found below :

[60993906-B](#) [72.330.1035.1](#) [776880-1](#) [827153-1](#) [9-1326729-8](#) [9-221607-5](#) [925474-1](#) [964562-4](#) [968782-1](#) [12004468](#) [12004475-L](#) [12004483](#)  
[12033816](#) [12052466](#) [12066163](#) [12015909](#) [12047958](#) [12084688](#) [12336-12](#) [13579678](#) [13669373](#) [13681974](#) [13688972](#) [13779834](#) [13796274](#)  
[13843152](#) [13581967](#) [13667961](#) [13669624](#) [13675513](#) [13753471](#) [13946876](#) [13955963](#) [13971791](#) [13979933](#) [13790534-L](#) [13797473](#)  
[13888202](#) [1428188-1](#) [1437287-3](#) [1428188-2](#) [DS07-19S-5020](#) [1456987-7](#) [APD-7CP-H](#) [APK-SB25A10L](#) [1452931-2](#) [15317331](#) [15326397](#)  
[15336198](#) [15435215](#)