




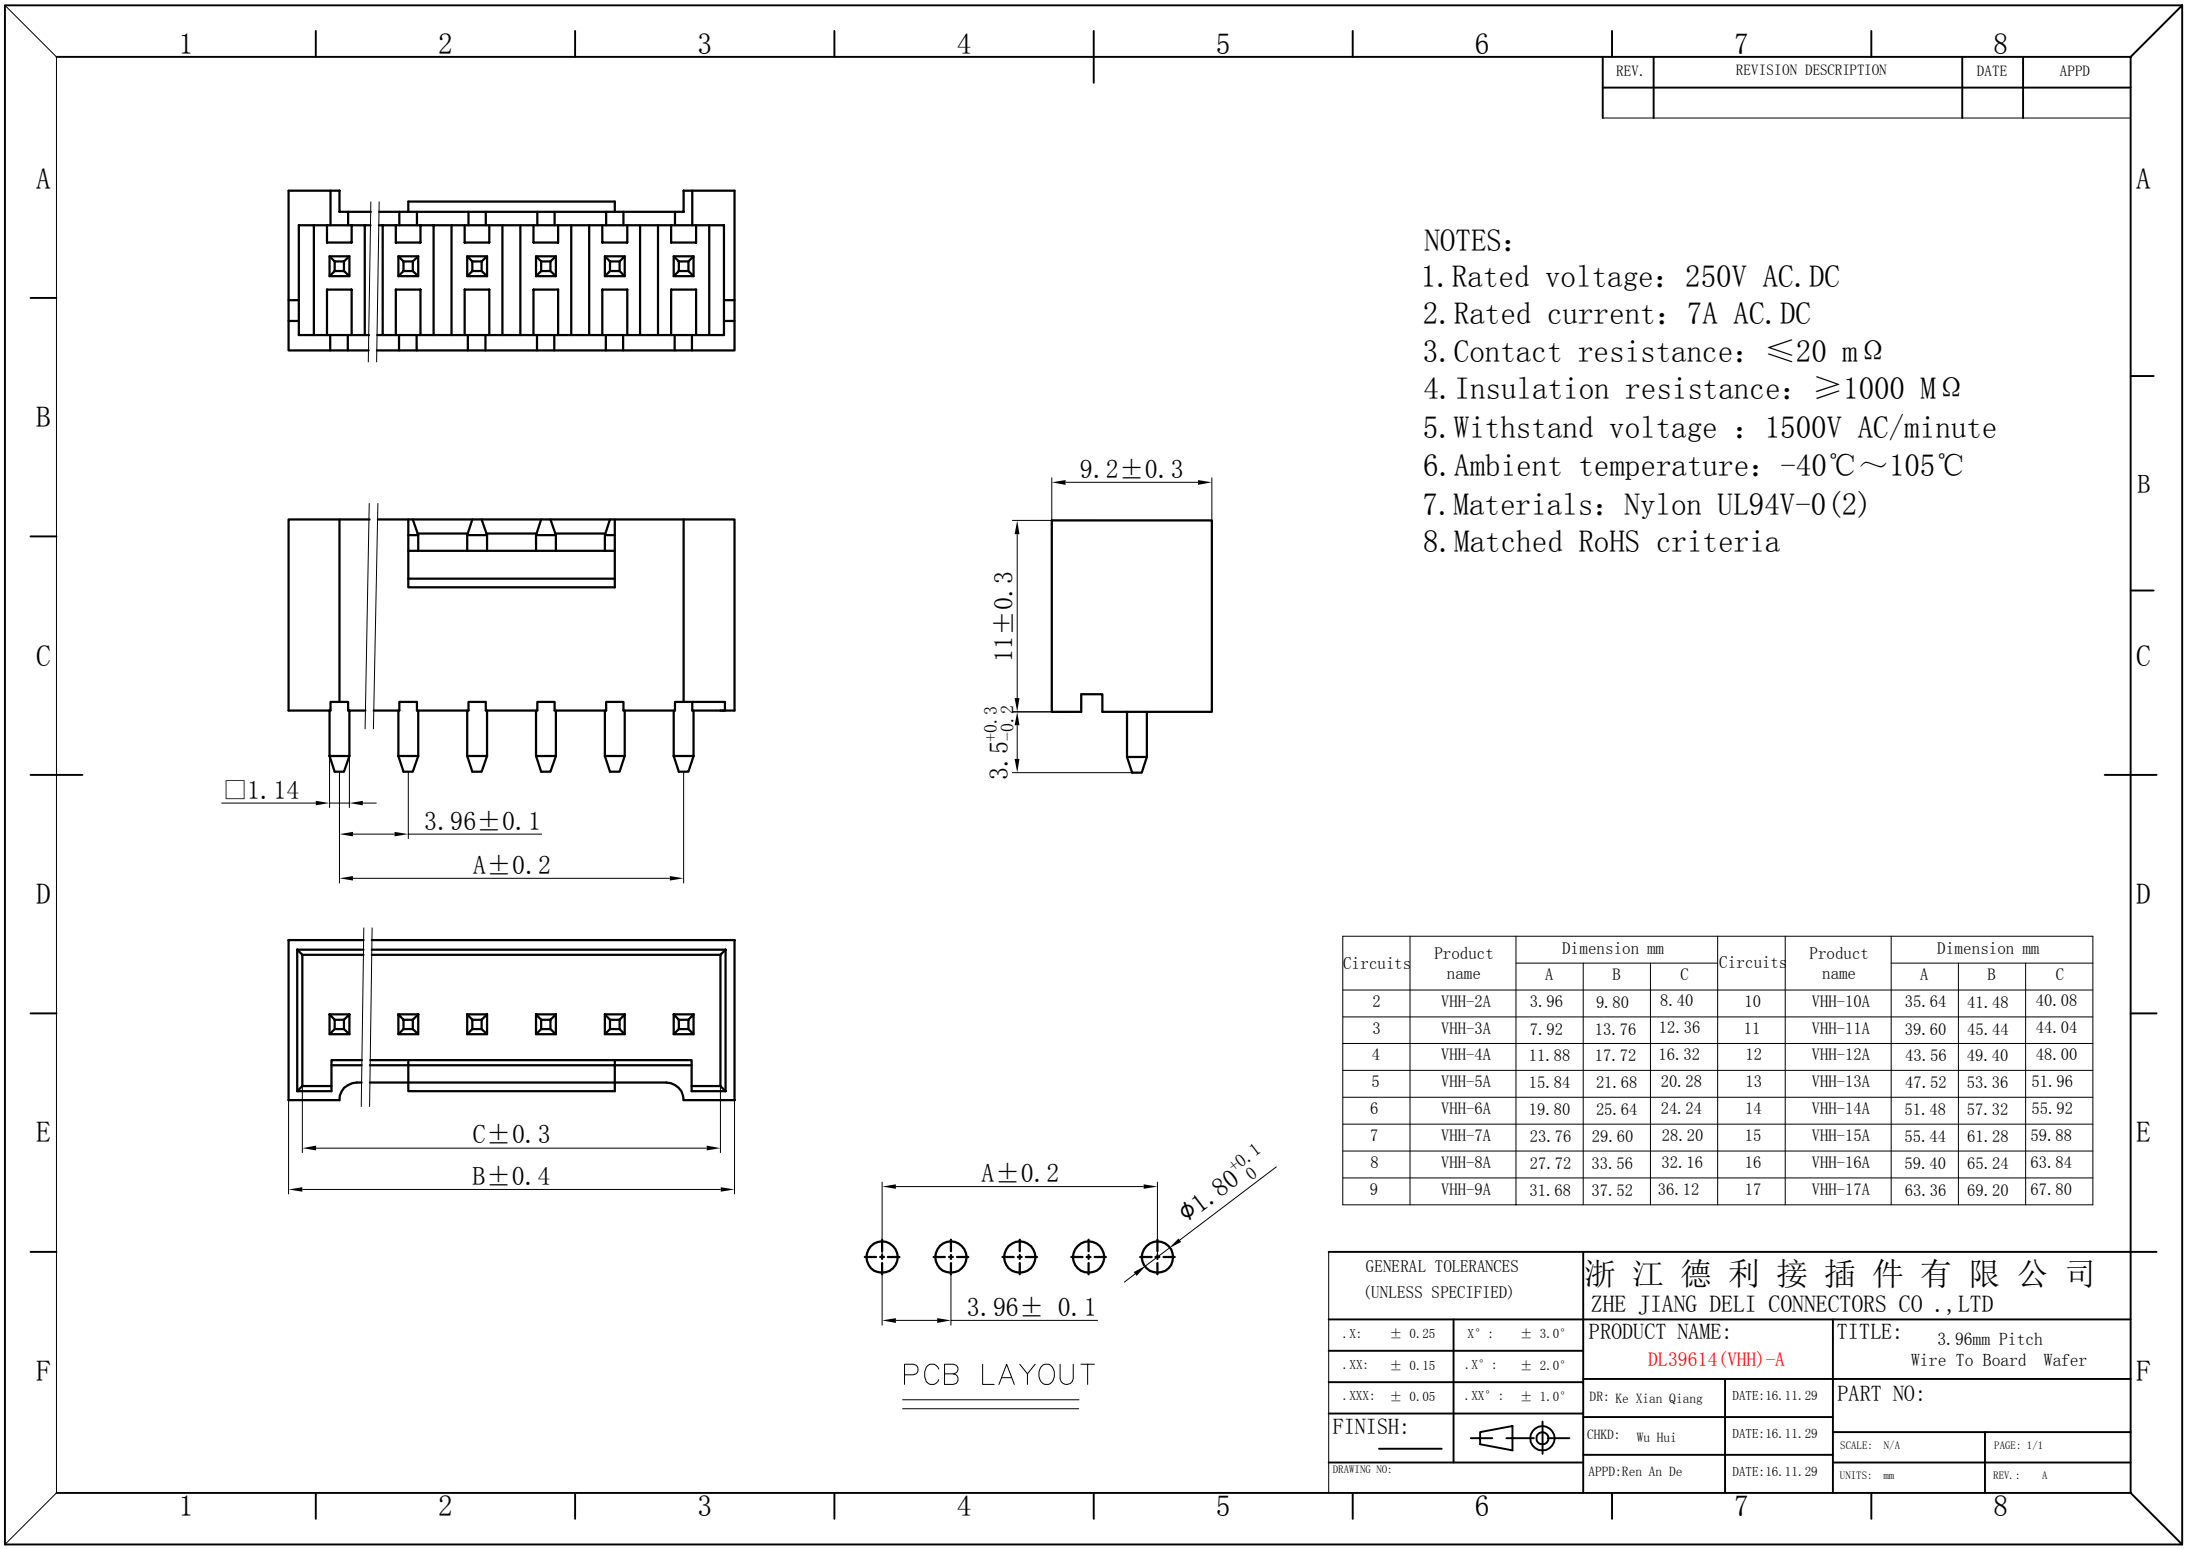


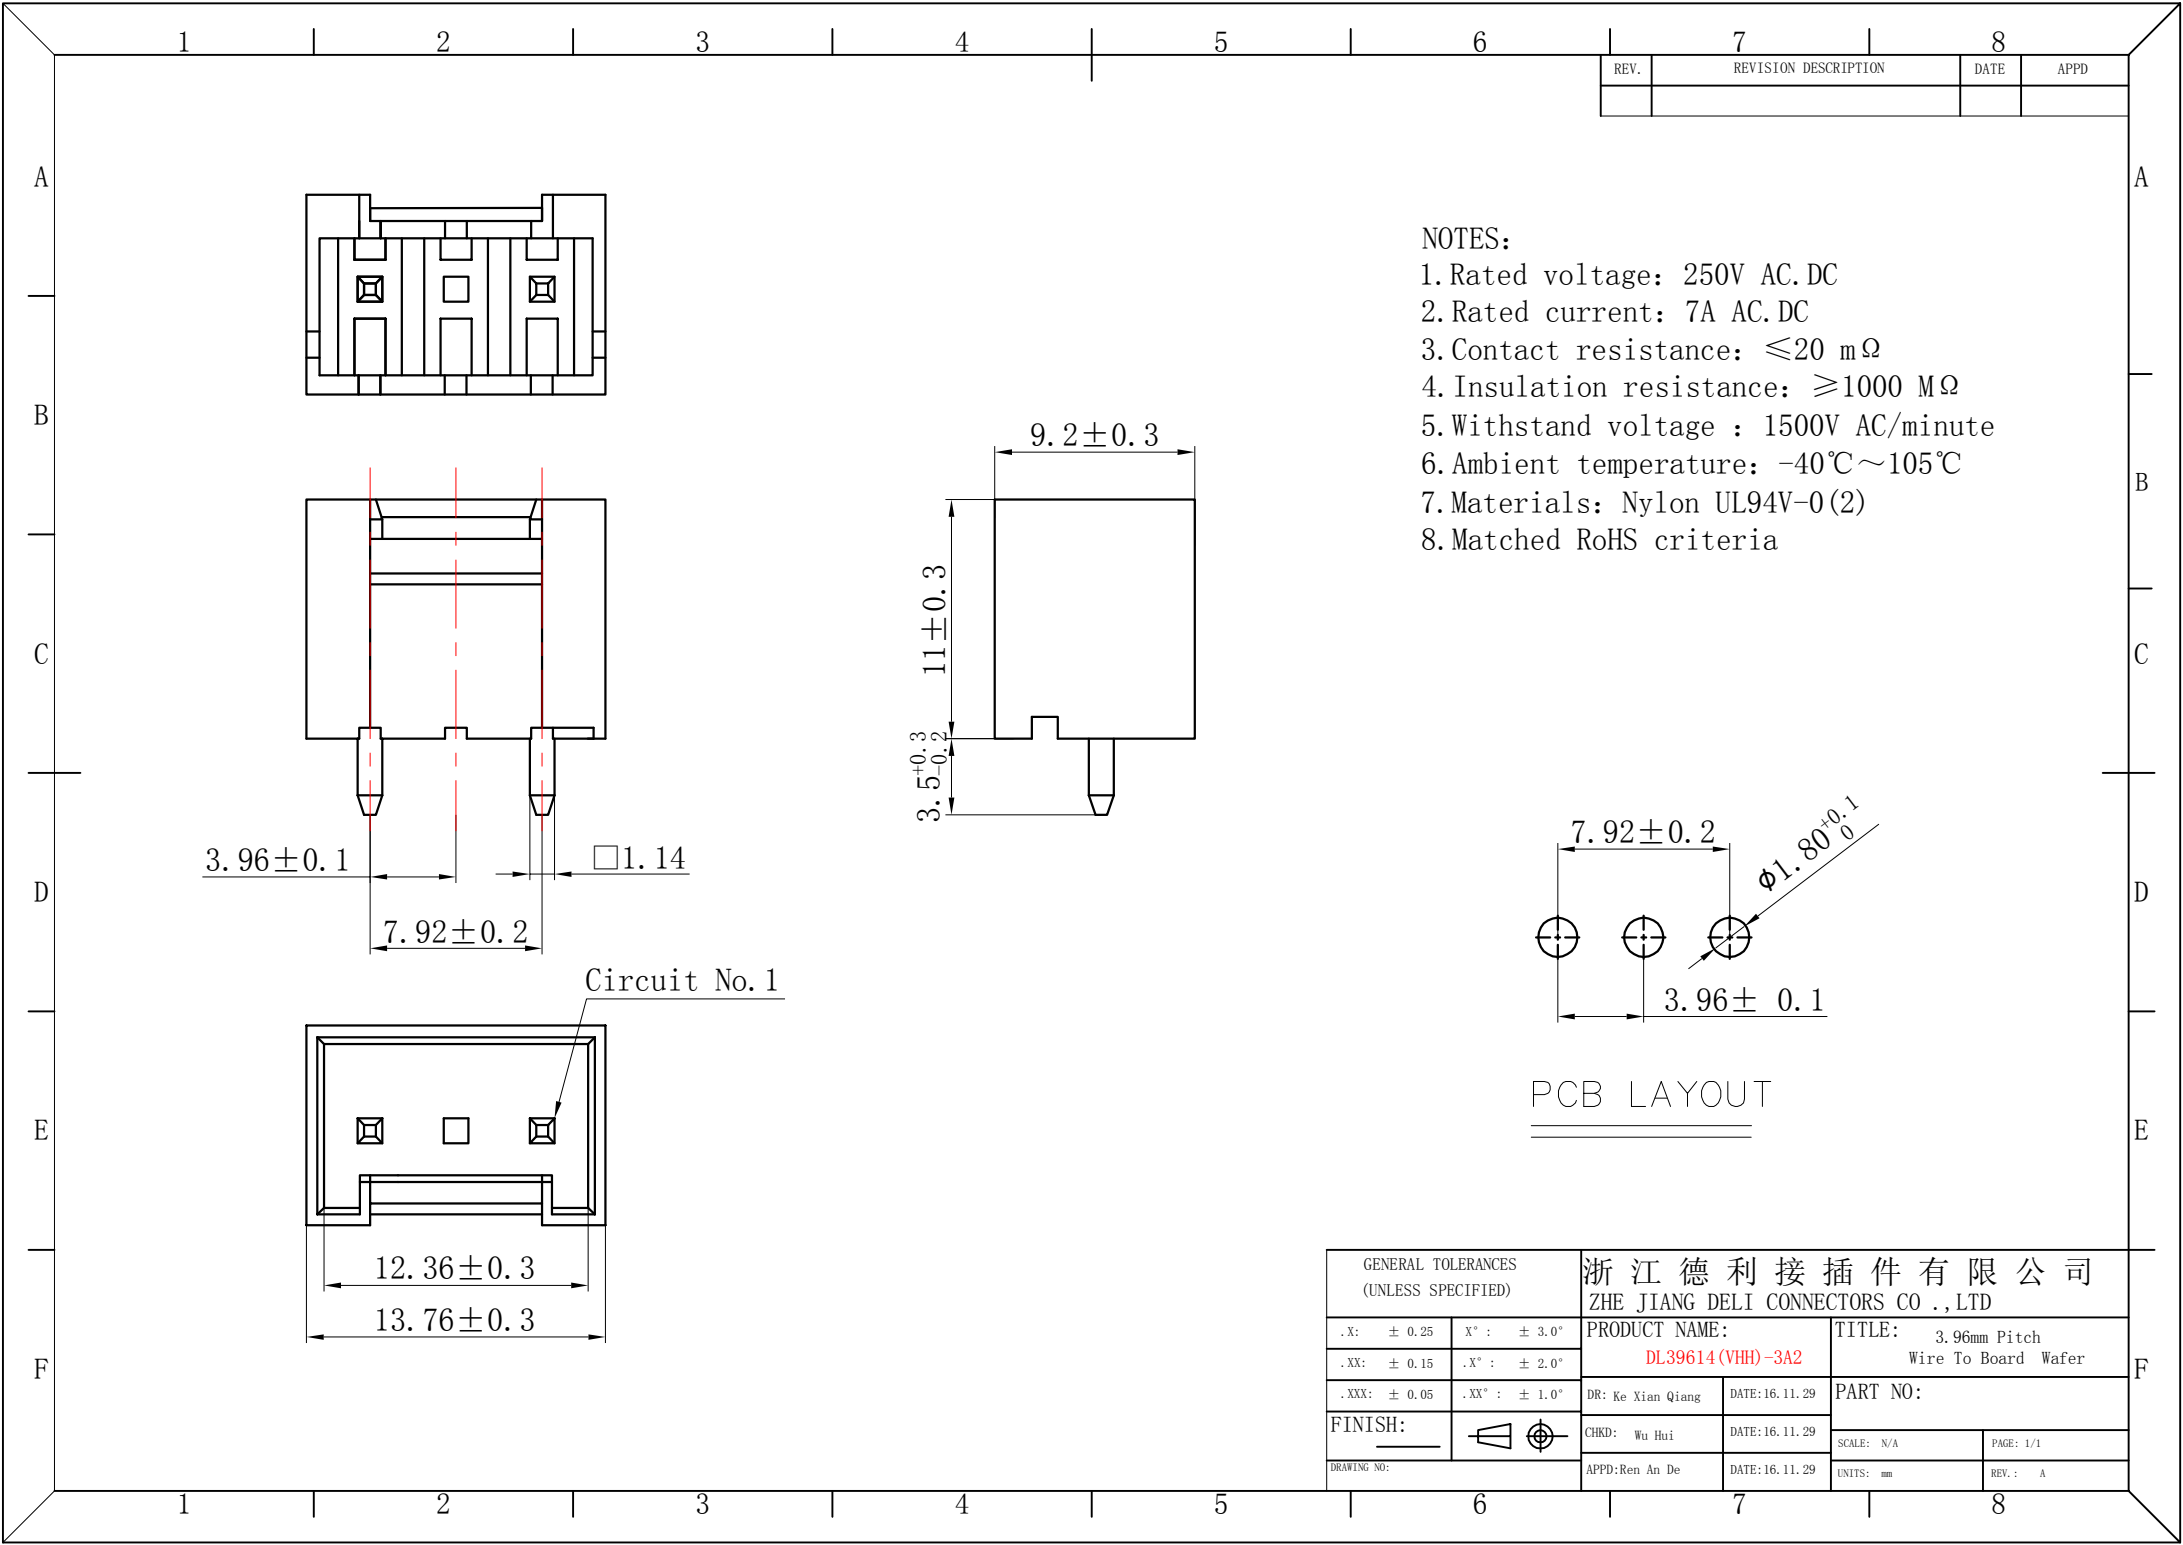

- NOTES:
- 1. Rated voltage: 250V AC.DC
 - 2. Rated current: 7A AC.DC
 - 3. Contact resistance: $\leq 20 \text{ m}\Omega$
 - 4. Insulation resistance: $\geq 1000 \text{ M}\Omega$
 - 5. Withstand voltage : 1500V AC/minute
 - 6. Ambient temperature: $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$
 - 7. Materials: Nylon UL94V-0 (2)
 - 8. Matched RoHS criteria

GENERAL TOLERANCES (UNLESS SPECIFIED)		浙江德利接插件有限公司 ZHE JIANG DELI CONNECTORS CO.,LTD			
.X: ± 0.25	X° : $\pm 3.0^{\circ}$	PRODUCT NAME: DL39614 (VHH)-3A2		TITLE: 3.96mm Pitch Wire To Board Wafer	
.XX: ± 0.15	.X° : $\pm 2.0^{\circ}$	DR: Ke Xian Qiang	DATE: 16. 11. 29	PART NO:	
.XXX: ± 0.05	.XX° : $\pm 1.0^{\circ}$	CHKD: Wu Hui	DATE: 16. 11. 29	SCALE: N/A	PAGE: 1/1
FINISH:		APPD: Ren An De	DATE: 16. 11. 29	UNITS: mm	REV.: A
DRAWING NO:					

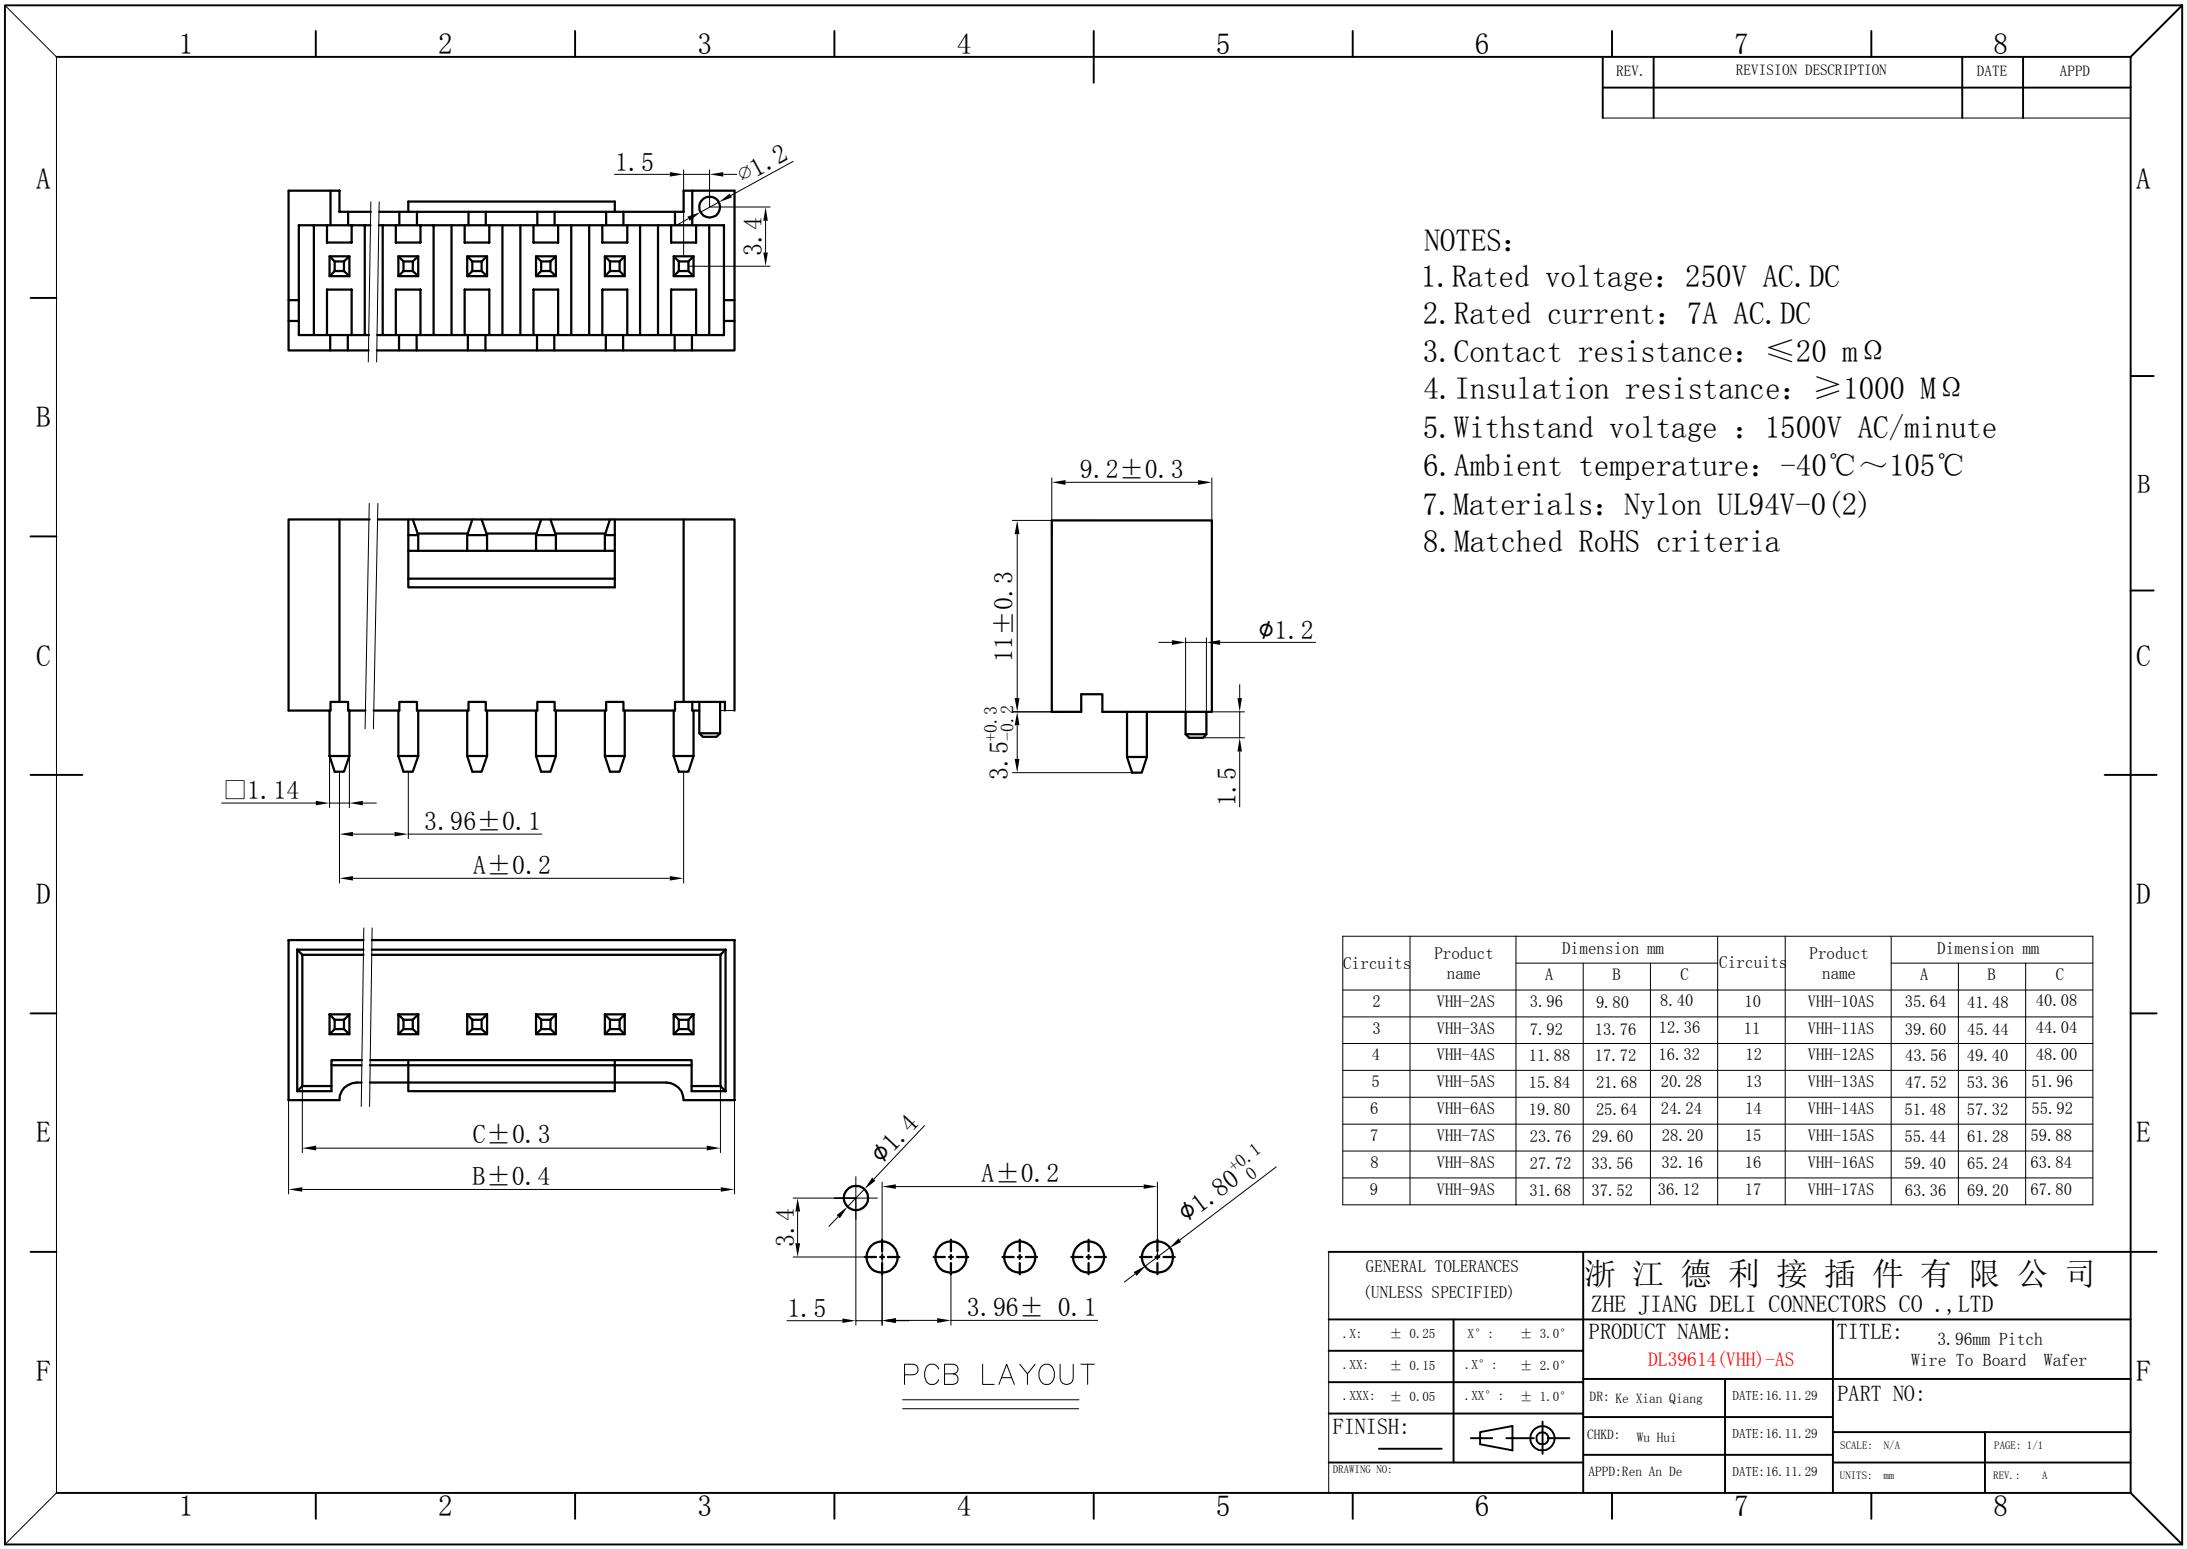


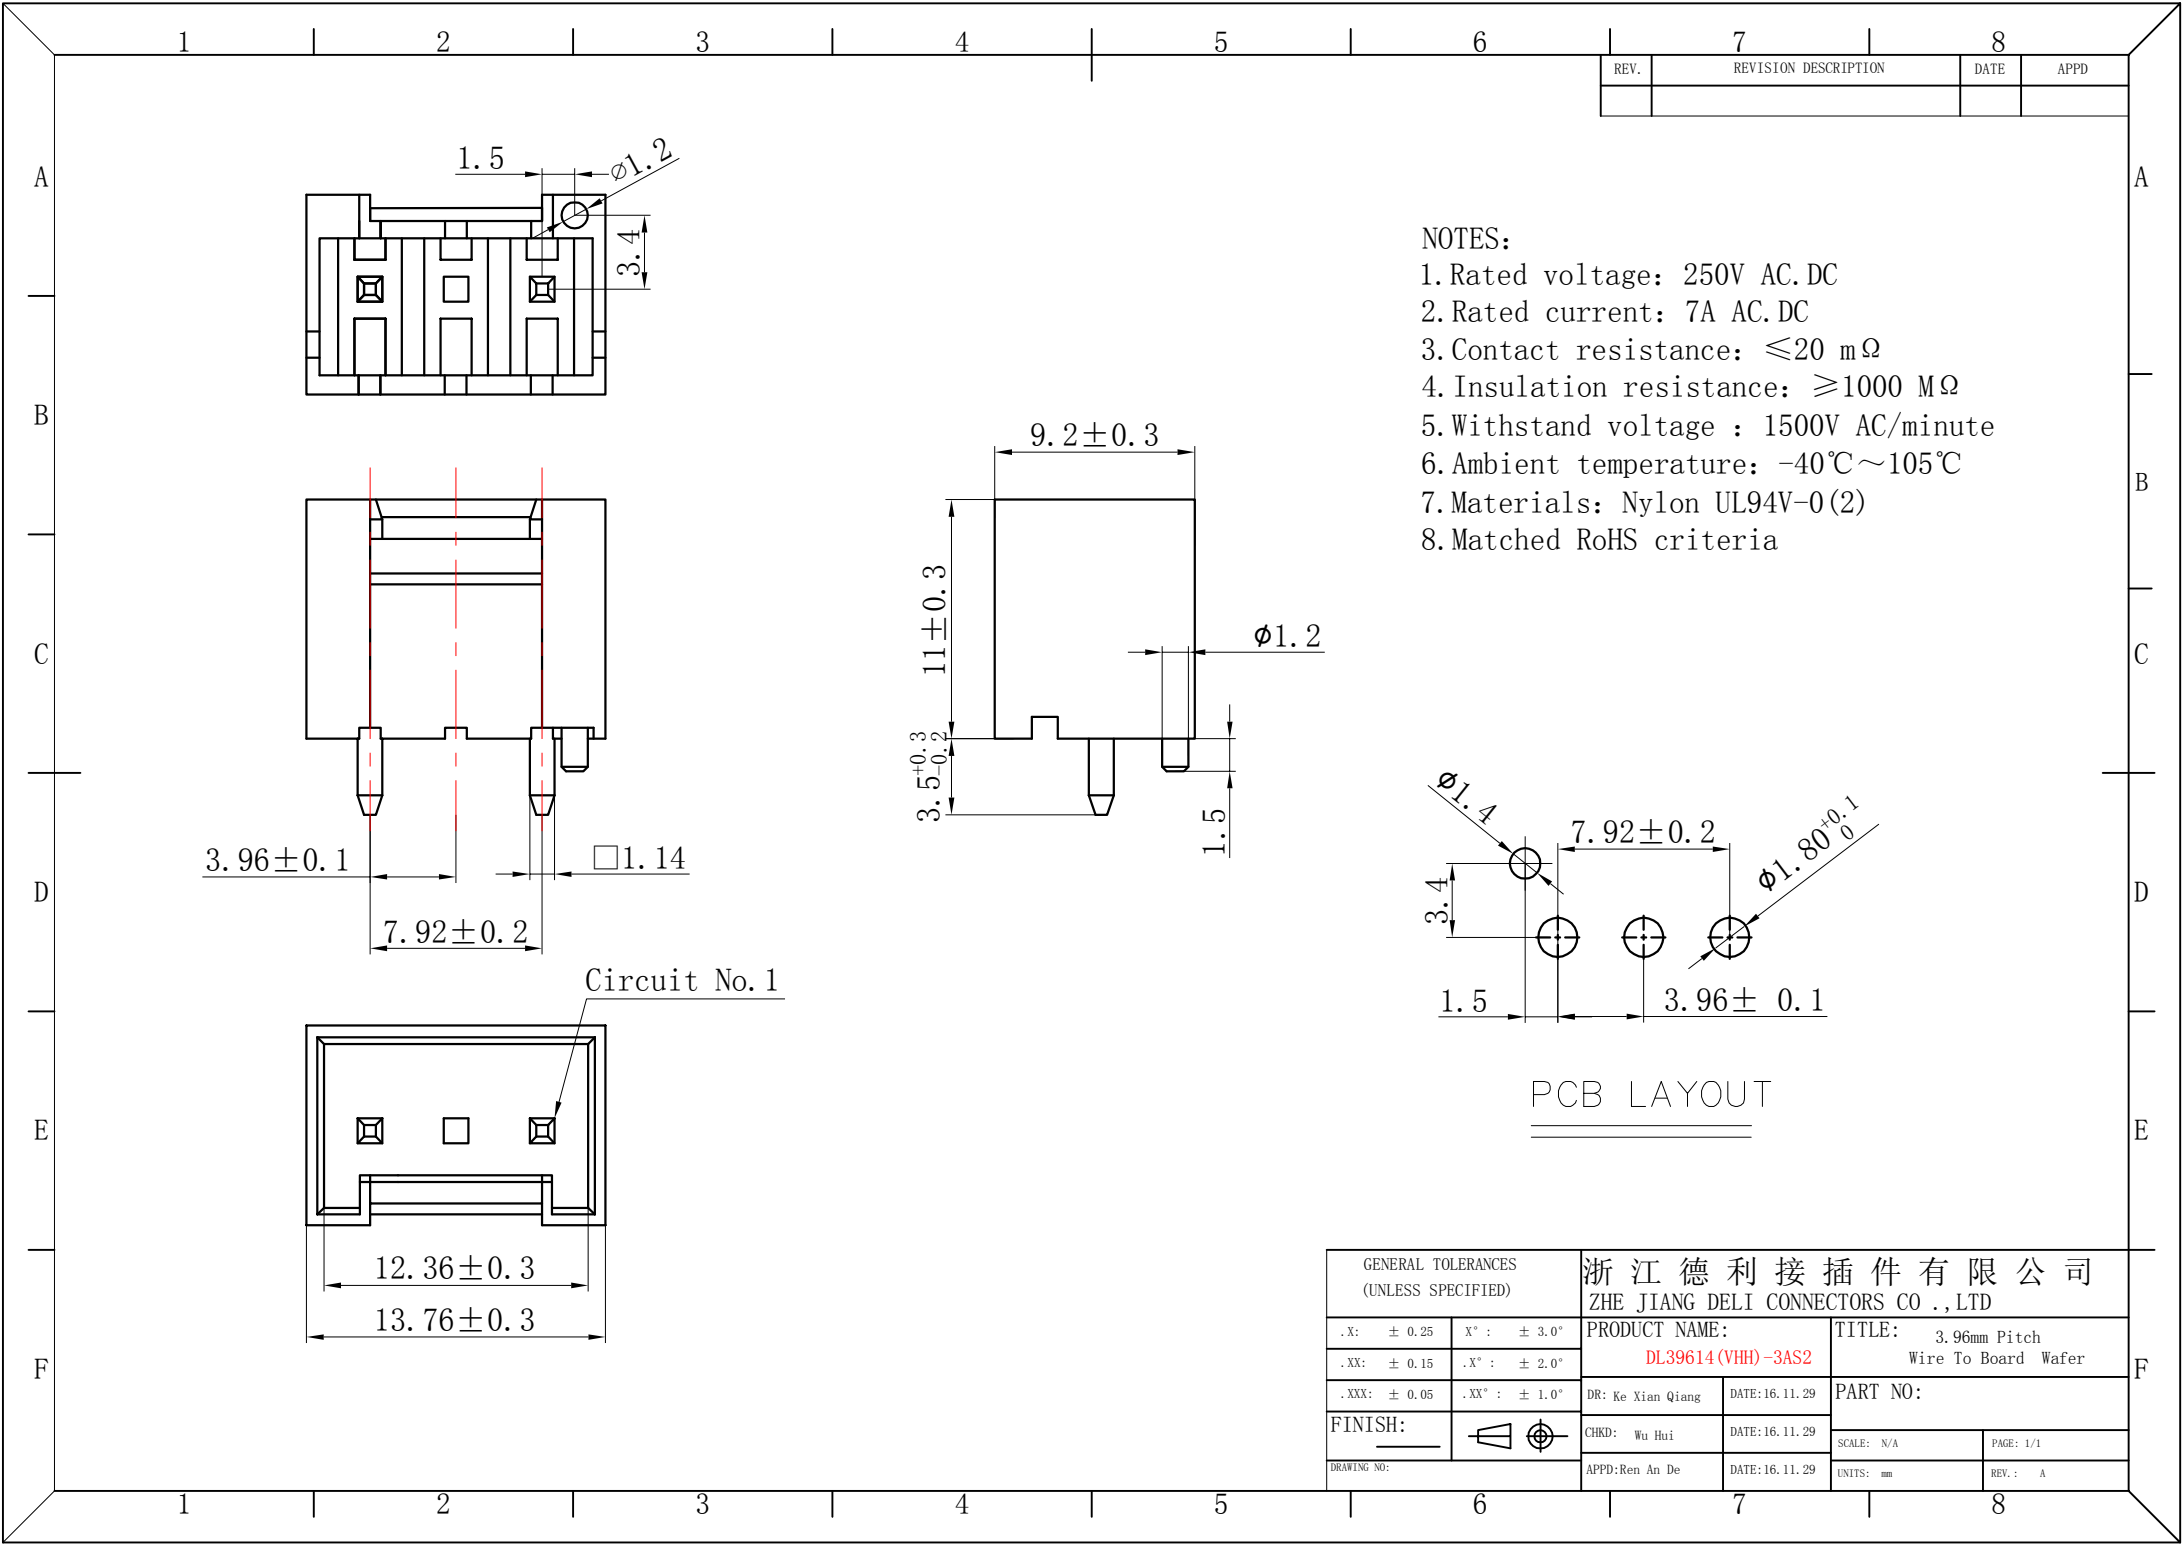



REV.	REVISION DESCRIPTION	DATE	APPD


- NOTES:
1. Rated voltage: 250V AC.DC
 2. Rated current: 7A AC.DC
 3. Contact resistance: $\leq 20 \text{ m}\Omega$
 4. Insulation resistance: $\geq 1000 \text{ M}\Omega$
 5. Withstand voltage : 1500V AC/minute
 6. Ambient temperature: $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$
 7. Materials: Nylon UL94V-0 (2)
 8. Matched RoHS criteria


GENERAL TOLERANCES (UNLESS SPECIFIED)		浙江德利接插件有限公司 ZHE JIANG DELI CONNECTORS CO.,LTD	
.X: ± 0.25	X°: $\pm 3.0^{\circ}$	PRODUCT NAME: DL39614 (VHH)-3AS2	TITLE: 3.96mm Pitch Wire To Board Wafer
.XX: ± 0.15	.X°: $\pm 2.0^{\circ}$	DR: Ke Xian Qiang	DATE: 16. 11. 29
.XXX: ± 0.05	.XX°: $\pm 1.0^{\circ}$	CHKD: Wu Hui	DATE: 16. 11. 29
FINISH:		APPD: Ren An De	DATE: 16. 11. 29
DRAWING NO:		UNITS: mm	PAGE: 1/1
			REV.: A

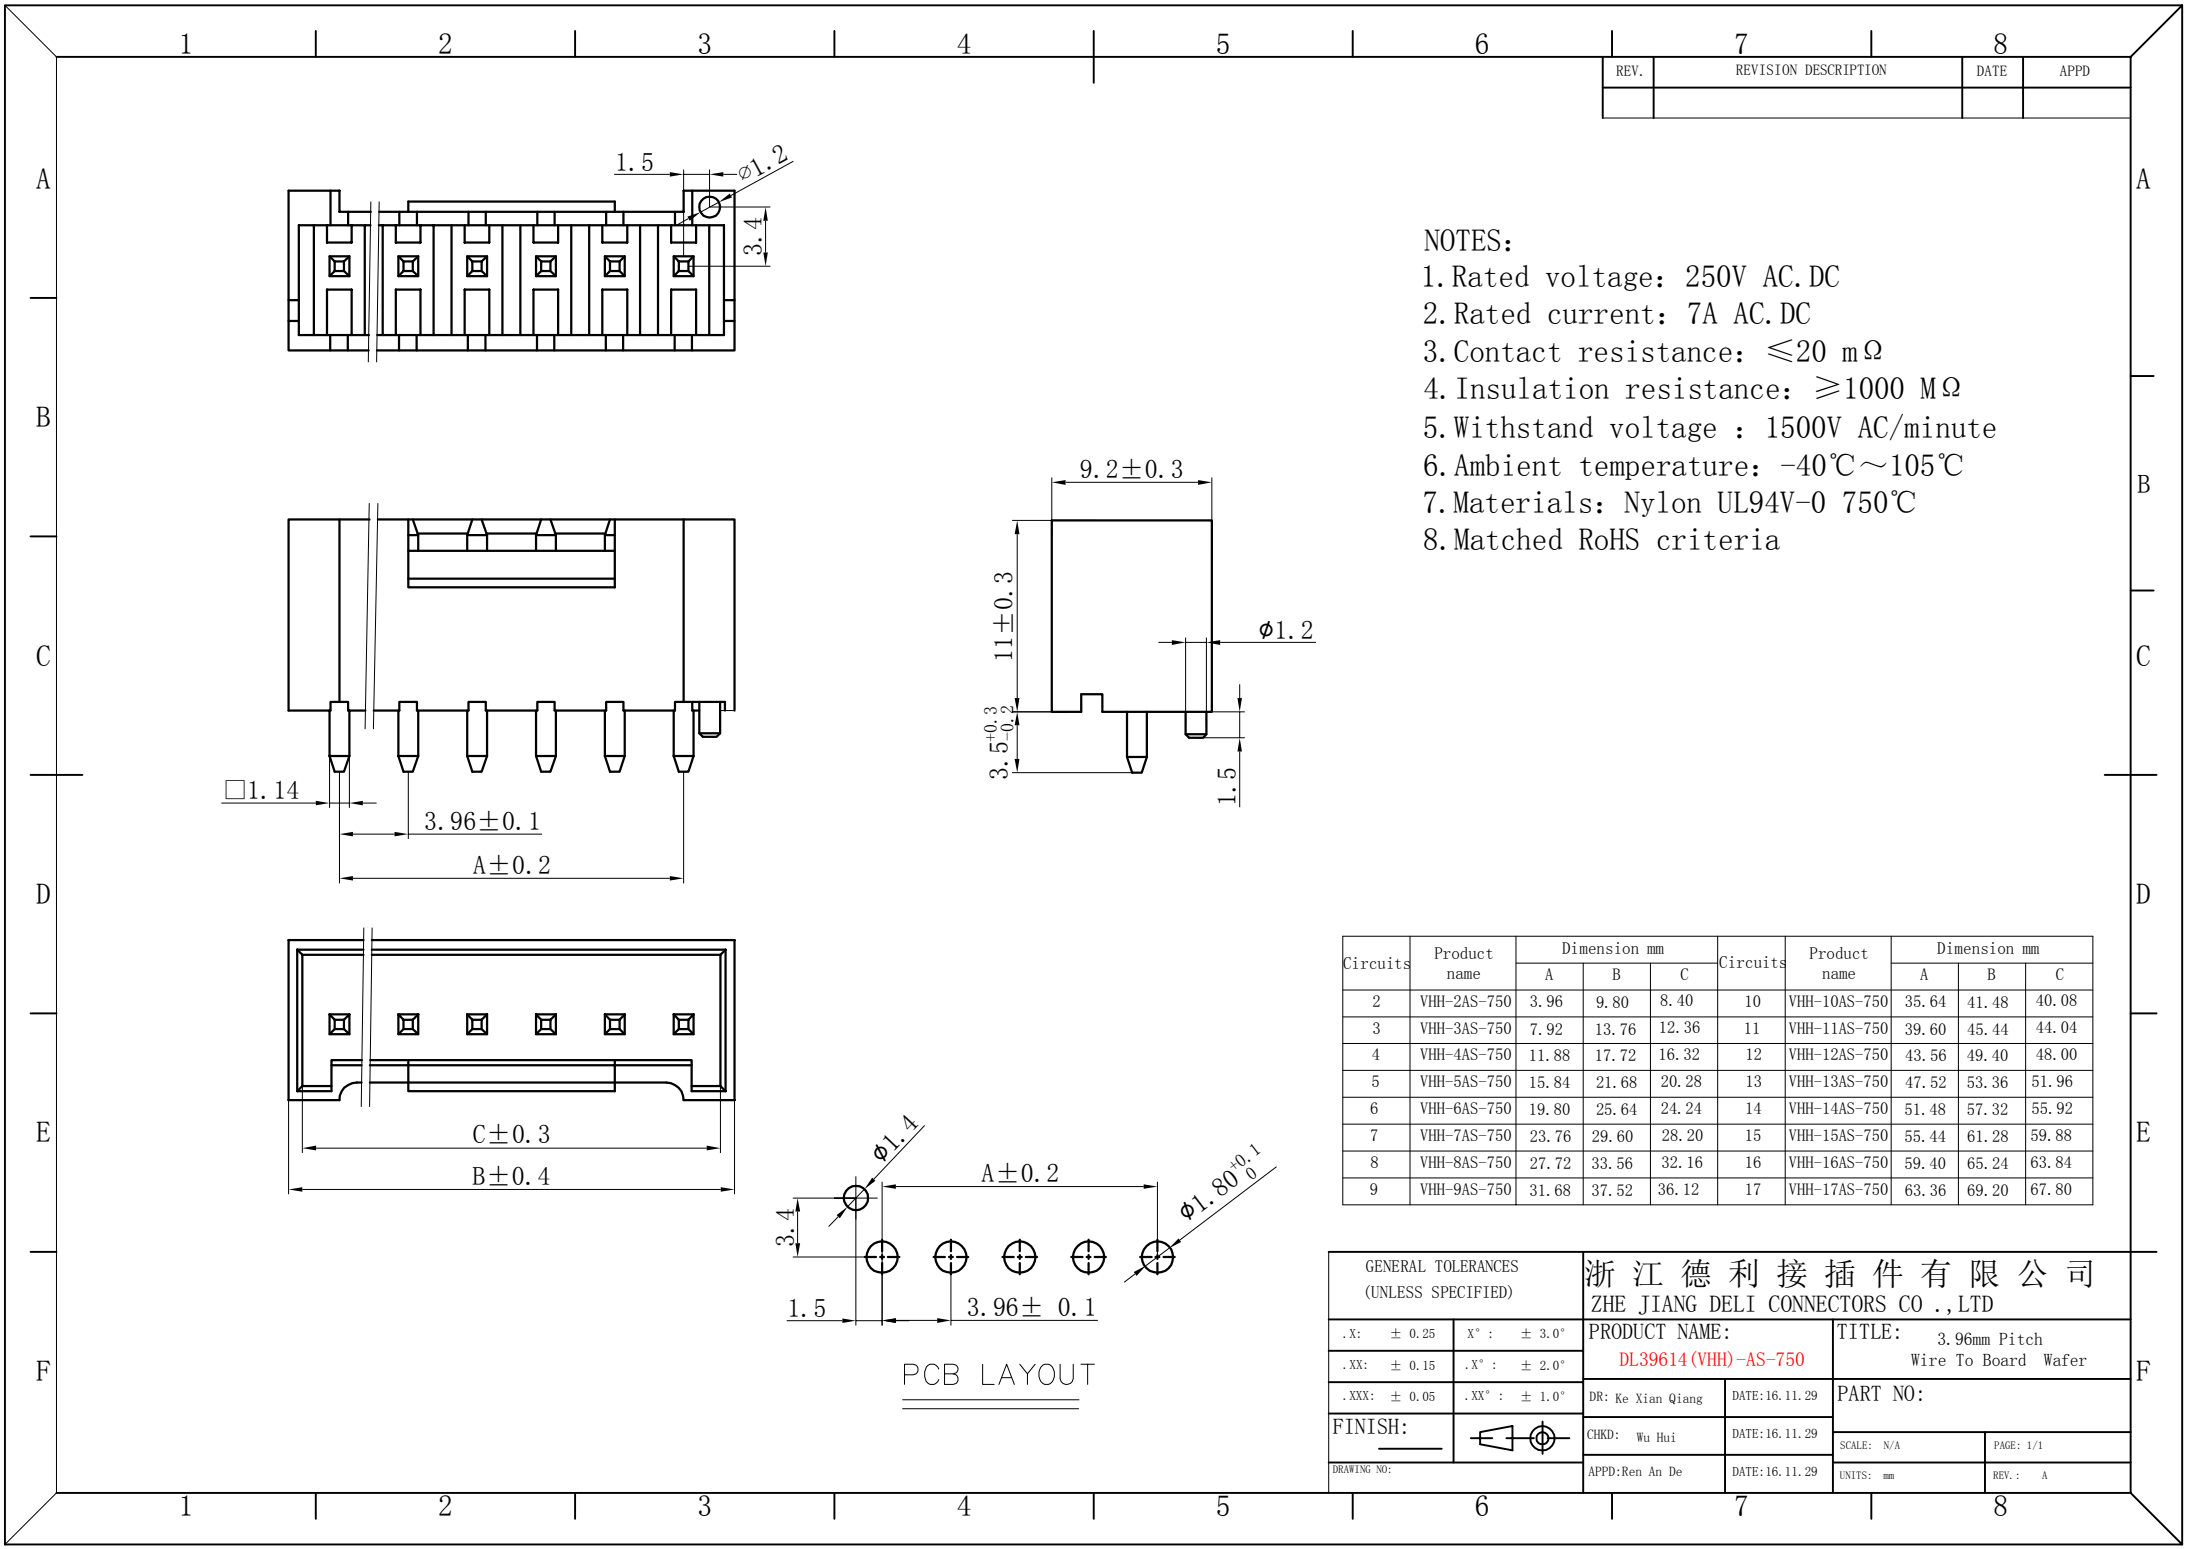


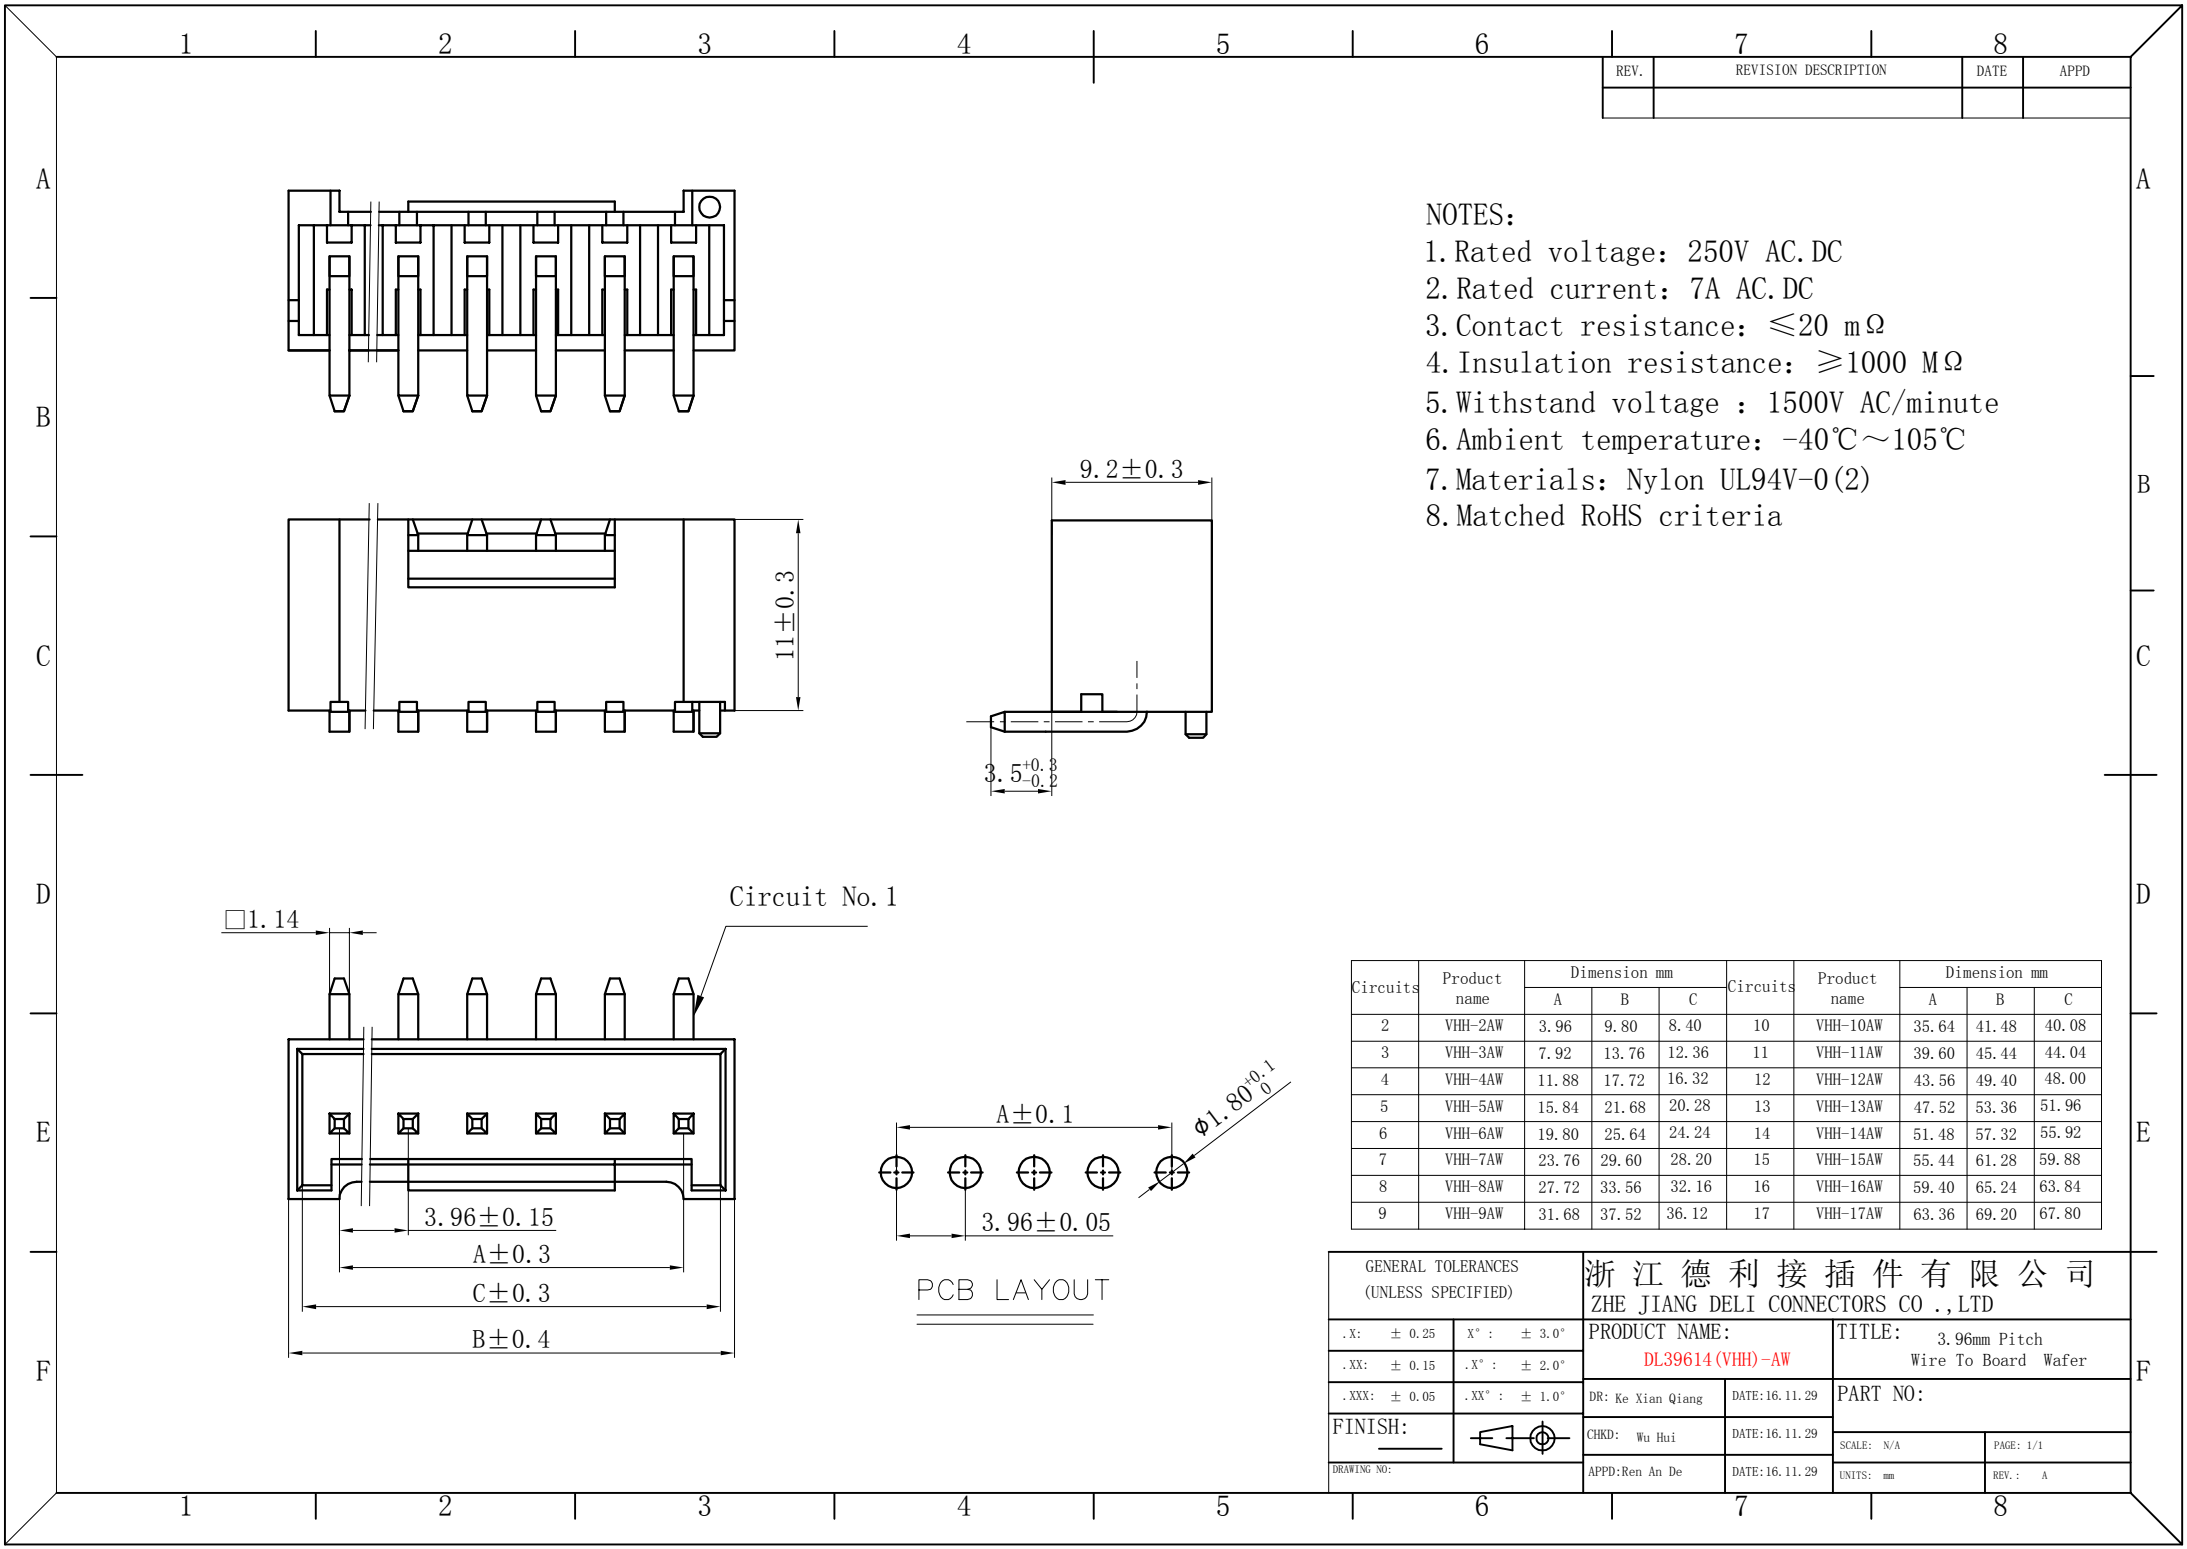

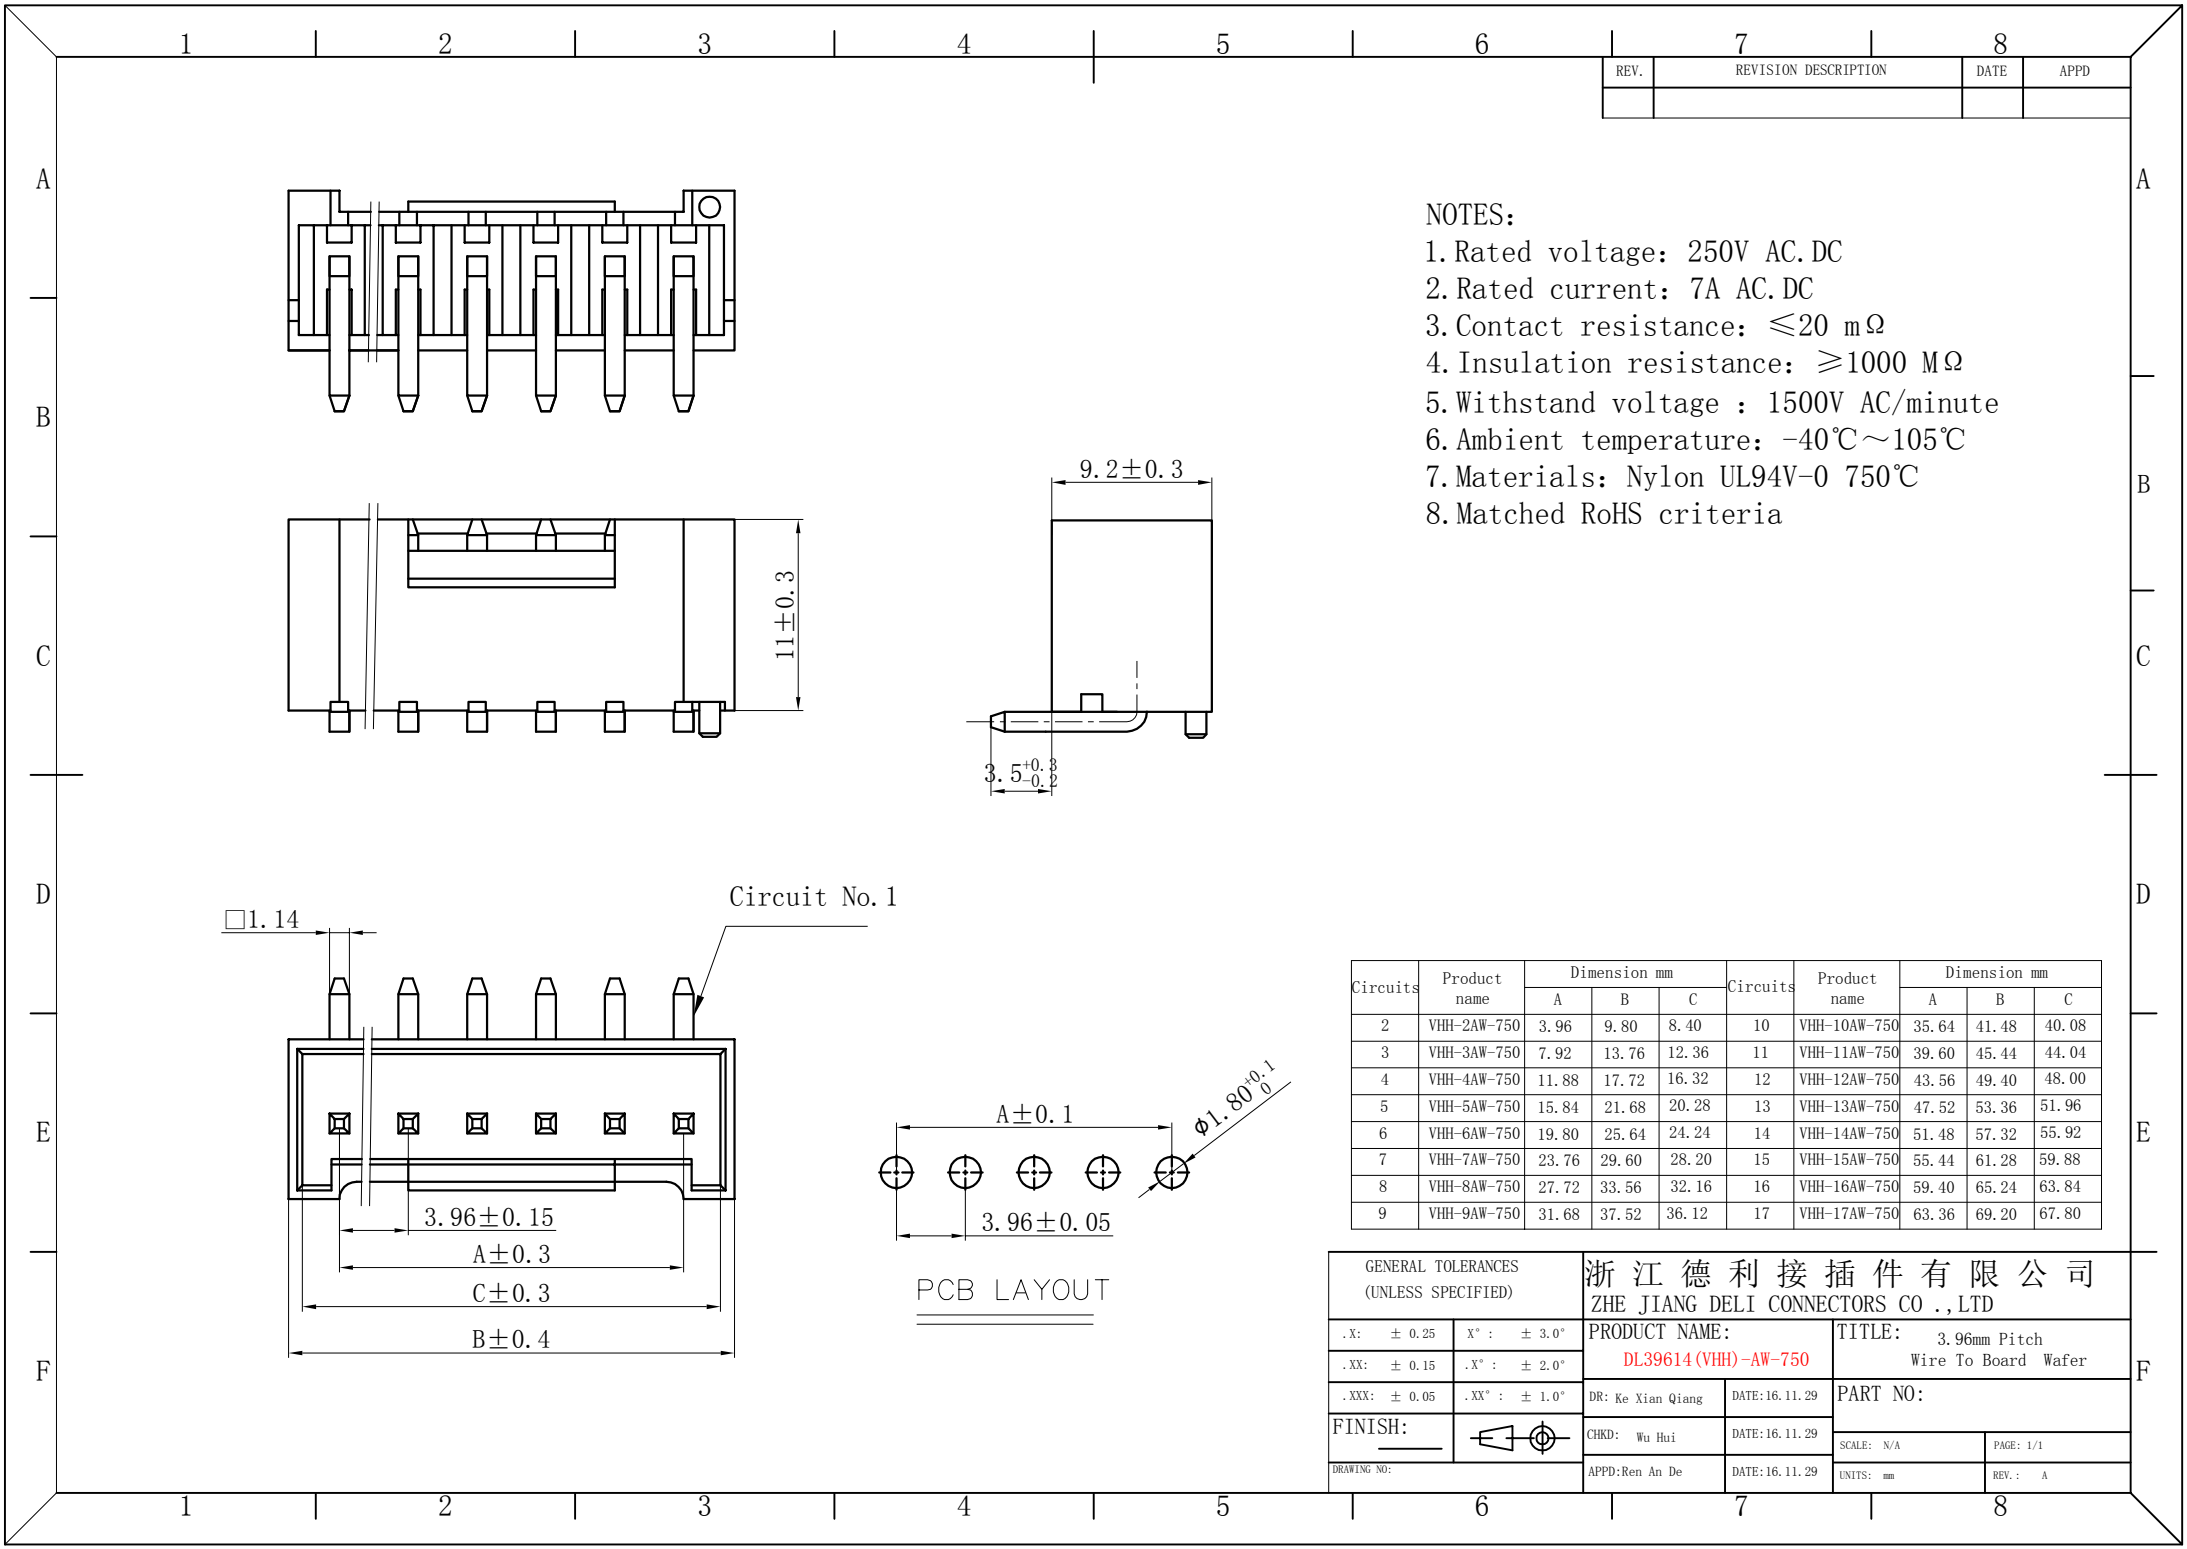

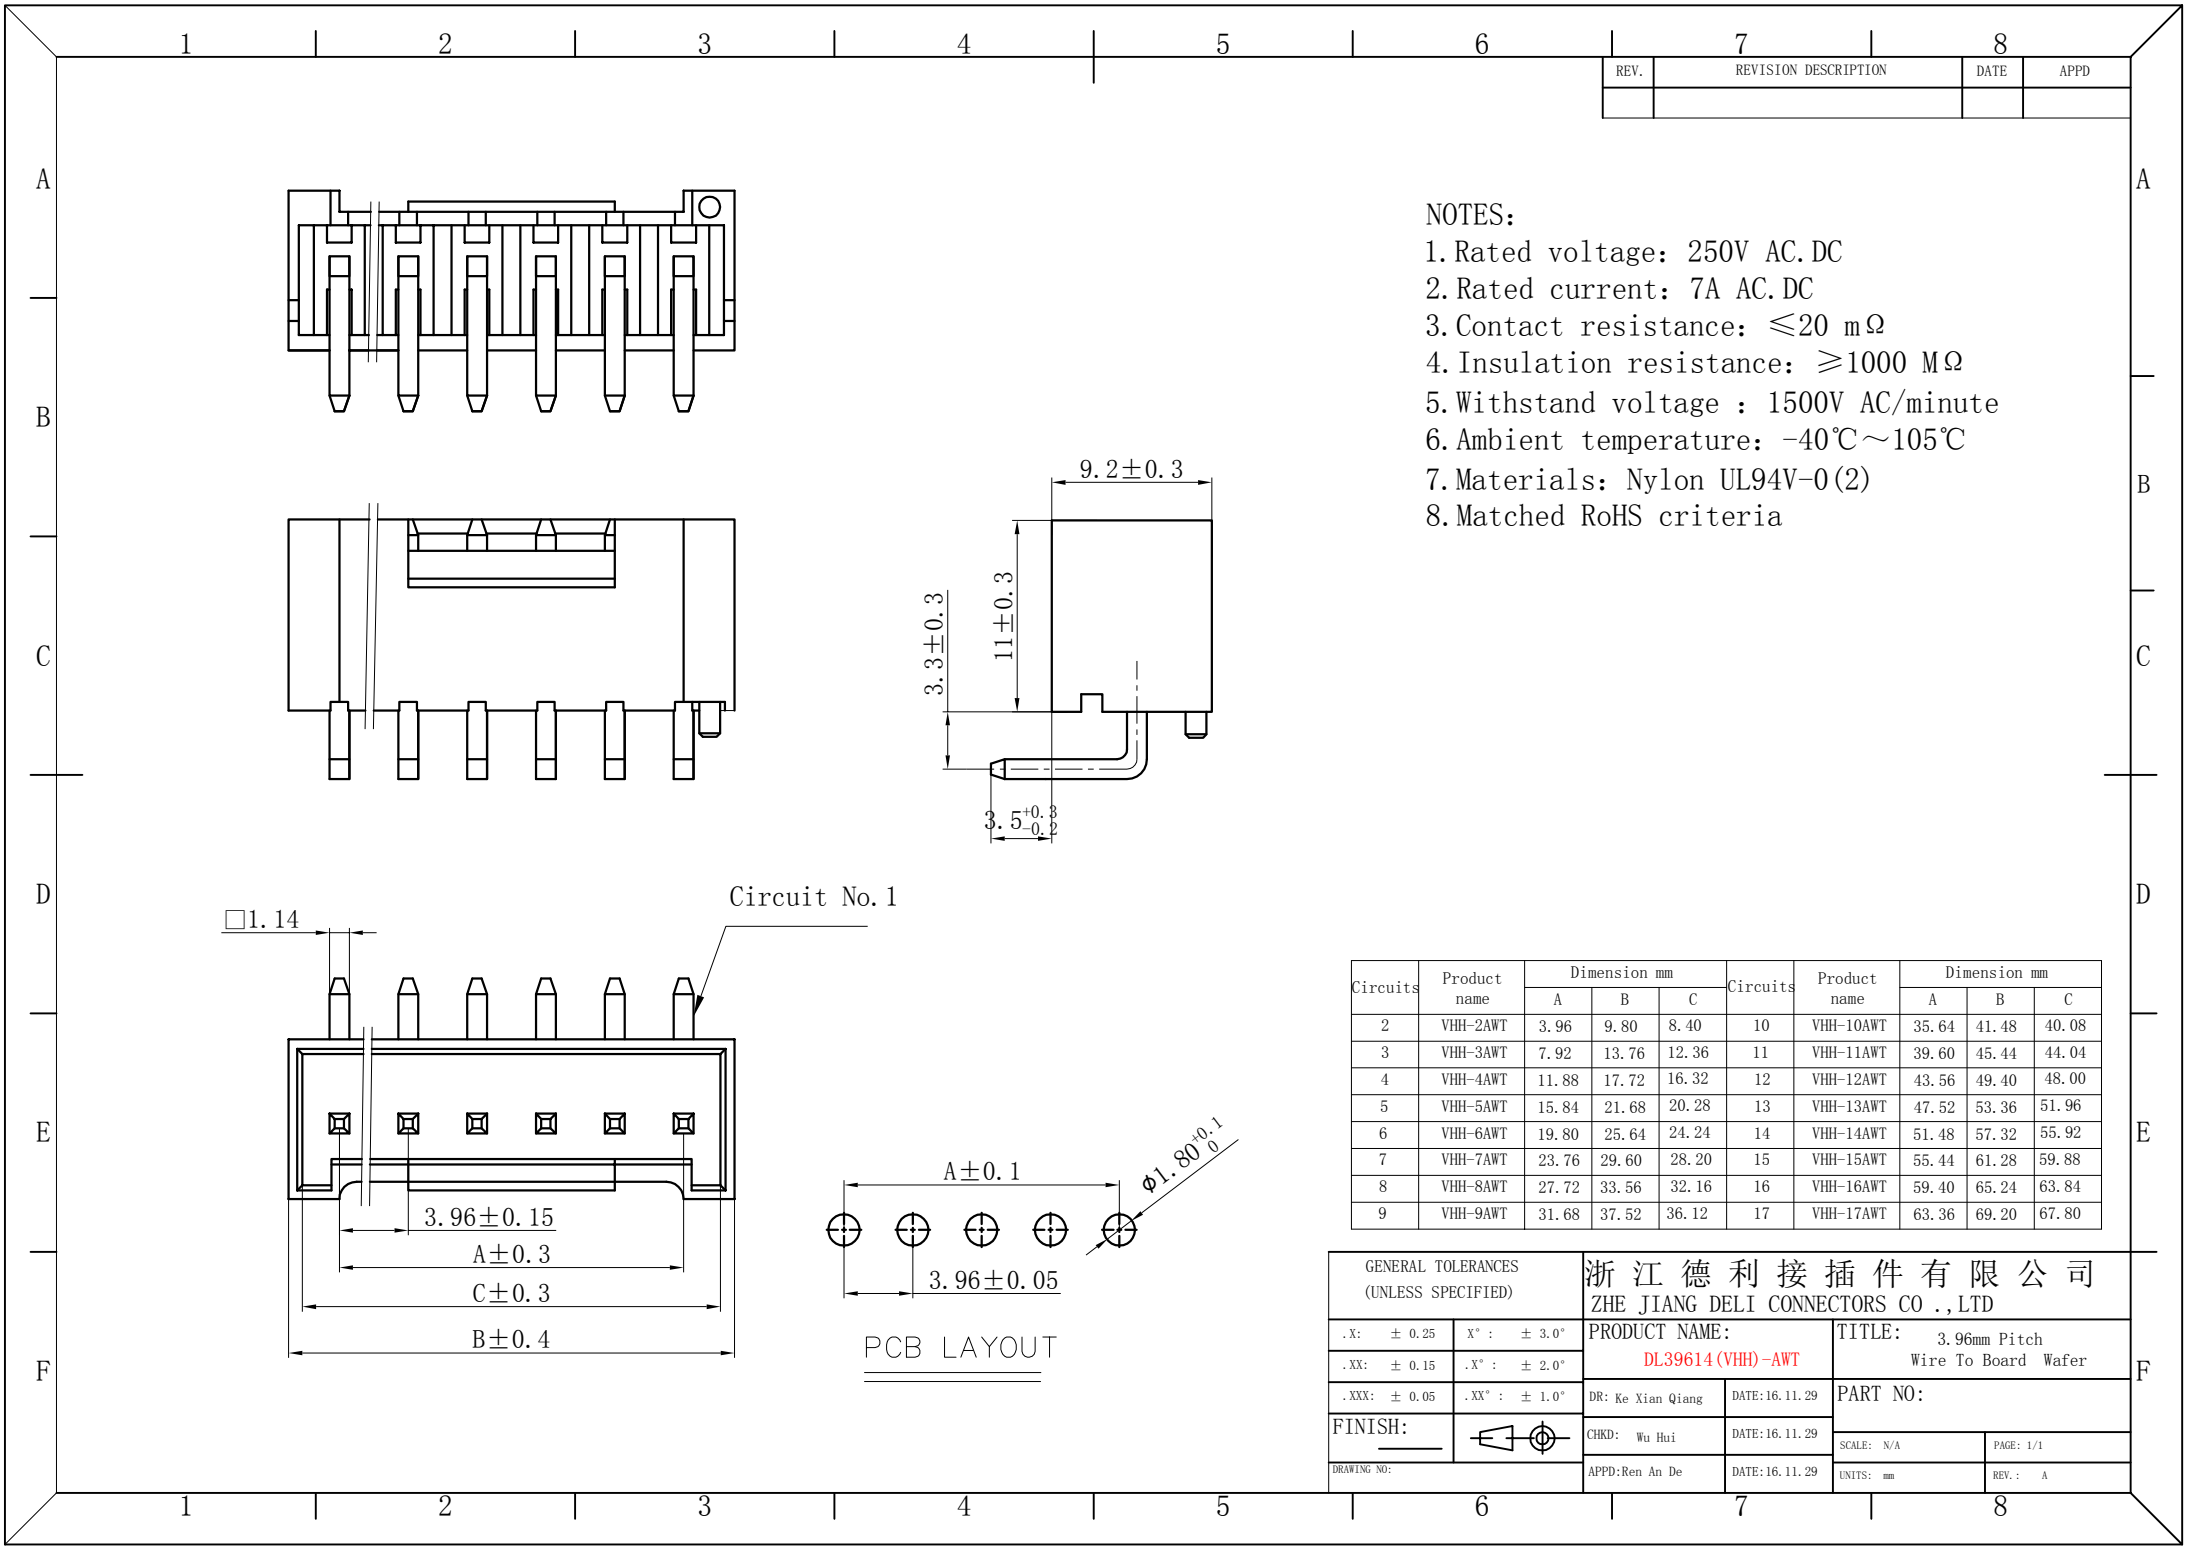

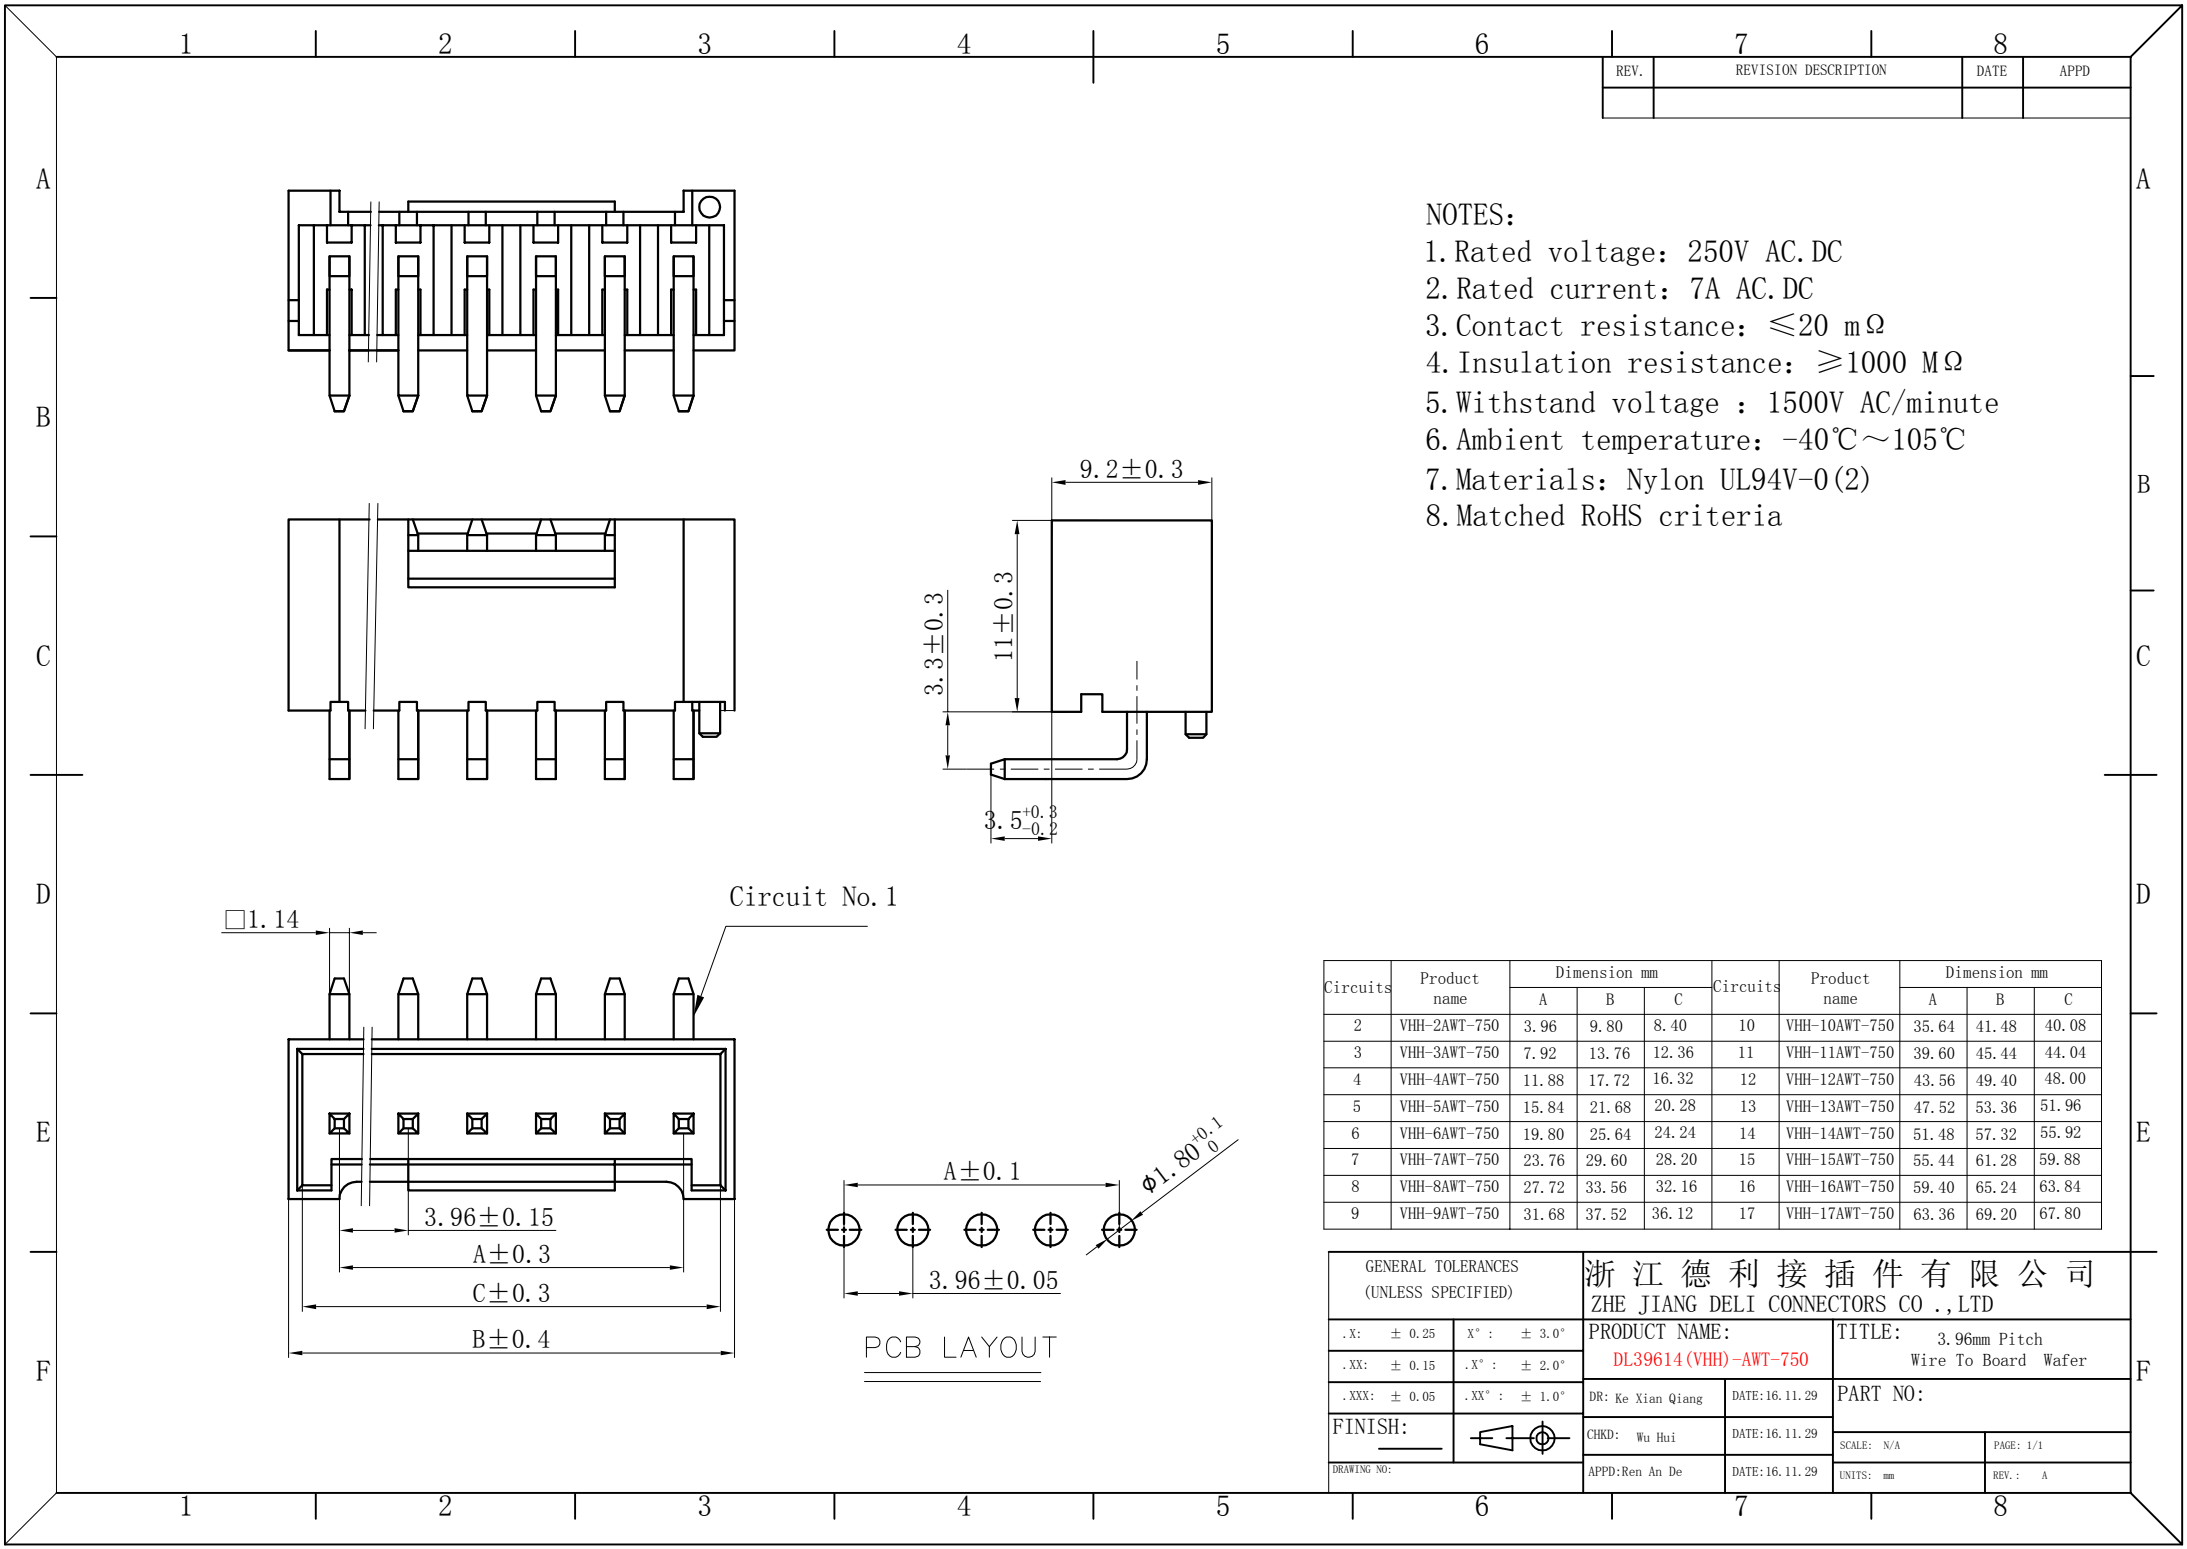

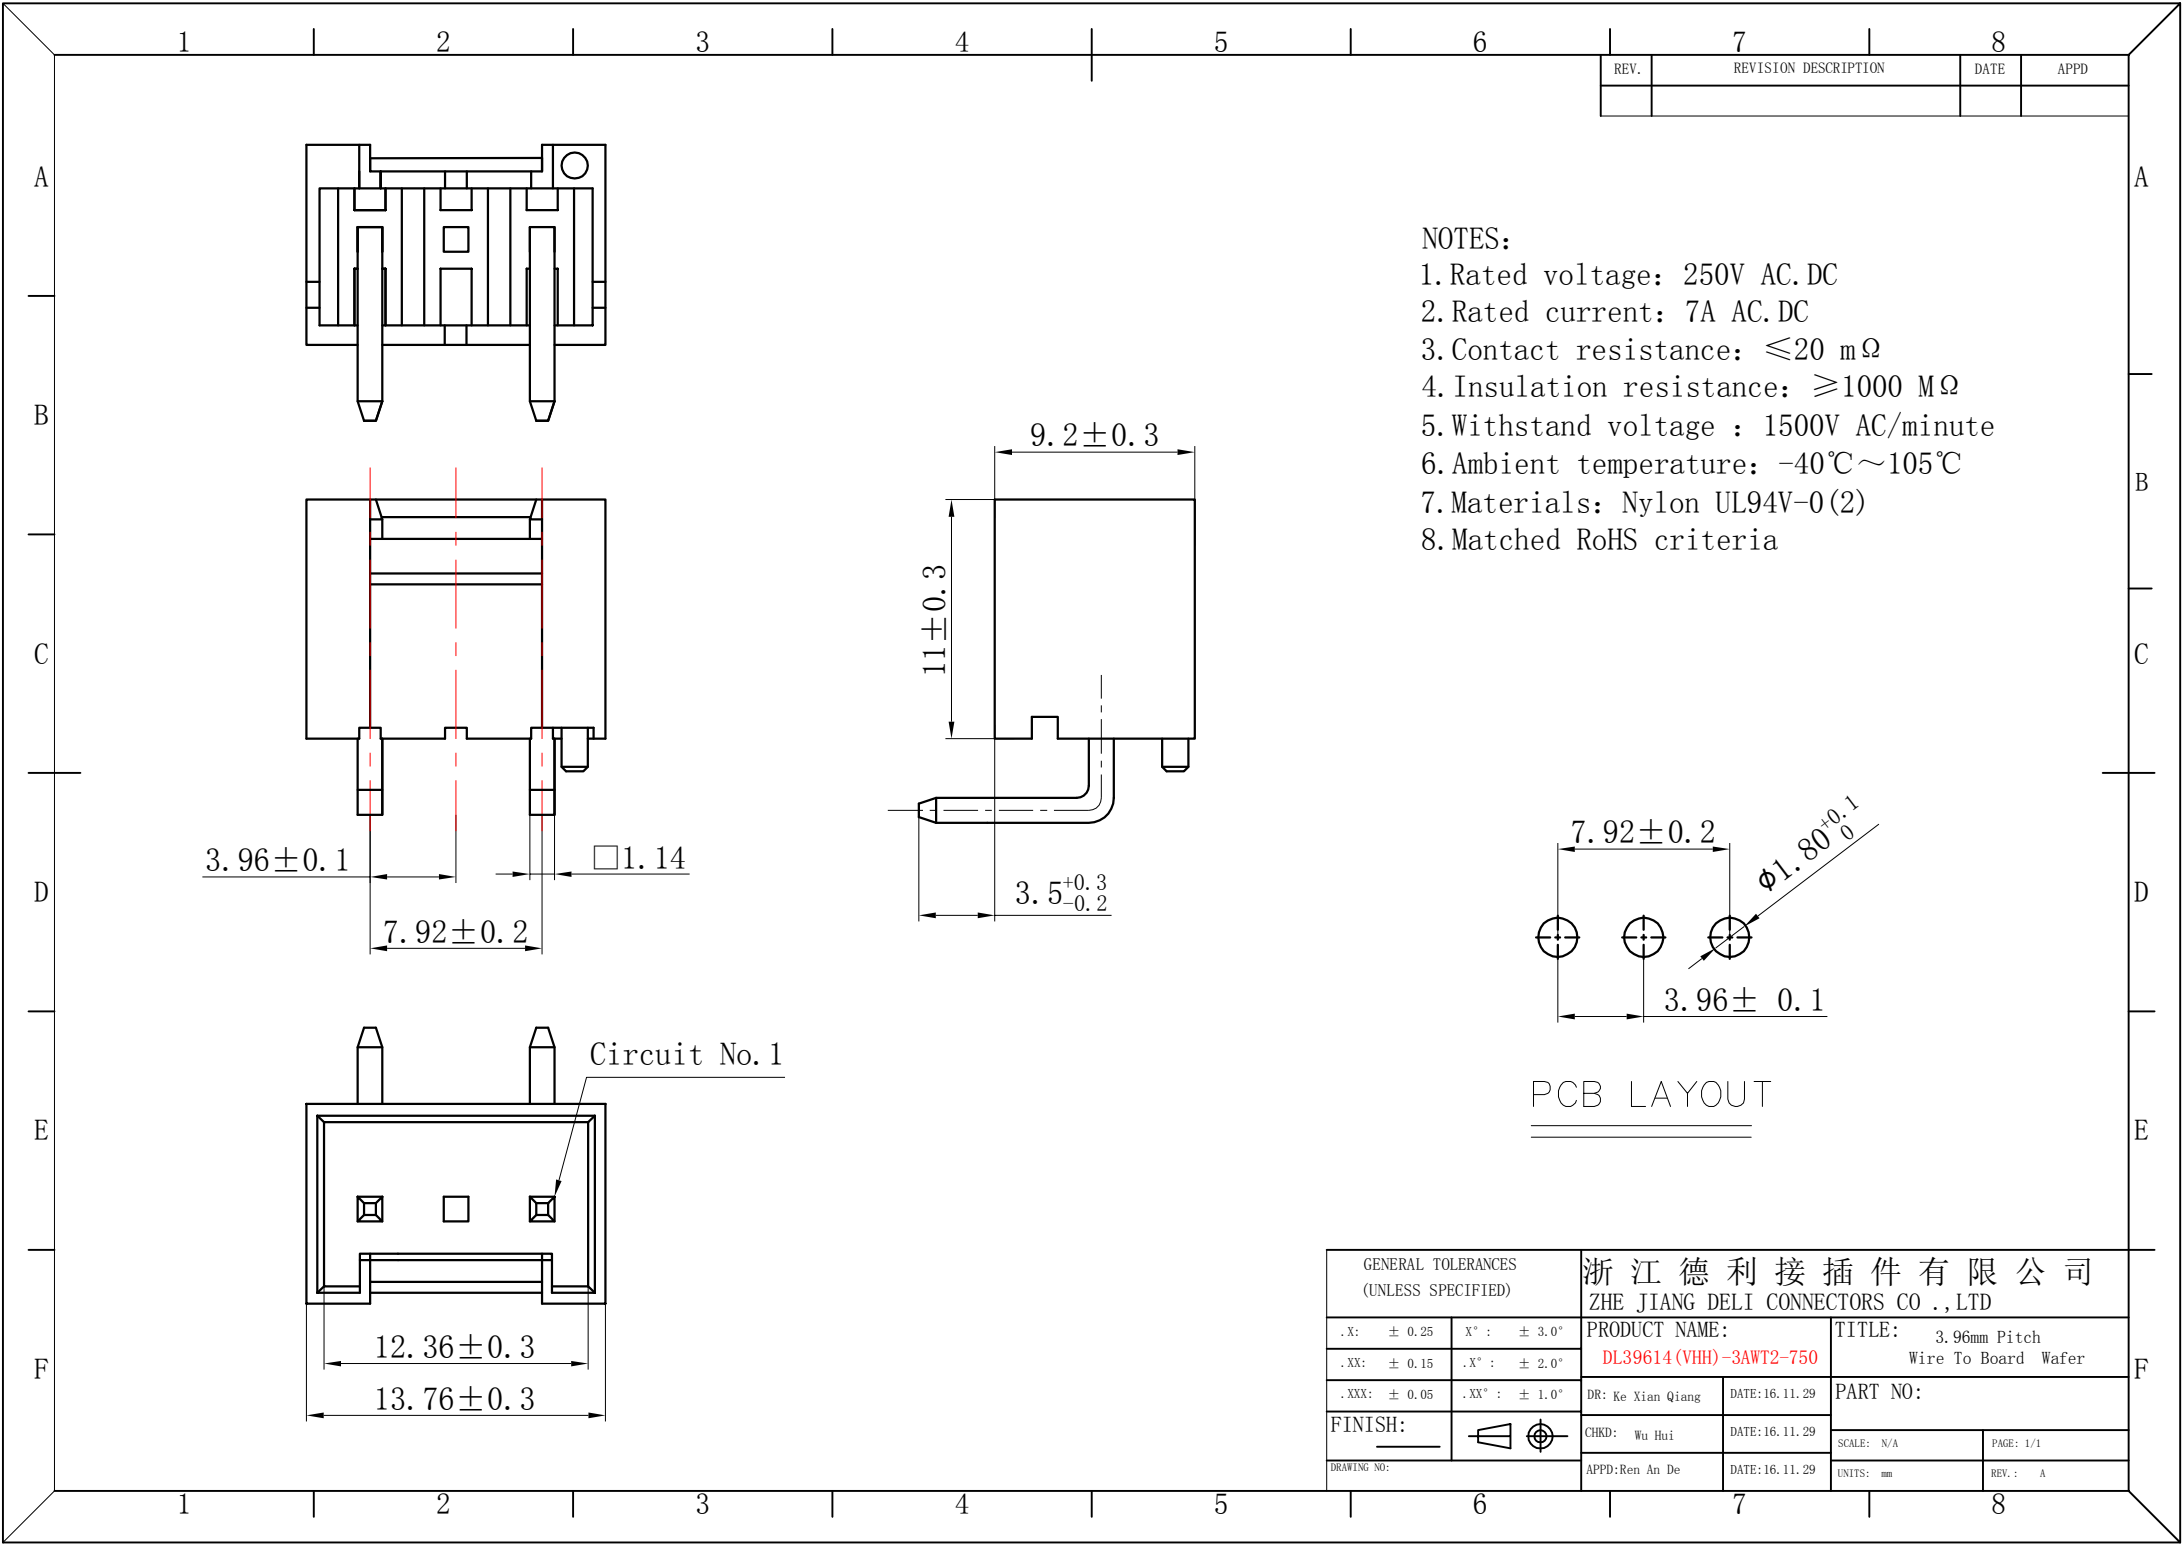

REV.	REVISION DESCRIPTION	DATE	APPD

- NOTES:
- 1. Rated voltage: 250V AC.DC
 - 2. Rated current: 7A AC.DC
 - 3. Contact resistance: $\leq 20 \text{ m}\Omega$
 - 4. Insulation resistance: $\geq 1000 \text{ M}\Omega$
 - 5. Withstand voltage : 1500V AC/minute
 - 6. Ambient temperature: $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$
 - 7. Materials: Nylon UL94V-0 (2)
 - 8. Matched RoHS criteria

GENERAL TOLERANCES (UNLESS SPECIFIED)		浙江德利接插件有限公司 ZHE JIANG DELI CONNECTORS CO.,LTD	
.X: ± 0.25	X*: $\pm 3.0^{\circ}$	PRODUCT NAME: DL39614 (VHH)-3AWT2-750	TITLE: 3.96mm Pitch Wire To Board Wafer
.XX: ± 0.15	.X*: $\pm 2.0^{\circ}$	DR: Ke Xian Qiang	DATE: 16. 11. 29
.XXX: ± 0.05	.XX*: $\pm 1.0^{\circ}$	CHKD: Wu Hui	DATE: 16. 11. 29
FINISH:		APPD: Ren An De	DATE: 16. 11. 29
DRAWING NO:		UNITS: mm	PAGE: 1/1
			REV.: A

A

B

C

D

E

F

A






B

C

D

E

F

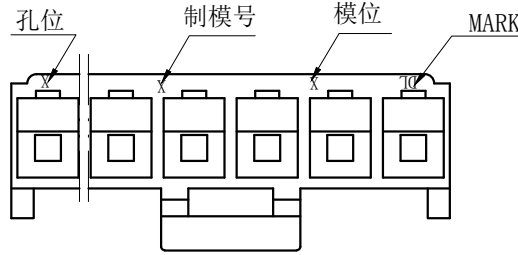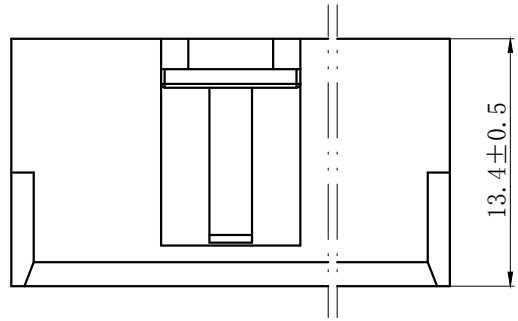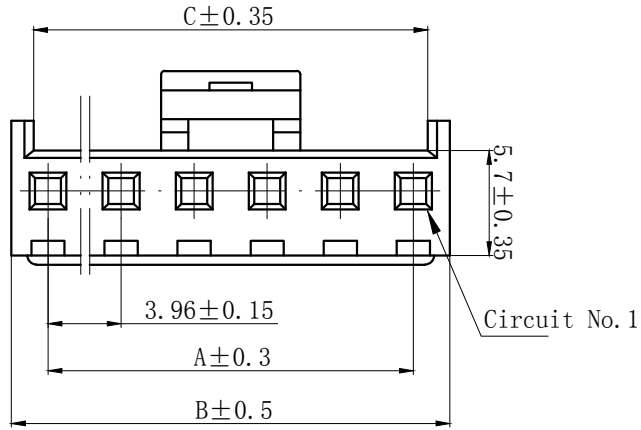

NOTES

Available in 02 through 15 Circuits.
Mates with DL39602 Series Housing.
Material : Nylon UL94V-0 (2)
Accepts DL39602-T Crimp Terminal.

Circuits	Product name	Dimension mm			Circuits	Product name	Dimension mm		
		A	B	C			A	B	C
2	VH-2Y	3.96	7.92	5.52	9	VH-9Y	31.68	35.64	33.24
3	VH-3Y	7.92	11.88	9.48	10	VH-10Y	35.64	39.60	37.20
4	VH-4Y	11.88	15.84	13.44	11	VH-11Y	39.60	43.56	41.16
5	VH-5Y	15.84	19.80	17.40	12	VH-12Y	43.56	47.52	45.12
6	VH-6Y	19.80	23.76	21.36	13	VH-13Y	47.52	51.48	49.08
7	VH-7Y	23.76	27.72	25.32	14	VH-14Y	51.48	55.44	53.04
8	VH-8Y	27.72	31.68	29.28	15	VH-15Y	55.44	59.40	57.00

GENERAL TOLERANCES (UNLESS SPECIFIED)				ZHE JIANG DELI CONNECTORS CO., LTD			
.X: ± 0.25	X°: ± 3.0°	PRODUCT NAME: DL39602 (VH)-Y		TITLE: 3.96 mm Pitch Connector Housing			
.XX: ± 0.15	.X°: ± 2.0°						
.XXX: ± 0.01	.XX°: ± 1.0°	DR: Chen Quan Long	DATE: 21.10.10	PART NO:			
FINISH: _____		CHKD: Wu Hui	DATE: 21.10.10				
DRAWING NO:		APPD: Ren An De	DATE: 21.10.10	SCALE: N/A		PAGE: 1/1	
				UNITS: mm		REV.: B	

A

B

C

D

E

F

1

2

3

4

5

6

7




8

REV.


REVISION DESCRIPTION

DATE


APPD

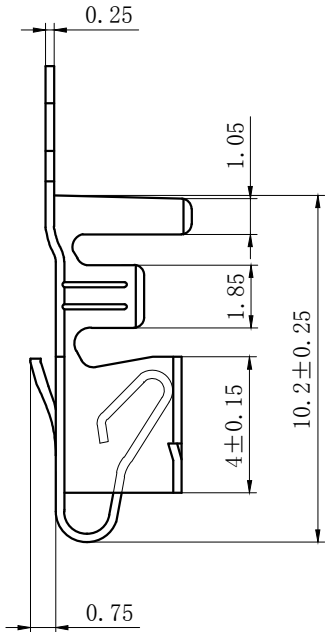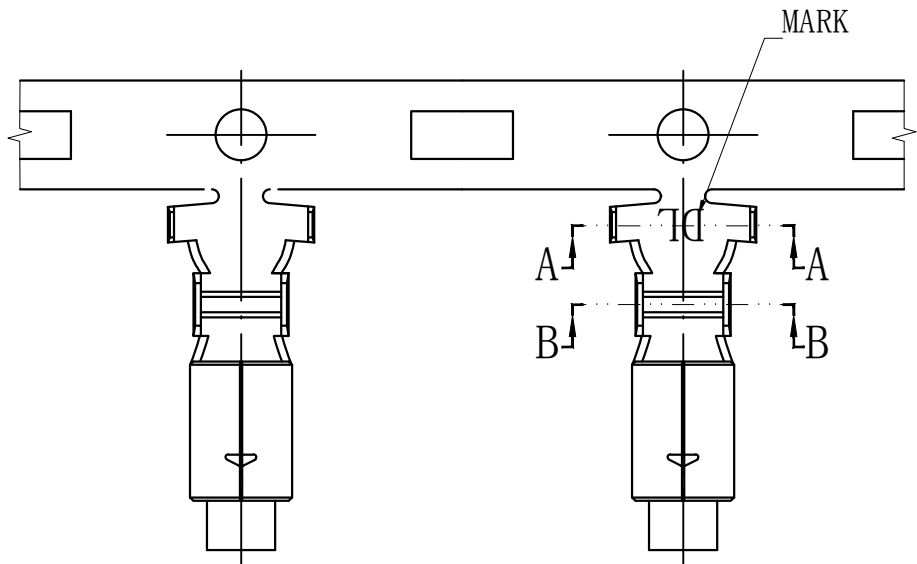

SECTION A-A



SECTION B-B



C向

NOTES

Used in DL39602-Y Series Housing.

Accepts AWG #24~16 Wire Range.

Insulation O.D.=1.2~3.0 mm.

Material : Phosphor Bronze .

Finish: Tin plated.

Qty/Reel: 3,500 PCS.

Thickness: 0.25 mm.

Product name	Dimension mm				适用线规 AWG#
	A1	B1	A2	B2	
VH-T-04	2.3	2.3	2.0	1.8	24-22
VH-T-03	4.3	4.3	2.8	2.6	20-16
VH-T-02	4.0	4.1	2.8	2.3	22-18

GENERAL TOLERANCES (UNLESS SPECIFIED)				ZHE JIANG DELI CONNECTORS CO.,LTD			
.X: ± 0.25	X° : ± 3.0°	PRODUCT NAME: DL39602 (VH)-T		TITLE: 3.96mm Pitch Crimp Terminal			
.XX: ± 0.15	.X° : ± 2.0°	DR:Yuan Jun Rong		DATE:21.3.3		PART NO:	
.XXX: ± 0.01	.XX° : ± 1.0°	CHKD: Liu Bing		DATE:21.3.3		SCALE: N/A	
FINISH:		APPD:Liu Bing		DATE:21.3.3		PAGE: 1/1	
DRAWING NO:						UNITS: mm	
						REV.: A	

1

2

3

4

5

6

7

8

A

B

C

D

E

F

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) *category:*

Click to view products by [DLL](#) *manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#)
[CSU011177004](#) [622-0430](#) [63453-116](#) [636-1030](#) [636-4007](#) [641938-9](#) [65692-001LF](#) [65781-018](#) [65781-047](#) [65817-010LF](#) [67095-007LF](#)
[67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#)
[8-1437020-4](#) [819-22-004-30-001101](#)