

# MDA

## 1/4" x 1-1/4" time delay ceramic fuse



Photo is representative

### Product features

- Ceramic tube time delay fuse
- 250 Vac/125 Vdc, 0.25 A to 30 A
- Compact 3AB footprint:  
1/4" x 1 1/4" (6.3 x 32 mm)
- Cartridge and axial lead versions available
- Fuse accessories (cartridge version):

<u>1Axxxx</u>	<u>HBH-I</u>	<u>HTB</u>	<u>HK</u>
<u>HKP</u>	<u>HBV-I</u>	<u>HGA</u>	<u>HTJ</u>
<u>HRK</u>	<u>HHB</u>	<u>HFA</u>	<u>HHK</u>
<u>HHN</u>	<u>HFB</u>	<u>HHJ</u>	<u>S-4000</u>

### Agency information

- UL Listed Card: MDA 1/4 A - 20 A (Guide JDYX, File E19180)
- UL Recognized Card: MDA 25 A - 30 A (Guide JDYX2, File E19180)
- CSA Certification Card: MDA 1/4 A - 20 A (Class No. 1422-01)
- CSA Component Acceptance: MDA 25 A - 30 A (Class No. 1422-30)



### Applications

Primary circuit protection:


- LED and general lighting
- LED/LCD televisions
- Appliances and white goods
- Printers and peripherals
- Test equipment
- Uninterruptible power supplies (UPS)

### Environmental compliance



### Ordering part number

**BK-MDA-BV-30-R**

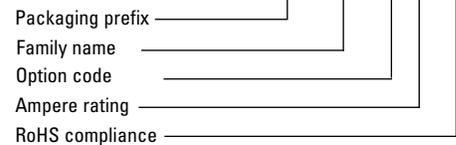

### Packaging prefix

#### Blank-

MDA-XXX-R: 5 pieces in tin tray.  
MDA-V-XXX-R, MDA-BV-XXX-R : 4 pieces in tin tray.

#### BK-

MDA-XXX-R, MDA-V-XXX-R, MDA-BV-XXX-R:  
100 pieces in a box.

#### TR-

MDA-V-XXX-R: 500 pieces on reel.

### Option code

#### -B

Board washable

#### -V

Axial leads



Powering Business Worldwide

### Electrical characteristics

Rating	% Amp rating	Opening time
250 mA to 30 A	100%	4 hours
250 mA to 30 A	135%	60 minutes maximum
250 mA to 30 A	200%	120 seconds maximum

### Product specifications

Part number	Current rating (A)	Voltage rating (Vac)	Voltage rating (Vdc)	Interrupting rating @ rated voltage <sup>1</sup>	Typical resistance <sup>2</sup> (mΩ)	Typical voltage drop <sup>3</sup> (mV)	Typical melting <sup>4</sup> I <sup>2</sup> t (A <sup>2</sup> sec)
MDA-1/4-R	0.25	250	-	200 A @ 250 Vac, 10000 A @ 125 Vac	9100	2900	0.28
MDA-1/2-R	0.50	250	-	200 A @ 250 Vac, 10000 A @ 125 Vac	2600	1650	1.2
MDA-3/4-R	0.75	250	-	200 A @ 250 Vac, 10000 A @ 125 Vac	520	495	0.42
MDA-1-R	1.0	250	-	200 A @ 250 Vac, 10000 A @ 125 Vac	380	470	0.90
MDA-1-1/2-R	1.5	250	-	200 A @ 250 Vac, 10000 A @ 125 Vac	190	370	3.4
MDA-2-R	2.0	250	-	200 A @ 250 Vac, 10000 A @ 125 Vac	120	295	8.8
MDA-2-1/2-R	2.5	250	125	200 A @ 250 Vac, 10000 A @ 125 Vac 10000 A @ 125 Vdc	66	246	7.2
MDA-3-R	3.0	250	125	200 A @ 250 Vac, 10000 A @ 125 Vac 10000 A @ 125 Vdc	48	215	15.9
MDA-4-R	4.0	250	125	200 A @ 250 Vac, 10000 A @ 125 Vac 10000 A @ 125 Vdc	31	176	37.2
MDA-5-R	5.0	250	125	200 A @ 250 Vac, 10000 A @ 125 Vac 10000 A @ 125 Vdc	23	173	65
MDA-6-R	6.0	250	125	200 A @ 250 Vac, 10000 A @ 125 Vac 10000 A @ 125 Vdc	18	166	98.1
MDA-7-R	7.0	250	125	200 A @ 250 Vac, 10000 A @ 125 Vac 10000 A @ 125 Vdc	15	158	135
MDA-8-R	8.0	250	125	200 A @ 250 Vac, 10000 A @ 125 Vac 10000 A @ 125 Vdc	13	162	188
MDA-10-R	10	250	125	200 A @ 250 Vac, 10000 A @ 125 Vac 10000 A @ 125 Vdc	9.5	142	332
MDA-12-R	12	250	125	750 A @ 250 Vac, 10000 A @ 125 Vac 10000 A @ 125 Vdc	7.6	128	125.2
MDA-15-R	15	250	125	750 A @ 250 Vac, 10000 A @ 125 Vac 10000 A @ 125 Vdc	5.7	107	336.8
MDA-20-R	20	250	125	1500 A @ 250 Vac, 10000 A @ 125 Vac 10000 A @ 125 Vdc	4.1	95	483.5
MDA-25-R	25	250	125	1500 A @ 250 Vac, 10000 A @ 125 Vac 10000 A @ 125 Vdc	3.1	105	734.7
MDA-30-R	30	250	125	1500 A @ 250 Vac, 10000 A @ 125 Vac 10000 A @ 125 Vdc	2.5	110	1096.7

1. Interrupting ratings measured at 70% ~ 80% power factor on AC, (20 A and 30 A, 90% - 100% over factor on AC).


2. Typical resistance measured at <10% of rated current at +25 °C

3. Typical voltage drop measured at +25 °C and rated current

4. Typical melting: (< 10 A, I<sup>2</sup>t measured at 10 x rated current), (> 12 A, I<sup>2</sup>t measured at interrupting rating and rated voltage)

**Dimensions- mm**

Drawing not to scale

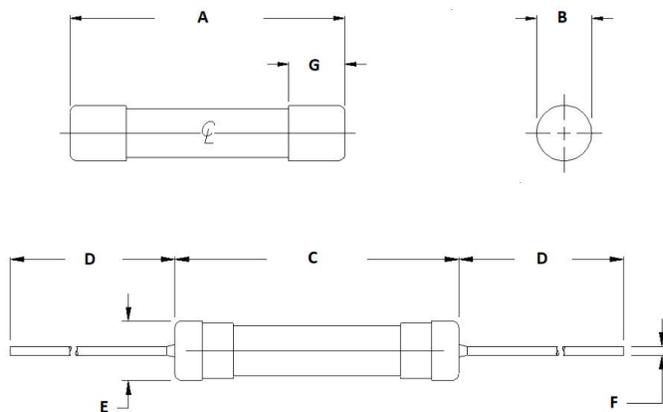

**Cartridge**

Dimensions	Size
A	31.75 ± 0.79
B	6.35 ± 0.1
G	4.8 ref for 10 A and below 6.48 ref for above 10 A

**Axial lead**

Dimensions	Size
C	32.82 ± 0.79
D	38.1mm ref
E	6.76 ref
F	0.81 ± 0.05 for 15 A and below 1.02 ± 0.05 for 20 A and above

**General specifications**

Operating temperature: -55 °C to +125 °C with proper derating factor applied.

Mechanical shock test 1/4 A to 10 A: MIL-STD 202 method 213. Condition C


Mechanical shock test 12 A to 30 A: MIL-STD 202G method 213. Condition J

Vibration test 1/4 A to 30 A: MIL-STD-202 method 204, test condition C


**Packaging information**

Packaging prefix	Description
Blank	MDA-XXX-R: 5 pieces in tin tray.
	MDA-V-XXX-R, MDA-BV-XXX-R: 4 pieces in tin tray.
BK-	MDA-XXX-R, MDA-V-XXX-R, MDP-BV-XXX-R: 100 pieces in a box.
TR-	MDA-V-XXX-R: 500 pieces on reel.


**Temperature derating curve**

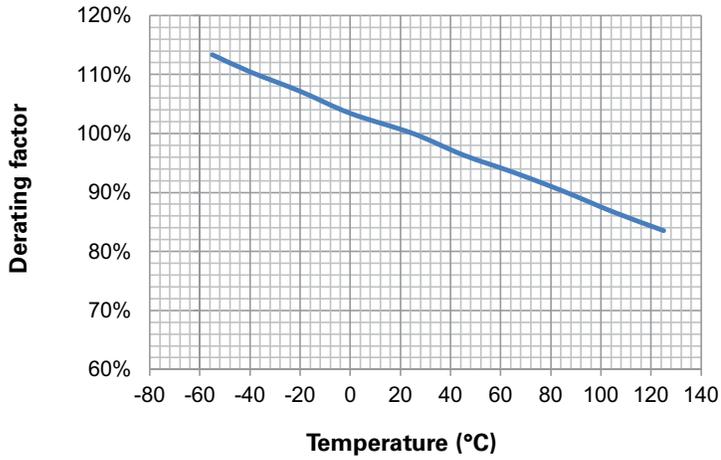


**Current vs. time curve**

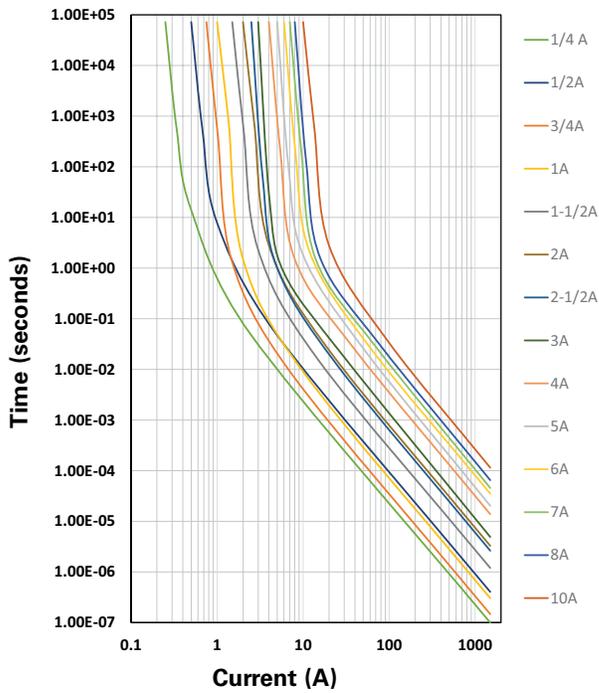


**Current vs. time curve**

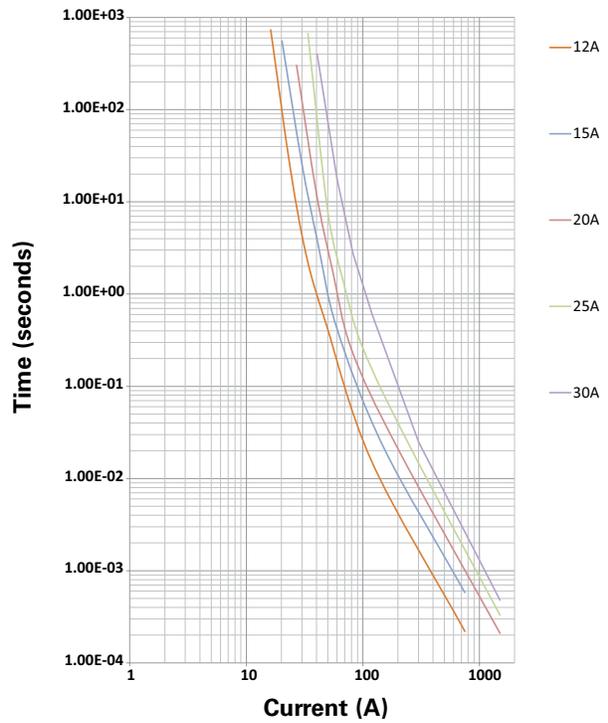


I<sup>2</sup>t vs. current curve

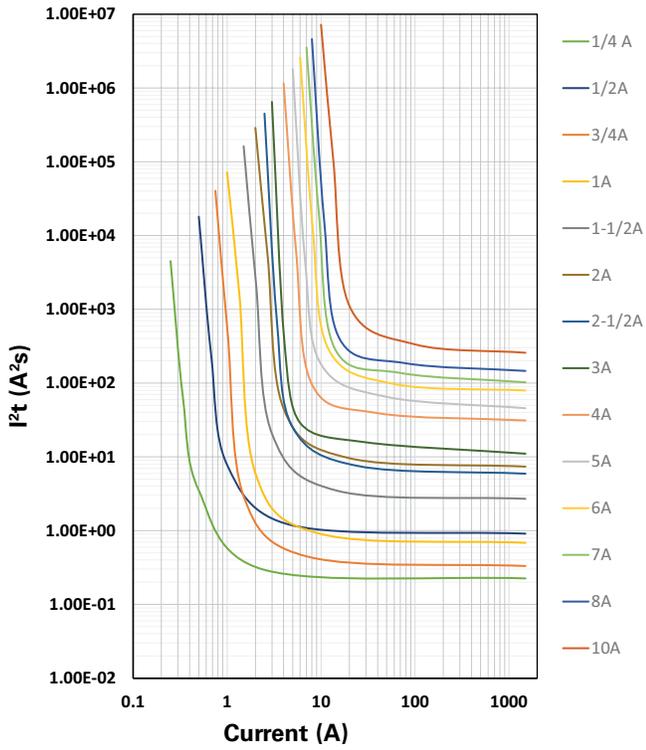


I<sup>2</sup>t vs current curve

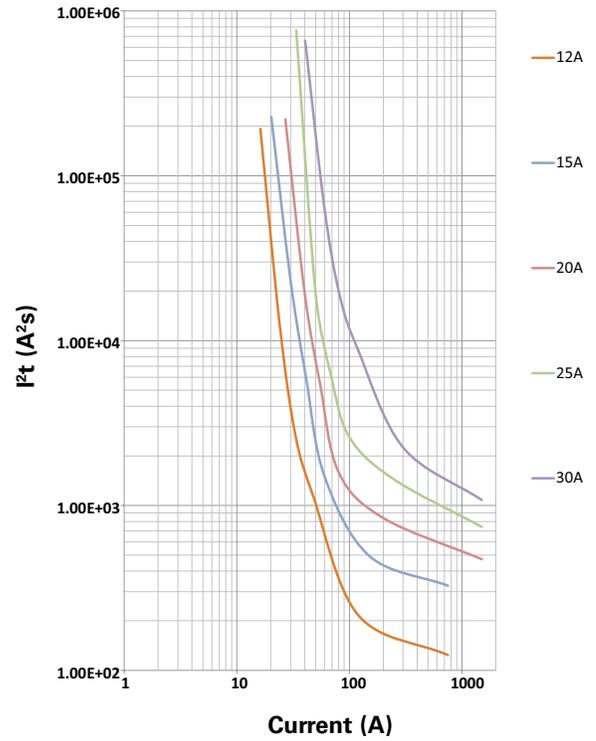


I<sup>2</sup>t vs. time curve

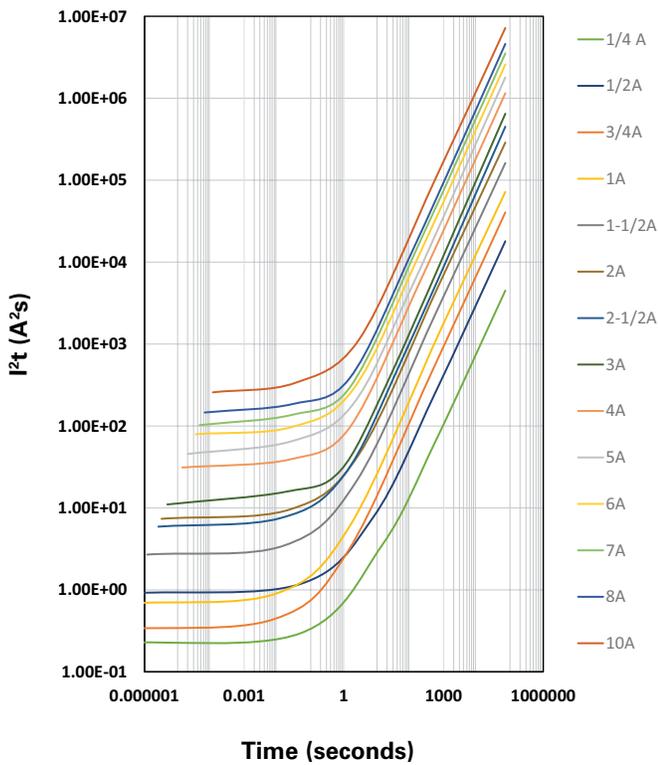

I<sup>2</sup>t vs time curve

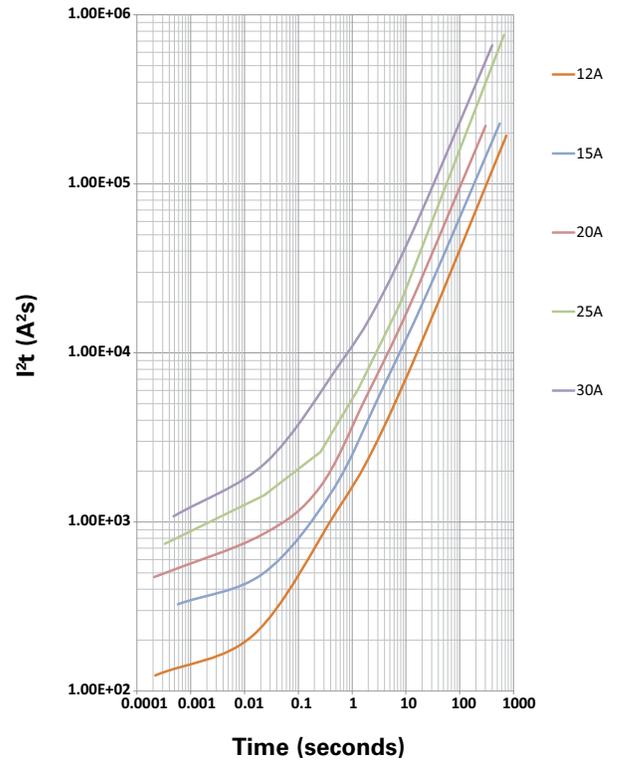

**Wave solder profile--(axial lead version only)**

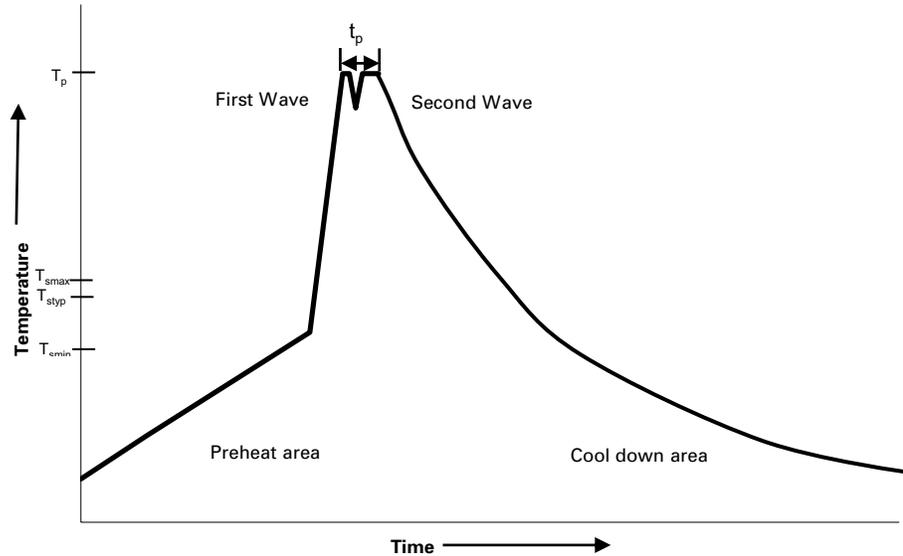

**Reference EN 61760-1:2006**

Profile feature		Standard SnPb solder	Lead (Pb) free solder
Preheat	• Temperature min. ( $T_{smin}$ )	100 °C	100 °C
	• Temperature typ. ( $T_{styp}$ )	120 °C	120 °C
	• Temperature max. ( $T_{smax}$ )	130 °C	130 °C
	• Time ( $T_{smin}$ to $T_{smax}$ ) ( $t_s$ )	70 seconds	70 seconds
$\Delta$ preheat to max Temperature		150 °C max.	150 °C max.
Peak temperature ( $T_p$ )*		235 °C – 260 °C	250 °C – 260 °C
Time at peak temperature ( $t_p$ )		10 seconds max 5 seconds max each wave	10 seconds max 5 seconds max each wave
Ramp-down rate		~ 2 K/s min ~3.5 K/s typ ~5 K/s max	~ 2 K/s min ~3.5 K/s typ ~5 K/s max
Time 25 °C to 25 °C		4 minutes	4 minutes

**Manual solder**

+350 °C (4-5 seconds by soldering iron), generally manual/hand soldering is not recommended

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

**Eaton**  
**Electronics Division**  
1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
Eaton.com/electronics

© 2023 Eaton  
All Rights Reserved  
Printed in USA  
Publication No. 2002 PCN23025  
November 2023

Eaton is a registered trademark.  
All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Cartridge Fuses](#) category:*

*Click to view products by [Eaton](#) manufacturer:*

Other Similar products are found below :

[MBO-20](#) [MDX-2](#) [MDX-3-2/10](#) [ABC-2](#) [AGC-15EX](#) [AGC-V-3-12-R](#) [MSL-5](#) [BK1-S500-1-6-R](#) [BK1-S501-3-15-R](#) [BK1-S505-1-R](#) [BK1-S505-5-R](#) [20.0M6.3X32F](#) [FSC-3.5A](#) [3AG3](#) [3AG5](#) [3AG8](#) [MDM-5](#) [MDX-5](#) [MKB-1/8](#) [BK1/S501-400-R](#) [BK1-S505-4-R](#) [BK/ABS-20](#) [BK/S506-V-400-R](#) [3AG4](#) [S506-V-400-R](#) [BKABS-30](#) [3NA3 814](#) [3NA3 836](#) [3NE4 101](#) [3NE8 024-1](#) [BK/C515S-1.5-R](#) [8.0M5X20M](#) [BP/GMA-1A](#) [BK/C520-1.5-R](#) [A15QS10-2](#) [GAB5](#) [002621009](#) [BK-AGC-B-2-R](#) [002631001](#) [002631006](#) [004112134](#) [004112135](#) [004116101](#) [004119100](#) [004119101](#) [004119102](#) [004119103](#) [004119104](#) [004139100](#) [004139101](#)