

SR-5H

250/300 V Subminiature time delay fuses



Product features

- Radial leaded time-delay thru-hole fuse
- Designed to IEC 60127-3, Sheet 4
- Ideal for electronic lighting
- cURus Recognized at 300 V/100 A
- Internationally accepted for primary and secondary overcurrent protection
- Place directly into PCB or plug into BK/PCS holder
- High inrush withstand capability
- Compatible with leaded and lead-free reflow and wave solder
- Plastic base/cap, UL 94V0

Agency information

- cURus: File E19180 JDYX2, JDYX8 (400 mA - 5 A)
- EK: SU05011-9005 1 A - 2.5 A, SU05011-9006A (5 A), SU05011-9006 (3.15 A - 4 A)
- PSE+JET: JET1641-31007-1006 (1 A - 5 A)
- CCC: 2009010207369246 (1 A - 5 A)
- SEMKO: 1414025 (1 A - 5 A)
- VDE: File 40020842 (1 A - 4 A), 40020843 (5 A)

General specifications

- Solderability: EIA-186-9E Method 9
- High Frequency Vibration: MIL-STD-202F, Method 201A
- Operating Temperature: -40 °C to +125 °C

Ordering

- The ordering code is the part number replacing the "." with a "-" plus adding the packaging suffix (i.e. SR-5H-1.25A; SR-5H-1-25A-AP)

Packaging suffixes

250 V Version

- -AP (1000 parts Ammo pack, Pitch =12.7 mm)
- -BK (200 parts in a polybag, Lead L=4.3 ±0.3 mm)
- -BK2 (200 parts in a polybag, Lead L=21 ±3.0 mm)

300 V Version

- -APH (1000 parts Ammo pack, Pitch =12.7 mm)
- -BKH (200 parts in a polybag, Lead L=4.3 ±0.3 mm)
- -BK2H (200 parts in a polybag, Lead L=21 ±3.0 mm)

Electrical Characteristics

Rated Current	1.5 I _n		2.75 I _n		4 I _n		10 I _n	
	min	max	min	max	min	max	min	max
400mA-5A	60 min	2 min	400 ms	10 sec	150 ms	3 sec	20 ms	150 ms

Specifications

Part number	Voltage rating (Vac)*	Interrupting rating (A) @ rated voltage	Typical DC cold resistance (Ω)	Typical melting I ² t	Voltage drop (mV) @ +20 °C @ rated current	Agency Information					
						VDE	SEMKO	cURus*	CCC	EK-Mark**	PSE
SR-5H-400mA	250/300	100	0.285	0.771618	127			X			
SR-5H-500mA	250/300	100	0.24	2	143			X			
SR-5H-630mA	250/300	100	0.162	3.5	120			X			
SR-5H-800mA	250/300	100	0.113	6.5	107			X			
SR-5H-1A	250/300	100	0.081	7.5	93	X	X	X	X	X	X
SR-5H-1.25A	250/300	100	0.06	13	88	X	X	X	X	X	X
SR-5H-1.6A	250/300	100	0.043	24	85	X	X	X	X	X	X
SR-5H-2A	250/300	100	0.031	30	74	X	X	X	X	X	X
SR-5H-2.5A	250/300	100	0.025	45	75	X	X	X	X	X	X
SR-5H-3.15A	250/300	100	0.018	57	73	X	X	X	X	X	X
SR-5H-4A	250/300	100	0.013	80	65	X	X	X	X	X	X
SR-5H-5A	250/300	100	0.007	115	45	X	X	X	X	X	X
SR-5H-6.3A	250/300	100	0.007	166	56						


* cURus: 400 mA -5 A @ 300 Vac/100 A; PSE: 1 - 5 A @ 300 Vac/100 A

** Voltage rating 250 Vac




Powering Business Worldwide

Dimensions / Packaging Information – mm

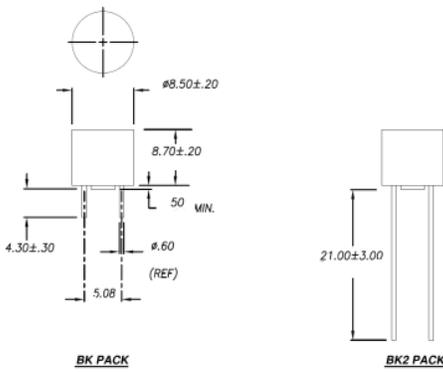


Dimensions / Packaging Information – mm

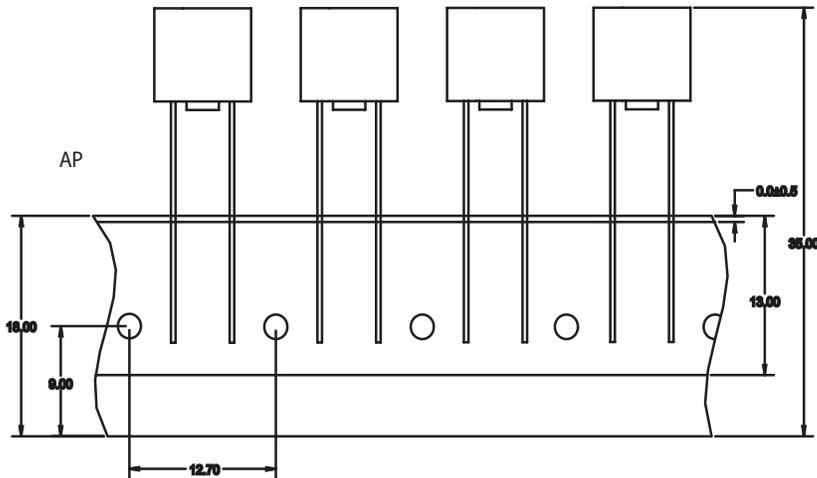

Packaging Suffix	
Packaging Code	Description
-BK	200 fuses in polybag, Lead L=4.3±0.3
-BK2	200 fuses in polybag, Lead L=21±3.0
-AP	1000 fuses, ammo-pack, pitch=12.7



Time-Current Curves

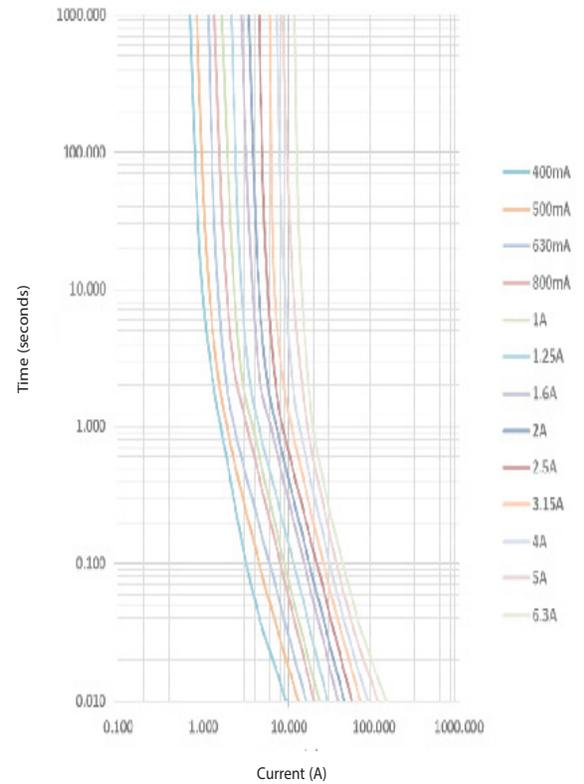

PCS Mounting Socket (RoHS compliant)

- Available as option. Specify catalog number BK/PCS (in bulk 100 per bag)

(PC)



Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com/electronics

© 2020 Eaton
All Rights Reserved
Printed in USA
Publication No. 4360 PCN19017M
January 2020

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fuses with Leads - Through Hole](#) category:

Click to view products by [Eaton](#) manufacturer:

Other Similar products are found below :

[89096-013](#) [89096-015](#) [A170100400](#) [252010](#) [25202.5](#) [252.062](#) [263.500](#) [265.750](#) [272.005](#) [273.600V](#) [274.250](#) [SR-5H-5A-BK](#) [SS-5-800MA-AP](#) [SS-5F-3.15A-AP](#) [252004](#) [263.750](#) [273.005](#) [3701630000](#) [0473004.MAT1L](#) [0473.750HAT1L](#) [0473001.HAT1L](#) [0473002.HAT1L](#) [0473.500HAT1L](#) [SS-5-1.6A-AP](#) [SS-5F-2.5A-AP](#) [SS-5-6.3A-BK](#) [SR-5H-4A-AP](#) [RST 5-AMMO](#) [SR-5H-3.15A-BK](#) [89096-005](#) [SR-5F-1-6A-BK](#) [SS-5FH-3.15A-AP](#) [SS-5-630MA-AP](#) [047301.5HAT1L](#) [SS-5H-1-25A-APH](#) [SR-5H-800MA-APH](#) [0034.722](#) [34.732](#) [MSF 4A 250V](#) [22D03-200](#) [883324G](#) [883220G](#) [883317G](#) [883217G](#) [883223G](#) [883322G](#) [883323G](#) [0263004.HAT1L](#) [0263.750HAT1L](#) [0473003.MXL](#)