

The ECS-327TXO is a low power CMOS SMD TCXO. The 3.28 x 2.5 x 1.3 mm ceramic package is ideal for LoRa WAN and accurate RTC applications.


ECS-327TXO 32.768 KHz SMD TCXO

ECS-327TXO SMD CMOS TCXO



- Low Profile
- 3.28 x 2.5 mm Footprint
- Extended Temp Range
- RoHS Compliant

DIMENSIONS (mm)

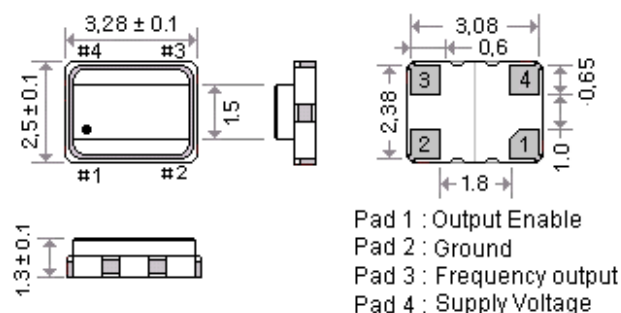

Use Bypass Cap of 0.1 μ F between Vdd & Gnd

Figure 1) Top, Side, and Bottom views

OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS

PARAMETERS	CONDITIONS	ECS-327TXO			UNITS
		MIN	TYP	MAX	
Frequency			32.768		KHz
Frequency Tolerance	@25°C $\pm$ 3°C			$\pm$ 1.5	ppm
Frequency Stability over Temp	-40 ~ +85°C			$\pm$ 5	ppm
Stability vs. Aging	First Year at +25°C			$\pm$ 3	ppm
Stability vs. VDD Change	$\pm$ 5% VDD Change			$\pm$ 0.2	ppm
Stability vs. Load Change	$\pm$ 10% Load Change			$\pm$ 0.2	ppm
Stability vs. Reflow	After 24 Hours			$\pm$ 1.0	ppm
Output	CMOS		15		pF
Output Voltage Level	VOH: VDD-0.4V min. (IOH 0.1 mA) VOL: 0.4V max. (IOL -0.1 mA)				
Start-Up time (see Note 1)			1	3	sec
Rise & Fall time	20% – 80%			100	ns
Duty Cycle	@ 1/2 VDD			40/60	%
Operating Temp		-40		+85	°C
Storage Temp		-55		+105	°C

Power Supply Current (Typical)

1.8V $\pm$ 5%	2.5V $\pm$ 5%	3.0V $\pm$ 5%	3.3V $\pm$ 5%
1.0 μ A	1.05 μ A	1.25 μ A	1.37 μ A

PAD CONNECTIONS

1	Output Enable
2	Gnd
3	Output
4	Supply Voltage

Enable Function

Pin 1	Output
Vih=0.8* VDD	Enabled
Vil=0.2*Low	Disabled





Figure 2) Suggested Land

PART NUMBERING GUIDE: Example ECS-327TXO-33-TR

ECS	SERIES	Voltage	PACKAGING
ECS	327TXO 32.768 KHz TCXO	18 = +1.8V 25 = +2.5V 30 = +3.0V 33 = +3.3V	TR = Tape & Reel 1K/Reel

Note 1: Effective 12/22 Start up the power supply under the recommended conditions of t_{VDD} , t_{OFF} , V_{bot} in order to operate it certainly.

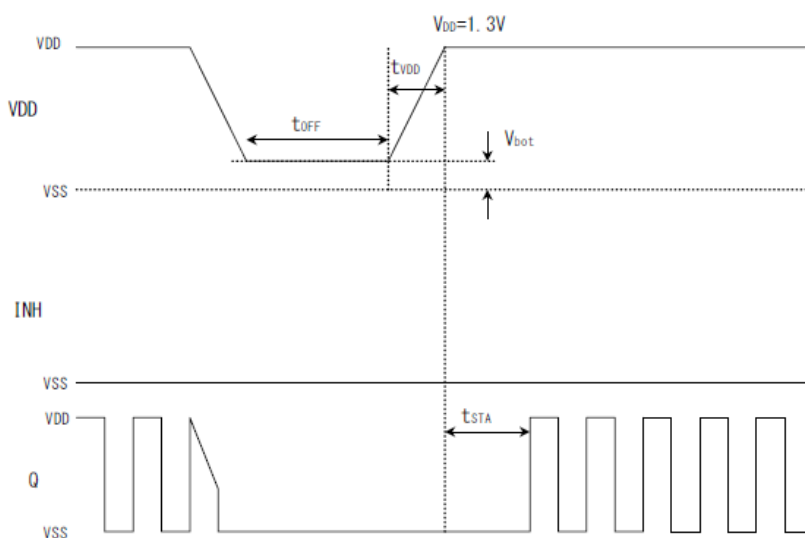

t_{VDD}	t_{OFF}	V_{bot}
under 10ms/V	over 0.5ms	0V

Timing Error over time
(± 5 ppm over $-40 \sim +85^{\circ}\text{C}$)

± 0.432 sec/day

± 12.960 sec/month

± 2.628 min/year

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [TCXO Oscillators](#) category:

Click to view products by [ECS Inc](#) manufacturer:

Other Similar products are found below :

[SIT5000ACC8E-33VQ-19.200000X](#) [SiT5001AI-2E-33N0-48.000000X](#) [TG3225CEN 25.0000M-KFGNNAB](#) [SIT5001AI-2E-33N0-24.000000x](#)
[SIT1566AC-JV-18E-32.768E](#) [KT1612A26000AAW18NBL](#) [X1G005421031215](#) [TX0408CB](#) [NT1220HH3I106EN100](#)
[NT1220HS3I106EN100](#) [NT1220HS3I507EN100](#) [BT0507BC3I507CN27](#) [SIT5146AI-FA-33N0A40.000000F](#) [SiT9551AI-02B1A3310-](#)
[312.500000](#) [NT1220HH3I507EN100](#) [BT0914AD3C507DN100](#) [BT0914AD3C106DN100](#) [9132S-26.000N30FT1XL](#) [8132S-10.000MN18DTL](#)
[8153S-26.000NL33DTL](#) [9175S-10.000K33FT1JL](#) [SX2T25.000B010J020S](#) [ATXAIG-H13-F-26.000MHZ-F25-T3](#) [ATX-13-D-26.000MHZ-](#)
[E05-T3](#) [LFPTXO000291](#) [LFTCXO073006](#) [SIT5356AI-FQ-33E0-25.000000X](#) [SIT5357AI-FQ-33N0-100.000000X](#) [ECS-TXO-2520-33-120-](#)
[AN-TR](#) [SiT5000AICGE-33E0-25.000000X](#) [SiT1568AI-JE-DCC-32.768E](#) [AST3TQ-T-20.000MHz-28](#) [AST3TQ-T-25.000MHz-28](#)
[SiT1552AC-JE-DCC-32.768D](#) [AST3TQ-V-30.720MHz-28](#) [AST3TQ-T-30.720MHz-28](#) [AST3TQ-T-40.000MHz-28](#) [ABDFTCXO-](#)
[20.000MHz-L-2-CT](#) [718-24-15](#) [AST3TQ-10.00MHz-2](#) [AST3TQ-19.20MHz-5](#) [AST3TQ-25.00MHz-5](#) [ASGTX-D-100.000MHz-1](#) [ASGTX-D-](#)
[106.250MHz-1](#) [ASGTX-P-1.500GHz-1](#) [AST3TDA-0000-T5](#) [AST3TDA53TACJ2-19.2000MHz](#) [AST3TDATAACJ5-20.0000MHz](#) [AST3TQ53-](#)
[T-10.000MHz-5-C](#) [AST3TQ53-T-20.000MHz-5-C](#)