

The ECX2-LMV is SMD LVDS Oscillator with MultiVolt™ capability of 2.375 ~ 3.63 V. Lowest in-class RMS jitter (12 KHz to 20 MHz) sub 50 fs at 156.250 MHz.

[Request a Sample](#)

OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS



PARAMETERS	CONDITIONS	ECX2-LMV			UNITS
		MIN	TYP	MAX	
Frequency Range		100.000		320.000	MHz
* Frequency Stability	-40 ~ +85°C (CN Opt)			±25	ppm
Supply Voltage		2.375		3.63	V
Input Current	Pin 1 Open or ViH			24	mA
Stand-by Current	Pin 1 ViL			30	µA
Symmetry	@ crossing point		45/55		%
Rise & Fall time	20% Vdd – 80% Vdd			0.3	nS
“0” Level	VOL	0.9	+1.10		V
“1” Level	VOH		+1.43	+1.6	V
Output Load	LVDS			100	Ω
Differential Output Voltage		247	330	454	mV
Differential Output error				50	mV
Output offset voltage		1.125	1.25	1.375	V
Output offset error				50	mV
Start Up Time				10	mS
Disable delay time				200	ns
Enable delay time				2	ms
Aging	1 st year			±5	ppm
RMS Jitter (12 kHz to 20 MHz Band)	@ 156.25 MHz 3.3V		46.8	60	fs
Operating Temp*	(N Opt)	-40		+85	°C
Storage Temp		-55		+125	°C

Features

- Ultra-low jitter: sub 50 fs at 156.25 MHz
- RoHS Compliant
- Tight Stability
- Wide Supply Voltage
- Compatible with +2.5V or +3.3V Power Supply
- Low Power consumption

Applications

- Networking & communications
- Optical Transceivers
- Fibre Channel
- Ethernet/Gbe/SyncE
- PON
- Test and measurement


PART NUMBERING GUIDE: Example ECX2-LMV-3CN-156.250-TR

SERIES	-	Package Size (mm)	Stability	Temp Range	-	Frequency	-	PACKAGING
ECX2-LMV LVDS, Ultra Low Jitter MultiVolt™ Oscillator		2 = 2.5 x 2.0 3 = 3.2 x 2.5 5 = 5 x 3.2 7 = 7 x 5	A = ±100 ppm B = ±50 ppm C = ±25 ppm ** D = ±20 ppm	M = -20 ~ +70°C N = -40 ~ +85°C		156.250 MHz		-TR = Tape & Reel

* Frequency Stability includes initial tolerance, temperature, supply voltage and load change reflow frequency shift.

** Contact ECS for availability over -40 ~ +85°C.

Typical Phase noise/Jitter

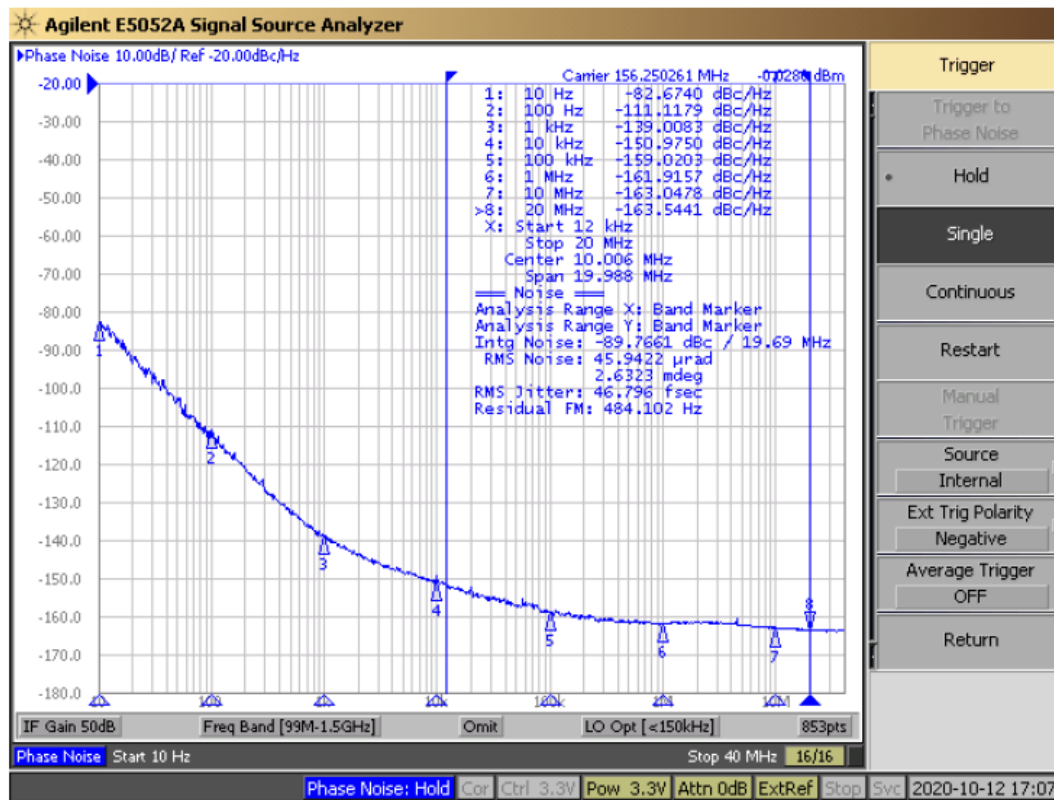

	Frequency (offset)	100.000	125.000	156.250	200.000	285.714	312.500
SSB Phase Noise Data (dBc/Hz typical)	10 Hz	-89.3	-76.7	-82.6	-74.0	-52.57	-45.2
	100 Hz	-118.2	-106.7	-111.1	-103.8	-84.2	-80.2
	1 KHz	-140.3	-135.6	-139.0	-130.7	-118.6	-112.7
	10 KHz	-154.2	-153.5	-150.9	-150.0	-146.4	-142.5
	100 KHz	-160.0	-159.7	-159.0	-158.4	-156.1	-153.8
	1 MHz	-162.6	-162.6	-161.9	-162.6	-160.5	-158.3
	10 MHz	-163.0	-163.0	-163.0	-163.9	-161.9	-159.4
	20 MHz	-163.2	-163.3	-163.5	-164.0	-162.3	-159.7
RMS Phase Jitter 12 KHz ~ 20 MHz		70.9 fs	56.9 fs	46.8 fs	33 fs	29.1 fs	35.2 fs

Table 1) Typical Phase Noise/Jitter


ECX2-LMV

SMD MultiVolt™ LVDS, low jitter
Crystal Oscillator




DIMENSIONS (mm)


2 = 2.5 x 2.0 Pkg

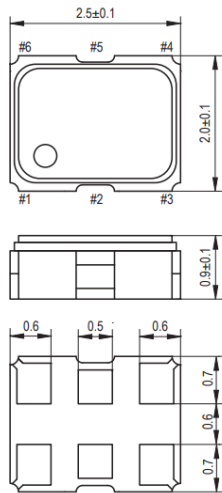

3 = 3.2 x 2.5 Pkg

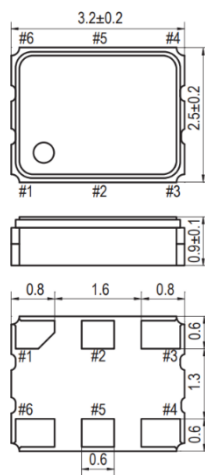

5 = 5 x 3.2 Pkg

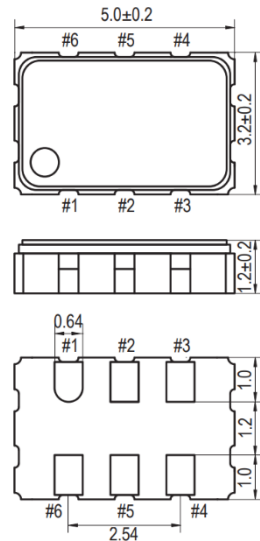

7 = 7 x 5 Pkg


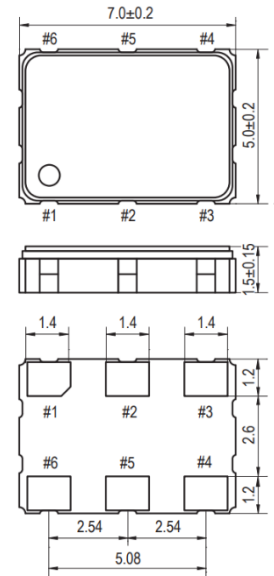


Figure 1) Top, Side,
Bottom & Land




Figure 2) Top, Side,
Bottom & Land

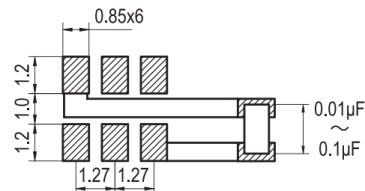


Figure 3) Top, Side,
Bottom & Land




Figure 4) Top, Side,
Bottom & Land

PIN	CONNECTIONS	
1	"L"	OPEN or "H"
2		NC
3		Gnd
4	Z	OUTPUT
5	Z	C-OUTPUT
6		VDD

Z : High Impedance

ECX2-LMV

SMD MultiVolt™ LVDS, low jitter
Crystal Oscillator



SOLDER PROFILE


Peak solder Temp +260°C ±5°C 10 ±5 Sec Max.

2 Cycles Max.

MSL 1, Lead Finish Au

Develop Frequencies

100.000 MHz
125.000 MHz
156.250 MHz
200.000 MHz
285.714 MHz
312.500 MHz

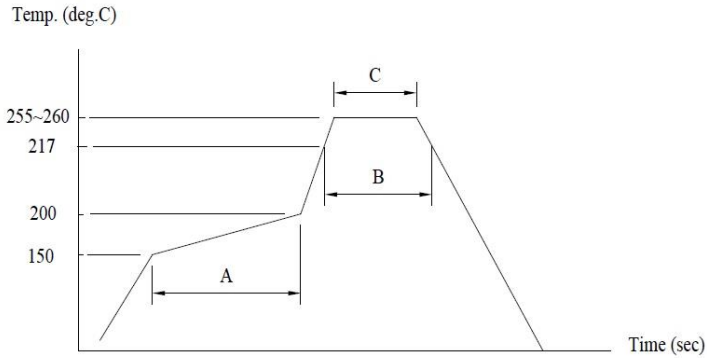

(A)→Preheating area : 150~200°C, 60~120sec.

(B)→Heating area : 217°C, 60~150sec.

(C)→Peak temperature : 255~260°C, 30sec. Max.

Ramp-up rate (217→260°C) : 3°C/sec. Max.


Ramp-down rate (260→217°C) : 6°C/sec. Max.

Time 25°C→260°C : 480sec. Max.

*Reference JEDEC J-STD-020

Figure 4) Suggested Reflow Profile

OUTPUT WAVEFORM

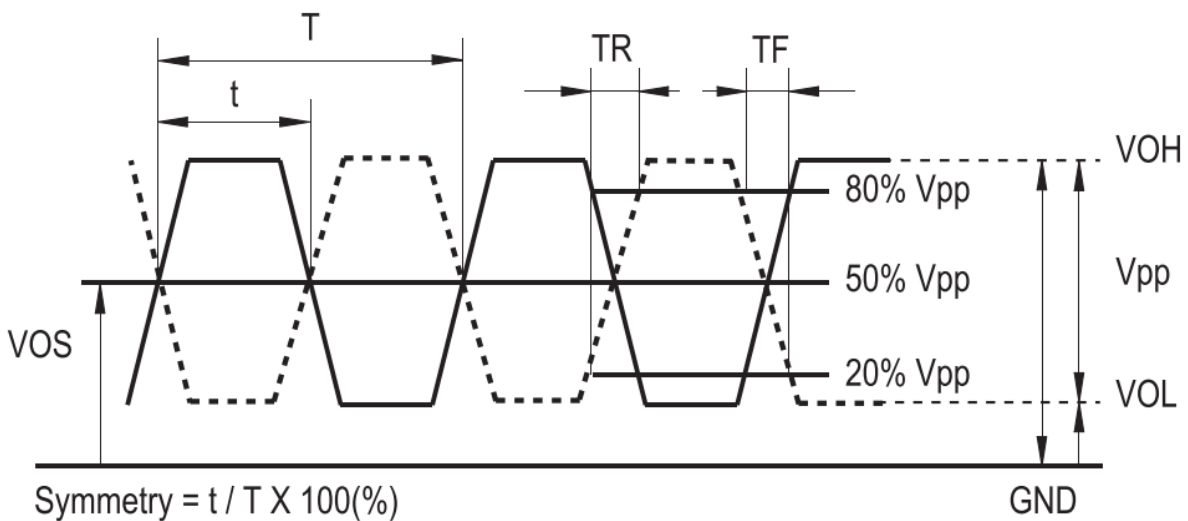

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Clock Oscillators](#) *category:*

Click to view products by [ECS Inc](#) *manufacturer:*

Other Similar products are found below :

[601252](#) [F335-25](#) [F535L-50](#) [NBXDDB017LN1TAG](#) [NBXHBA019LN1TAG](#) [SiT1602BI-22-33E-50.000000E](#) [SiT8209AI-32-33E-125.000000](#)
[SIT8918AA-11-33S-50.000000G](#) [SM4445TX-33.333M-T250](#) [F335-24](#) [F535L-12](#) [F535L-24](#) [SiT8503AI-18-33E-0.200000X](#)
[SIT9122AI2C233E300.000000X](#) [9120AC-2D2-33E212.500000](#) [ASFL1-48.000MHZ-LC-T](#) [SIT8920AM-31-33E-25.0000](#) [9102AI-](#)
[233N33E100.00000X](#) [9102AI-232H25S125.00000](#) [9102AI-133N25E200.00000](#) [3921AI-2CF-33NZ125.000000](#) [EC3620ETTS-24.000M TR](#)
[SG-210SEB 3.6864MB0](#) [SIT1602BC-83-33E-10.000000Y](#) [8003AI-12-33S-40.00000Y](#) [1602BI-13-33S-19.200000E](#) [8208AI-2F-18E-](#)
[25.000000X](#) [8208AI-8F-33E-66.666666X](#) [NX7031E0125.000000](#) [SiT1602BI-23-33E-25.000000G](#) [SiT1602BC-13-33E-50.000000E](#)
[NX51500001](#) [SiT1602BI-22-33E-12.000000E](#) [NX71C50003](#) [KN3270029](#) [SiT1602BI-22-33E-25.000000E](#) [SiT1602BI-12-33E-48.000000E](#)
[CCHD-575-25-24.000](#) [SG3225HBN 100.000000M-CJGA3](#) [SG3225HBN 156.250000M-CJGA3](#) [9120AI-2B2-25E200.0000](#) [9365AC-1E2-](#)
[33E156.250000X](#) [9365AC-1E2-33E156.253906X](#) [KK3270021](#) [HX7124001Q](#) [9003AC-23-18DQ-40.00000Y](#) [SG7050CAN 26.000000M-](#)
[TJGA3](#) [632L3I007M37280](#) [FO3HFCYM0.032768-T3](#) [SiT1602BI-23-18E-33.333330G](#)