



ED-HMI3010-156C

Datasheet


by EDA Technology Co., Ltd

built: 2026-07-29

ED-HMI3010-156C

15.6-inch Industrial HMI Based on Raspberry Pi 5

- 15.6" TFT, resolution 1920x1080, multi-point capacitive touch screen
- Broadcom BCM2712 2.4GHz quad-core 64-bit Arm Cortex-A76 CPU
- Up to 16GB LPDDR4 RAM and 64GB SD Card storage
- 1 x Gigabit ethernet port, 2 x USB 3.0, 2 x USB 2.0
- 1 stereo audio output, support headphone and speaker
- 12V power input on DC Jack connector
- Support backlight adjustment via DDCUI software
- Embedded installation, compatible with VESA standard bracket installation

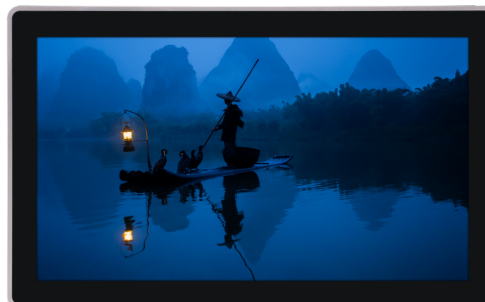

Specifications

System	
CPU	Broadcom BCM2712 2.4GHz quad-core 64-bit Arm Cortex-A76
VPU	H.265 (HEVC), up to 4Kp60 decode
GPU	OpenGL ES 3.1 & Vulkan 1.2
Memory	Options for 2GB, 4GB, 8GB, 16GB LPDDR4X-4267
Storage	Options for 32GB, 64GB SD Storage Card

Software	
Operating System	Raspberry Pi OS (Desktop) 64-bit Raspberry Pi OS (Lite) 64-bit

Side I/O	
1000M Ethernet	1 x adaptive 10/100/1000M ethernet port, RJ45 connector. It can be used to access the network.
USB 2.0	2 x USB 2.0 ports, dual layer Type-A connector, each channel supports up to 480Mbps transmission rate.
USB 3.0	2 x USB 3.0 ports, dual layer Type-A connector, each channel supports up to 5Gbps transmission rate.
Audio	1 x 3.5mm audio jack, stereo audio output
Speaker	1 x PA output, built-in a 4Ω 5W speaker.
Power	1 x DC Jack port, support 12V power input.

Side I/O	
SD Card Slot	1 x Micro SD card slot, which is used to install Micro SD card. It supports booting the OS from SD card.

Buttons and Indicators	
PWR	1 x Red power indicator, using to check the status of device power-on and power-off.
PWR/ACT	1 x Power/System status indicator, red and green, using to view the status of device power-up and system read/write.
Brightness Adjustment Button	2 x Brightness adjustment buttons for increasing and decreasing the brightness.
Volume Adjustment Button	2 x Volume adjustment buttons for increasing and decreasing the volume.
Mute Button	1 x Mute button for mute and unmute audio.
ON/OFF Button	1 x power button, which is used to turn on and turn off the device.

LCD	
Type	15.6" TFT
Resolution	1920 x 1080
Color Number	16.7M
Active Area	344.16mm (H) x 193.59mm (V)
Backlight	LED
Luminance	450cd/m ²
Contrast Ratio	1000:1
Response Time	20ms
Viewing Angle (CR≥10)	89° (L) / 89° (R) / 89° (U) / 89° (D)

Touch Screen	
Type	Capacitive Touch Screen
multi-touch	Up to 5 points
Communication Method	USB
Transmittance	≥85%

Touch Screen	
Surface Hardness	≥6H

Electrical Characteristics	
Input Voltage	12V DC (±10%)
Power Consumption	35W (Max)

Mechanical Characteristics	
Dimensions	388.3mm x 238.3mm x 47.5mm (WxDxH)
Weight	About 2.4kg
Installation	Embedded front installation and VESA bracket mounting

Wireless	
Wi-Fi	Dual-band 802.11ac Wi-Fi
Bluetooth	Bluetooth 5.0 / Bluetooth Low Energy (BLE)

Environmental	
Operating Temperature	-20°C ~ 50°C
Storage Temperature	-25°C ~ 60°C
Ambient humidity	5% ~ 95% (non-condensing)
Certifications	• FCC ◦ FCC Part 15 Subpart B • CE ◦ EN IEC 62368-1:2024+A11:2024 ◦ EN IEC 62311:2020 ◦ ETSI EN 301 489-1 V2.2.3 (2019-11) ETSI EN 301 489-3 V2.3.2 (2023-01) ETSI EN 301 489-17 V3.3.1 (2024-09) EN 55032:2015 + A1:2020 + A11:2020 EN 55035:2017 + A11:2020 EN IEC 61000-3-2:2019 + A1:2021 + A2:2024 EN 61000-3-3:2013 + A1:2019 + A2:2021 ◦ ETSI EN 300 328 V2.2.2 (2019-07) ETSI EN 301 893 V2.2.1 (2024-11) ETSI EN 300 440 V2.2.1 (2018-07)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [HMI Displays & Panel PCs](#) category:

Click to view products by [EDATEC](#) manufacturer:

Other Similar products are found below :

[HG3G-V8XT22MF-W](#) [HG4G-VCXT22MF-B](#) [ED-HMI3010-156CA-0832](#) [HG2G-V5FT22TF-B](#) [NA5-15W101B-V2](#) [1650118](#) [1650120](#)
[1650121](#) [1650122](#)