



TH97/2478



TH09/2479




IATF 0113686

SGS TH07/1033

## MMBT2222E / MMBT2222AE

### NPN Silicon Epitaxial Planar Transistor

for switching and amplifier applications



1.Base 2.Emitter 3.Collector  
SOT-523 Plastic Package

#### Absolute Maximum Ratings ( $T_a = 25^\circ\text{C}$ )

Parameter		Symbol	Value	Unit
Collector Base Voltage	MMBT2222E MMBT2222AE	$V_{CBO}$	60 75	V
Collector Emitter Voltage	MMBT2222E MMBT2222AE	$V_{CEO}$	30 40	V
Emitter Base Voltage	MMBT2222E MMBT2222AE	$V_{EBO}$	5 6	V
Collector Current		$I_C$	600	mA
Power Dissipation		$P_{tot}$	150	mW
Junction Temperature		$T_j$	150	$^\circ\text{C}$
Storage Temperature Range		$T_{stg}$	- 55 to + 150	$^\circ\text{C}$



TH97/2478



TH09/2479


 IATF 0113686  
 SGS TH07/1033

## MMBT2222E / MMBT2222AE

Characteristics at  $T_a = 25^\circ\text{C}$

Parameter	Symbol	Min.	Max.	Unit
DC Current Gain at $V_{CE} = 10 \text{ V}$ , $I_C = 0.1 \text{ mA}$ at $V_{CE} = 10 \text{ V}$ , $I_C = 1 \text{ mA}$ at $V_{CE} = 10 \text{ V}$ , $I_C = 10 \text{ mA}$ at $V_{CE} = 1 \text{ V}$ , $I_C = 150 \text{ mA}$ at $V_{CE} = 10 \text{ V}$ , $I_C = 150 \text{ mA}$ at $V_{CE} = 10 \text{ V}$ , $I_C = 500 \text{ mA}$	$h_{FE}$	35	-	-
	$h_{FE}$	50	-	-
	$h_{FE}$	75	-	-
	$h_{FE}$	50	-	-
	$h_{FE}$	100	300	-
	$h_{FE}$	30	-	-
	$h_{FE}$	40	-	-
Collector Base Cutoff Current at $V_{CB} = 50 \text{ V}$ at $V_{CB} = 60 \text{ V}$	$I_{CBO}$	-	100	nA
Emitter Base Cutoff Current at $V_{EB} = 3 \text{ V}$	$I_{EBO}$	-	100	nA
Collector Base Breakdown Voltage at $I_C = 10 \mu\text{A}$	$V_{(BR)CBO}$	60	-	V
		75	-	
Collector Emitter Breakdown Voltage at $I_C = 10 \text{ mA}$	$V_{(BR)CEO}$	30	-	V
		40	-	
Emitter Base Breakdown Voltage at $I_E = 10 \mu\text{A}$	$V_{(BR)EBO}$	5	-	V
		6	-	
Collector Emitter Saturation Voltage at $I_C = 150 \text{ mA}$ , $I_B = 15 \text{ mA}$ at $I_C = 500 \text{ mA}$ , $I_B = 50 \text{ mA}$	$V_{CE(sat)}$	-	0.4	V
		-	0.3	
		-	1.6	
		-	1	
Base Emitter Saturation Voltage at $I_C = 150 \text{ mA}$ , $I_B = 15 \text{ mA}$ at $I_C = 500 \text{ mA}$ , $I_B = 50 \text{ mA}$	$V_{BE(sat)}$	-	1.3	V
		0.6	1.2	
		-	2.6	
		-	2	
Transition Frequency at $V_{CE} = 20 \text{ V}$ , $-I_E = 20 \text{ mA}$ , $f = 100 \text{ MHz}$	$f_T$	300	-	MHz
Collector Output Capacitance at $V_{CB} = 10 \text{ V}$ , $f = 100 \text{ KHz}$	$C_{ob}$	-	8	pF
Delay Time at $V_{CC} = 30 \text{ V}$ , $V_{BE(OFF)} = 0.5 \text{ V}$ , $I_C = 150 \text{ mA}$ , $I_{B1} = 15 \text{ mA}$	$t_d$	-	10	ns
Rise Time at $V_{CC} = 30 \text{ V}$ , $V_{BE(OFF)} = 0.5 \text{ V}$ , $I_C = 150 \text{ mA}$ , $I_{B1} = 15 \text{ mA}$	$t_r$	-	25	ns
Storage Time at $V_{CC} = 30 \text{ V}$ , $I_C = 150 \text{ mA}$ , $I_{B1} = -I_{B2} = 15 \text{ mA}$	$t_{stg}$	-	225	ns
Fall Time at $V_{CC} = 30 \text{ V}$ , $I_C = 150 \text{ mA}$ , $I_{B1} = -I_{B2} = 15 \text{ mA}$	$t_f$	-	60	ns

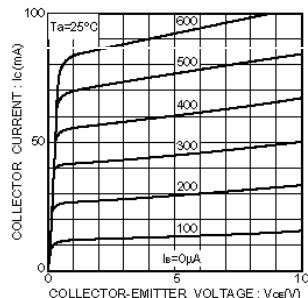


Fig.1 Grounded emitter output characteristics

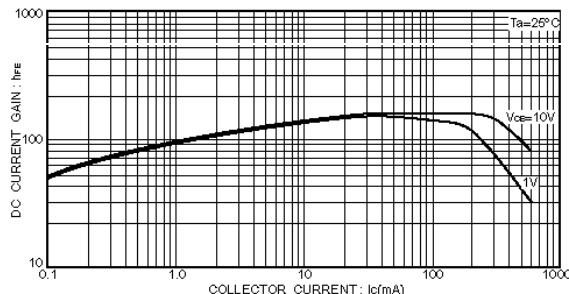


Fig.3 DC current gain vs. collector current(I)

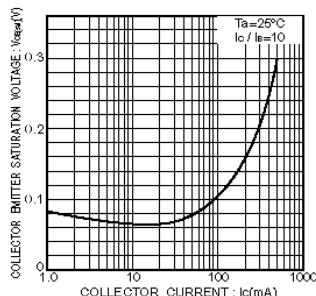


Fig.2 Collector-emitter saturation voltage vs. collector current

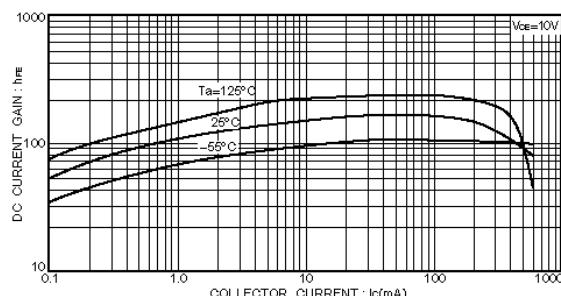


Fig.4 DC current gain vs. collector current(II)

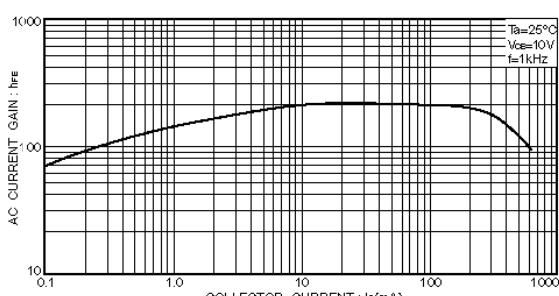


Fig.5 AC current gain vs. collector current


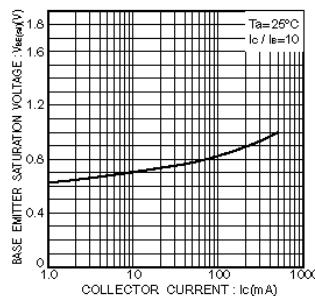


Fig.6 Base-emitter saturation voltage vs. collector current

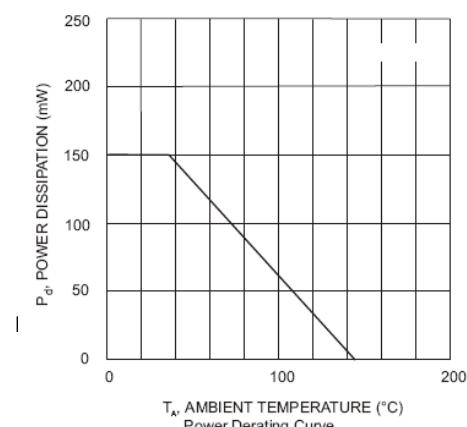

T<sub>A</sub> AMBIENT TEMPERATURE (°C)  
Power Derating Curve

Rev. 02 : March 24, 2005

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Other Tools category:***

***Click to view products by EIC Semiconductor manufacturer:***

Other Similar products are found below :

[568681-1](#) [CR-12FP4--260R](#) [5800-0090](#) [58061-1](#) [59085](#) [00-8273-RDPP](#) [00-8729-WHPP](#) [593033](#) [593072](#) [593564100](#) [593575](#) [593593](#)  
[011349-000](#) [CRCW08052740FRT1](#) [LUC-012S070DSM](#) [LUC-024S105DSP](#) [599-2021-3-NME](#) [599-JJ-2021-03](#) [00-5080-YWPP](#) [00-9089-](#)  
[RDPP](#) [00-9300-RDPP](#) [CRCW2010331JR02](#) [601-JJ-06](#) [601-SPB](#) [601YSY](#) [602-JJ-03](#) [602SPB](#) [603-JJ-07-FP](#) [603-JJY-04](#) [M15570-25](#)  
[CRTN1013](#) [CS16](#) [6-1579014-0](#) [CSB3](#) [6203](#) [6240-1](#) [M43435 TY 2 SZ 3 FIN B BLK](#) [M43435 TY 5 SZ 3 FIN C NAT](#) [M-5Z](#) [M6816](#) [660-](#)  
[29ABT1](#) [662508-1](#) [CVHD-950X-93.333](#) [CW104-01X](#) [671-GP-04-KT39-73207](#) [CW307-01A](#) [CW30901A](#) [CW6211201A](#) [679793-1](#) [69001-](#)  
[0105](#)