

LCD0805 Series Type

SMD Inductor for Power Line

FEATURES

- Utilizing a miniaturized winding structure.
- These products provide low DC resistance and high current.
- Precision inductance tolerance is available.



APPLICATIONS

- Personal computers, Hard disk drives
- xDSL modem and Cable modem
- Digital camera and other electronic equipment

PRODUCT IDENTIFICATION

LCD 0805 - 1R0 K - T

(1) (2) (3) (4) (5)

(1) Product name

(2) Dimension

(3) Inductance

1R0 : 1.0uH ; 100 : 10uH


(4) Tolerance

J : $\pm 5\%$; K : $\pm 10\%$; M : $\pm 20\%$

(5) Taping style


T : Taping ; None : Bulk

SHAPES AND DIMENSIONS(Unit:mm)

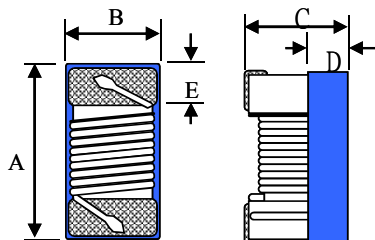

A max.	: 2.40	mm
B max.	: 1.65	mm
C	: 1.20 ± 0.1	mm
D ref.	: 0.65	mm
E	: 0.44 ± 0.1	mm

RECOMMENDED FOOTPRINT(Unit:mm)



LCD0805 Series Type

SMD Inductor for Power Line

ELECTRICAL CHARACTERISTICS

Our Product Part Number	Inductance (uH)/MHz	Inductance Tolerance	Q/MHz Typ.	SRF Typ. (MHz)	RDC $\pm 30\%$ (Ω)	Idc Typ. (mA)	Irms Typ. (mA)	Color Coding
LCD0805-R47□-T	0.47/7.9	K,M	14/7.9	850	0.12	1400	1500	Blue
LCD0805-R68□-T	0.68/7.9	K,M	14/7.9	765	0.15	1200	1300	Gray
LCD0805-1R0□-T	1.0/7.9	K,M	14/7.9	208	0.13	1100	1300	Black
LCD0805-1R2□-T	1.2/7.9	K	14/7.9	159	0.16	960	1270	Red
LCD0805-1R5□-T	1.5/7.9	K,M	14/7.9	159	0.17	920	1260	Brown
LCD0805-1R8□-T	1.8/7.9	K,M	14/7.9	112	0.20	860	1080	Orange
LCD0805-2R2□-T	2.2/7.9	K,M	13/7.9	87	0.22	740	1040	Red
LCD0805-2R7□-T	2.7/7.9	K,M	13/7.9	72	0.25	680	1040	Yellow
LCD0805-3R3□-T	3.3/7.9	K,M	12/7.9	70	0.28	620	1020	Orange
LCD0805-3R9□-T	3.9/7.9	K,M	14/7.9	61	0.38	580	960	Green
LCD0805-4R7□-T	4.7/7.9	K,M	14/7.9	51	0.43	520	840	Yellow
LCD0805-5R6□-T	5.6/7.9	K,M	12/7.9	47	0.50	480	800	Blue
LCD0805-6R8□-T	6.8/7.9	K,M	14/7.9	46	0.68	420	700	Green
LCD0805-8R2□-T	8.2/7.9	K,M	13/7.9	33	0.73	400	680	Violet
LCD0805-100□-T	10/2.5	J,K,M	14/2.5	31	0.85	360	560	Blue
LCD0805-120□-T	12/2.5	J,K,M	14/2.5	30	0.90	340	460	Gray
LCD0805-150□-T	15/2.5	J,K,M	15/2.5	28	1.40	300	380	Violet
LCD0805-180□-T	18/2.5	J,K,M	15/2.5	27	1.55	280	360	White
LCD0805-220□-T	22/2.5	J,K,M	15/2.5	20	1.76	240	340	Gray
LCD0805-270□-T	27/2.5	J,K,M	15/2.5	17	2.00	220	300	Black
LCD0805-330□-T	33/2.5	J,K,M	15/2.5	17	2.35	200	300	White
LCD0805-470□-T	47/2.5	J,K,M	14/2.5	15	3.40	160	280	Black
LCD0805-560□-T	56/2.5	J,K,M	14/2.5	10	4.42	150	240	Yellow
LCD0805-680□-T	68/2.5	J,K,M	14/2.5	10	4.45	140	240	Brown
LCD0805-820□-T	82/2.5	J,K,M	14/2.5	10	7.50	100	180	Orange
LCD0805-101□-T	100/1.0	J,K,M	10/1.0	9	7.50	100	180	Red

1. When ordering, please specify tolerance and packaging codes. Ex: LCD0805-100J-T

Tolerance : J = $\pm 5\%$, K = $\pm 10\%$, M = $\pm 20\%$

Packaging : Clear tape and reel { standard }.

2. L, Q : Agilent/HP E4991A+ Agilent/HP16197A

(The electrical specification test by the smallest gap position) or HP16193A

3. SRF : Agilent/HP E4991A+ Agilent/HP 16197A

(The electrical specification test by the smallest gap position) or HP16193A

4. Rdc : DIGITAL MILLIOHM METER Chroma 16502, or equivalent.


5. Idc for Inductance drop 10% from its value without current.

6. Irms for a 25°C rise above 25°C ambient.

7. Operating temperature range from -25°C to 85°C.

8. Packaging quantity: 2000 pcs/reel

1st





COLOR CODING

LCD0805 Series Type

SMD Inductor for Power Line

ELECTRICAL CHARACTERISTICS

Characteristics(L,Q vs. Frequency)

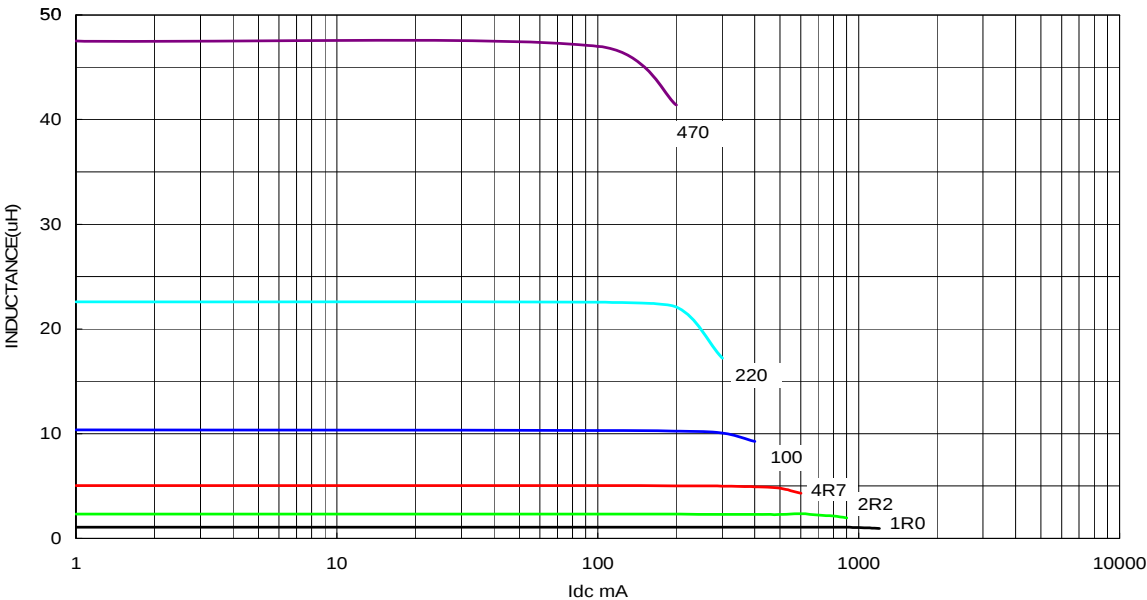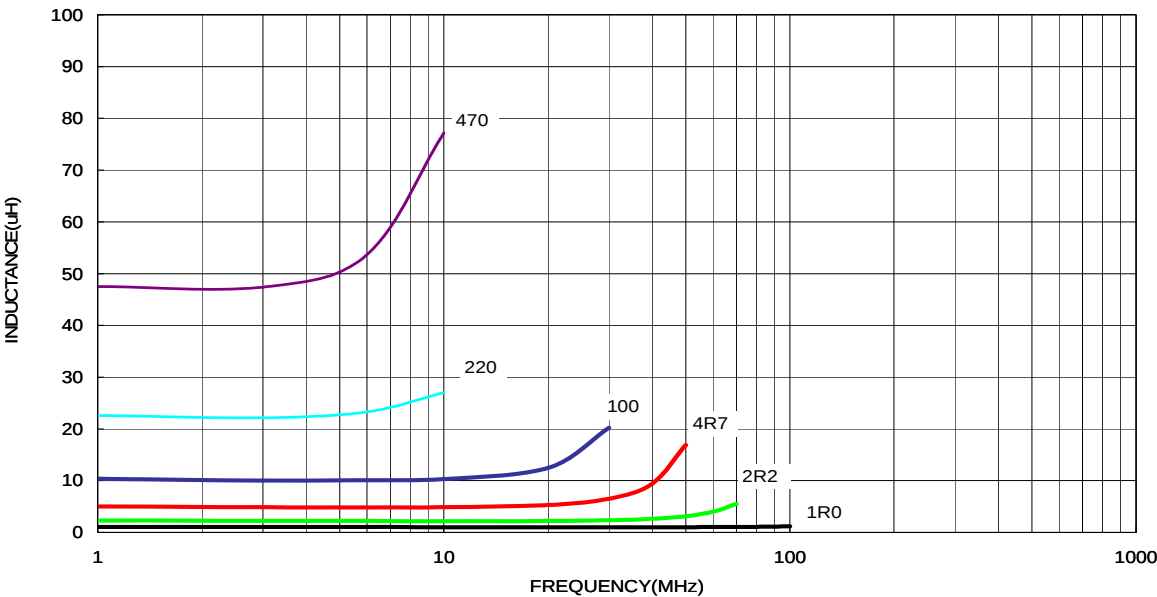

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [EMTEK](#) manufacturer:

Other Similar products are found below :

[CR32NP-100KC](#) [CR32NP-151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#) [CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#)