
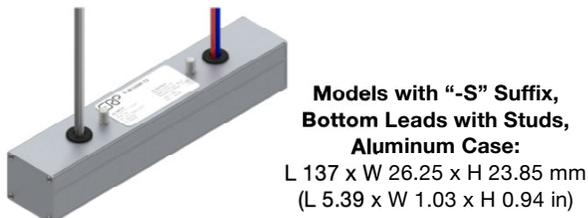


## 96 W, Efficient, Compact Non-Dimmable CV Class 2 / Class II LED Drivers

Nominal Input Voltage	Max. Output Power	Nominal Output Voltage	Max. Output Current	Efficiency	Max. Case Temperature	THD	Power Factor
120 & 277, 220 to 240 Vac	96 W	12, 24, 48 Vdc	8, 4, 2 A	up to 93% typical	90°C (measured at the hot spot)	< 20%	> 0.9

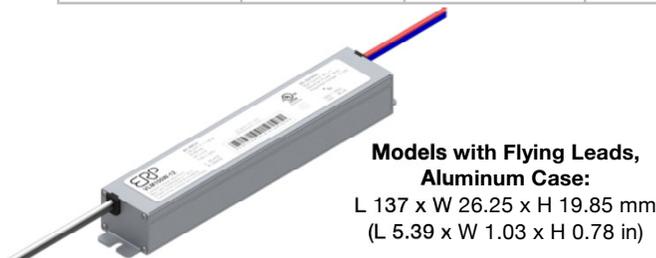

ERP Part Number	Nominal Input Voltage (Vac)	Pout Max (W)	Vout Nom (Vdc)	Iout Min (A)	Iout Max (A)	Open Loop Voltage (No Load Vout Max) (Vdc)
<b>120/277 VAC NOMINAL VOLTAGE</b>						
VLM100W-12 <sup>(1)</sup>	120 & 277	96	12	0.2	8	12.84
VLM100W-24	120 & 277	96	24	0.2	4	25.68
VLM100W-48	120 & 277	96	48	0.1	2	51.36
VLM100W-12-S <sup>(1)</sup>	120 & 277	96	12	0.2	8	12.84
VLM100W-24-S	120 & 277	96	24	0.2	4	25.68
VLM100W-48-S	120 & 277	96	48	0.1	2	51.36
<b>220 TO 240 VAC NOMINAL VOLTAGE</b>						
VLM100E-12	220 to 240	96	12	0.2	8	12.84
VLM100E-24	220 to 240	96	24	0.2	4	25.68
VLM100E-48	220 to 240	96	48	0.1	2	51.36
VLM100E-12-T	220 to 240	96	12	0.2	8	12.84
VLM100E-24-T	220 to 240	96	24	0.2	4	25.68
VLM100E-48-T	220 to 240	96	48	0.1	2	51.36

### FEATURES

- Very high power density of 24 W/in<sup>3</sup>
  - Class 2 power supply
  - UL Class P
  - IP20-rated case with silicone-based potting
  - 90° C maximum case hot spot temperature
  - Lifetime: 50,000 hours min at 70° C case temperature
  - Complies with ENERGY STAR®, DLC (DesignLight Consortium®) and CA Title 24 technical requirements
  - Worldwide safety approvals
- 
- Additional safety approvals when using the optional strain reliefs for models with "-T" suffix

1. VLM100W-12 is not Class 2 because the over-current protection of this model exceeds the 8A UL Class 2 limit.
  2. Suffix for the different mounting options:
    - 1) No suffix: side leads
    - 2) "-T": Terminal blocks
    - 3) "-S": Bottom lead exit with studs
- For additional options of output current and output voltage, contact your sales representative or send an email to: [SaveEnergy@erp-power.com](mailto:SaveEnergy@erp-power.com)

### APPLICATIONS

- Strip lights
- Pendants
- Linears
- Cove Lights



#### CHINA Operations

tel: +86-756-6266298  
No. 8 Pingdong Road 2  
Zhuhai, Guangdong, China 519060

[www.erp-power.com](http://www.erp-power.com)

[SaveEnergy@erp-power.com](mailto:SaveEnergy@erp-power.com)

#### USA Headquarters

tel: +1-805-517-1300  
893 Patriot Drive, Suite E  
Moorpark, CA 93021, USA

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LED Power Supplies](#) category:*

*Click to view products by [ERP Power](#) manufacturer:*

Other Similar products are found below :

[ESS015W-1000-12](#) [EUC-075S105DT](#) [PDA-WIFI](#) [PIFC-K250F](#) [PITB-K222A](#) [ALD-514012PJ134](#) [LB240S24KH](#) [LMH020-SPLC-0000-0000001](#) [79534](#) [79535](#) [EUG-200S210DT](#) [ESS030W-1050-21](#) [ESS030W-0900-32](#) [BPOXL 4-12-035](#) [SLM160W-3.9-40-ZA](#) [ESS010W-0180-42](#) [ESS010W-0350-24](#) [ESS010W-0200-42](#) [PDA080B-1A0G](#) [ESS010W-0500-12](#) [PDA150B-S1A5G](#) [ZPS-20](#) [SLM140W-1.05-130-ZA](#) [ESS040W-1400-27](#) [ESS015W-0700-18](#) [ESS010E-0250-42](#) [EVM120W-2700-42-ECN2](#) [EDC-100S105SV-0007](#) [79278](#) [EUD-150S350DVA](#) [LWA320-C420-ARK-B](#) [50304](#) [HVG-320-36AB](#) [HVG-320-54AB](#) [OT FIT 50/220-240/300 D L](#) [OT FIT 35/220-240/350 D CS L](#) [OT FIT 65/220-240/350 D CS L](#) [ELEMENT 30/220-240/700 S](#) [LC 75W 100-400MA 1-10V LP EXC](#) [LCA 35W 150-700MA ONE4ALL LP PRE](#) [LCA 50W 100-400MA ONE4ALL LP PRE](#) [LCA 50W 350-1050MA ONE4ALL LP PRE](#) [LCA 50W 350-1050MA 2XCH LP PRE](#) [LCI 150/325-1050/300 O4A SL PRE](#) [LCA 75W 100-400MA ONE4ALL LP PRE](#) [LCA 45W 500-1400MA ONE4ALL SC PRE](#) [LC 50W 100-400MA FLEXC LP EXC](#) [LCA 75W 350-1050MA ONE4ALL LP PRE](#) [LC 50W 350-1050MA FLEXC LP EXC](#) [LC 75W 350-1050MA FLEXC LP EXC](#)