



▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	N/A	ON
2-3	N/A	2-1

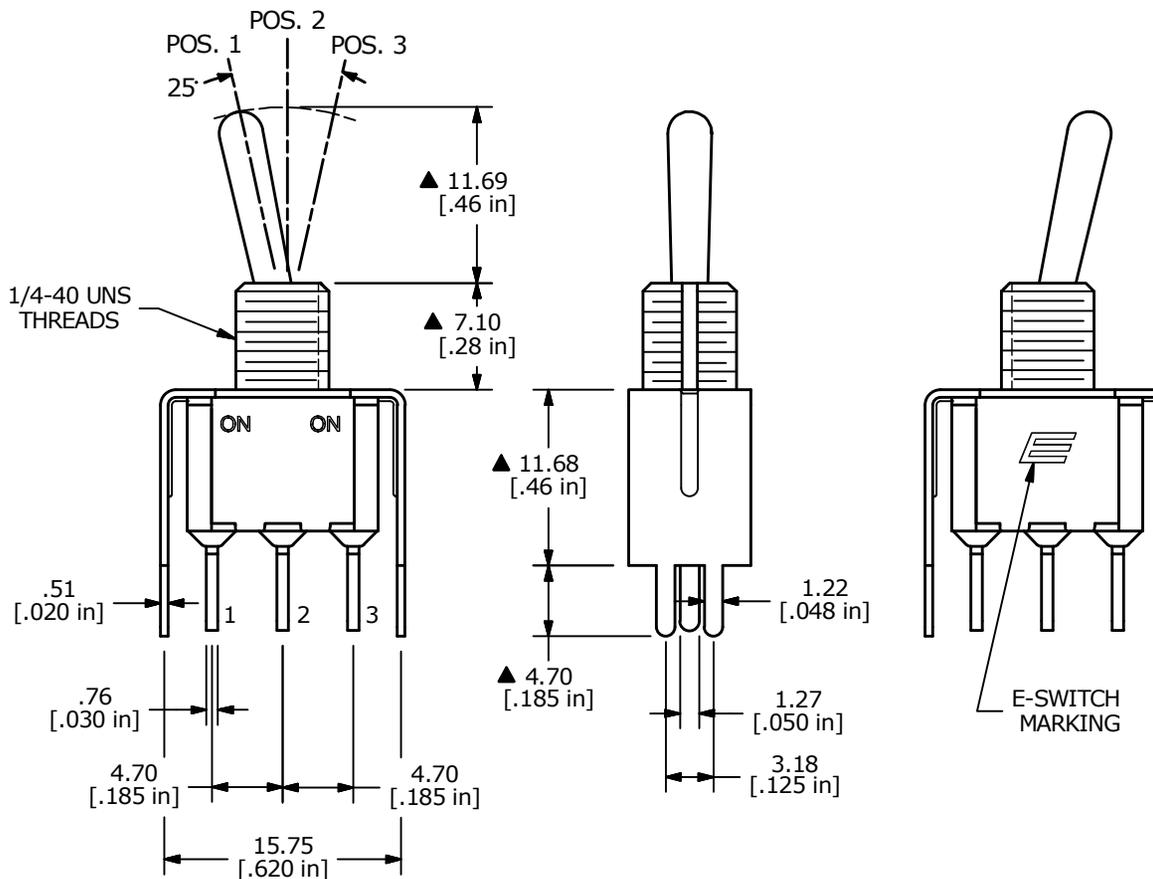

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
X.XX = ±0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: SILVER
5. RATING: RATING: 5A @ 120 VAC OR 28VDC
2A @ 250 VAC
6. ELECTRIC LIFE: 40,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @ SEA LEVEL
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.
- ▲ 11. HARDWARE TO BE SHIPPED BULK:
T100011 - LOCK WASHER (Qty 1)
T100015 - LOCK RING (Qty 1)
T100000 - HEX NUT (Qty 2)



A	24130	RELEASE	12/18/19	MW
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE 100SP1T1B3VS2QEH				
SCALE	DATE	DR	DWG	REV
2:1	12/18/2019	MW	ST111171	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Toggle Switches](#) category:

Click to view products by [E-Switch](#) manufacturer:

Other Similar products are found below :

[8928K478](#) [8951K2998](#) [8951K3310](#) [8956K1283](#) [8956K1285](#) [8956K1286](#) [8956K1287](#) [8A1-C-222](#) [020017-13](#) [CS8275](#) [637H/25](#)
[7101SPDV30BE](#) [7103SDV30BE](#) [7105D](#) [7108P3YAV2BE](#) [71YY50282](#) [7209SY9AQE](#) [7209SYCBCE](#) [7301SS24484](#) [7303KZQE](#) [7306K36](#)
[7503K21](#) [7565K6](#) [7595K6](#) [7691K14](#) [7704K3](#) [8391K108](#) [8811K17](#) [8835K3](#) [8858K44](#) [8E4011](#) [1202W](#) [A201SCWZB04](#) [A232S1YZQ](#)
[12149A-3V](#) [12156AX408](#) [12147AGKX679](#) [12TW29-1](#) [130312](#) [14TL1-7](#) [1520230-9](#) [EHTSLPKG](#) [MST105E](#) [MST105F](#) [MTA106H-P](#) [169-0019-003](#) [169-0019-005](#) [JG-72968](#) [PB02KE](#) [2221BK](#)