# **EG1215 SERIES SLIDE SWITCH**

ANTI-VANDAL SWITCHES


DETECTOR

DIP I

KEYLOCK SWITCHES 8



#### **APPLICATIONS / MARKETS**













# RoHS

### SPECIFICATIONS

Contact Rating: 25mA @ 24VDC Electrical Life: 10,000 Cycles Contact Resistance: 70mΩ Max

Insulation Resistance: 1MΩ Min @ 100VDC Dielectric Strength: 100VAC for 1 Minute Operating Temperature: -20°C to 70°C Storage Temperature: -40°C to 85°C

Travel: 1.50mm

**Contact Arrangement:** SPDT **Actuation Force:** 150±100gF

#### **FEATURES & BENEFITS**

- · Surface mount PC board design
- 1.50mm travel
- Compact design
- 150 gram force
- SPDT function


#### **PART NUMBER CONFIGURATOR**


Series Option Option Option

EG1215 A - 1.30mm A - SPDT


Specifications subject to change without notice 8.2.2018


#### **BODY DIMENSIONS**

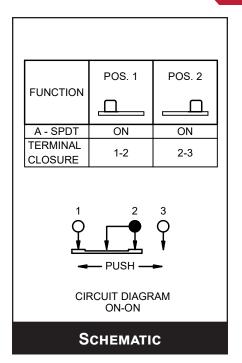


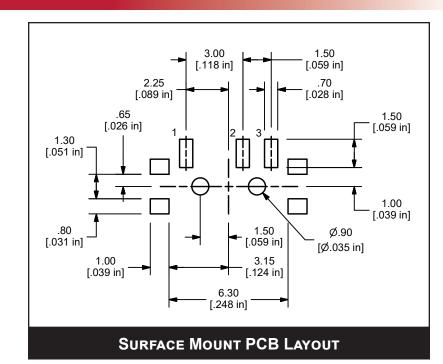

#### A - SPDT - FUNCTION OPTION







## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Slide Switches category:

Click to view products by E-Switch manufacturer:

Other Similar products are found below:

6-1437581-1 M43R MHS123K15D MHS133K MHSS1104A MMD GH49S010001 MSS12A EPS1PC1 1825074-1 1825160-3 1825167-2 1825289-7 K232CB 25139NLDB 25449NAH SLB1240R45 1825078-1 1825080-4 1825269-1 1825270-2 STS141RA04 T2215BEN506 GH46P000001 GH46W000001 GH49P010001 25339NA M42A TG36P000000 TG36P000050 AYZ0202AG 47227LFE 49331L 50208L L203091MS02Q 4-1437581-7 X2225CR-437W 49329L 1101M1S3ZB8E2 1-1437581-1 MSS2225G04 TG39W000000 1825075-1 MSS42G TG36WS80065 T105S1CWZBE SLB124145 SLB1280R5 SLB1340R45 25136NLDB