


LS25 SERIES SNAP ACTION SWITCH

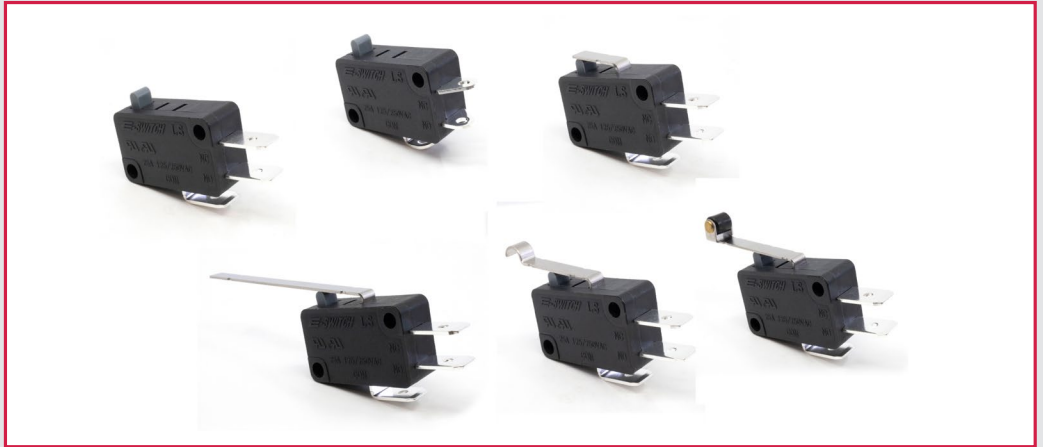

SPECIFICATIONS

Contact Arrangement: SPDT
Contact Rating Options: 125/250VAC @ 25A
Contact Resistance: 100mΩ MAX. (Initial)
Insulation Resistance: 100MΩ MIN. @ 500VDC
Dielectric Strength: 500VAC for 1 minute
Electrical Life: 10,000 Cycles
Mechanical Life: 1,000,000 Cycles
Operating Temperature: -25°C to +85°C
Operating Force (OF): 400gf MAX.
IP Rating: IP40
Free Position (FP): IP40
OverTravel (OT): 0.80mm
Operating Position (OP): 14.8mm ~ 22.8mm
Switch Dimensions: 27.8mm x 10.3mm x 15.9mm

FEATURES & BENEFITS

Plunger or lever actuator options
Long life cycle
IP40 rated
Multiple termination options

PART NUMBER CONFIGURATOR

Series

LS25

Actuator Options

00 - Round, Pin Plunger 400gf
01 - Lever, Straight 350gf
02 - Lever, Straight 160gf
03 - Lever, Straight 90gf
04 - Lever, Simulated Roller 180gf
05 - Lever, Roller 350gf
06 - Lever, Roller 180gf

Operating Force

F090 - 90gf
F160 - 160gf
F180 - 180gf
F350 - 350gf
F400 - 400gf

Termination


S1 - Solder Lug
C1 - Quick Connect - 0.187"
C2 - Quick Connect - 0.250"

Circuit

A - SPDT

NOTES:
 Each actuator has individual operating force

Specifications subject to change without notice 11/12/2025




LS25 SERIES SNAP ACTION SWITCH

ACTUATOR OPTIONS

00 ROUND, PIN PLUNGER 400gf

O.P. (MM)	P.T. (MM)
14.35±0.5	2.1 MAX.


O.P. = OPERATING POINT
P.T. = PRE-TRAVEL

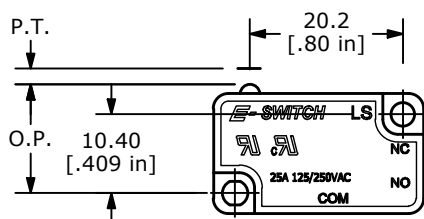

01 LEVER, STRAIGHT 350gf

O.P. (MM)	P.T. (MM)
14.75±1.0	2.1 MAX.


O.P. = OPERATING POINT
P.T. = PRE-TRAVEL

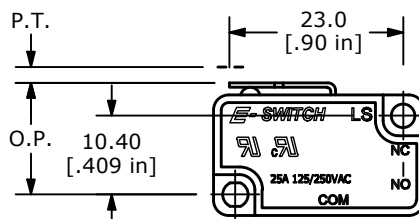

02 LEVER, STRAIGHT 160gf

O.P. (MM)	P.T. (MM)
14.05±1.0	4.7 MAX.


O.P. = OPERATING POINT
P.T. = PRE-TRAVEL

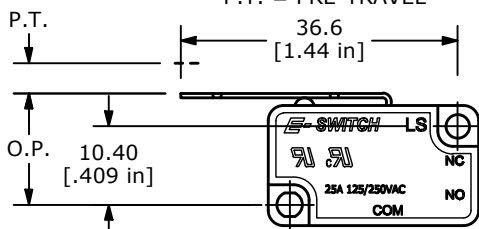

03 LEVER, STRAIGHT 90gf

O.P. (MM)	P.T. (MM)
12.05±2.0	9.7 MAX.


O.P. = OPERATING POINT
P.T. = PRE-TRAVEL

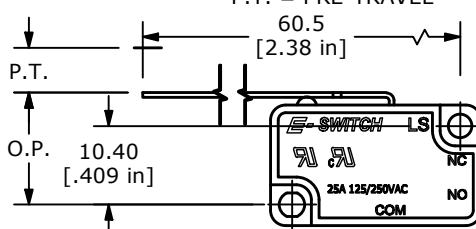

04 LEVER, SIMULATED ROLLER 180gf

O.P. (MM)	P.T. (MM)
17.4±1.5	4.3 MAX.


O.P. = OPERATING POINT
P.T. = PRE-TRAVEL

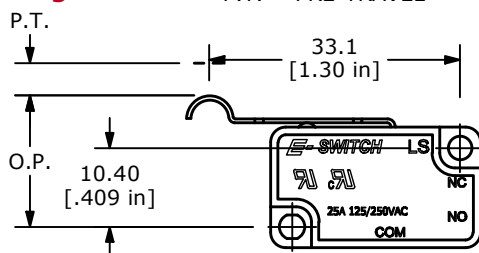

05 LEVER, ROLLER 350gf

O.P. (MM)	P.T. (MM)
20.05±1.0	2.3 MAX.


O.P. = OPERATING POINT
P.T. = PRE-TRAVEL

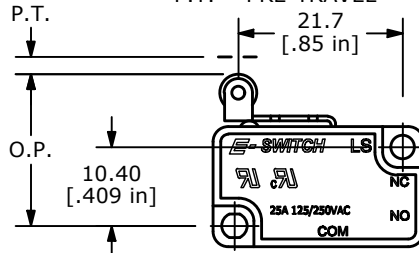

06 LEVER, ROLLER 180gf

O.P. (MM)	P.T. (MM)
20.05±1.5	4.7 MAX.


O.P. = OPERATING POINT
P.T. = PRE-TRAVEL

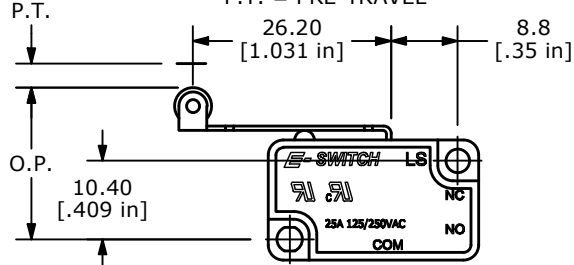


LS25 SERIES SNAP ACTION SWITCH

TERMINATION OPTIONS

S1 - SOLDER LUG

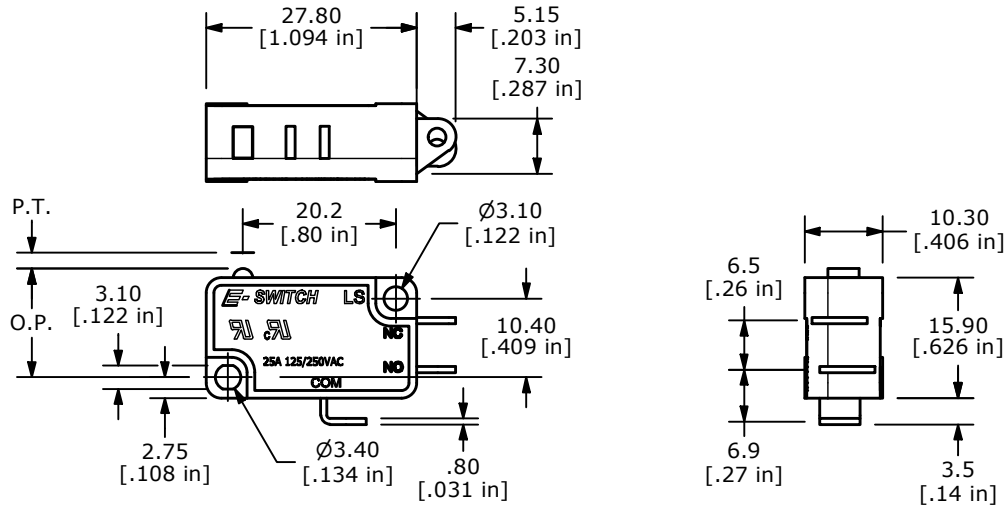

C1 - QUICK CONNECT - 0.187"

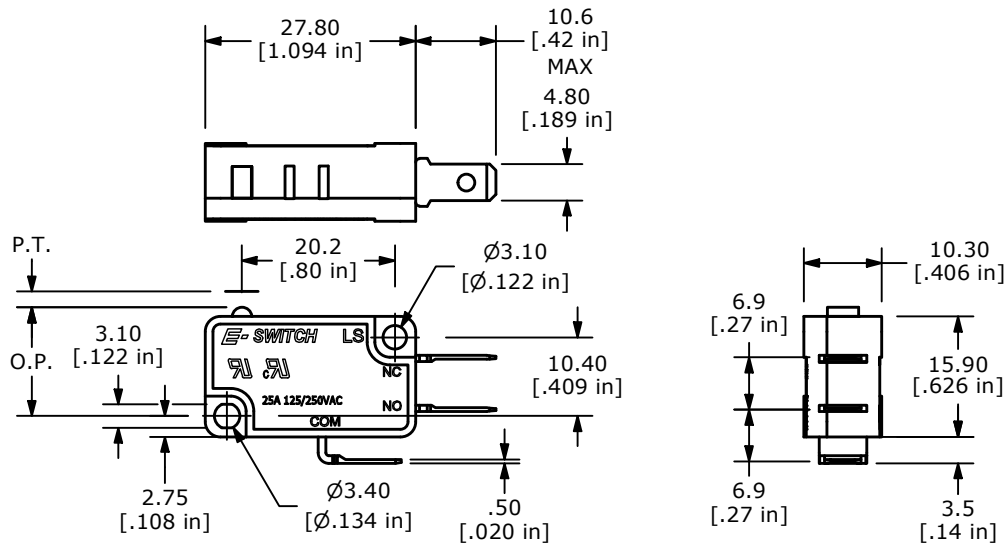

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Basic / Snap Action Switches](#) ***category:***

Click to view products by [E-Switch](#) ***manufacturer:***

Other Similar products are found below :

[602EN535-RB](#) [602HE5-RB1](#) [604HE223-6B](#) [624HE17-RB](#) [6SE1](#) [70599106](#) [MBH2731](#) [79211923](#) [79218589](#)
[MIL30126AB6BBMD4A12XAU](#) [ML-1155](#) [ML-1376](#) [PL-100](#) [11SM1077-H4](#) [11SM1077-H58](#) [11SM8423-H2](#) [11SM77-T](#) [11SM866](#)
[11SX47-H58](#) [1245.0120](#) [D433V3RD](#) [1267.7101](#) [D4BFC1](#) [12SW3-22](#) [13SX21-H58](#) [AS11189](#) [B2-501611](#) [BZ-1R2447-P1](#) [BZ-2RQ219-A22](#)
[BZ-2RQ81-A2](#) [BZ-2RW8224-A2](#) [BZ-2RW8225530-A2-S](#) [BZ-2RW8478-D2](#) [BZ-3RW85514-PC2-S](#) [BZ-7RW82056T-S](#) [BZ-R2136-A2](#) [BZ-](#)
[RX4420](#) [HS-1067](#) [1EN578-6](#) [1HS58](#) [1SM23-T2](#) [1SM282](#) [1SX48-T2](#) [JE-42](#) [21SX64](#) [21SX81-H58](#) [221K22910](#) [K5K/2087](#) [22SM723-T2](#)
[2405105](#)