




MAX. PANEL THICKNESS 8.0mm

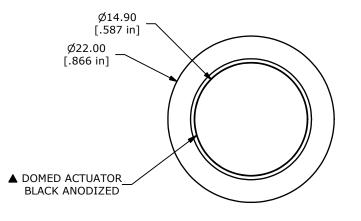

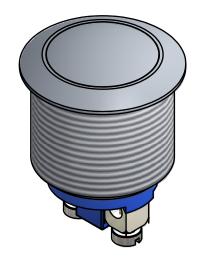




▲	SWITCH FUNCTION				
	POS. 1	POS. 2			
	OFF	(ON)			
	OPEN	1-2			
	(ON) - MOMENTARY				

(ON) = MOMENTARY

NOTE:

- 1. ALL DIMENSIONS IN MM [INCH]
- 2. GENERAL TOLERANCE: $X.X = \pm 0.4$ $X.XX = \pm 0.25$
- 3. TERMINAL NOS. FOR REF. ONLY
- ▲4. FUNCTION: SPST
- ▲5. RATING: 2A @ 48VDC
- 6. CONTACT RESISTANCE: $50m\Omega$ MAX. @ 1A 12VDC
- 7. INSULATION RESISTANCE: $1,000M\Omega$ @ 500VDC
- 8. DIELECTRIC STRENGTH: 2,000VAC MIN. FOR 1 MINUTE
- 9. ELECTRICAL LIFE: 200,000 CYCLES
- 10. CONTACT MATERIAL: SILVER PLATED COPPER
- 11. OPERATING TEMPERATURE: -20°C TO 55°C
- 12. INGRESS PROTECTION: IP65
- 13. ▲DENOTES CRITICAL PARAMETER
- 14. 2002/95/EC (ROHS) COMPLIANT
- ▲15. HARDWARE INCLUDED: HEX NUT AND O-RING (NOT SHOWN)

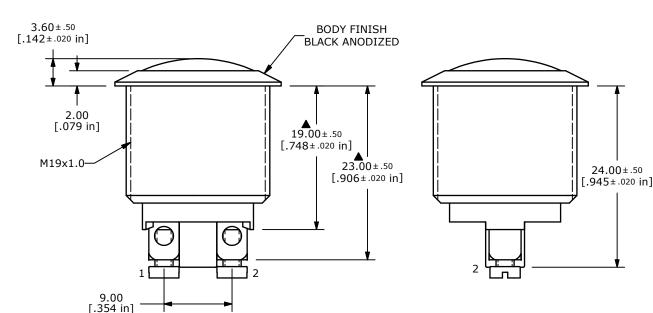

В	20330	20330 CORRECT TEMP RATING AND CONVERT		BMA		
REV	EV PCR NO DESCRIPTION		DATE	BY		
THE INFORMATION CONTAINED IN THIS BOOLINGNESS OR BEORDIETARY						

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E+SWITCH*						
TITLE PV1S64011						
-	SCALE 2:1	DATE 12/12/2011	DR BMA	DWG 52-PV1S64011	REV B	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Pushbutton Switches category:

Click to view products by E-Switch manufacturer:

Other Similar products are found below:

8940K2012 LW1L-M1C10V-A LW1L-M1C70-A LW2L-A1C20M-GD LW2L-M1C20M-A 60324L M22-D-R-GB0/K11 M7E-HRN2 67021K512 67081K512X 701PB580 7190K101 7199K101 810K12910 810KSV30B MML21EA2ADK MML21KA3ABK MML23KA3AC05K-001 MML23KW3AA01W 8418K2 8442K3 8450K1 860K11911T01A 861901 861K11911T01A07 861K13810T00A14 861K13911 8646AB6X718UL 8646ABUL 9001KXRK 907AYY100 PMHD155A1 95-313.000 9533CD4+U574+U4922 95-414.000 99-450.837 99-453.837 PV3H2B0NN-341 1203MRA A22NZBGANGA A22NZBMMNGA A22NZBNANGA A22NZBMANGA A22NZBMA1X03EC56 A3A-5123-02 A3A-7140 A3A-7340 A3U-TMW-A2C-5M A595