

APPLICATIONS / MARKETS













SPECIFICATIONS

Electrical Rating: 50mA, 24VDC Electrical Life: 500,000 Cycles Contact Resistance: 50mΩ Max. Insulation Resistance: 1000 M Ω Min.

Dielectric Strength: 250VAC

Operating/Storage Temperature: -25°C to 55°C

Travel: 0.5mm

Moisture Protection: IP65


Contact Arrangement: SPST Off-(On)

Actuation Force: 490 grams Panel Thickness: 1-5mm Mounting Nut Torque: 0.8Nm

FEATURES & BENEFITS

- 19mm panel cutout
- Solder or wire lead termination options
- Ring illumination
- LED color options
- · Crisp tactile response
- IP65 rated

PART NUMBER CONFIGURATOR

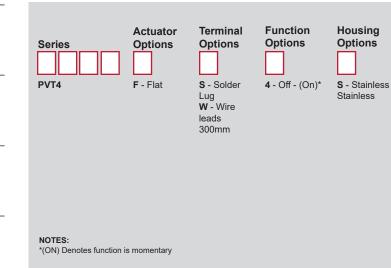

Button Finish

S - Stainless Stainless

Lens Style

3 - Ring Illumination **LED** Color

0 - White

1 - Red

2 - Orange 3 - Green

4 - Blue 5 - Yellow LED Voltage **Options**

1 - Base Voltage

3 - 6V


4 - 12V


5 - 24V


Specifications subject to change without notice 10.27.2020





SOLDERLUGTERMINATION




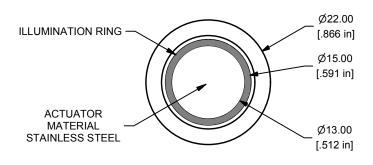




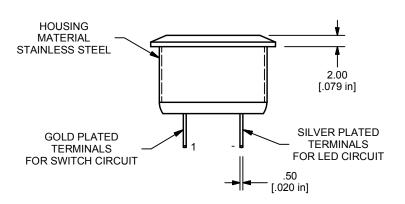









WIRE LEAD TERMINATION




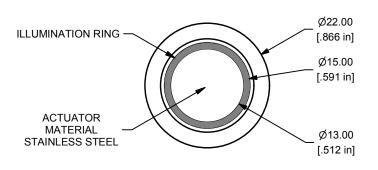









X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Pushbutton Switches category:

Click to view products by E-Switch manufacturer:

Other Similar products are found below:

8940K2012 LW1L-M1C10V-A LW1L-M1C70-A LW2L-A1C20M-GD LW2L-M1C20M-A 60324L M22-D-R-GB0/K11 M7E-HRN2 67021K512 67081K512X 701PB580 7190K101 7199K101 810K12910 810KSV30B MML21EA2ADK MML21KA3ABK MML23KA3AC05K-001 MML23KW3AA01W 8418K2 8442K3 8450K1 860K11911T01A 861901 861K11911T01A07 861K13810T00A14 861K13911 8646AB6X718UL 8646ABUL 9001KXRK 907AYY100 PMHD155A1 95-313.000 9533CD4+U574+U4922 95-414.000 99-450.837 99-453.837 PV3H2B0NN-341 1203MRA A22NZBGANGA A22NZBMMNGA A22NZBNANGA A22NZBMANGA A22NZBMA1X03EC56 A3A-5123-02 A3A-7140 A3A-7340 A3U-TMW-A2C-5M A595