

APPLICATIONS / MARKETS













Illumination

1 - Base Voltage

Voltage

Options

SPECIFICATIONS

Electrical Rating: 2A, 36VDC Electrical Life: 200,000 Cycles

Contact Resistance: 50mΩ Max. at 1A 12VDC Dielectric Strength: 2,000V RMS at sea level Operating/Storage Temperature: -20°C to 70°C

Travel: 1.80mm

Moisture Protection: IP67 **Contact Arrangement: SPST** Actuation Force: 4.5 N Panel Thickness: 1-6mm Mounting Nut Torque: 1-3Nm

FEATURES & BENEFITS

- · Short body design
- 19mm diameter panel cutout
- **Multiple LED options**
- Ring or Ring/Power symbol illumination available
- IP67 rated
- **SPST**
- · Soldered wire leads (500mm long) optional

PART NUMBER CONFIGURATOR

Actuator Series Options SV4 F - Flat

Terminal Options

2 - Solder

W - Wire Leads

500mm long

Function Options

3 - 1 Pole

Off - (On)*

Body Finish **Options**

S - Stainless

Steel

Actuator Finish **Options**

S - Stainless Steel

Lens Style **Options**

3 - Ring moveable

with Actuator 6 - Ring /Power moveable with Actuator

LED-Color **Options**

0 - White

1 - Red 3 - Green


4 - Blue 5 - Yellow


G - Red/Green H - Red/Blue


*() denotes function is momentary


Specifications subject to change without notice 3.5.2020


BODY DIMENSIONS

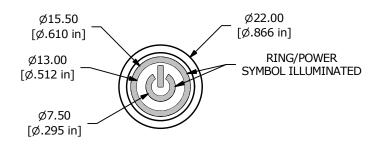

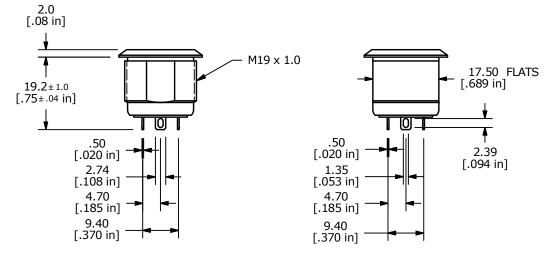










ACUATOR OPTIONS

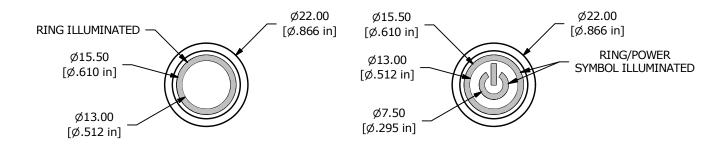

WIRE LEAD OPTION

SWITCH	WIRE	LENGTH
SW1-1	WIRE, 20AWG AWM UL3385, BLACK	500.0 [19.7 in]
SW1-2	WIRE, 20AWG AWM UL3385, BLACK	500.0 [19.7 in]
SW1- (-)	WIRE, 20AWG AWM UL3385, GREEN	500.0 [19.7 in]
SW1- (+)	WIRE, 20AWG AWM UL3385, RED	500.0 [19.7 in]

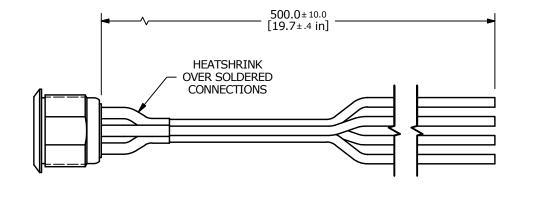



BOTTOM VIEW SHOWN WITHOUT WIRING

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Pushbutton Switches category:

Click to view products by E-Switch manufacturer:

Other Similar products are found below:

8940K2012 LW1L-M1C10V-A LW1L-M1C70-A LW2L-A1C20M-GD LW2L-M1C20M-A 60324L M22-D-R-GB0/K11 M7E-HRN2 67021K512 67081K512X 701PB580 7190K101 7199K101 810K12910 810KSV30B MML21EA2ADK MML21KA3ABK MML23KA3AC05K-001 MML23KW3AA01W 8418K2 8442K3 8450K1 860K11911T01A 861901 861K11911T01A07 861K13810T00A14 861K13911 8646AB6X718UL 8646ABUL 9001KXRK 907AYY100 PMHD155A1 95-313.000 9533CD4+U574+U4922 95-414.000 99-450.837 99-453.837 PV3H2B0NN-341 1203MRA A22NZBGANGA A22NZBMMNGA A22NZBNANGA A22NZBMANGA A22NZBMA1X03EC56 A3A-5123-02 A3A-7140 A3A-7340 A3U-TMW-A2C-5M A595