



ERD6 SERIES MINIATURE SIZE □7×3 ROTARY SELECTOR SWITCH

■ FEATURES

- Outer dimension 7.2mm square, 3.0mm high on board.
- Positions and switch code can be identified.
- Pin-out compatible with most of current equivalents.
- Gold plated contact area ensures reliable electric continuity for micro current.
- Surface mounting type can be supplied in embossed taping for automatic packing.
- Easy position setting with wide switching angle and high digit visibility.
- All plastics are UL 94V-0 grade fire retardant.
- RoHS compliant.

■ APPLICATIONS

- Address switching applications
- Data storage devices
- Computer and peripherals
- Instrumentation

■ SPECIFICATIONS


1.ELECTRICAL

● Contact rating	Max. switching load	100mA, 5VDC
	Min. switching load	10μA, 5VDC
● Contact resistance (initial)		100mΩ Max.
● Insulation resistance		100MΩ Min. at 100VDC
● Dielectric strength		250VAC rms. at 60 seconds

2.MECHANICAL and ENVIRONMENTAL


● Temperature rating	operation	-25℃ to +85℃
	storage	-40℃ to +85℃
● Operation force		510gf-cm Max.
● Operation life		10,000 detents Min.
● Vibration		10Hz-50Hz-10Hz for 6Hrs.
● Solderability		After flux 245±5℃ for 5±1 seconds
● Resistance to soldering heat	solder bath	260±5℃ for 5±1 seconds
	solder reflow	Peak temperature 260℃ Max.

3.SOLDERING PROCESS

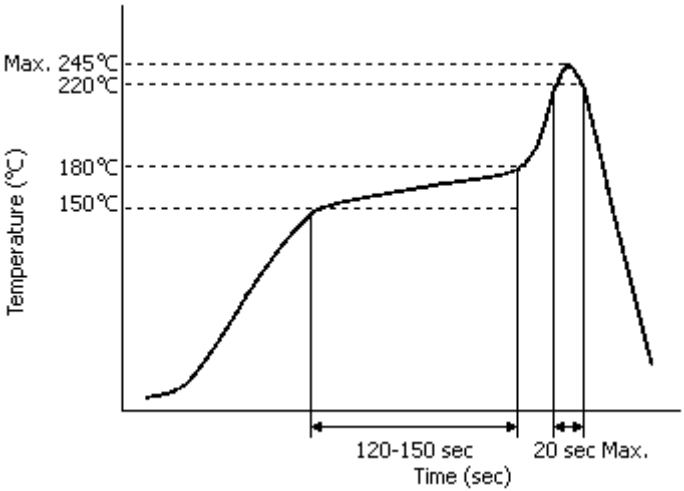
● Solder iron	Max. 2 sec/350℃
● Reflow soldering heat for SMT & THR type (reference only)	

■ PART NUMBERING SYSTEM

ERD6 04 A S XX Z


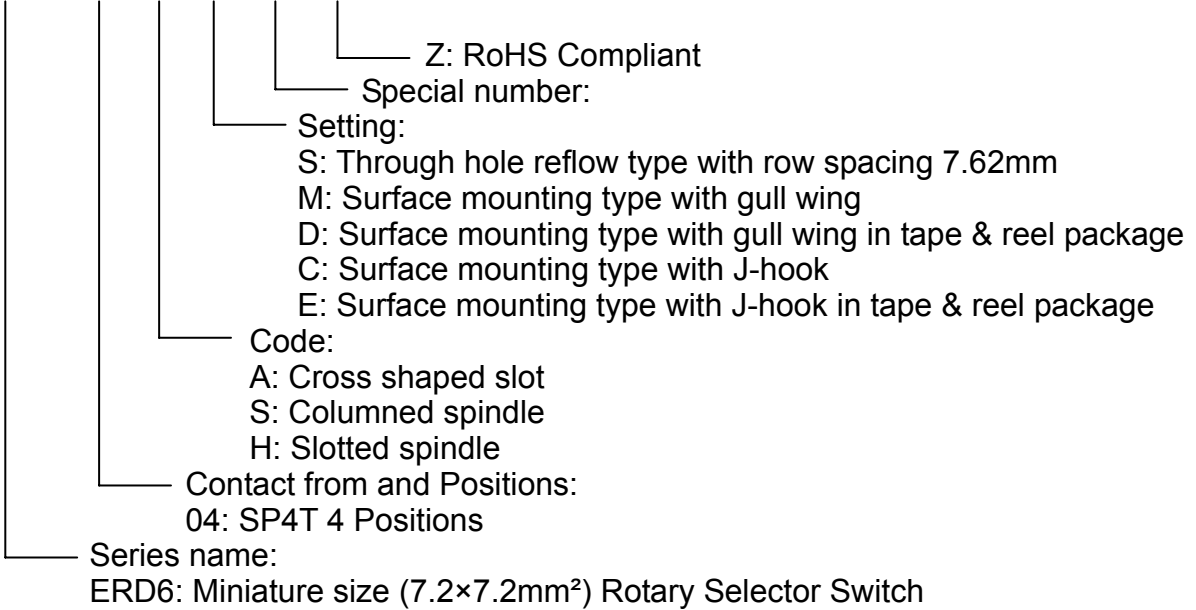


CONSTRUCTION


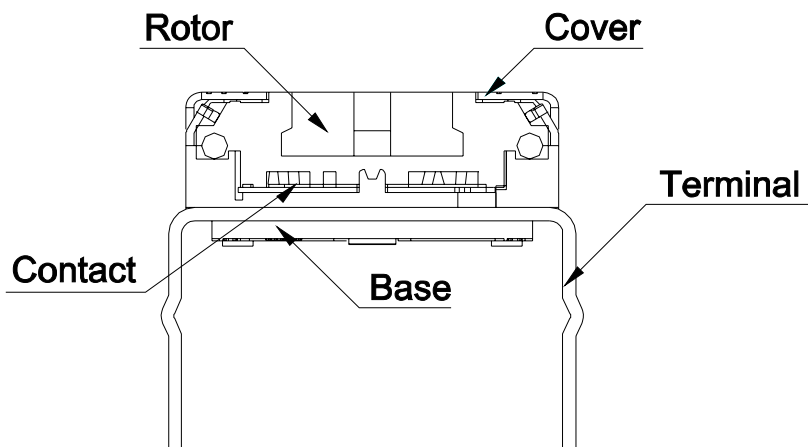


OPTIONS



1. Special marking available
2. Shaft available

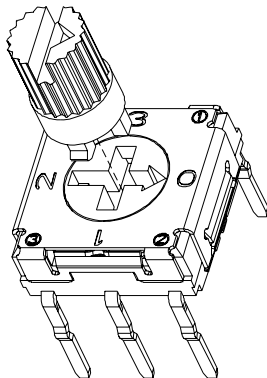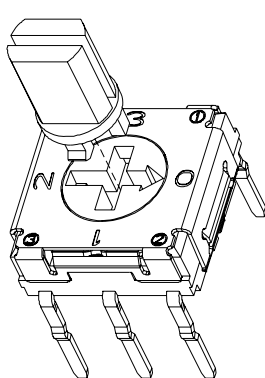

S type




H type



PACKING

1.PACKING METHOD


Type	Package	Number of pcs. Per IC Tube	Number of pcs. Per Reel
Through Hole Reflow Type		70	-
Surface Mounting Type		70	1000

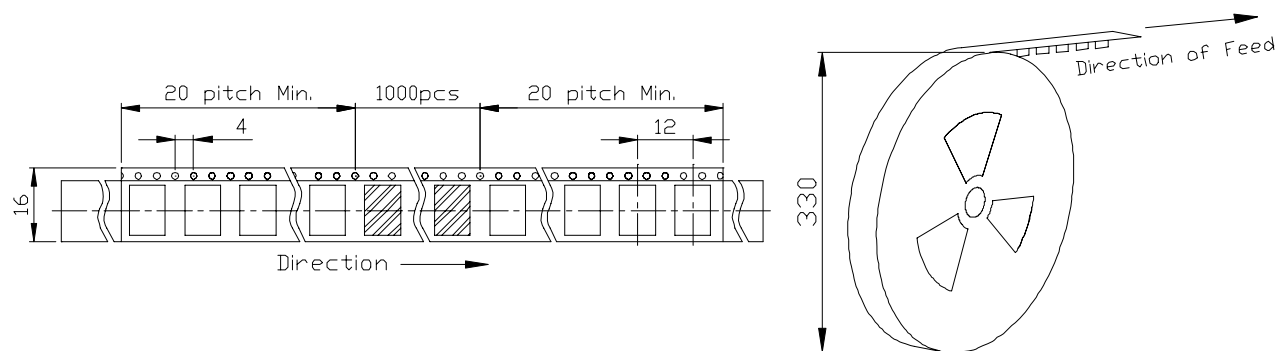


QUICK SELECTION GUIDE

SIZE	POSITIONS	CIRCUIT TYPE	SETTING POSITION	PIN OUT	SHAPE OF TERMINAL	PART NUMBER
7×7	4	1 POLE 4 CONTACTS	TOP SETTING	3:3	THR WITH ROW SPACING 7.62mm	ERD604XSZ
					SMT WITH GULL WING	ERD604XMZ
					SMT WITH GULL WING IN T&R	ERD604XDZ
					SMT WITH J-HOOK	ERD604XCZ
					SMT WITH J-HOOK IN T&R	ERD604XEZ

Through hole reflow (THR)

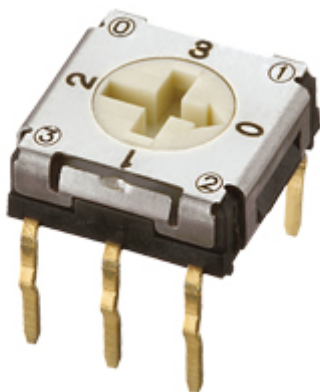

Gull wing (SMT)

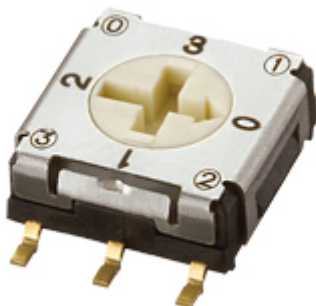


J-Hook (SMT)




DIMENSIONS AND CIRCUITRY


DIMENSIONS Unit:mm(inch) ERD604ASZ SERIES

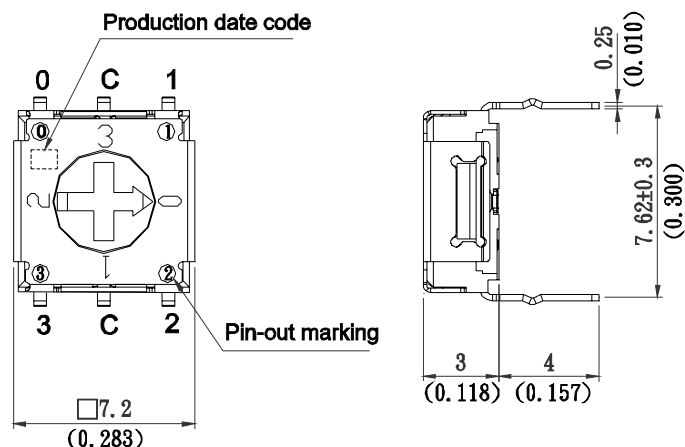


P.C.B LAYOUT

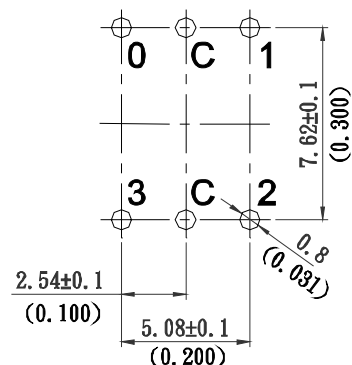


DIMENSIONS Unit:mm(inch) ERD604AMZ SERIES

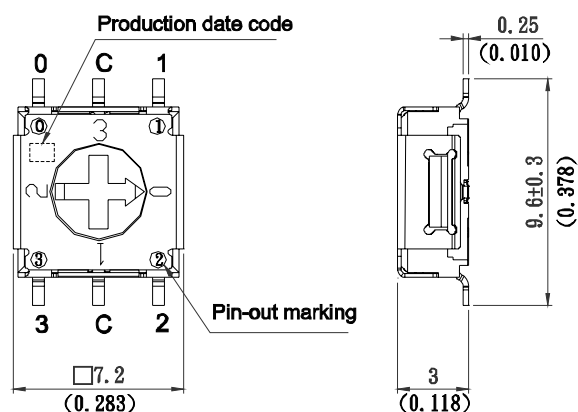


P.C.B LAYOUT

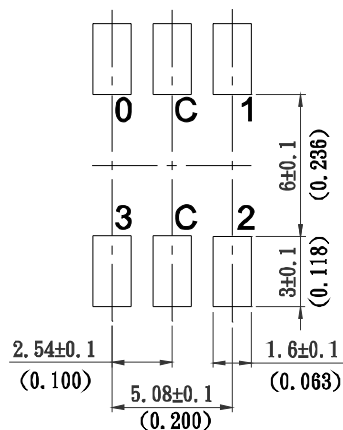

DIMENSIONS Unit:mm(inch) ERD604ACZ SERIES

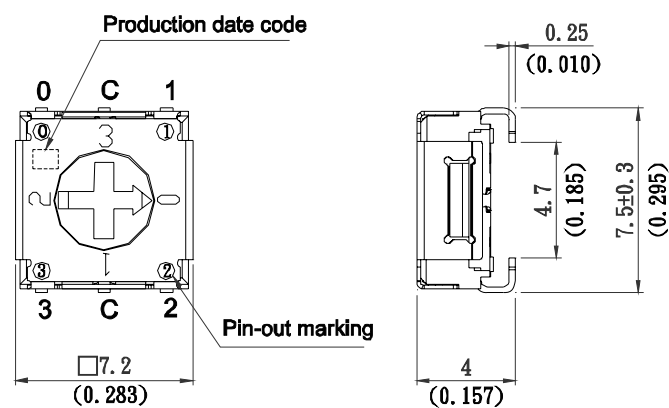

P.C.B LAYOUT

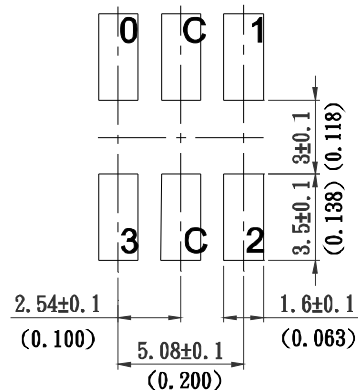

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Excel Cell Electronic\(ECE\)](#) manufacturer:

Other Similar products are found below :

[401477F](#) [401491X](#) [401508B](#) [401509X](#) [401524B](#) [BU090](#) [BU135](#) [BU160](#) [BU185](#) [BX120](#) [BX155](#) [CA090-90](#) [D55TPR](#) [DS-08](#) [EAM101EZ](#)
[EAM102EZ](#) [EAM104EZ](#) [EAM104LTZ](#) [EAM106EZ](#) [EAM107E-Z](#) [EAM108EZ](#) [EAM108LT](#) [EAM110EZ](#) [EAM112EZ](#) [EAM112LZ](#)
[EDG101S](#) [EDG101S61](#) [EDG102S](#) [EDG102S33](#) [EDG103S](#) [EDG103S33](#) [EDG104S](#) [EDG104S33](#) [EDG104SRA33](#) [EDG105S](#) [EDG105S33](#)
[EDG106S](#) [EDG106S33](#) [EDG107S](#) [EDG107S33](#) [EDG108S](#) [EDG108S33](#) [EDG110S](#) [EDG110S33](#) [EDG112S33](#) [EDG601S](#) [EDR1D1A0500Z](#)
[EDS102SZ](#) [EDS103SZ](#) [EDS104SZ](#)