

## EX360 Series CAT IV True RMS MultiMeters + NCV



**True RMS provides accurate readings when measuring distorted or noisy waveforms. Choose a model designed for Electrical, HVAC, or Industrial Applications. Advanced LoZ feature eliminates false readings caused by ghost voltages. CAT IV safety rating ensures the highest level of protection.**



Model EX360  
Electrical DMM

Model EX365  
Industrial DMM

Model EX363  
HVAC DMM

### Common Features

- True RMS for accurate AC measurements
- 6000 count white LED backlit display
- Fast 60-segment Analog Bargraph for viewing trends
- LoZ prevents false readings caused by ghost voltages (see back page for illustration)
- Built-in Non-contact AC Voltage Detector (NCV) with Hi/Low ranges and LED indicator
- Continuity beeper with visual alert
- Smart Data Hold freezes the displayed reading and automatically updates the reading and alerts user (audibly and visually) if the measurement changes  $\pm 50$  counts
- Peak Hold captures the highest reading
- Relative Mode for Capacitance Zero and offset adjustment
- Auto Power off with disable

- Complete with test leads, 9V battery, holster with tilt stand and built-in magnet, and general purpose bead wire temperature probe (Model EX363)

### Model Features

- **Model EX360** — for Electrical applications
  - Frequency and Capacitance measurement
- **Model EX363** — for HVAC applications
  - $\mu$ A function for HVAC flame rod measurements
  - Type K Temperature
  - Frequency and Capacitance measurement
- **Model EX365** — for Industrial/Commercial applications
  - 10A AC/DC Current measurement with 11A/1000V high energy fuse
  - Frequency and Capacitance measurement

Specifications on next page

### Ordering


- EX360 **N**\*..... Electrical CAT IV True RMS MultiMeter + NCV
- EX363 **N**\*..... HVAC CAT IV True RMS MultiMeter + NCV
- EX365 **N**\*..... Industrial CAT IV True RMS MultiMeter + NCV

**N**\* Indicates products that are available with optional calibration traceable to NIST. Order with -NIST after part number for product plus Calibration Certificate.



EX360 UPC Code: 793950393604  
EX363 UPC Code: 793950393635  
EX365 UPC Code: 793950393659

Specifications	EX360	EX363	EX365
Basic Accuracy (DCV)	0.5%	0.5%	0.5%
NCV Detector	80 to 1000V (50-60Hz) and 160 to 1000V (50-60Hz)	80 to 1000V (50-60Hz) and 160 to 1000V (50-60Hz)	80 to 1000V (50-60Hz) and 160 to 1000V (50-60Hz)
DC/AC Voltage	0.1mV to 1000V	0.1mV to 1000V	0.1mV to 1000V
DC/AC Current	—	—	1mA to 10A
DC/AC $\mu$ A Current	—	600 $\mu$ A	—
Resistance	0.1 $\Omega$ to 40M $\Omega$	0.1 $\Omega$ to 40M $\Omega$	0.1 $\Omega$ to 40M $\Omega$
Capacitance	1nF to 10mF	1nF to 10mF	1nF to 10mF
Frequency	0.01Hz to 100kHz	0.01Hz to 100kHz	0.01Hz to 100kHz
Temperature (Type K)	—	-40 to 742°F (-40 to 394°C)	—
Diode Test	1.5V	1.5V	1.5V
Continuity	Audible and Visual	Audible and Visual	Audible and Visual
Dimensions	6.5x3.2x1.7" (164x82X44mm)	6.5x3.2x1.7" (164x82X44mm)	6.5x3.2x1.7" (164x82X44mm)
Weight	5.9oz (450g)	5.9oz (450g)	5.9oz (450g)

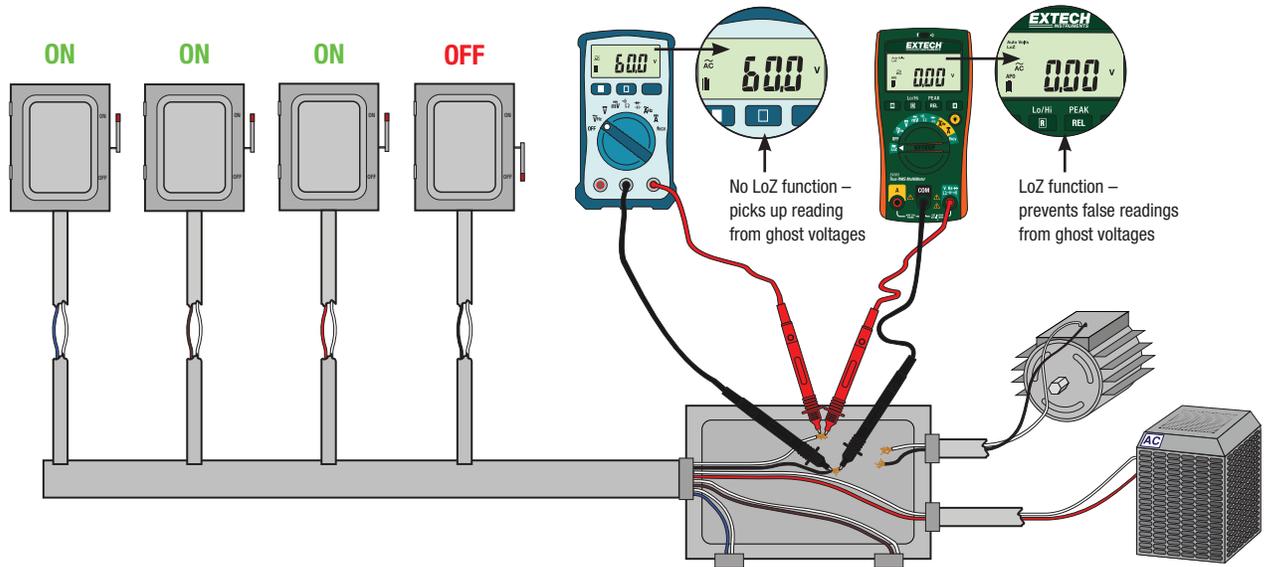

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Digital Multimeters](#) category:*

*Click to view products by [Extech](#) manufacturer:*

Other Similar products are found below :

[8009](#) [6111-517](#) [FS881](#) [40705X](#) [USB390A](#) [780417A](#) [GPT-9904](#) [382099](#) [589250](#) [780418](#) [C.A 6131](#) [C.A 6133](#) [30XR](#) [34XR](#) [35XP](#) [TESTO](#)  
[745](#) [0590 7450](#) [TESTO 760-3](#) [0590 7603](#) [440012](#) [AX-155](#) [AX-174](#) [AX-178](#) [AX-18B](#) [AX-190A](#) [AX-503](#) [AX-507B](#) [AX-572](#) [AX-594](#) [AX-](#)  
[LCR41A](#) [AX-MS8221A](#) [AX-MS8250](#) [AX-PDM01](#) [AX-T520](#) [AX-T901](#) [AX-T903](#) [BAT-250-EUR](#) [BM233](#) [BM805S](#) [BM807S](#) [BM817S](#)  
[BM827S](#) [BM829S](#) [BM857S](#) [BM859S](#) [BM867S](#) [BM905S](#) [33XR](#) [UNITEST TESTFIX 9023](#) [37XR](#) [UT56](#) [UT58C](#)