# Round Cable EMI Suppression Cores (2643102002)



Part Number: 2643102002

43 ROUND CABLE CORE

### **Explanation of Part Numbers:**

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade
- Last digit 2 = Burnished (All cable cores have been burnished to remove the sharp edges)

Fair- Rite offers a broad selection of ferrite EMI suppression cable cores in several materials with guaranteed minimum impedance specifications.

For smaller suppression parts, refer to the section EMI Suppression Beads.

Our Expanded Cable and Suppressor Kit (part number 0199000005) contains a selection of these suppression cores.

For any cable suppression core not listed here, feel free to contact our customer service group for availability and pricing.


## Catalog Drawing 3D Model

The C dimension, the core length, can be modified to suit specific applications.

Weight: 55 (g)

<u>++ • · Ban.</u> • • (B)					
Dim	mm	mm tol	nominal inch	inch misc.	
A	25.9	±0.75	1.02		
В	12.8	±0.25	0.504	_	
С	28.6	±0.80	1.126	_	





### **Chart Legend**

+ Test frequency

The column "H (Oe)" gives for each bead the calculated dc bias field in oersted for 1 turn and 1 ampere direct current. The actual dc H field in the application is this value of "H" times the actual NI (ampere- turn) product. For the effect of the dc bias on the impedance of the bead material, see figures 18-23 in the application note  $\Box$ How to choose Ferrite Components for EMI Suppression  $\Box$ .


Typical Impedance $(\Omega)$			
10 MHz	87		
25 MHz <sup>+</sup>	135		
100 MHz <sup>+</sup>	204		
250 MHz	247		

Electrical	Properties
H(Oe)	0.22

Suppression cable cores are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is listed on our catalog drawing.

**Catalog Drawing** 

Single turn impedance tests for 31, 43 and 46 material cores are performed on the E4991A/HP4291B Impedance Analyzer. The 61 material parts are tested on the E4991A / HP4291B Impedance Analyzer and 75 material parts are tested on the E4990A Impedance Analyzer. Cores are tested with the shortest practical wire length.

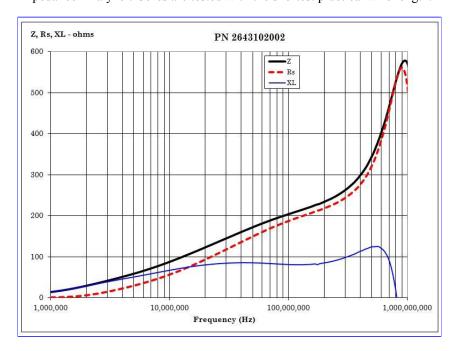

Fair- Rite Products Corp. One Commercial Row, Wallkill, New York 12589-0288

888-324-7748 845-895-2055 Fax: 845-895-2629 Fax: 845-895-2629 www.fair- rite.com

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Ferrite Cable Cores category:

Click to view products by Fair-Rite manufacturer:

Other Similar products are found below:

FB73-422 FX28R0984-0 FX28R0984-2 AB 3X2X3SM 2643164251 2643665709 2661626402 LB 2.8X4.5U 28R1127 28R1260 28R1575 SM28R0760 2631006302 2643165451 2643178351 28R0760 4327 030 11761 SS7X4X3W 4327 030 16141 2643103102 2643164151 2943666671 2643163851 AB4X2X6SM 28B1101 SM28R1575 2643625902 2643626102 28B0268-000 28B0375-100 28B0375-300 28B0500-100 28B0562-000 28B0562-200 28B0625-100 28B1020-100 28B1417-200 28R1101-000 28R1102-100 28R1127-500 28R0453-200 28R0669-000 28R0898-200 28R0756-200 28R0480-000 28R1127-000 28R0984-200 28R0592-010 28R0756-000