

3.5mm Male to 2.4mm Female Adapter

3.5mm male to 2.4mm female adapter part number SM3072 from Fairview Microwave is in-stock and ships same day. This Fairview 3.5mm to 2.4mm adapter has a male to female gender configuration. SM3072 3.5mm male to 2.4mm female adapter operates to 27 GHz. The 3.5mm connector mates mechanically with commercially available SMA and 2.92mm (K) connectors. The 2.4mm connector mates mechanically with commercially available 1.85mm (V) connectors. The Fairview Microwave RF adapter provides excellent VSWR of 1.15:1 maximum.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	DC		27	GHz
VSWR			1.15:1	

Electrical Specification Notes:
Values at 25°C, sea level.

Mechanical Specifications

Size	
Length	0.849 in [21.56 mm]
Weight	0.01279 lbs [5.8 g]

Description	Connector 1	Connector 2
Type	3.5mm Male	2.4mm Female
Polarity	Standard	Standard
Interface Specification	IEEE STD 287	MIL-STD-348
Mating Cycles	500	500
Hex Size	5/16 inch	
Mating Torque	8 to 10 in-lbs [0.90 to 1.13 Nm]	



Configuration:

- 3.5mm Male Connector 1
- 2.4mm Female Connector 2
- 50 Ohms
- Straight Body Geometry

Features:

- VSWR of 1.15:1 max up to 27 GHz
- 3.5mm interface meets IEEE STD 287
- 2.4mm interface meets MIL-STD-348
- Contact plating according to MIL-G-45204
- Gold Plated Beryllium Copper Contact

Applications:

- Enables Between Series Connections
- General Purpose Test

Fairview Microwave
1130 Junction Dr. #100
Allen, TX 75013
Tel: 1-800-715-4396 / (972) 649-6678
Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Material Specifications

Description	Connector 1	Connector 2
Type	3.5mm Male	2.4mm Female
Contact Material	Beryllium Copper	Beryllium Copper
Contact Plating	Gold	Gold
Contact Plating Spec.	MIL-G-45204	MIL-G-45204
Insulation Material	PEI/PCTFE	PEI/PCTFE
Outer Contact Material		Passivated Stainless Steel
Outer Conductor Contact Spec.		QQ-P-35
Body Material	Passivated Stainless Steel	
Body Plating Spec.	QQ-P-35	
Coupling Nut Material	Passivated Stainless Steel	
Coupling Nut Plating Spec.	QQ-P-35	

Environmental Specifications

Temperature


Operating Range -55 to +135 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Typical Performance Data

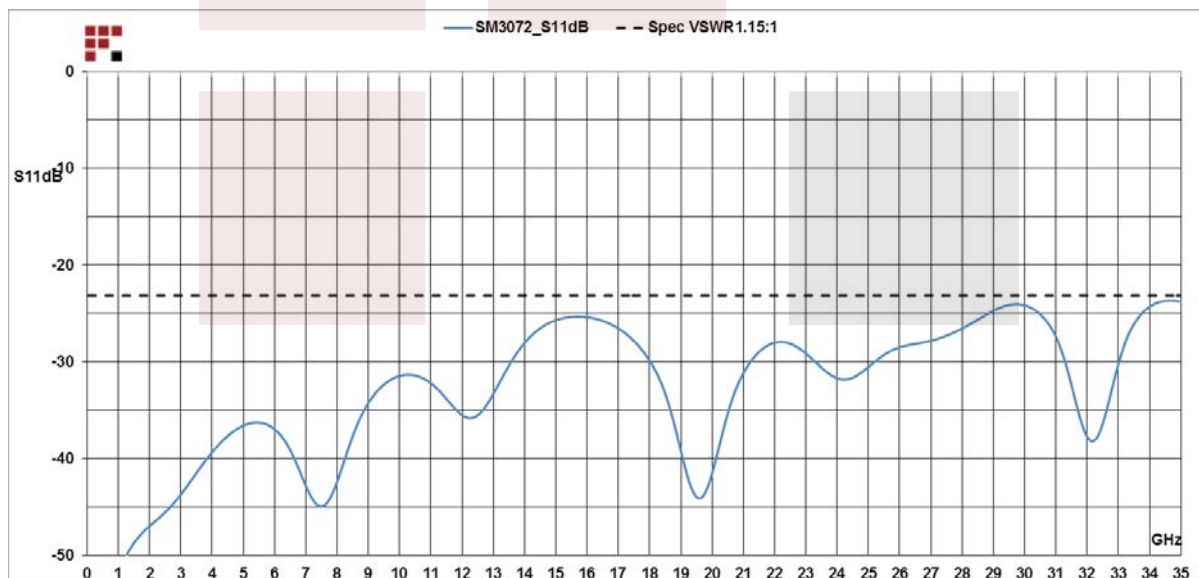


3.5mm Male to 2.4mm Female Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [3.5mm Male to 2.4mm Female Adapter SM3072](#)

URL: <https://www.fairviewmicrowave.com/3.5mm-male-2.4mm-female-adapter-sm3072-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

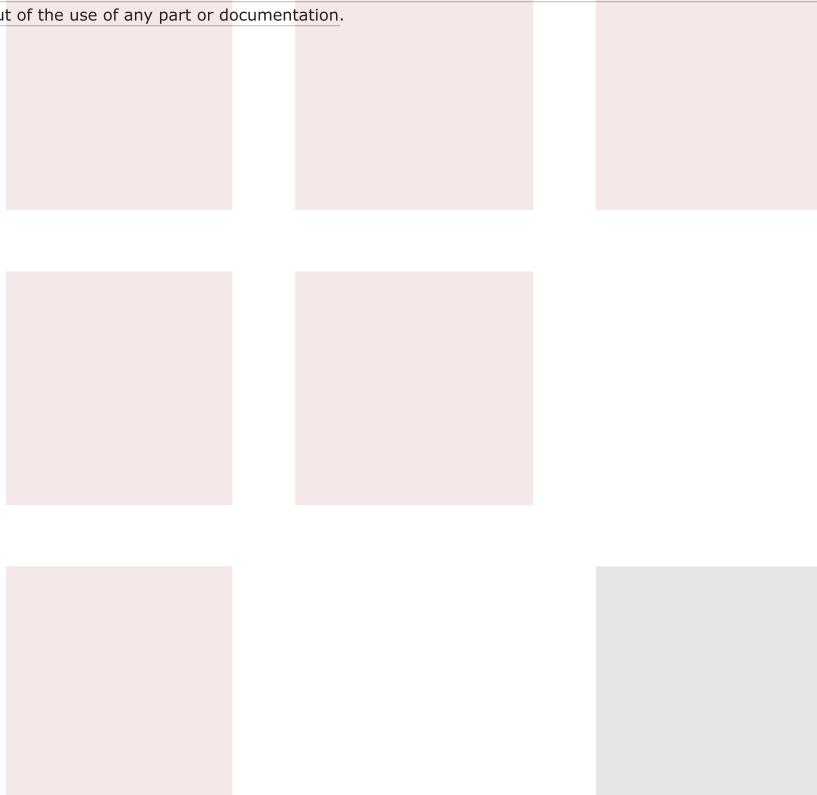

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Adapters - Between Series](#) ***category:***

Click to view products by [Fairview Microwave](#) ***manufacturer:***

Other Similar products are found below :

[5945-9503-000](#) [ADBJ20-E1-BJ379](#) [ADI95](#) [ADPL75-A1-PL75](#) [BJ158FL](#) [95-850-148-2](#) [ADBJ20-E2-BJ79](#) [UAD95](#) [242235](#) [AD-HQF-QCM-PM-2.5](#) [VA301](#) [ADT-2681-NM-SMF-02](#) [000-78875](#) [SMAF-SMBF1-3GT50G-50](#) [SMAM-MMCXM1-3GT50G-50](#) [5300](#) [N9910X-602](#) [000-2900](#) [1057377-1](#) [1059825-1](#) [RF2-03-T-00-50-G](#) [4295](#) [MCX/M-SMA/F](#) [1269#](#) [1270](#) [BNC\(75\)J-H.FLJ-BPA-V\(40\)](#) [1296](#) [1297](#) [400PSM-CR](#) [53K164-S00N1](#) [53S164-K00N1](#) [SMA6251A1-3GT50G-50](#) [FME/F-SMA/M](#) [FME/M-SMA/F](#) [73386-1640](#) [82-6532](#) [1918231](#) [22640154](#) [22640940](#) [22645651](#) [23004937](#) [73386-0192](#) [73386-0103](#) [1046274-1](#) [242105](#) [242130](#) [242201RP](#) [25-7510](#) [122498RP](#) [ADAPT/MMCXF/SMAM](#)