
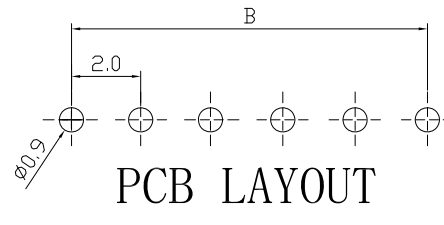
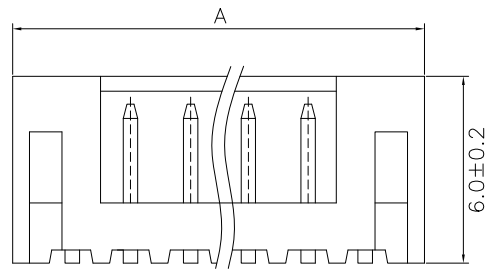
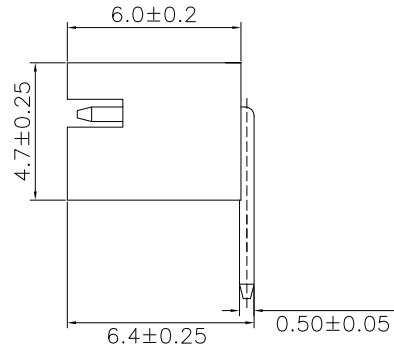



RoHS

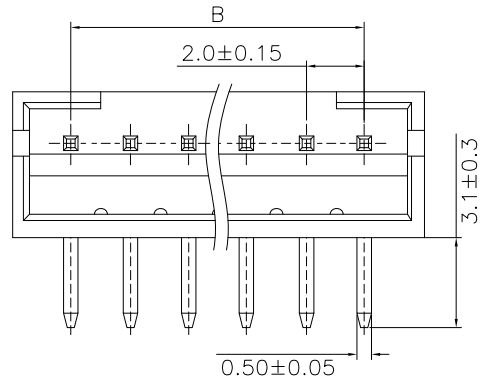

SPECIFICATIONS

- 1、Current Rating: 2A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 30mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1000V AC/minute
- 7、Material:Wafer PA66 PIN Brass Tin-plated

NP	A	B	NP	A	B
2P	6±0.2	2±0.15	10P	22±0.2	18±0.15
3P	8±0.2	4±0.15	11P	24±0.2	20±0.15
4P	10±0.2	6±0.15	12P	26±0.2	22±0.15
5P	12±0.2	8±0.15	13P	28±0.2	24±0.15
6P	14±0.2	10±0.15	14P	30±0.2	26±0.15
7P	16±0.2	12±0.15	15P	32±0.2	28±0.15
8P	18±0.2	14±0.15	16P	34±0.2	30±0.15
9P	20±0.2	16±0.15			

GENERL TOLERANCE		制 图	YUEWANG LIN			料 号 PART NO.	PH-NPW-M	版 本 REV.	A
X.±0.25	X.*±2°		审 核	PANJIN LI			品 名 TITLE	PH-CONNECTORS	
.X±0.20	.X*±1°	核 准		GUANBIN LUO			深圳市富港科技有限公司 SHENZHEN FUGANG TECHNOLOGY CO., LTD		
.XX±0.15	.XX*±0.5°								
.XXX±0.10	.XXX*±0.5°								
		单 位 UNITS	MM	比 例 SCALE	1:1				

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) ***category:***

Click to view products by [FG](#) ***manufacturer:***

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#)
[CSU011177004](#) [622-0430](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#)
[65817-010LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#)
[71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)
[803-43-024-10-001000](#)