

LONG LIFE WITH EXTRA LOWER IMPEDANCE

长寿命极低阻抗品



- Extra lower impedance with temperature range $-55\sim+105^{\circ}\text{C}$
极低阻抗和适用于 $-55\sim+105^{\circ}\text{C}$ 的温度范围
- Load life of 3000~5000 hours
负荷寿命3000~5000 小时
- Impedance 20~40% less than FVZ series
阻抗值比 FVZ 系列低20~40%
- Comply with the RoHS directive
符合 RoHS 指令



SPECIFICATIONS 特性表

Items 项目	Characteristics 主要特性																																																		
Operation Temperature Range 使用温度范围	-55 ~ +105℃																																																		
Voltage Range 额定工作电压范围	6.3 ~ 100V																																																		
Capacitance Range 静电容量范围	3.3 ~ 4700μF																																																		
Capacitance Tolerance 静电容量允许偏差	± 20% at 120Hz, 20℃																																																		
Leakage Current 漏电流	Leakage current (Ø4~Ø10) ≤0.01CV or 3 μA, whichever is greater (after 2 minutes application of rated voltage) Leakage current (Ø12.5~Ø16) ≤0.03CV or 4 μA, whichever is greater (after 2 minute application of rated voltage) 漏电流(Ø4~Ø10) ≤0.01CV或3 μ A, 取较大值 (施加额定工作电压 2 分钟后) 漏电流 (Ø12.5~Ø16) ≤0.03CV 或 4 μ A, 取较大值 (施加额定工作电压 2 分钟后)																																																		
Dissipation Factor (tanδ) 损耗角正切	Measurement frequency 测试频率: 120Hz, Temperature 温度: 20℃ <table><tr><td colspan="2">Rated Voltage (V) 额定工作电压</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63~80</td><td>100</td></tr><tr><td rowspan="2">tan δ(max.) 最大损耗角正切</td><td>Ø4~Ø10</td><td>0.26</td><td>0.20</td><td>0.18</td><td>0.16</td><td>0.14</td><td>0.12</td><td>0.12</td><td>0.12</td></tr><tr><td>Ø12.5~Ø16</td><td>0.26</td><td>0.20</td><td>0.18</td><td>0.16</td><td>0.14</td><td>0.12</td><td>0.12</td><td>0.12</td></tr></table>										Rated Voltage (V) 额定工作电压		6.3	10	16	25	35	50	63~80	100	tan δ(max.) 最大损耗角正切	Ø4~Ø10	0.26	0.20	0.18	0.16	0.14	0.12	0.12	0.12	Ø12.5~Ø16	0.26	0.20	0.18	0.16	0.14	0.12	0.12	0.12												
Rated Voltage (V) 额定工作电压		6.3	10	16	25	35	50	63~80	100																																										
tan δ(max.) 最大损耗角正切	Ø4~Ø10	0.26	0.20	0.18	0.16	0.14	0.12	0.12	0.12																																										
	Ø12.5~Ø16	0.26	0.20	0.18	0.16	0.14	0.12	0.12	0.12																																										
Stability at Low Temperature 低温特性	Measurement frequency 测试频率: 120Hz <table><tr><td colspan="2">Rated Voltage (V) 额定工作电压</td><td colspan="3">6.3 ~ 16</td><td colspan="5">25 ~ 100</td></tr><tr><td rowspan="3">Impedance Ratio 阻抗比 ZT/Z20 (max.)</td><td colspan="2">Z(-25℃) / Z(20℃)</td><td colspan="3">2</td><td colspan="5">2</td></tr><tr><td colspan="2">Z(-40℃) / Z(20℃)</td><td colspan="3">3</td><td colspan="5">3</td></tr><tr><td colspan="2">Z(-55℃) / Z(20℃)</td><td colspan="3">4</td><td colspan="5">3</td></tr></table>										Rated Voltage (V) 额定工作电压		6.3 ~ 16			25 ~ 100					Impedance Ratio 阻抗比 ZT/Z20 (max.)	Z(-25℃) / Z(20℃)		2			2					Z(-40℃) / Z(20℃)		3			3					Z(-55℃) / Z(20℃)		4			3				
Rated Voltage (V) 额定工作电压		6.3 ~ 16			25 ~ 100																																														
Impedance Ratio 阻抗比 ZT/Z20 (max.)	Z(-25℃) / Z(20℃)		2			2																																													
	Z(-40℃) / Z(20℃)		3			3																																													
	Z(-55℃) / Z(20℃)		4			3																																													
Load Life 高温负荷特性	After 5000 hrs. (3000hrs. for Ø4~Ø6.3×5.8) application of the rated voltage at 105℃, they meet the characteristics listed below. 在 105℃ 环境中施加额定工作电压5000小时(Ø4~Ø6.3×5.8为3000小时)后, 电容器的特性符合下表的要求。 <table><tr><td>Capacitance Change 静电容量变化率</td><td colspan="9">Within ±30% of initial value 初始值的 ±30%以内</td></tr><tr><td>Dissipation Factor 损耗角正切</td><td colspan="9">300% or less of initial specified value 不大于规范值的300%</td></tr><tr><td>Leakage Current漏电流</td><td colspan="9">initial specified value or less 不大于规范值</td></tr></table>										Capacitance Change 静电容量变化率	Within ±30% of initial value 初始值的 ±30%以内									Dissipation Factor 损耗角正切	300% or less of initial specified value 不大于规范值的300%									Leakage Current漏电流	initial specified value or less 不大于规范值																			
Capacitance Change 静电容量变化率	Within ±30% of initial value 初始值的 ±30%以内																																																		
Dissipation Factor 损耗角正切	300% or less of initial specified value 不大于规范值的300%																																																		
Leakage Current漏电流	initial specified value or less 不大于规范值																																																		
Shelf Life 高温贮存特性	After leaving capacitors under no load at 105° C for 1000 hours, they meet the specified value for load life characteristics listed above. 在105℃ 环境中无负荷放置1000 小时后, 电容器的特性符合高温负荷特性中所列的规定值。																																																		
Resistance to Soldering Heat 耐焊接热特性	After reflow soldering and restored at room temperature, they meet the characteristics listed below. 经过回流焊并冷却至室温后, 电容器的特性符合下表的要求。 <table><tr><td>Capacitance Change 静电容量变化率</td><td colspan="9">Within ± 10% of initial value 初始值的 ±10%以内</td></tr><tr><td>Dissipation Factor 损耗角正切</td><td colspan="9">initial specified value or less 不大于规范值</td></tr><tr><td>Leakage Current漏电流</td><td colspan="9">initial specified value or less 不大于规范值</td></tr></table>										Capacitance Change 静电容量变化率	Within ± 10% of initial value 初始值的 ±10%以内									Dissipation Factor 损耗角正切	initial specified value or less 不大于规范值									Leakage Current漏电流	initial specified value or less 不大于规范值																			
Capacitance Change 静电容量变化率	Within ± 10% of initial value 初始值的 ±10%以内																																																		
Dissipation Factor 损耗角正切	initial specified value or less 不大于规范值																																																		
Leakage Current漏电流	initial specified value or less 不大于规范值																																																		
Marking 标识	Black print on the case top. 铝壳顶部黑字印刷。																																																		

Diagram of Dimensions 尺寸图

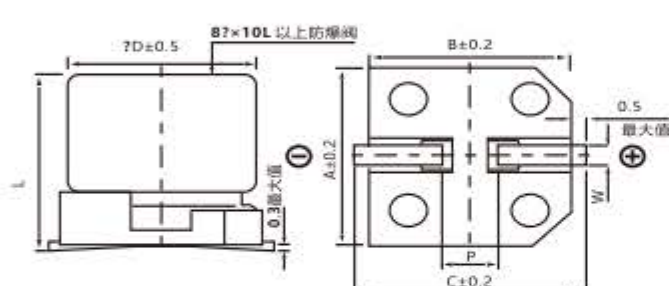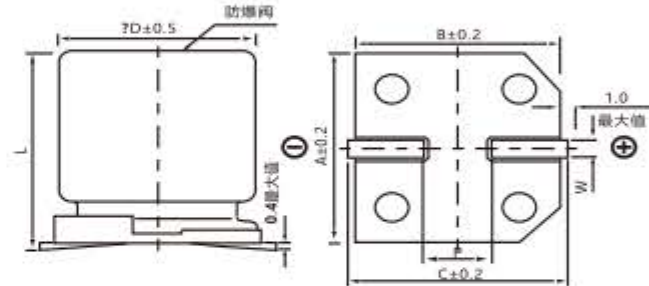 $\Phi D=4\sim 10$ 适用 $\Phi 12.5$ 以上适用

DIMENSIONS (Unit: mm) 尺寸表

DXL	4X5.8	5X5.8	6.3X5.8	6.3X7.7	8X10.5	10X10.5	10X13.5	12.5X13.5	12.5X16	16X16.5
A	4.3	5.3	6.6	6.6	8.3	10.3	10.3	13.0	13.0	17.0
B	4.3	5.3	6.6	6.6	8.3	10.3	10.3	13.0	13.0	17.0
C	5.1	5.9	7.2	7.2	9.2	11.2	11.2	13.7	13.7	18.0
P±0.2	1.0	1.5	2.0	2.0	3.1	4.4	4.4	4.4	4.4	6.4
L	5.8 ± 0.3	5.8 ± 0.3	5.8 ± 0.3	7.7 ± 0.3	10.5 ± 0.5	10.5 ± 0.5	13.5 ± 0.5	13.5 ± 0.5	16 ± 0.5	16.5 ± 0.5

DRAWING (Unit: mm) 外形图



DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT & IMPEDANCE 规格尺寸及最大允许纹波电流及阻抗值

μF	WV Code 代码	6.3			10			16		
		0J			1A			1C		
10	100							4 × 5.8	1.35	90
15	150							4 × 5.8	1.35	90
22	220	4 × 5.8	1.35	90	4 × 5.8	1.35	90	5 × 5.8	0.76	160
33	330	5 × 5.8 (4 × 5.8)	0.76 (1.35)	160 (90)	5 × 5.8	0.76	160	5 × 5.8	0.76	160
47	470	5 × 5.8 (4 × 5.8)	0.76 (1.35)	160 (90)	6.3 × 5.8	0.44	240	6.3 × 5.8	0.44	240
56	560	5 × 5.8	0.76	160	6.3 × 5.8	0.44	240	6.3 × 5.8 (5 × 5.8)	0.44 (0.76)	240 (160)
68	680	6.3 × 5.8	0.44	240	6.3 × 5.8	0.44	240	6.3 × 5.8	0.44	240
100	101	6.3 × 5.8	0.44	240	6.3 × 7.7	0.34	300	6.3 × 7.7 (6.3 × 5.8)	0.34 (0.44)	300 (240)
150	151	6.3 × 5.8	0.44	240	6.3 × 7.7	0.34	300	6.3 × 7.7 (6.3 × 5.8)	0.34 (0.44)	300 (240)
220	221	6.3 × 7.7 (6.3 × 5.8)	0.34 (0.44)	300 (240)	6.3 × 7.7	0.34	300	6.3 × 7.7	0.34	300
330	331	8 × 10.5	0.17	600	10 × 10.5 (8 × 10.5)	0.09 (0.17)	850 (600)	8 × 10.5 (6.3 × 7.7)	0.17 (0.34)	600 (300)
470	471	8 × 10.5	0.17	600	10 × 10.5 (8 × 10.5)	0.09 (0.17)	850 (600)	10 × 10.5 (8 × 10.5)	0.09 (0.17)	850 (600)
680	681	10 × 10.5 (8 × 10.5)	0.09 (0.17)	850 (600)	10 × 10.5	0.09	850	10 × 10.5 (8 × 10.5)	0.09 (0.17)	850 (600)
1000	102	10 × 10.5 (8 × 10.5)	0.09 (0.17)	850 (600)	10 × 13.5 (10 × 10.5)	0.07 (0.09)	950 (850)	16 × 16.5 (12.5 × 16) (12.5 × 13.5)	0.05 (0.055) (0.06)	1450 (1200) (1100)
1500	152	10 × 13.5	0.07	950	12.5 × 13.5	0.06	1100	16 × 16.5	0.05	1450
2200	222	12.5 × 13.5	0.06	1100	12.5 × 16	0.055	1200	Case size ØD×L(mm) 尺寸	Impedance (Ω) at 20°C, 100KHz 阻抗值	Ripple current (mA rms) at 105°C, 100KHz 纹波电流
3300	332	12.5 × 16	0.055	1200	16 × 16.5	0.05	1450			
4700	472	16 × 16.5	0.05	1450						

WV Code μF 代码	25			35			50			
	1E			1V			1H			
4.7	4R7				4 × 5.8	1.35	90	5 × 5.8	1.52	85
10	100	4 × 5.8	1.35	90	5 × 5.8	0.76	160	6.3 × 5.8 (5 × 5.8)	0.88 (1.52)	165 (115)
15	150	5 × 5.8	0.76	160	5 × 5.8	0.76	160	6.3 × 5.8	0.88	165
22	220	6.3 × 5.8 (5 × 5.8)	0.44 (0.76)	240 (160)	6.3 × 5.8	0.44	240	6.3 × 7.7 (6.3 × 5.8)	0.68 (0.88)	195 (165)
33	330	6.3 × 5.8	0.44	240	6.3 × 5.8	0.44	240	6.3 × 7.7	0.68	195
47	470	6.3 × 7.7 (6.3 × 5.8)	0.34 (0.44)	300 (240)	6.3 × 7.7 (6.3 × 5.8)	0.34 (0.44)	300 (165)	8 × 10.5 (6.3 × 7.7)	0.34 (0.68)	350 (195)
56	560	6.3 × 7.7	0.34	300	6.3 × 7.7	0.34	300	8 × 10.5	0.34	350
68	680	6.3 × 7.7	0.34	300	8 × 10.5	0.17	600	8 × 10.5	0.34	350
100	101	8 × 10.5 (6.3 × 7.7)	0.17 (0.34)	600 (300)	8 × 10.5	0.17	600	10 × 10.5 (8 × 10.5)	0.18 (0.34)	670 (350)
150	151	8 × 10.5 (6.3 × 7.7)	0.16 (0.34)	600 (300)	10 × 10.5	0.09	850	10 × 13.5 (10 × 10.5)	0.14 (0.18)	780 (670)
220	221	8 × 10.5	0.17	600	10 × 10.5 (8 × 10.5)	0.09 (0.16)	850 (600)	(10 × 13.5) (10 × 10.5)	(0.14) (0.18)	(780) (670)
330	331	10 × 10.5 (8 × 10.5)	0.09 (0.17)	850 (600)	(10 × 13.5) (10 × 10.5)	(0.07) (0.09)	(950) (850)	12.5 × 13.5	0.12	900
470	471	10 × 13.5 (10 × 10.5)	0.07 (0.09)	950 (850)	12.5 × 13.5 (10 × 13.5) (10 × 10.5)	0.06 (0.07) (0.09)	1100 (1000) (850)	16 × 16.5 (12.5 × 16) (12.5 × 13.5)	0.08 (0.10) (0.12)	1250 (1050) (900)
680	681	12.5 × 13.5	0.06	1100	12.5 × 16 (12.5 × 13.5)	0.055 (0.06)	1200 (1100)			
1000	102	16 × 16.5 (12.5 × 16) (12.5 × 13.5)	0.05 (0.055) (0.06)	1450 (1200) (1100)	16 × 16.5	0.05	1450	Case size øD xL(mm) 尺寸	Impedance (Ω) at 20°C, 100KHz 阻抗值	Ripple current (mA rms) at 105°C, 100KHz 纹波电流
1500	152	16 × 16.5	0.05	1450						

• Case size ØD×L(mm), ripple current (mA rms) at 105°C, 100KHz, Impedance (Ω) at 20°C 100KHz • 尺寸ØD×L(mm), 纹波电流(mA rms) 于105°C, 100KHz, 阻抗值(Ω) 于20°C 100KHz

DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT & IMPEDANCE 规格尺寸及最大允许纹波电流及阻抗值

WV Code 代码	μF	63			80			100		
		1J			1K			2A		
3.3	3R3				5 × 5.8	5.0	25			
4.7	4R7	5 × 5.8	3.0	50	6.3 × 5.8	3.0	40			
10	100	6.3 × 7.7 (6.3 × 5.8)	1.2 (1.5)	120 (80)	6.3 × 7.7	2.4	60	8 × 10.5	1.3	130
22	220	8 × 10.5 (6.3 × 7.7)	0.65 (1.2)	250 (120)	8 × 10.5	1.3	130	10 × 10.5 (8 × 10.5)	0.7 (1.3)	200 (160)
33	330	8 × 10.5	0.65	250	10 × 10.5	0.7	200	10 × 13.5	0.45	200
47	470	10 × 10.5 (8 × 10.5)	0.50 (0.65)	300 (250)	10 × 13.5	0.45	300	12.5 × 13.5	0.32	500
68	680	12.5 × 13.5 (10 × 10.5)	0.16 (0.50)	800 (300)	12.5 × 13.5	0.32	500	12.5 × 13.5	0.32	500
100	101	12.5 × 13.5 (10 × 13.5) (10 × 10.5)	0.16 (0.25) (0.50)	800 (400) (300)	12.5 × 13.5 (10 × 13.5)	0.32 (0.45)	500 (300)	16 × 16.5 (12.5 × 16) (12.5 × 13.5)	0.17 (0.26) (0.32)	795 (550) (500)
150	151	12.5 × 13.5 (10 × 13.5)	0.16 (0.25)	800 (650)	12.5 × 13.5	0.32	500	Case size ∅D-L(mm) 尺寸	Impedance (Ω) at 20°C, 100KHz 阻抗值	Ripple current (mA rms) at 105°C, 100KHz 纹波电流
220	221	12.5 × 13.5	0.16	800	12.5 × 16 (12.5 × 13.5)	0.26 (0.32)	550 (500)			
330	331	16 × 16.5	0.082	1400	16 × 16.5	0.17	795			

• Case size ∅D×L(mm), ripple current (mA rms) at 105°C, 100KHz, Impedance (Ω) at 20°C 100KHz • 尺寸∅D×L(mm), 纹波电流(mA rms) 于105°C, 100KHz, 阻抗值(Ω) 于20°C 100KHz

FREQUENCY COEFFICIENT OF ALLOWABLE RIPPLE CURRENT 纹波电流频率补偿系数


Frequency 频率			50Hz	120Hz	300Hz	1KHz	10KHz~
Coefficient 系数	∅4 ~ ∅10	4.7 ~ 68μF	0.35	0.50	0.64	0.83	1.00
		100 ~ 1500μF	0.40	0.55	0.70	0.85	1.00
	∅12.5 ~ ∅16	~ 68μF	0.40	0.55	0.70	0.85	1.00
		100 ~ 680μF	0.45	0.65	0.80	0.90	1.00
		1000 ~ 4700μF	0.65	0.85	0.95	1.00	1.00

- The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 10°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.
- 铝电解电容器由于在纹波电流叠加时自我发热，温度上升而老化，每升温10°C 寿命减少一半；要想保持长寿命请在使用过程中降低纹波电流。

- Taping specifications are given in page 17 "Taping Specifications". 编带标准请参阅第 17 页 "编带标准"。
- Please refer to page 18 "Package Quantity" for the minimum package quantity. 最小包装数量请参阅第 18 页 "包装数量"。

SMD EXPLANATION OF PART NUMBERS

贴片产品编码规则

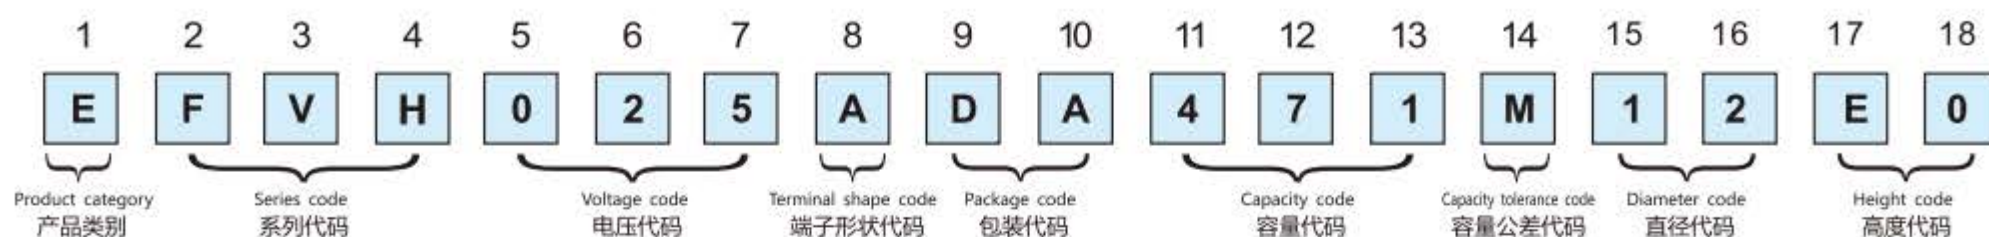


(2、3、4)			(5、6、7)		(11、12、13)		(14)		(8)		(15、16)		(17、18)					
Series 系列	Voltage (w.v) 电压	Code 代码	Capacitance (uF) 静电容量	Code 代码	Cap.Tolerance (%) 容量允许	Code 代码	Tape 端子类型		Code 代码	Diameter (□) 直径	Code 代码	Length (mm) 高度	Code 代码					
FVE	4	4R0	0.1	0R1	± 10	K	No dummy terminal 无辅助端子		A	4	04	4.5	45					
FVH	6.3	6R3	0.22	R22	± 20	M	With dummy terminal 有辅助端子		G	5	05	5.4	54					
FVA	10	010	1	010										6.3	06	5.8	58	
FVZ	16	016	4.7	4R7										8	08	6.5	65	
FVR	25	025	10	100										10	10	7.7	77	
FVL	35	035	47	470										12.5	12	10.2	A0	
FVM	50	050	100	101										16	16	10.5	B0	
FVU	63	063	470	471										18	18	13.5	E0	
FVG	100	100	1000	102													16	G5
FVB	160	160	4700	472													16.5	H0
FVN	250	250	10000	103													21.5	N0
FVD	350	350																
FVC	400	400																

(9、10)				
Packaging 包装要求	External diameter 纸盘外径	Fit size 适合尺寸	Code 代码	
	□(mm)	□D(mm)		
Brading 编带	Paper tray 纸盘	380	ØD4~18	DA
		330	ØD4~18	DB
	Glue tray 胶盘	380	ØD4~10	RA
	Blister box 吸塑盒	-	ØD12.5~18	TR

Radial EXPLANATION OF PART NUMBERS

插件产品编码规则

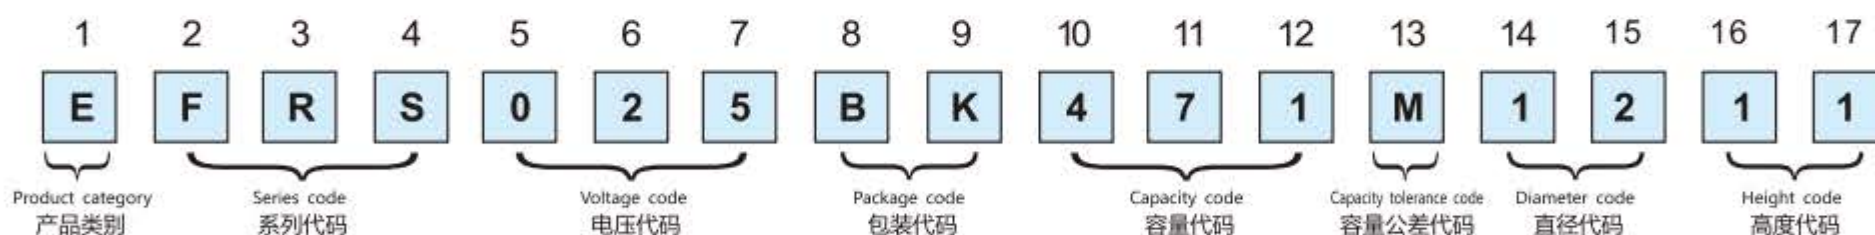

(2、3、4)			(5、6、7)		(10、11、12)		(13)		(8、9)		(14、15)		(16、17)	
Series 系列	Voltage (w.v) 电压	Code 代码	Capacitance (uF) 静电容量	Code 代码	Cap.Tolerance (%) 容量允许	Code 代码	Packaging 包装形式		Code 代码	Diameter (∅) 直径	Code 代码	Length (mm) 高度	Code 代码	
FRA	4	4R0	0.1	0R1	± 10	K	Long-legged bulk长脚散装		BK	4	04	4.5	04	
FRS	6.3	6R3	0.22	R22	± 20	M	Long-legged taping长脚编带		BA	5	05	5.5	05	
FRU	10	010	1	010						6.3	06	6.0	06	
FRK	16	016	4.7	4R7						8	08	6.5	06	
FBR	25	025	10	100						10	10	7.0	07	
FBU	35	035	47	470						12.5	12	8.0	08	
	50	050	100	101						16	16	10	10	
	63	063	470	471						18	18	11	11	
	100	100	1000	102								11.5	11	
	160	160	4700	472								12	12	
	250	250	10000	103								16	16	
	350	350												
	400	400												

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - SMD category:](#)

Click to view products by [FOLLON manufacturer:](#)

Other Similar products are found below :

[ULV2H1R8MNL1GS](#) [EMZA500ARA221MJA0G](#) [UCX1V471MNQ1MS](#) [10SVP120M](#) [DV100M050C055ETR](#) [AEH1012471M016R](#)
[GVT1C337M0608CNVC](#) [EMK1EM331FB0D00R](#) [EMF1CM221FB0D00R](#) [EMF1CM331FB0D00R](#) [EMF1CM471FB0D00R](#)
[EMK1AM102GB0D00R](#) [EMK1HM221GB0D00R](#) [DV221M025E077ETR](#) [RVT1A101M0505](#) [GVZ1H101M0607](#) [CK1E100M0405](#)
[GVM1E331M0607](#) [VT10UF100V167RV0127](#) [VT100UF16V167RV0124](#) [CS100UF35V167RV0155](#) [CK220UF16V167RV0142](#)
[VT10UF16V167RV0128](#) [VT22UF35V167RV0131](#) [CS470UF10V167RV0150](#) [CK100UF16V167RV0138](#) [CK220UF10V167RV0141](#)
[RVT330UF25V167RV0055](#) [CS47UF16V167RV0152](#) [VT470UF16V167RV0135](#) [CS100UF10V167RV0144](#) [126RV0017](#)
[VT47UF35V167RV0137](#) [CS220UF35V167RV0148](#) [126RV0010](#) [126RV0009](#) [VT220UF25V167RV160](#) [VT220UF16V167RV0088](#)
[126RV0012](#) [126RV0011](#) [126RV0013](#) [126RV0018](#) [126RV0008](#) [126RV0015](#) [126RV0021](#) [126RV0006](#) [126RV0007](#) [126RV0014](#) [126RV0019](#)
[126RV0004](#)