

## FEATURES

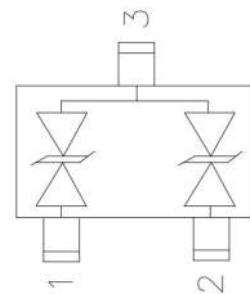
- ✧ 455 watts peak pulse power per line ( $t_P=8/20\mu s$ )
- ✧ Protect for two I/O lines with bi-directional
- ✧ Low clamping voltage
- ✧ Working voltages:15V
- ✧ Low leakage current
- ✧ RoHS compliant



SOT-23

## MAIN APPLICATIONS

- ✧ RS-232, RS-422 & RS-485
- ✧ Servers, notebook, and desktop
- ✧ Cellular handsets and accessories
- ✧ Control & monitoring systems
- ✧ Portable electronics
- ✧ Wireless bus protection
- ✧ Set-top box



PIN Configuration

## PROTECTION SOLUTION TO MEET

- ✧ IEC61000-4-2 (ESD)  $\pm 30kV$  (air),  $\pm 30kV$  (contact)

## MECHANICAL CHARACTERISTICS

- ✧ SOT-23 package
- ✧ Molding compound flammability rating: UL 94V-0
- ✧ Weight 8 milligrams (approximate)
- ✧ Quantity per reel: 3,000pcs
- ✧ Reel size: 7 inch
- ✧ Lead finish: lead free
- ✧ Marking code: BB2

**ABSOLUTE MAXIMUM RATINGS**( $T_A=25^\circ\text{C}$ , RH=45%-75%, unless otherwise noted)

Parameter	Symbol	Value	Unit
Peak pulse power dissipation on 8/20μs waveform	$P_{PP}$	455	W
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	$V_{ESD}$	+/- 30 +/- 30	kV
Lead soldering temperature	$T_L$	260 (10 sec.)	°C
Operating junction temperature range	$T_J$	-55 to +125	°C
Storage temperature range	$T_{STG}$	-55 to +150	°C

**ELECTRICAL CHARACTERISTICS**( $T_A=25^\circ\text{C}$ )

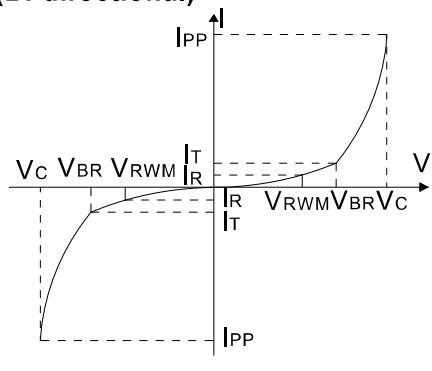
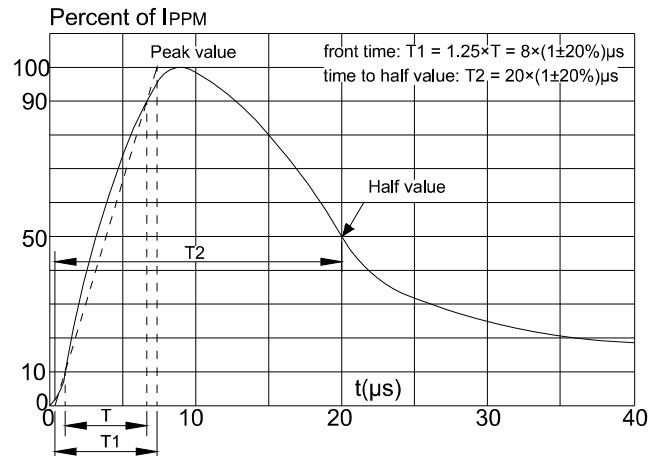
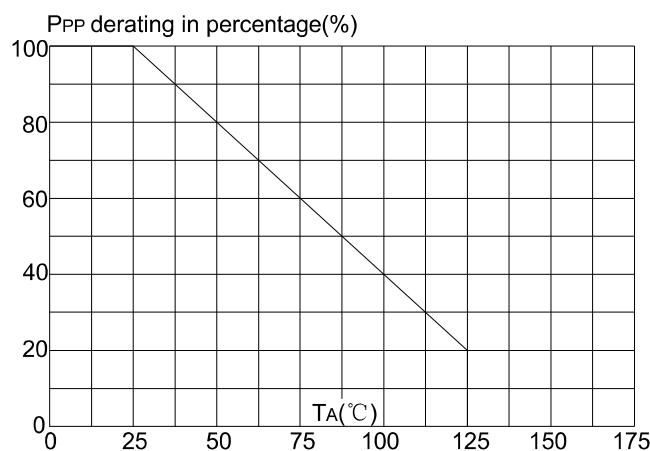
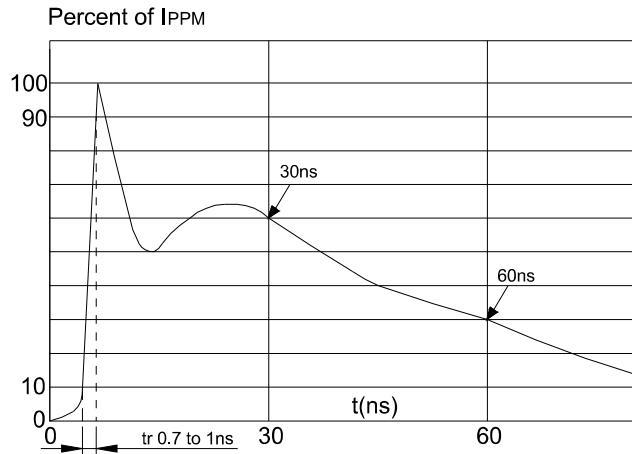
Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Reverse working voltage	$V_{RWM}$				15	V
Reverse breakdown voltage	$V_{BR}$	$I_T=1\text{mA}$	17.0		19.5	V
Reverse leakage current	$I_R$	$V_{RWM}=15\text{V}$			1.0	μA
Clamping voltage (pin1 to pin3, pin2 to pin3)	$V_C$	$I_{PP}^{(1)}=1\text{A}, t_P=8/20\mu\text{s}$			20	V
		$I_{PP}^{(2)}=13\text{A}, t_P=8/20\mu\text{s}$			35	V
Junction capacitance	$C_J^{(2)}$	$V_{RWM}=0\text{V}, f=1\text{MHz}$		30		pF
Junction capacitance	$C_J^{(3)}$	$V_{RWM}=0\text{V}, f=1\text{MHz}$		15		pF

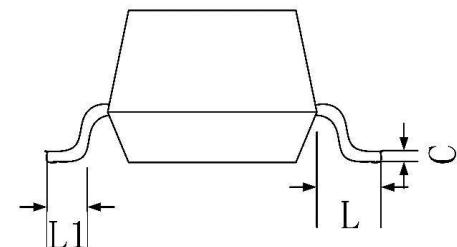
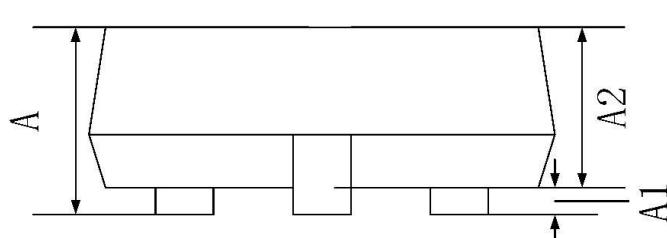
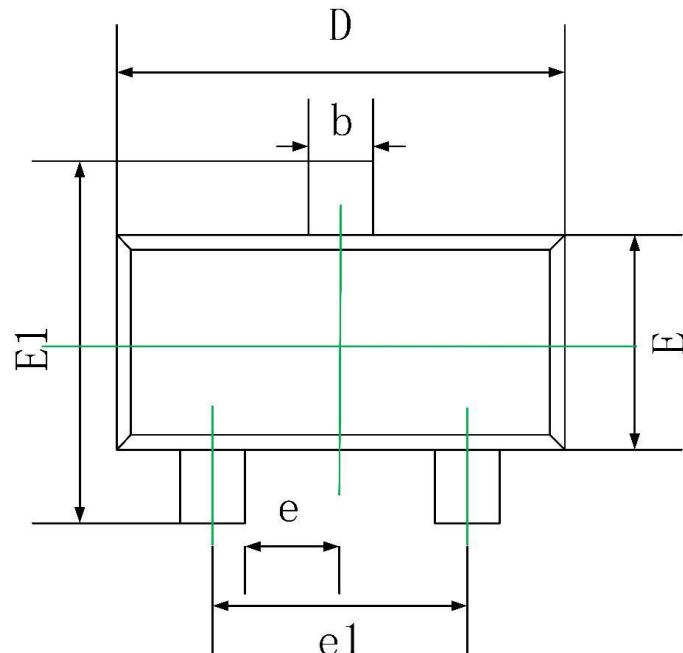
①Surge waveform: 8/20μs

 ② $C_J$  measured @ $V_{RWM}=0\text{V}, 1\text{MHz}$  (pin1 to pin3, pin2 to pin3)

 ③ $C_J$  measured @ $V_{RWM}=0\text{V}, 1\text{MHz}$  (pin1 to pin2, pin2 to pin1)

**RATINGS AND V-I CHARACTERISTICS CURVES** ( $T_A=25^\circ\text{C}$ , unless otherwise noted)

**FIG.1: V- I curve characteristics  
(Bi-directional)**

**FIG.2: Pulse waveform (8/20 $\mu\text{s}$ )**

**FIG.3: Pulse derating curve**

**FIG.4: ESD clamping (30kV contact)**


**SOT-23 Package Information**


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP.		0.037 TYP.	
e1	1.800	2.000	0.071	0.079
L	0.550 REF.		0.022 REF.	
L1	0.300	0.500	0.012	0.020

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for ESD Suppressors / TVS Diodes category:***

***Click to view products by FUXINSEMI manufacturer:***

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [DESD5V0U1BB-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#) [P6KE8.2A](#)  
[SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS](#) [E6327](#) [ESD105-B1-02EL](#) [E6327](#) [ESD112-B1-02EL](#) [E6327](#) [ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)  
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DESD5V0U1BL-7B](#) [DRTR5V0U4SL-7](#)  
[SCM1293A-04SO](#) [ESD200-B1-CSP0201](#) [E6327](#) [SM12-7](#) [SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#) [VESD12A1A-HD1-GS08](#)  
[CPDUR5V0R-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [D1213A-02WL-7](#) [MMAD1108/TR13](#)  
[5KP100A](#) [5KP15A](#) [5KP18A](#) [5KP48A](#) [5KP90A](#) [5KP90CA](#)