

 FUZETEC TECHNOLOGY CO., LTD.	NO.	PQ28-122E		
	Product Specification and Approval Sheet	Version	A0	Page

Radial Leaded PTC Resettable Fuse : FRVL Series

1. Summary

- (a) **RoHS Compliant (Lead Free) product**
- (b) **Applications : Wide variety of electronic equipment**
- (c) **Product Features : Solid state, Radial leaded product ideal for up to 120V_{AC/DC}**
- (d) **Operation Current : 0.10A~3.75A**
- (e) **Maximum Operating Voltage : 120V_{AC/DC}**
- (f) **Maximum Interrupt Voltage : 135V_{AC/DC}**
- (g) **Temperature Range : -40°C to 85°C**

2. Agency Recognition

UL : File No. E211981
 C-UL: *File No. E211981
 TÜV : File No. R50122733

*FRVL040-120F~FRVL070-120F and FRVL090-120F~FRVL130-120F C-UL In Process.

3. Electrical Characteristics (23°C)

Part Number	Hold Current I _H , A	Trip Current I _T , A	Max.Time to Trip at 5xI _H ,S	Max. Current I _{MAX} , A	Max. Oper. Voltage V _{MAX} , V _{AC/DC}	Max. Int. Voltage V _{I-MAX} , V _{AC/DC}	Typ Power Pd, W	Resistance	
								R _{MIN} Ohms	R _{1MAX} Ohms
FRVL010-120F	0.10	0.20	10.0	2.0	120	135	0.84	3.00	7.50
FRVL017-120F	0.17	0.34	10.0	2.0	120	135	0.84	2.00	7.00
FRVL020-120F	0.20	0.40	9.0	2.0	120	135	1.08	1.83	4.40
FRVL025-120F	0.25	0.50	7.5	3.0	120	135	1.08	1.25	3.00
FRVL030-120F	0.30	0.60	8.5	3.0	120	135	1.44	0.88	2.10
FRVL040-120F	0.40	0.80	6.5	3.0	120	135	1.44	0.55	1.29
FRVL050-120F	0.50	1.00	6.0	3.0	120	135	1.56	0.50	1.17
FRVL065-120F	0.65	1.30	5.7	5.0	120	135	1.68	0.31	0.72
FRVL070-120F	0.75	1.50	6.3	5.0	120	135	1.80	0.25	0.60
FRVL075-120F	0.75	1.50	15.0	7.5	120	135	2.64	0.25	0.69
FRVL090-120F	0.90	1.80	7.2	5.0	120	135	1.80	0.20	0.47
FRVL100-120F	1.00	2.00	15.0	10.0	120	135	2.64	0.18	0.47
FRVL110-120F	1.10	2.20	8.2	8.0	120	135	2.28	0.15	0.38
FRVL125-120F	1.25	2.50	20.0	12.5	120	135	2.88	0.11	0.33
FRVL130-120F	1.35	2.70	9.6	10.0	120	135	2.64	0.12	0.30
FRVL135-120F	1.35	2.70	20.0	13.5	120	135	3.12	0.11	0.30
FRVL160-120F	1.60	3.20	11.4	12.0	120	135	3.12	0.09	0.22
FRVL185-120F	1.85	3.70	12.6	12.0	120	135	3.36	0.08	0.19
FRVL200-120F	2.00	4.20	36.0	20.0	120	135	4.32	0.08	0.21
FRVL250-120F	2.50	5.00	15.6	15.0	120	135	4.44	0.05	0.13
FRVL300-120F	3.00	6.00	19.8	17.0	120	135	4.56	0.04	0.10
FRVL375-120F	3.75	7.50	24.0	20.0	120	135	4.80	0.03	0.08

NOTE : Specification subject to change without notice.

2019/9/18



IH=Hold current-maximum current at which the device will not trip at 23°C still air.
 IT=Trip current-minimum current at which the device will always trip at 23°C still air.
 V MAX=Maximum voltage device can withstand without damage at its rated current.
 I MAX= Maximum fault current device can withstand without damage at rated voltage (V MAX).
 Pd=Typical power dissipated from device when in tripped state in 23°C still air environment.
 RMIN=Minimum device resistance at 23°C.
 R1MAX=Maximum device resistance at 23°C, 1 hour after tripping .
 Physical specifications:
 Lead material: FRVL010-120F Tin plated copper clad steel, 24AWG.
 FRVL017-120F Tin plated copper, 24AWG.
 FRVL020-120F~FRVL070-120F and FRVL090-120F Tin plated copper, 22AWG.
 FRVL075-120F and FRVL100-120F~FRVL375-120F Tin plated copper, 20AWG.
 Soldering characteristics:MIL-STD-202, Method 208E.
 Insulating coating:Flame retardant epoxy, meets UL-94V-0 requirement.

4. Production Dimensions (millimeter)

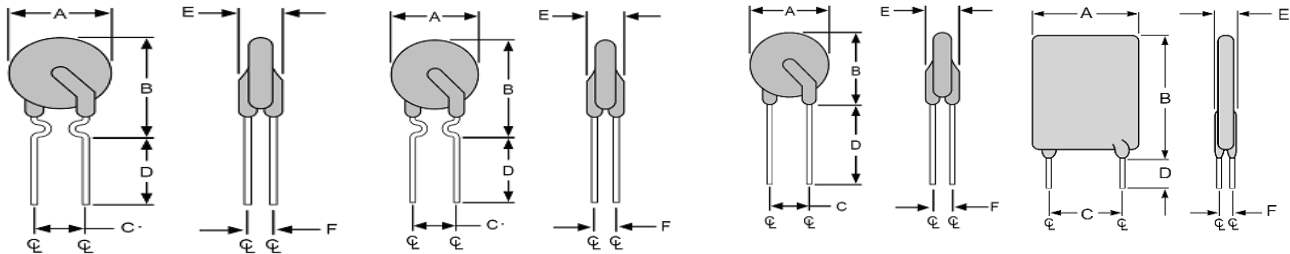


Fig.1

FRVL010-120F~FRVL017-120F
 Lead Size :24AWG
 Φ 0.51 mm Diameter

Fig.2

FRVL020-120F~FRVL090-120F
 Lead Size :22AWG
 Φ 0.65 mm Diameter

Fig.3

FRVL110-120F~FRVL375-120F
 Lead Size :20AWG
 Φ 0.81 mm Diameter

Fig.4

FRVL075-120F ~FRVL200-120F
 Lead Size : 20AWG
 Φ 0.81 mm Diameter


Part Number	Fig.	A	B	C	D	E	F
		Maximum	Maximum	Typical	Minimum	Maximum	Typical
FRVL010-120F	1	7.9	13.0	5.1	7.6	3.8	2.2
FRVL017-120F	1	7.9	13.0	5.1	7.6	3.8	2.2
FRVL020-120F	2	7.9	13.0	5.1	7.6	3.8	2.2
FRVL025-120F	2	7.9	13.0	5.1	7.6	3.8	2.2
FRVL030-120F	2	7.9	13.0	5.1	7.6	3.8	2.2
FRVL040-120F	2	8.2	14.2	5.1	7.6	3.8	2.2
FRVL050-120F	2	9.2	14.9	5.1	7.6	3.8	2.2
FRVL065-120F	2	9.7	14.9	5.1	7.6	3.8	2.2
FRVL070-120F	2	10.6	15.5	5.1	7.6	3.8	2.2
FRVL075-120F	4	10.9	17.0	5.1	7.6	4.1	2.2
FRVL090-120F	2	11.9	15.9	5.1	7.6	3.8	2.2
FRVL100-120F	4	11.5	20.1	5.1	7.6	4.1	2.2
FRVL110-120F	3	13.3	18.3	5.1	7.6	4.1	2.2
FRVL125-120F	4	14.0	21.7	5.1	7.6	4.1	2.2
FRVL130-120F	3	15.5	20.6	5.1	7.6	4.1	2.2
FRVL135-120F	4	16.3	21.7	5.1	7.6	4.1	2.2
FRVL160-120F	3	17.5	22.5	5.1	7.6	4.1	2.2

NOTE : Specification subject to change without notice.




FRVL185-120F	3	19.9	24.9	5.1	7.6	4.1	2.2
FRVL200-120F	4	23.5	27.9	10.2	7.6	4.1	2.2
FRVL250-120F	3	22.5	27.5	10.2	7.6	4.1	2.2
FRVL300-120F	3	25.5	30.0	10.2	7.6	4.1	2.2
FRVL375-120F	3	29.5	34.0	10.2	7.6	4.1	2.2

5. Thermal Derating Curve

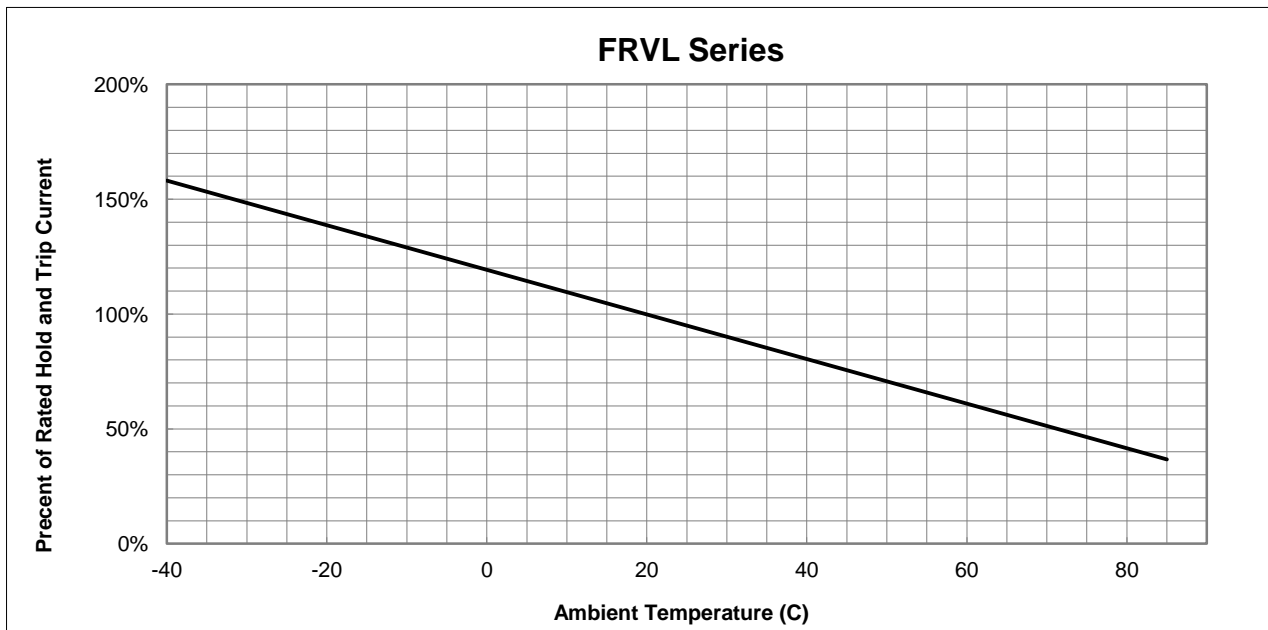

6. Typical Time-To-Trip at 23°C


- A=FRVL010-120F
- B=FRVL017-120F
- C=FRVL020-120F
- D=FRVL025-120F
- E=FRVL030-120F
- F=FRVL040-120F
- G=FRVL050-120F
- H=FRVL065-120F
- I=FRVL070-120F
- J=FRVL090-120F
- K=FRVL110-120F
- L=FRVL130-120F
- M=FRVL160-120F
- N=FRVL185-120F
- O=FRVL250-120F
- P=FRVL300-120F
- Q=FRVL375-120F

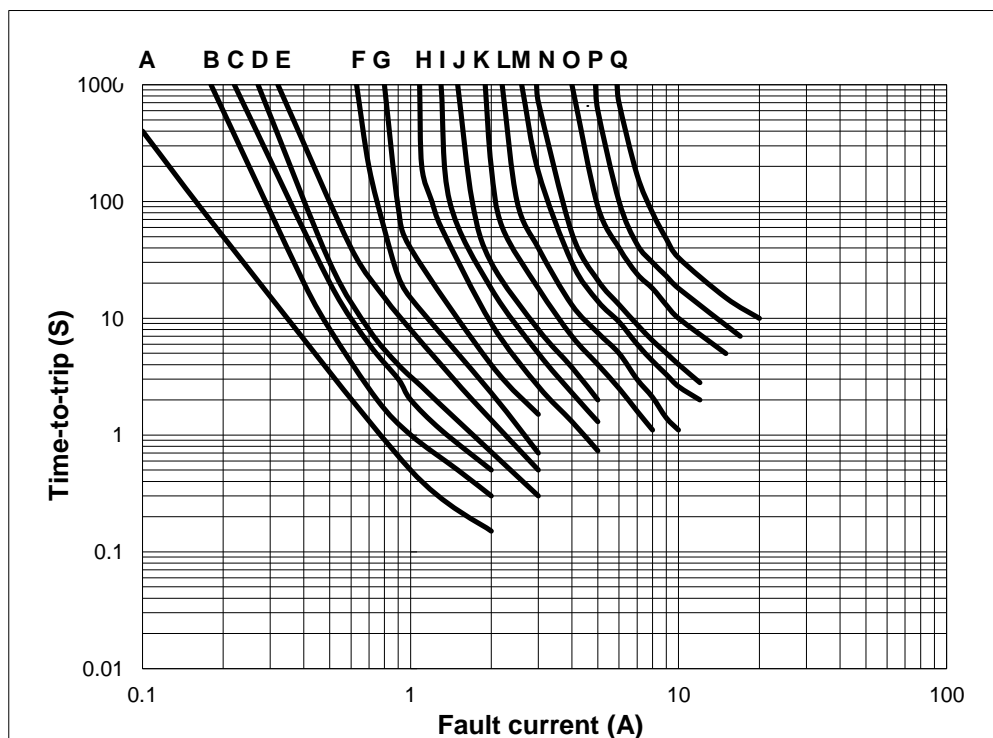

NOTE : Specification subject to change without notice.



- R=FRVL075-120F
- S=FRVL100-120F
- T=FRVL125-120F
- U=FRVL135-120F
- V=FRVL200-120F

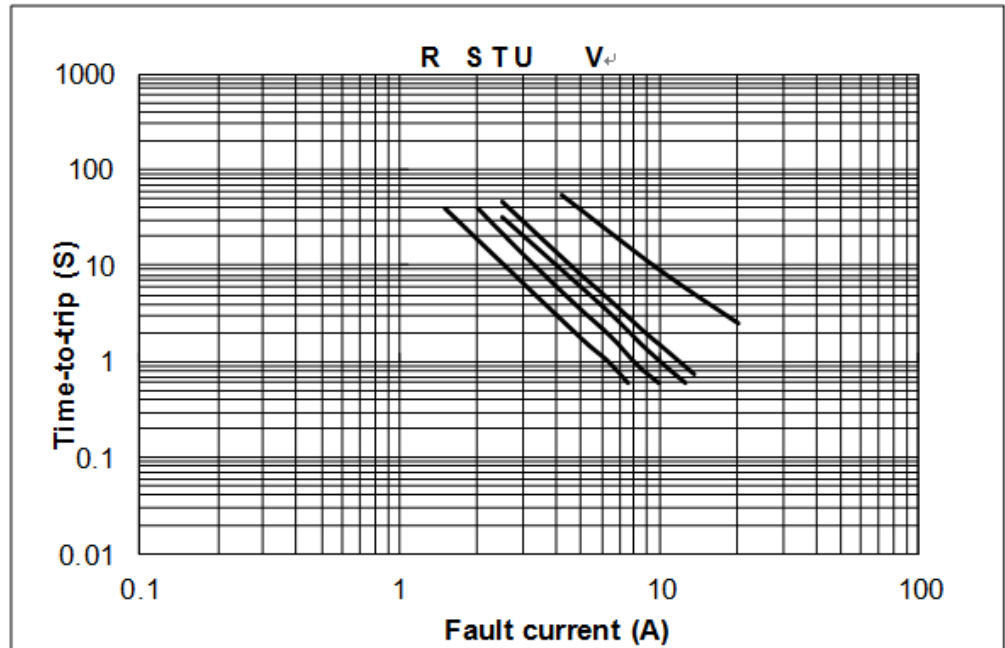


7. Material Specification


- Lead material : FRVL010-120F Tin plated copper clad steel, 24 AWG.
- FRVL017-120F Tin plated copper, 24 AWG.
- FRVL020-120F~FRVL070-120F and FRVL090-120F Tin plated copper, 22AWG.
- FRVL075-120F and FRVL100-120F~FRVL375-120F Tin plated copper, 20AWG.
- Soldering characteristics:MIL-STD-202, Method 208E.
- Insulating coating:Flame retardant epoxy, meets UL-94V-0 requirement

8. Part Numbering and Marking System

Part Numbering System

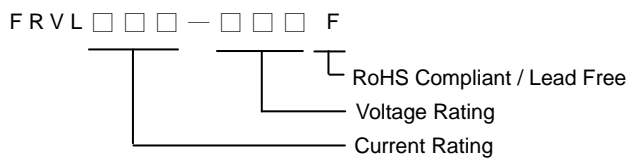

Part Marking System

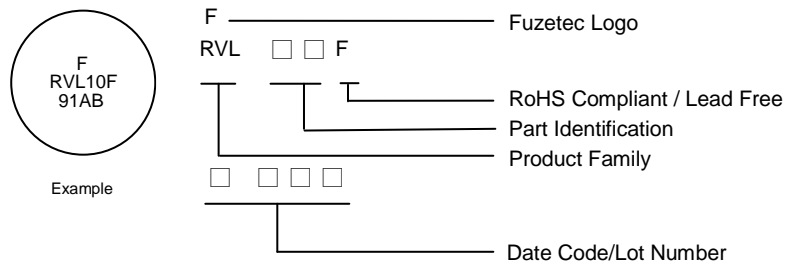

Note: Font on Marking may look slightly different due to fine turnings of each Marking printer.

Warning:

- Each product should be carefully evaluated and tested for their suitability of application.
- Operation beyond the specified maximum rating or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent, including some inert material such as silicone based oil, lubricant and etc. Prolonged contact will damage the device performance.
- Additional protection mechanism are strongly recommended to be used in conjunction with the PPTC device for protection against abnormal or failure conditions.
- Avoid use of PPTC device in a constrained space such as potting material, housing and containers where have limited space to accommodate device thermal expansion and/or contraction.



NOTE : Specification subject to change without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Resettable Fuses - PPTC](#) category:

Click to view products by [Fuzetec](#) manufacturer:

Other Similar products are found below :

[RF0077-000](#) [RF3301-000](#) [RF3382-000](#) [RF3394-000](#) [SMD125-2](#) [RF2531-000](#) [RF2873-000](#) [RF3060-000](#) [TR600-150Q-B-0.5-0.130](#)
[5E4795/04-1502](#) [SMD100-2](#) [NIS5431MT1TXG](#) [SMD250-2](#) [BK60-050-DI](#) [RS30-090](#) [RS30-600](#) [RS30-800](#) [RS30-900](#) [RS60RB-160](#)
[OZCH0110AF2E](#) [BK60-110-DI-E0.6](#) [BK60-010-DI-E0.5](#) [BK250-040-DY-E0.6](#) [NIS6420MT1TWG](#) [BSMD0402L-005](#) [BSMD1210-150-16V](#)
[BSMD0402L-075](#) [BSMD1210-050-16V](#) [JK-SMD1210-050-13.2V](#) [JK-SMD1210-150/6V](#) [JK-SMD100L-33](#) [SMD2018-075-60V](#) [BSMD1210-](#)
[110-16V](#) [BSMD1210-150-12V](#) [JK-P730](#) [JK-SMD400L](#) [JK-SMD1210-030-16](#) [JK-SMD300L-16](#) [JK-SMD185L-33](#) [JK-P200](#) [JK250-180T](#)
[SRF1206P200](#) [TLC-USMD150/12](#) [TLC-USMD200/8](#) [TLC-USMD150/8](#) [FTR250-080](#) [FRT220-33F](#) [FUSB135F](#) [JK-mSMD125-8](#) [JK-P600](#)