

CAB469RF: MMCX R/A PLUG + SMA STRAIGHT BULKHEAD JACK WITH O-RING RATED TO IP67/68 + MULTIPLE CABLE SIZES, 6GHz

SPECIFICATIONS :

1. MMCX RIGHT ANGLE PLUG, P/N:
FOR Ø1.37MM, RG178 CABLE: RFCT-MMCX003-M78.
FOR Ø1.13MM LOW LOSS CABLE: RFCT-MMCX002-M13.
2. COAXIAL CABLE, SEE P/N OPTIONS.
3. SMA STRAIGHT BULKHEAD JACK WITH O-RING RATED TO IP67/68,
P/N: RFCT-SMA069-F78.

ENVIRONMENTAL:



- A. BULKHEAD MOUNTED CONNECTOR (RFCT-SMA069-F78) RATED TO THE FOLLOWING SPECIFICATION:
- i. IP6X – DUST TIGHT – NO PARTICLE INGRESS.
 - ii. IPX7 WATERPROOF FOR 30 MINUTES UP TO 1 METER UNDERWATER.
 - iii. IPX8 WATERPROOF FOR 48 HOURS AT 1 METER UNDERWATER.

NOTES:

1. THE ORIENTATION OF CONNECTORS ON DRAWING IS FOR REFERENCE ONLY, IF THE ORDER IS LEFT BLANK THE CONNECTOR WILL NOT HAVE FIXED ORIENTATION.
2. FIXED ORIENTATION IS SUGGESTED FOR CABLE LENGTH 50MM TO 100MM. PLEASE SPECIFY THE FIXED ORIENTATIONS FROM THE ORDER CODE (F1, F2, ETC)
3. CONTACT GCT IF THE ORIENTATION YOU REQUIRE IS NOT SHOWN.
4. WORKING FREQUENCY RANGE: DC-6GHz.
5. OPERATING TEMPERATURE: -40°C TO +125°C.
6. IMPEDANCE: 50 Ohm.

USAGE PRECAUTIONS: CABLES USING 'MICRO' COAX ARE DELICATE:

- (i) HANDLE WITH CARE.
- (ii) DO NOT TWIST; APPLY EXCESSIVE FORCES OR SHARP BENDS TO THE CABLE. DO NOT FORCEFULLY DEFORM WIRES.
- (iii) CONSULT CONNECTOR MANUFACTURER'S DATASHEETS FOR DETAILED NOTES ON HANDLING INSTRUCTIONS.

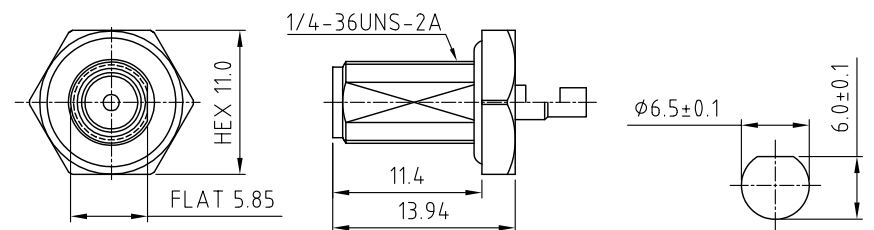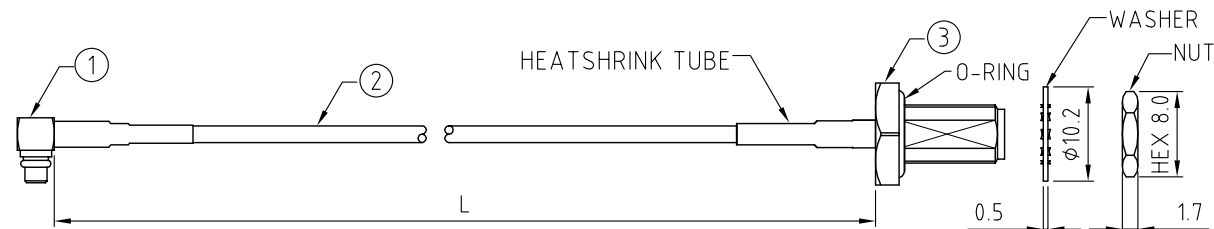

HOW TO ORDER

CAB469RF - X X X X - X X - X - X

"L" LENGTH IN MM:
eg: 100MM = 0100
(MIN. 0050-MAX.0400
STANDARD = 0100, 0150, 0200)
TOLERANCE: 50-200mm: ± 5 mm.
201-400mm: ± 7 mm.

CABLE SIZE OPTIONS:



- 1 = RG178 CABLE, COLOR: BROWN
2 = Ø1.37MM CABLE, COLOR: BLACK
3 = Ø1.13MM LOW LOSS CABLE, COLOR: GRAY

WASHER AND NUT OPTIONS:
BLANK = SEPARATELY PACKED (STANDARD)
A = ASSEMBLED WITH CONNECTOR

ORIENTATION OPTIONS:

BLANK = DOES NOT HAVE A FIXED ORIENTATION
F1 = MMCX CONNECTION DOWN (L=50-200MM)
F2 = MMCX CONNECTION UP (L=50-200MM)
F3 = MMCX CONNECTION & SMA FLAT SAME ORIENTATION (L=50-200MM)
F4 = MMCX CONNECTION & SMA FLAT OPPOSITE ORIENTATION (L=50-200MM)
(SEE NOTES 1, 2, 3 AND DIAGRAMS FOR MORE INFORMATION)

RECOMMENDED SMA
MOUNTING HOLE

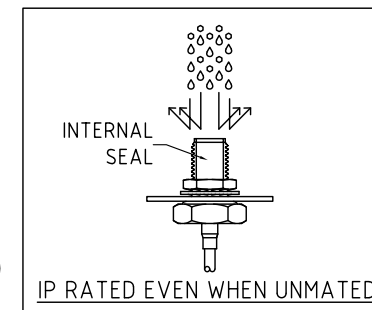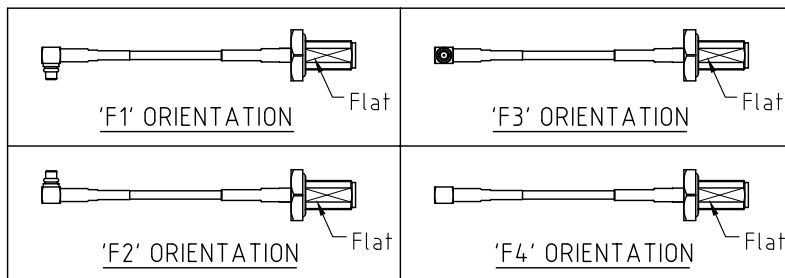

REV.	DATE	BY	DESCRIPTION
0.0	24/05/21	NYW	RELEASE
1.1	15/04/22	NYW	ADD 1.37 CABLE OPTION.
2.2	08/11/22	CC	ADD F3&F4 OPTIONS
3.3	03/01/23	NYW	CORRECT RG78 CABLE COLOR.
4.4	12/01/23	NYW	ADD 1.13 LL CABLE OPTION.
5.5	28/01/24	CC	ADD IP RATING VIEW
6.6	16/02/25	CC	ADD GCT logo.

Scale: NTS	THIRD ANGLE	Unstated X XX XXX ANGLES	Tolerances: N/A N/A N/A N/A
Drawn: CC			
App'd: XXX	Title CABLE ASSEMBLY		
Date: 16 Feb. '25	Revision: 1.6	Unit: mm	

IP Rated RF Products	 	Drawing Number: CAB469RF	
		Sheet 1	of 1
© THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT		Drawing ©	E and O E

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Cable Assemblies](#) category:

Click to view products by [GCT](#) manufacturer:

Other Similar products are found below :

[73-6364-6](#) [R285001001](#) [FCB-3030-ALT](#) [PCW-18-75](#) [24P103C24P2-003](#) [R288940003](#) [R288940035](#) [73-6351-25](#) [81-6201-1600](#) [1-3636-620-5212](#) [BNC TO SMA Cable](#) [PT815NN](#) [EJT1P3N100](#) [73412-1880](#) [89761-3417](#) [PT89TT](#) [PT8X2NT](#) [R284C0351020](#) [PT86NB](#) [LPRS-UFL-N-N-100-SMA-S-F-B](#) [0SD01Q010960](#) [MXKF56KF1000](#) [MXHJD3HJ3000](#) [G3Q01Q71069.0](#) [G3Q01Q71106.0](#) [LPRS-UFL-N-N-100-UFL-N-N-N](#) [PT82NT](#) [20499-111](#) [1750006009](#) [0100290290610GX](#) [0100290011829GX](#) [1750007965-01](#) [64876](#) [SMAF-MMCXM31605](#) [IPEX-SMA-200](#) [SMA-02-0.3](#) [SMA-11-1.0](#) [ETA2040-300cm](#) [1932144](#) [1932623](#) [1905759](#) [EJT1P3N200](#) [FRSMP-085-MRSMA-088](#) [84079180](#) [73116-0014](#) [73116-0016](#) [73116-0057](#) [73116-0054](#) [73116-0068](#) [73412-0237](#)