

RFPC-SMA29-F : RP SMA Vertical Jack, PCB Connector, 6GHz

Material and Plating:

Insulator: PTFE, WHITE

Pin: Brass, Gold




Body: Brass, Gold

Specification:

Operating Temperature: -55°C~+125°C

Working Frequency Range: DC~6GHz

Impedance: 50 Ohm.

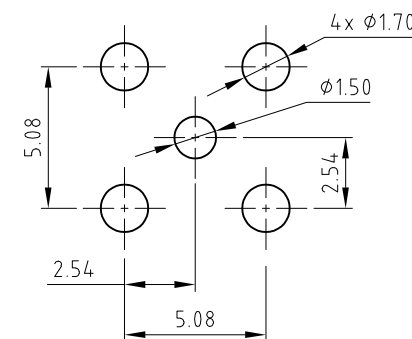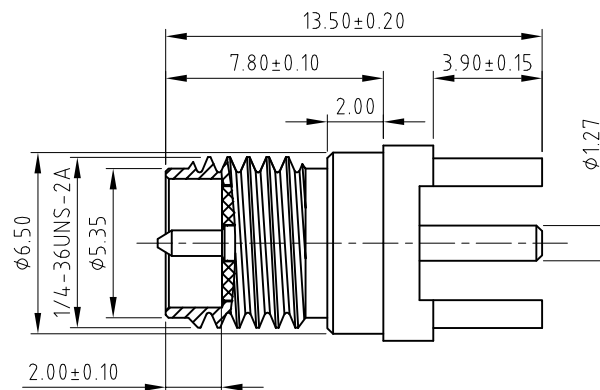

Recommended PCB Layout
Tolerance: ±0.05

REV. DATE & DOW
1.0 2/7/23 - CC RELEASE
1.1 2/13/24 - CC RELEASE
1.2 12/15/25 - NYM
Add GCT logo.


Scale: NTS

Drawn: CC

App'd: XXX

Date: 12 MAY '25

THIRD ANGLE



Unstated	Tolerances:
.X	±0.2
.XX	±0.1
.XXX	±0.05
ANGLES	±3°

Title RP SMA PCB Connector

Revision: 1.2

Material
SEE NOTE

NOT TO SCALE

Unit: mm



THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE
COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT

Type: RFPC-SMA29-F

RFPC-SMA29-F

Drawing Number:

Sheet 1 of 2

Drawing © E and O E

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Connectors](#) / [Coaxial Connectors](#) ***category:***

Click to view products by [GCT](#) ***manufacturer:***

Other Similar products are found below :

[6002-7051-003](#) [6059674-1](#) [630059-000](#) [M55339/15-00491](#) [7002-1541-010](#) [7002-1572-002](#) [7003-1572-002](#) [7004-1512-000](#) [7009-1511-004](#)
[7105-1521-002](#) [7145-1521-002](#) [7203-1571-003](#) [7209-1511-011](#) [7405-1521-005](#) [7405-1521-019](#) [7405-1521-802](#) [755-74-5](#) [7706-2](#) [873183](#)
[PL375-33](#) [95-850-148-3](#) [R107003010W](#) [R112186000](#) [R113082097](#) [R113236000](#) [R113240097](#) [R114083000](#) [R114670000W](#) [R121053000](#)
[R124072220W](#) [R124076450](#) [R124175123](#) [R125075001](#) [R125414001](#) [R125415030](#) [R125415271](#) [R141007161](#) [R141574161W](#)
[R142004000W](#) [R142076000W](#) [R142076161W](#) [R142184000W](#) [R142676700](#) [R143012000](#) [R143075000W](#) [R143089117](#) [R143235161W](#)
[R143292700](#) [R143557000](#) [R161008000](#)