






APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/7/24	
A		UPDATE DRAWING	6/19/24	JJ/RC

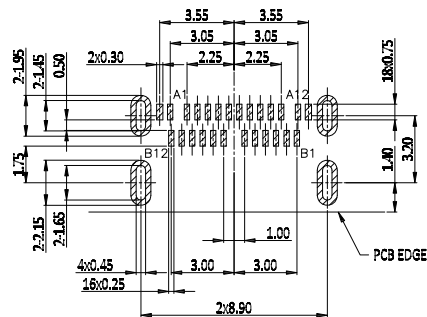

RECOMMENDED PCB LAYOUT

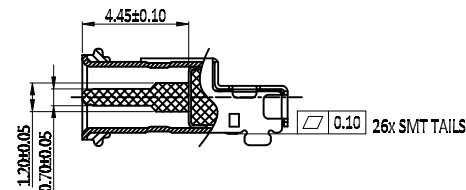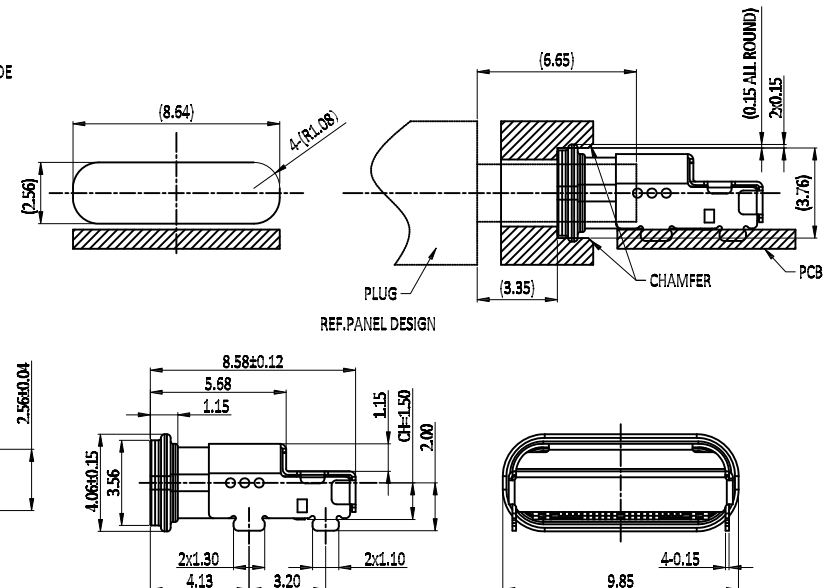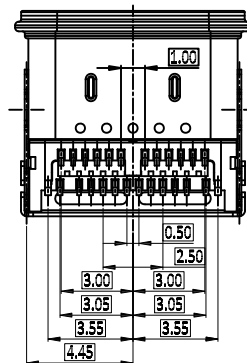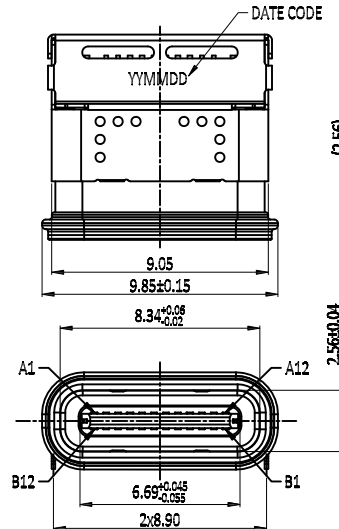

Pin	Signal Name	Mating Sequence	Pin	Signal Name	Mating Sequence
A1	GND	First	B12	GND	First
A2	TX1p	Second	B11	TX2p	Second
A3	TX1n	Second	B10	TX2n	Second
A4	VBUS	First	B9	VBUS	First
A5	CC1	Second	B8	SBU2	Second
A6	Dp1	Second	B7	Dn2	Second
A7	Dn1	Second	B6	Dp2	Second
A8	SBU1	Second	B5	CC2	Second
A9	VBUS	First	B4	VBUS	First
A10	RX1n	Second	B3	TX2n	Second
A11	RX1p	Second	B2	TX2n	Second
A12	GND	First	B1	GND	First
SHELL	GND		SHELL	GND	

SPECIFICATIONS:

Material:

Molding housing: Hi-temp thermoplastic, rated UL 94V-0, Color: Black

Terminal: Copper alloy

Shell: Stainless steel, Nickel plated

MID Plate: Stainless steel, Nickel plated

LIM: Chn-lims, Color: Black

O-ring: Silica gel

Plating:

30u" Gold over Nickel underplate on contact area,

Gold flash over Nickel underplate overall

Electrical:

Current rating: 5A

Contact resistance: 40mΩ Max.(Initial)

Insulation resistance: 100 Mohms min

Dielectric withstanding: 100VAC

Mechanical:

Insertion Force: 5~20N

Extraction Force: Initial: 8~20N

After durability: 6~20N

Durability: 10,000 Cycles

Temperature Rating:

Operating temperature: -20°C to +85°C

Environmental:

Waterproof: IPX8

Lead free, RoHS compliant.



PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS. TOLERANCES: EXCEPT AS NOTED

MM	ANGLE
.0 ± .50	±3°
.00 ± .15	
.000 ± .10	

DRAWN	JJ	6/7/24
CHECKED	RC	6/7/24
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE	UNIVERSAL SERIAL BUS, TYPE C4.0, FEMALE, 24P TRANSMISSION EFFICIENCY: GEN3X2 40G WATERPROOF IPX8		
SIZE	PART NO.	REV.	
X	USB-C40-S-RA-CS67-SMT-WP-BK-30-T/R	A	

REF:	S00013T	SCALE:	NTS	SHEET	1 OF 2
------	---------	--------	-----	-------	--------

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [USB Connectors](#) category:

Click to view products by [GCT](#) manufacturer:

Other Similar products are found below :

[A-USB A-LP-SMT-C](#) [A-USB B-TOP-C](#) [217450-1](#) [KUSBX-AS2N-W](#) [30-498-6](#) [SK-60A-2](#) [30-489](#) [A-USB A-2P-C](#) [USBFTVSCCG](#) [E8110-001-01](#) [MUSBA81130](#) [USB3FTV7APEG](#) [4198](#) [17-200011](#) [1040870124](#) [914-614A2025S10200](#) [1002-001-BL-KIT](#) [MUSBR-AHD2-M41-SK](#) [GSB3116344HR](#) [GSB343K331HR](#) [USBF21GSCC](#) [U221-041N-1WVS62-F5D](#) [HYCW153-USBD05-500B](#) [HYCW219-USBD05-075B](#) [HYCW148-USBD05-117B](#) [HYCW149-USBD05-740B](#) [HYCW204-USBD05-108B](#) [HYCW214-USBA04-113B](#) [HYCW213-USBA04-113B](#) [KMMX-BSMT35S-1-B30TR](#) [GT-2A001F-CGNG1](#) [GT-USB-7010i](#) [HC-ST-003-07-J](#) [918-418K2022Y40028](#) [920-462A2021Y10104](#) [AF 90°](#) [WJDG ZB](#) [TYPE-C 6P LCH10.5](#) [MICRO 7.2ZB5.0](#) [AM 180°](#) [MINI 5PTP-GZ](#) [TYPE-C 16PLC-H10.0](#) [TYPE-C 6PLCH10.5 073](#) [MINI 5P](#) [90°4J](#) [10.0 180°ZCZB-HJ](#) [AF 180°WJB15.0](#) [TYPE-C 6P CC](#) [MICRO 5.9ZB5.0\(040\)](#) [10.0 HCHTZB6.3](#) [10.0 180° ZCJB-HJ](#) [TYPE-C](#) [14PLC-H10.0](#)