

# G2R1000MT33J

## 3300 V 1000 mΩ SiC MOSFET




Silicon Carbide MOSFET  
N-Channel Enhancement Mode

|                                |   |         |
|--------------------------------|---|---------|
| $V_{DS}$                       | = | 3300 V  |
| $R_{DS(ON)}(\text{Typ.})$      | = | 1000 mΩ |
| $I_D(T_c = 100^\circ\text{C})$ | = | 3 A     |


### Features

- Softer  $R_{DS(ON)}$  v/s Temperature Dependency
- LoRing™ - Electromagnetically Optimized Design
- Smaller  $R_G(\text{INT})$  and Lower  $Q_G$
- Low Device Capacitances ( $C_{oss}$ ,  $C_{rss}$ )
- Industry-Leading UIL & Short-Circuit Robustness
- Robust Body Diode with Low  $V_F$  and Low  $Q_{RR}$
- Normally Off-Stable Temperature up to 175°C
- Optimized Package with Separate Driver Source Pin

### Package

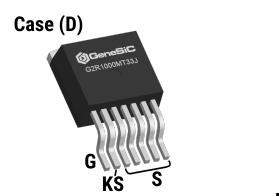

TO-263-7



D = Drain  
G = Gate  
S = Source  
KS = Kelvin Source



### Advantages

- Compatible with Commercial Gate Drivers
- Low Conduction Losses at all Temperatures
- Reduced Ringing
- Faster and More Efficient Switching
- Lesser Switching Spikes and Lower Losses
- Better Power Density and System Efficiency
- Ease of Paralleling without Thermal Runaway
- Superior Robustness and System Reliability

### Applications

- Auxiliary Power Supply
- 1500V Solar Inverter Systems
- Industrial Motors (AC Servos)
- General Purpose Inverters
- Pulsed Power
- Piezo Drivers
- Ion Beam Generators

### Absolute Maximum Ratings (At $T_c = 25^\circ\text{C}$ Unless Otherwise Stated)

| Parameter                         | Symbol                | Conditions  | Values     | Unit | Note    |
|-----------------------------------|-----------------------|---|------------|------|---------|
| Drain-Source Voltage              | $V_{DS(\text{max})}$  | $V_{GS} = 0 \text{ V}$ , $I_D = 100 \mu\text{A}$                          | 3300       | V    |         |
| Gate-Source Voltage (Dynamic)     | $V_{GS(\text{max})}$  |   | -10 / +25  | V    |         |
| Gate-Source Voltage (Static)      | $V_{GS(\text{op})}$   | Recommended Operation   | -5 / +20   | V    |         |
| Continuous Forward Current        | $I_D$                 | $T_c = 25^\circ\text{C}$ , $V_{GS} = -5 / +20 \text{ V}$                  | 5          |      |         |
|                                   |                       | $T_c = 100^\circ\text{C}$ , $V_{GS} = -5 / +20 \text{ V}$                 | 3          | A    | Fig. 15 |
|                                   |                       | $T_c = 135^\circ\text{C}$ , $V_{GS} = -5 / +20 \text{ V}$                 | 2          |      |         |
| Pulsed Drain Current              | $I_{D(\text{pulse})}$ | $t_p \leq 3\mu\text{s}$ , $D \leq 1\%$ , $V_{GS} = 20 \text{ V}$ , Note 1 | 10         | A    | Fig. 14 |
| Power Dissipation                 | $P_D$                 | $T_c = 25^\circ\text{C}$  | 74         | W    | Fig. 16 |
| Non-Repetitive Avalanche Energy   | $E_{AS}$              | $L = 150 \text{ mH}$ , $I_{AS} = 1.0 \text{ A}$                           | 75         | mJ   |         |
| Operating and Storage Temperature | $T_j$ , $T_{stg}$     |   | -55 to 175 | °C   |         |

### Thermal/Package Characteristics

| Parameter                           | Symbol     | Conditions | Values |      |      | Unit | Note    |
|-------------------------------------|------------|------------|--------|------|------|------|---------|
|                                     |            |            | Min.   | Typ. | Max. |      |         |
| Thermal Resistance, Junction - Case | $R_{thJC}$ |            | 1.78   | 2.01 |      | °C/W | Fig. 13 |
| Weight                              | $W_T$      |            |        | 1.45 |      | g    |         |

Note 1: Pulse Width  $t_p$  Limited by  $T_{j(\text{max})}$



**Electrical Characteristics (At  $T_C = 25^\circ\text{C}$  Unless Otherwise Stated)**

| Parameter                                     | Symbol              | Conditions   | Values      |              |             | Unit             | Note       |
|---|---------------------|--|-------------|--------------|-------------|------------------|------------|
|   |                     |  | Min.        | Typ.         | Max.        |                  |            |
| Drain-Source Breakdown Voltage                | $V_{DSS}$           | $V_{GS} = 0 \text{ V}, I_D = 100 \mu\text{A}$  | 3300        |              |             | V                |            |
| Zero Gate Voltage Drain Current               | $I_{DSS}$           | $V_{DS} = 3300 \text{ V}, V_{GS} = 0 \text{ V}$  |             | 1            |             | $\mu\text{A}$    |            |
| Gate Source Leakage Current                   | $I_{GS}$            | $V_{DS} = 0 \text{ V}, V_{GS} = 25 \text{ V}$<br>$V_{DS} = 0 \text{ V}, V_{GS} = -10 \text{ V}$  |             |              | 100<br>-100 | nA               |            |
| Gate Threshold Voltage                        | $V_{GS(\text{th})}$ | $V_{DS} = V_{GS}, I_D = 2.0 \text{ mA}$<br>$V_{DS} = V_{GS}, I_D = 2.0 \text{ mA}, T_j = 175^\circ\text{C}$  | 1.8<br>2.30 | 3.50         |             | V                | Fig. 9     |
| Transconductance                              | $g_{fs}$            | $V_{DS} = 10 \text{ V}, I_D = 2 \text{ A}$<br>$V_{DS} = 10 \text{ V}, I_D = 2 \text{ A}, T_j = 175^\circ\text{C}$                                    |             | 0.90<br>0.70 |             | S                | Fig. 4     |
| Drain-Source On-State Resistance              | $R_{DS(\text{ON})}$ | $V_{GS} = 20 \text{ V}, I_D = 2 \text{ A}$<br>$V_{GS} = 20 \text{ V}, I_D = 2 \text{ A}, T_j = 175^\circ\text{C}$                                    |             | 1000<br>2505 | 1300        | $\text{m}\Omega$ | Fig. 5-8   |
| Input Capacitance                             | $C_{iss}$           |  |             | 238          |             |                  |            |
| Output Capacitance                            | $C_{oss}$           |  |             | 10           |             | pF               | Fig. 11    |
| Reverse Transfer Capacitance                  | $C_{rss}$           |  |             | 2.4          |             |                  |            |
| $C_{oss}$ Stored Energy                       | $E_{oss}$           |  |             | 6            |             | $\mu\text{J}$    | Fig. 12    |
| $C_{oss}$ Stored Charge                       | $Q_{oss}$           |  |             | 17           |             | nC               |            |
| Effective Output Capacitance (Energy Related) | $C_{o(er)}$         |  |             | 12           |             | pF               | Note 2     |
| Effective Output Capacitance (Time Related)   | $C_{o(tr)}$         |  |             | 17           |             |                  |            |
| Gate-Source Charge                            | $Q_{gs}$            |  |             | 5            |             |                  |            |
| Gate-Drain Charge                             | $Q_{gd}$            | $V_{DS} = 1000 \text{ V}, V_{GS} = -5 / +20 \text{ V}$<br>$I_D = 2 \text{ A}$  |             | 7            |             | nC               | Fig. 10    |
| Total Gate Charge                             | $Q_g$               | Per IEC607478-4  |             | 18           |             |                  |            |
| Internal Gate Resistance                      | $R_{G(\text{int})}$ | $f = 1 \text{ MHz}, V_{AC} = 25 \text{ mV}$  |             | 4.6          |             | $\Omega$         |            |
| Turn-On Switching Energy (Body Diode)         | $E_{on}$            |  |             | 51           |             | $\mu\text{J}$    | Fig. 22,26 |
| Turn-Off Switching Energy (Body Diode)        | $E_{off}$           | $T_j = 25^\circ\text{C}, V_{GS} = -5/+20\text{V}, R_{G(\text{ext})} = 20 \Omega, L = 1800.0 \mu\text{H}, I_D = 2 \text{ A}, V_{DD} = 1700 \text{ V}$ |             | 18           |             |                  |            |
| Turn-On Delay Time                            | $t_{d(on)}$         |  |             | 14           |             |                  |            |
| Rise Time                                     | $t_r$               | $V_{DD} = 1700 \text{ V}, V_{GS} = -5/+20\text{V}$   |             | 24           |             |                  |            |
| Turn-Off Delay Time                           | $t_{d(off)}$        | $R_{G(\text{ext})} = 20 \Omega, L = 1800.0 \mu\text{H}, I_D = 2 \text{ A}$<br>Timing relative to $V_{DS}$ , Inductive load                           |             | 14           |             | ns               | Fig. 24    |
| Fall Time                                     | $t_f$               |  |             | 11           |             |                  |            |

\*The chip technology was characterized up to 200 V/ns. The measured  $dV/dt$  was limited by measurement test setup and package.

Note 2:  $C_{o(er)}$ , a lumped capacitance that gives same stored energy as  $C_{oss}$  while  $V_{DS}$  is rising from 0 to 1000V.

$C_{o(tr)}$ , a lumped capacitance that gives same charging times as  $C_{oss}$  while  $V_{DS}$  is rising from 0 to 1000V.



### Reverse Diode Characteristics


| Parameter                        | Symbol                | Conditions  | Values |      |      | Unit | Note       |
|----------------------------------|-----------------------|---|--------|------|------|------|------------|
|                                  |                       |   | Min.   | Typ. | Max. |      |            |
| Diode Forward Voltage            | $V_{SD}$              | $V_{GS} = -5 \text{ V}, I_{SD} = 1 \text{ A}$   |        | 8.5  |      | V    | Fig. 17-18 |
|                                  |                       | $V_{GS} = -5 \text{ V}, I_{SD} = 1 \text{ A}, T_j = 175^\circ\text{C}$  |        | 8.2  |      |      |            |
| Continuous Diode Forward Current | $I_S$                 | $V_{GS} = -5 \text{ V}, T_c = 100^\circ\text{C}$  | 2      |      |      | A    |            |
| Diode Pulse Current              | $I_{S(\text{pulse})}$ | $V_{GS} = -5 \text{ V}$ , Note 1  |        | 8    |      | A    |            |
| Reverse Recovery Time            | $t_{rr}$              | $V_{GS} = -5 \text{ V}, I_{SD} = 2 \text{ A}, V_R = 1700 \text{ V}$<br>$dif/dt = 1100 \text{ A}/\mu\text{s}, T_j = 25^\circ\text{C}$  |        | 19   |      | ns   |            |
| Reverse Recovery Charge          | $Q_{rr}$              |   |        | 40   |      | nC   |            |
| Peak Reverse Recovery Current    | $I_{rrm}$             | $V_{GS} = -5 \text{ V}, I_{SD} = 2 \text{ A}, V_R = 1700 \text{ V}$<br>$dif/dt = 1100 \text{ A}/\mu\text{s}, T_j = 175^\circ\text{C}$ |        | 2    |      | A    |            |
| Reverse Recovery Time            | $t_{rr}$              |   |        | 24   |      | ns   |            |
| Reverse Recovery Charge          | $Q_{rr}$              |   |        | 152  |      | nC   |            |
| Peak Reverse Recovery Current    | $I_{rrm}$             |   |        | 4    |      | A    |            |



**G2R1000MT33J**  
**3300 V 1000 mΩ SiC MOSFET**




Figure 1: Output Characteristics ( $T_j = 25^\circ\text{C}$ )

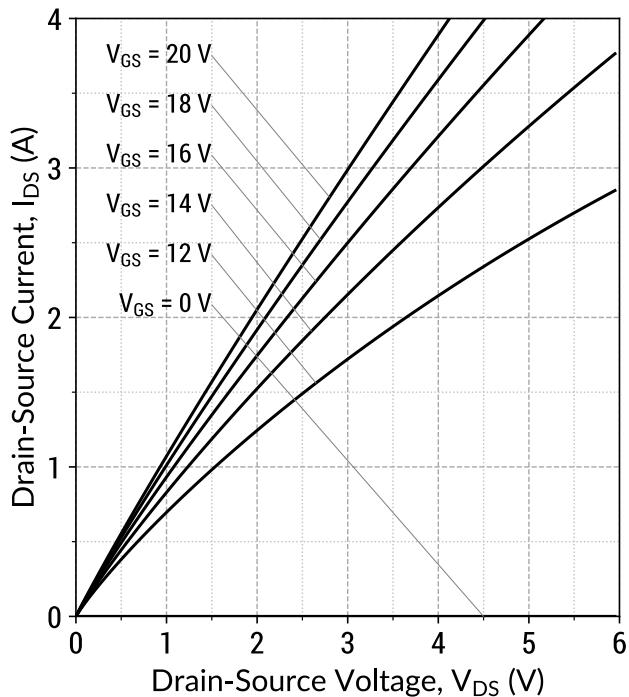


$$I_D = f(V_{DS}, V_{GS}); t_P = 250 \mu\text{s}$$

Figure 2: Output Characteristics ( $T_j = 175^\circ\text{C}$ )

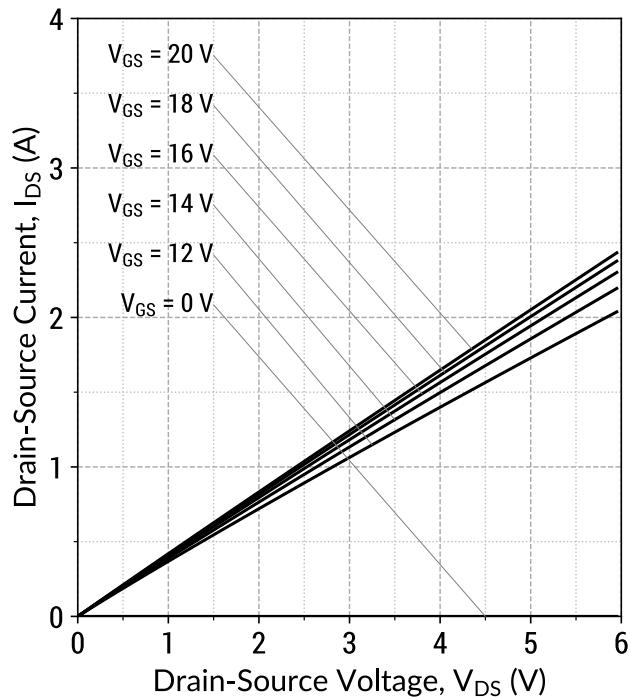


$$I_D = f(V_{DS}, V_{GS}); t_P = 250 \mu\text{s}$$

Figure 3: Output Characteristics ( $V_{GS} = 20 \text{ V}$ )

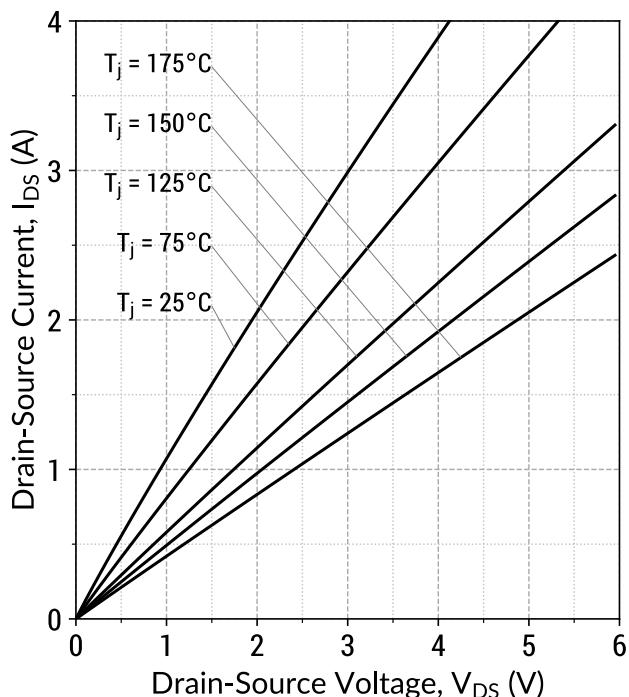

$$I_D = f(V_{DS}, T_j); t_P = 250 \mu\text{s}$$

Figure 4: Transfer Characteristics ( $V_{DS} = 10 \text{ V}$ )

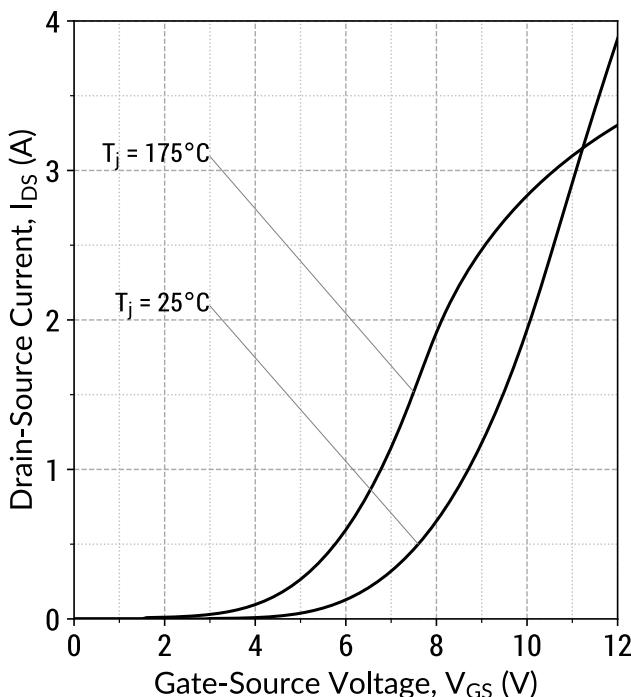


$$I_D = f(V_{GS}, T_j); t_P = 100 \mu\text{s}$$



**G2R1000MT33J**  
**3300 V 1000 mΩ SiC MOSFET**




Figure 5: On-State Resistance v/s Temperature

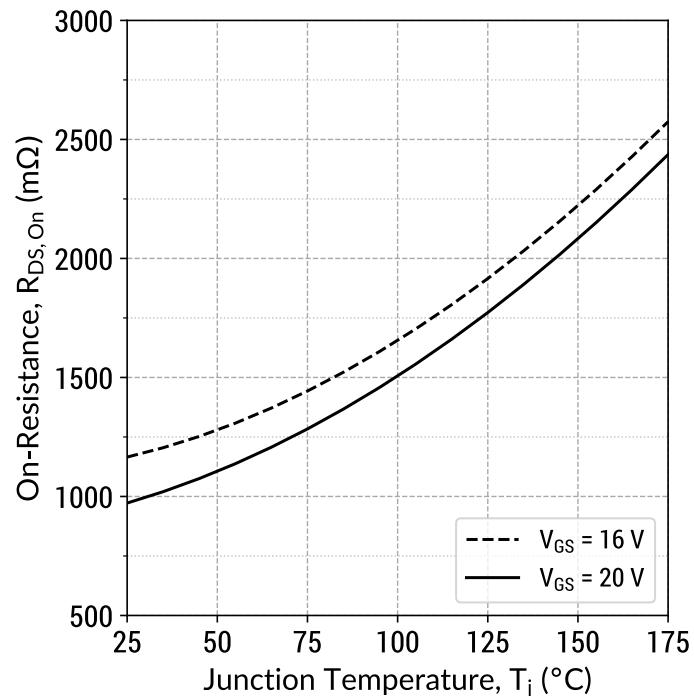


$$R_{DS(ON)} = f(T_j, V_{GS}); t_P = 250 \mu\text{s}; I_D = 2 \text{ A}$$

Figure 6: On-State Resistance v/s Drain Current

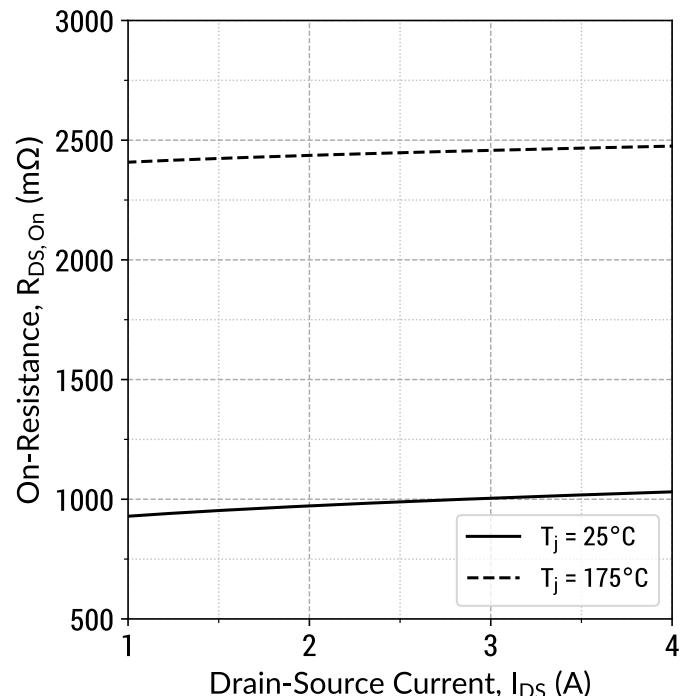


$$R_{DS(ON)} = f(T_j, I_D); t_P = 250 \mu\text{s}; V_{GS} = 20 \text{ V}$$

Figure 7: Normalized On-State Resistance v/s Temperature

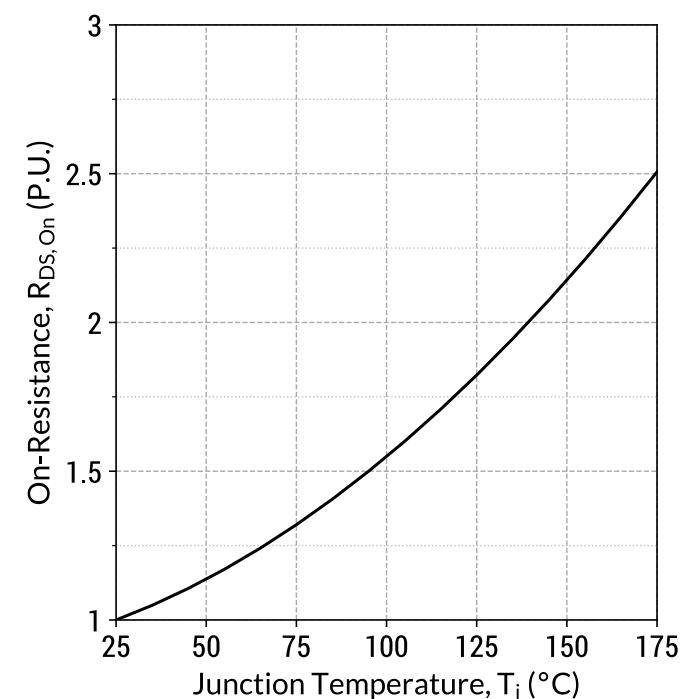

$$R_{DS(ON)} = f(T_j); t_P = 250 \mu\text{s}; I_D = 2 \text{ A}; V_{GS} = 20 \text{ V}$$

Figure 8: On-State Resistance v/s Gate Voltage

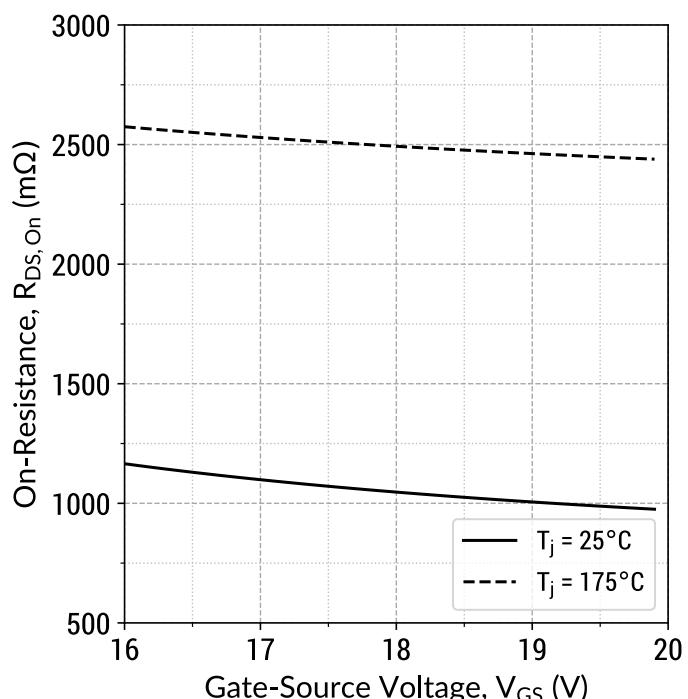


$$R_{DS(ON)} = f(T_j, V_{GS}); t_P = 250 \mu\text{s}; I_D = 2 \text{ A}$$




**G2R1000MT33J**  
**3300 V 1000 mΩ SiC MOSFET**

Figure 9: Threshold Voltage Characteristics

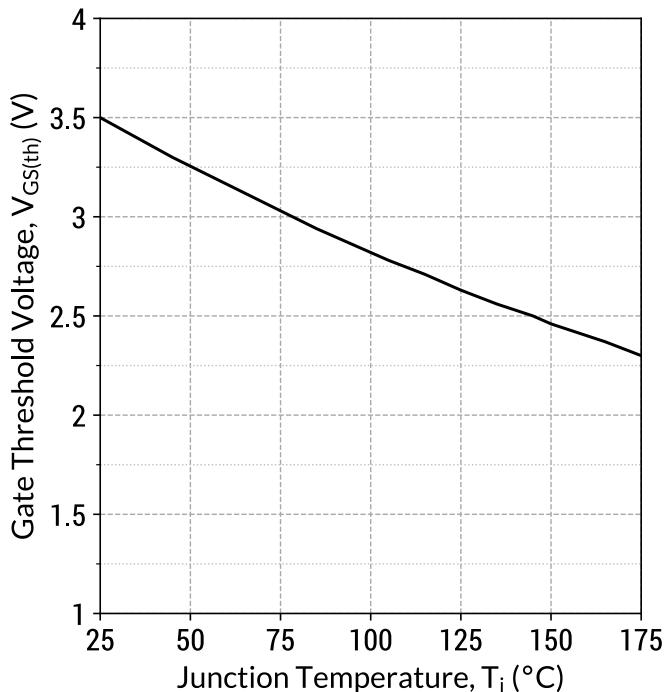


$V_{GS(th)} = f(T_j)$ ;  $V_{DS} = V_{GS}$ ;  $I_D = 2.0$  mA

Figure 10: Gate Charge Characteristics

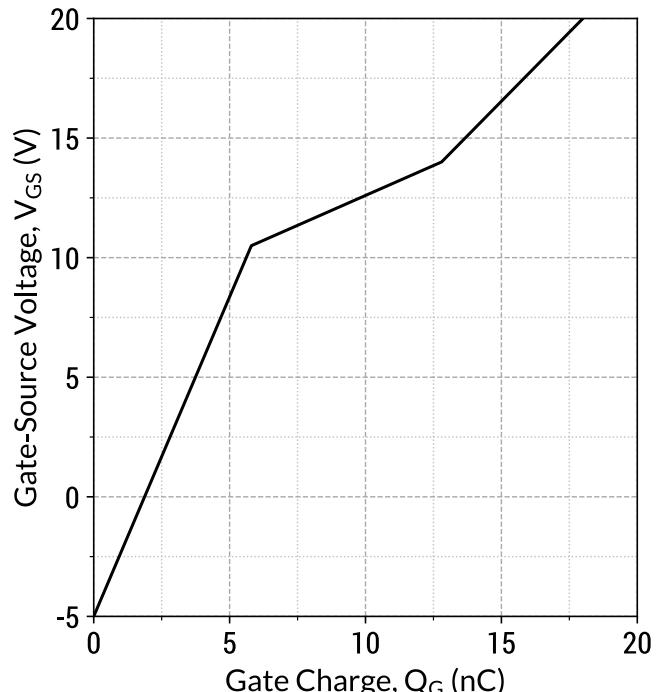


$I_D = 2$  A;  $V_{DS} = 1000$  V;  $T_c = 25^\circ\text{C}$

Figure 11: Capacitance v/s Drain-Source Voltage

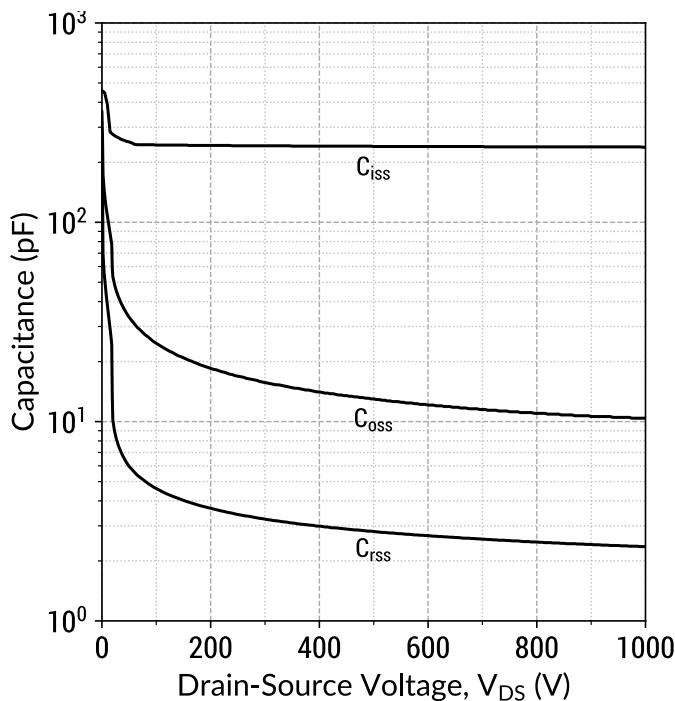


$f = 1$  MHz;  $V_{AC} = 25$  mV

Figure 12: Output Capacitor Stored Energy

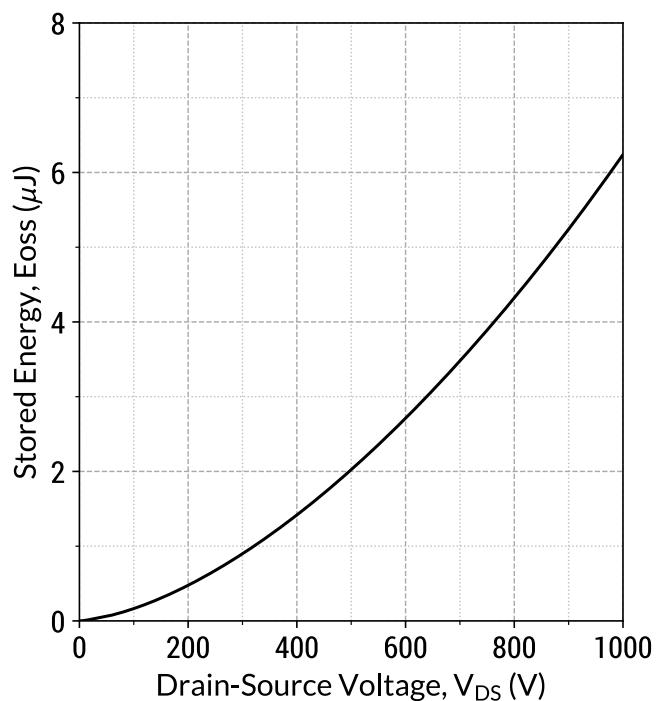


$E_{oss} = f(V_{DS})$

Figure 13: Transient Thermal Impedance

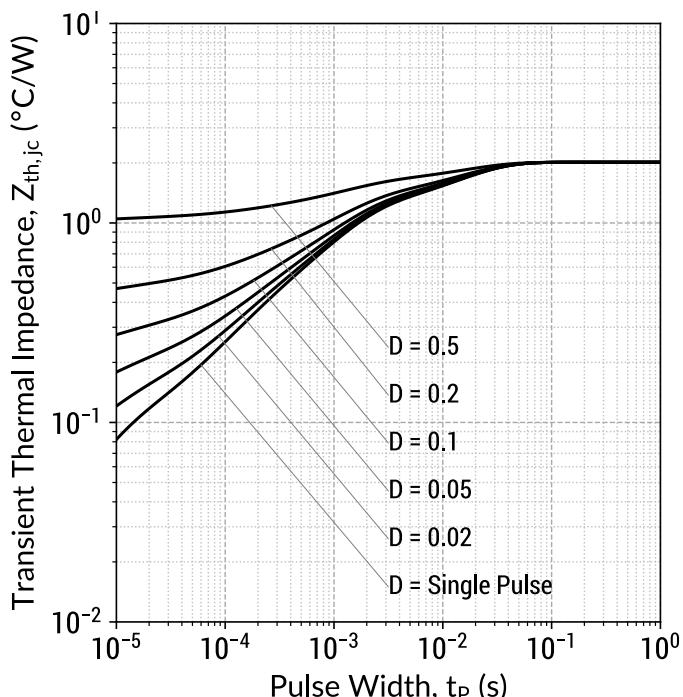


$$Z_{th,ic} = f(t_P, D); D = t_P/T$$

Figure 14: Safe Operating Area ( $T_c = 25^{\circ}\text{C}$ )

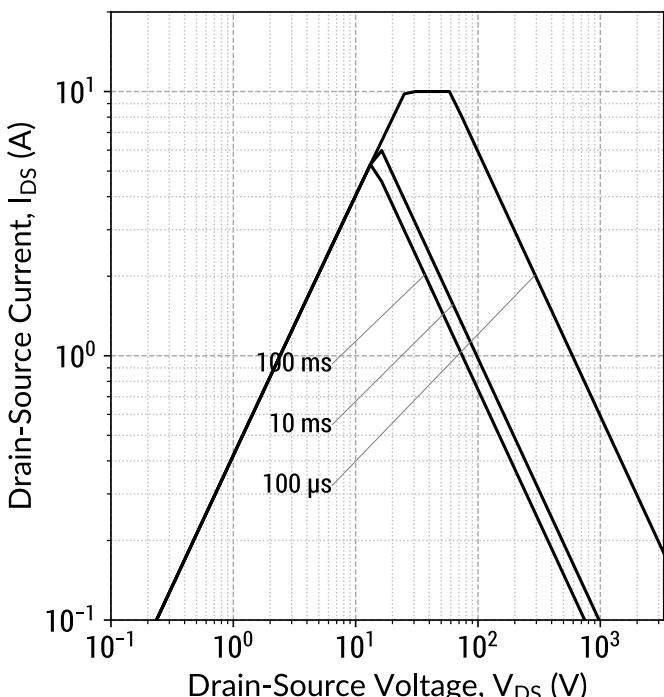


$$I_D = f(V_{DS}, t_P); T_j \leq 175^{\circ}\text{C}; D = 0$$

Figure 15: Current De-rating Curve

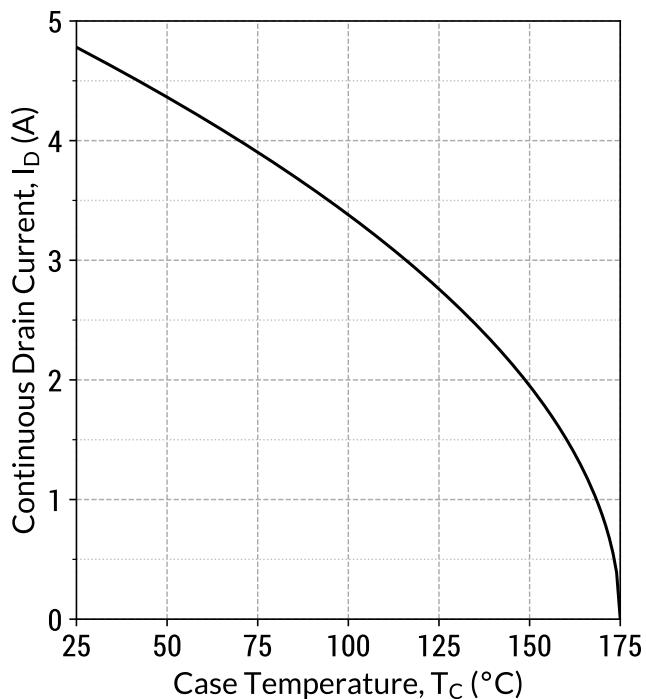

$$I_D = f(T_c); T_j \leq 175^{\circ}\text{C}$$


Figure 16: Power De-rating Curve

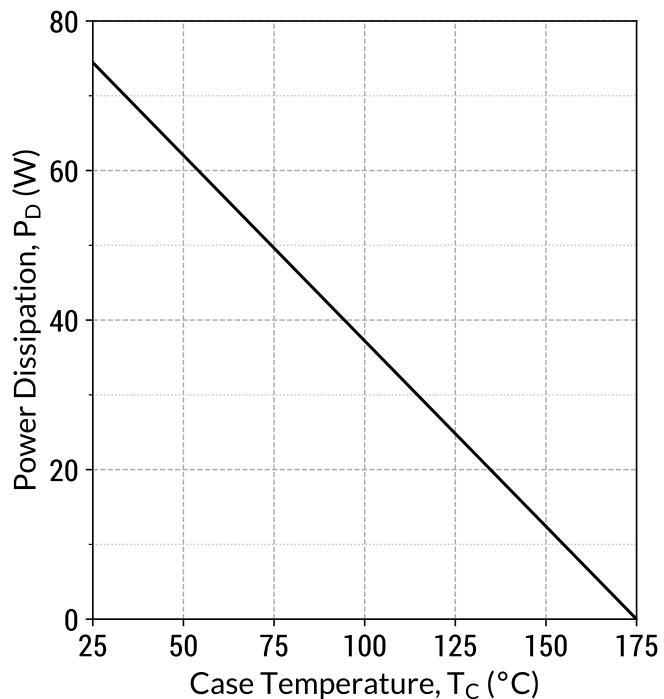

$$P_D = f(T_c); T_j \leq 175^{\circ}\text{C}$$


**G2R1000MT33J**  
**3300 V 1000 mΩ SiC MOSFET**

Figure 17: Body Diode Characteristics ( $T_j = 25^\circ\text{C}$ )

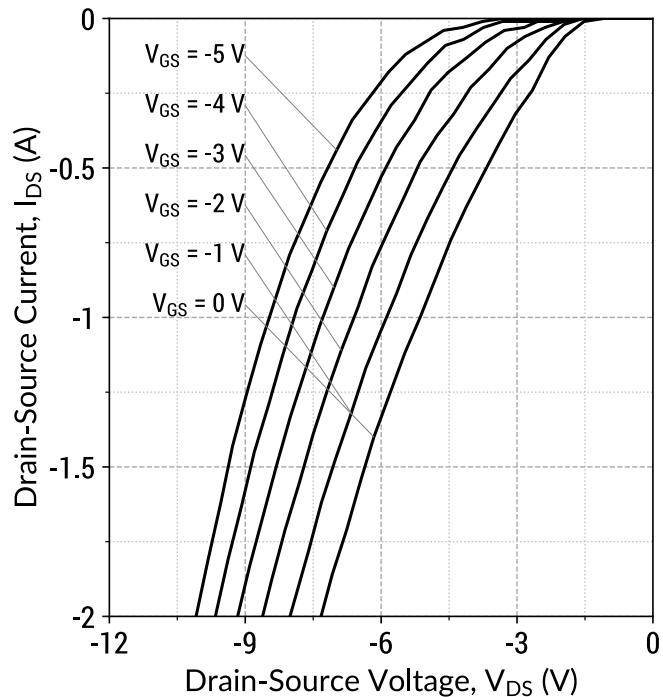


$I_D = f(V_{DS}, V_{GS})$ ;  $t_P = 250 \mu\text{s}$

Figure 18: Body Diode Characteristics ( $T_j = 175^\circ\text{C}$ )

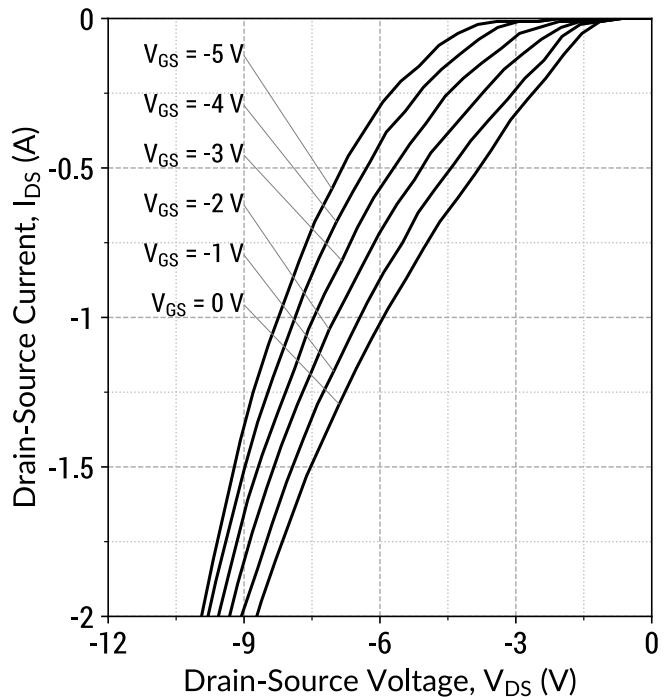


$I_D = f(V_{DS}, V_{GS})$ ;  $t_P = 250 \mu\text{s}$

Figure 19: Third Quadrant Characteristics ( $T_j = 25^\circ\text{C}$ )

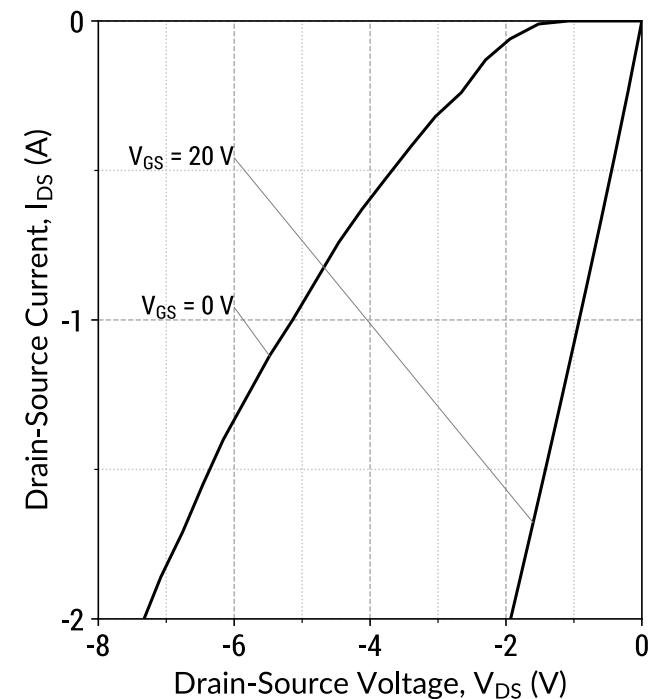

$I_D = f(V_{DS}, V_{GS})$ ;  $t_P = 250 \mu\text{s}$


Figure 20: Third Quadrant Characteristics ( $T_j = 175^\circ\text{C}$ )

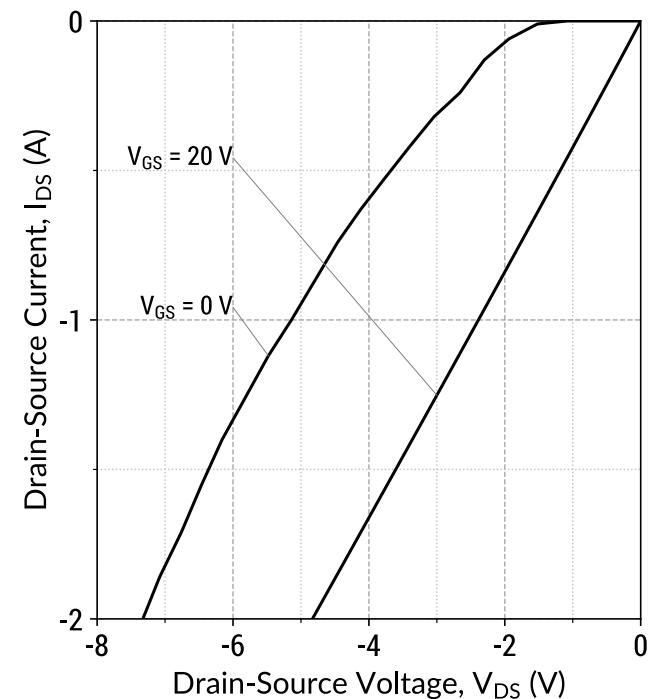

$I_D = f(V_{DS}, V_{GS})$ ;  $t_P = 250 \mu\text{s}$


**G2R1000MT33J**  
**3300 V 1000 mΩ SiC MOSFET**

**Figure 21: Inductive Switching Energy v/s Drain Current ( $V_{DD} = 1500V$ )**

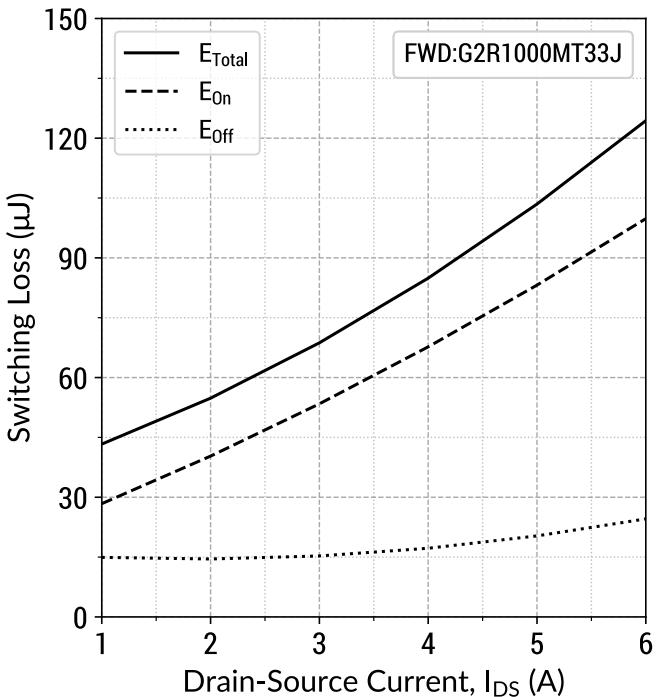


$T_j = 25^\circ\text{C}; V_{GS} = -5/+20\text{V}; R_{G(ext)} = 20 \Omega; L = 1800.0\mu\text{H}$

**Figure 22: Inductive Switching Energy v/s Drain Current ( $V_{DD} = 1700V$ )**

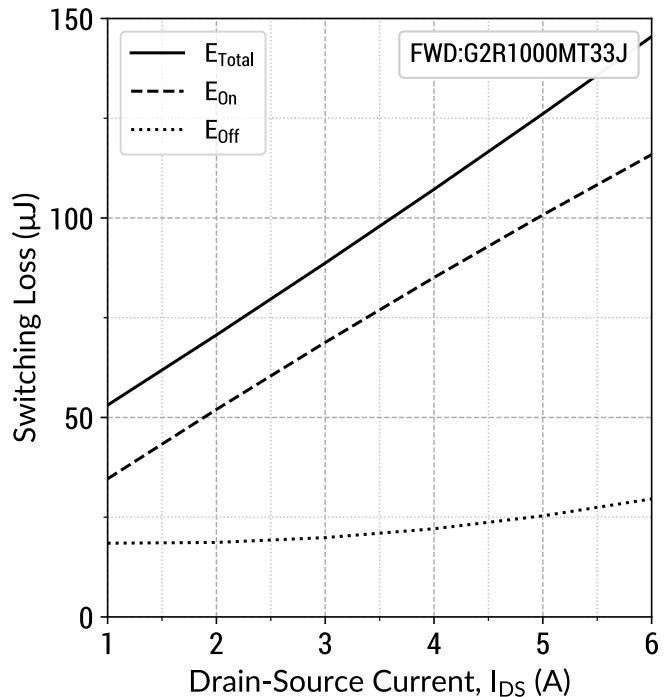


$T_j = 25^\circ\text{C}; V_{GS} = -5/+20\text{V}; R_{G(ext)} = 20 \Omega; L = 1800.0\mu\text{H}$

**Figure 23: Inductive Switching Energy v/s  $R_{G(ext)}$  ( $V_{DD} = 1700V$ )**

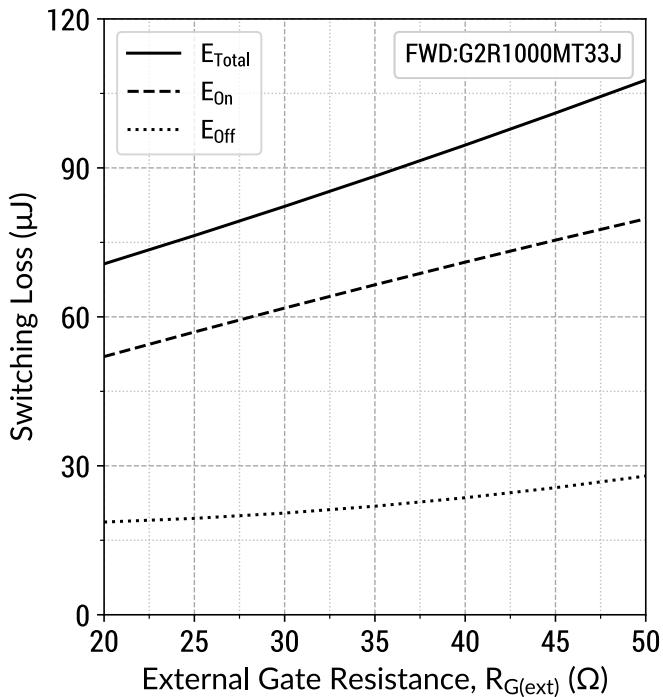

$T_j = 25^\circ\text{C}; V_{GS} = -5/+20\text{V}; I_{DS} = 2 \text{A}; L = 1800.0\mu\text{H}$


**Figure 24: Switching Time v/s  $R_{G(ext)}$  ( $V_{DD} = 1700V$ )**

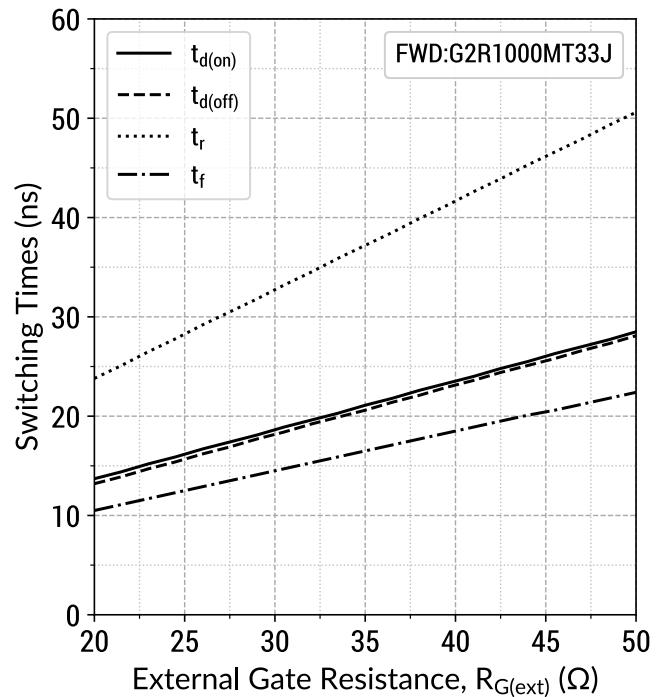

$T_j = 25^\circ\text{C}; V_{GS} = -5/+20\text{V}; I_{DS} = 2 \text{A}; L = 1800.0\mu\text{H}$


**G2R1000MT33J**  
**3300 V 1000 mΩ SiC MOSFET**

**Figure 25: Inductive Switching Energy v/s Temperature  
 $(V_{DD} = 1700V)$**

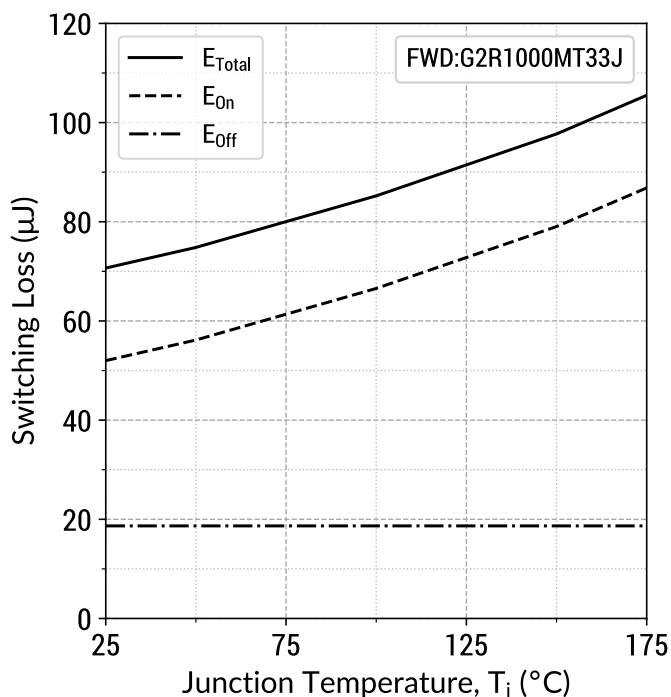


$T_j = 25^{\circ}\text{C}; V_{GS} = -5/+20\text{V}; R_{G(\text{ext})} = 20 \Omega; I_{DS} = 2 \text{A}; L = 1800.0\mu\text{H}$

**Figure 26:  $dV/dt$  v/s  $R_{G(\text{ext})}$   
 $(V_{DD} = 1700\text{V})$**

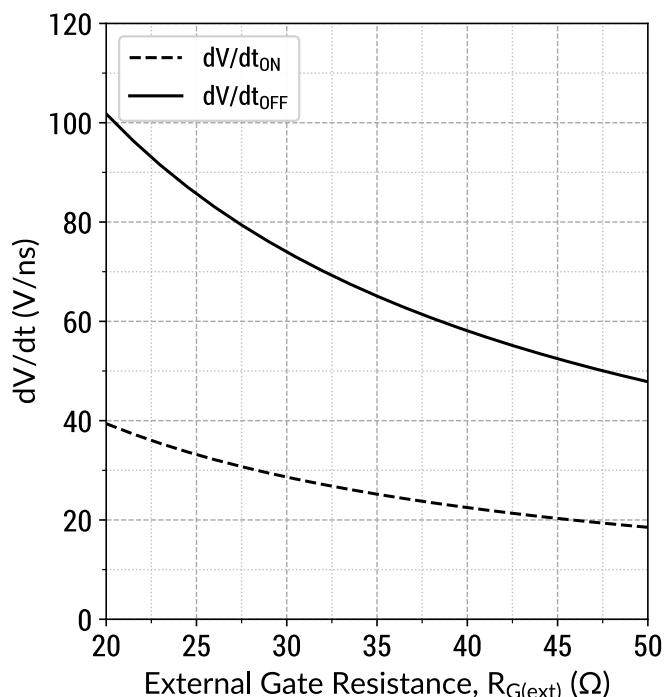


$T_j = 25^{\circ}\text{C}; V_{GS} = -5/+20\text{V}; I_{DS} = 2 \text{A}; L = 1800.0\mu\text{H}$


#### Gate Charge Circuit

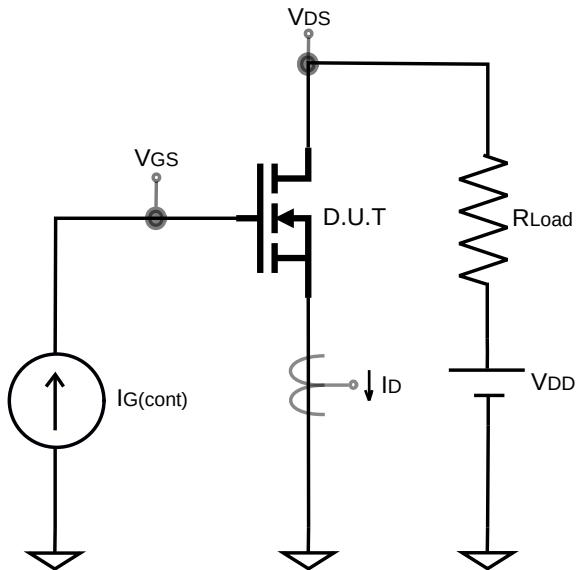


#### Gate Charge Waveform

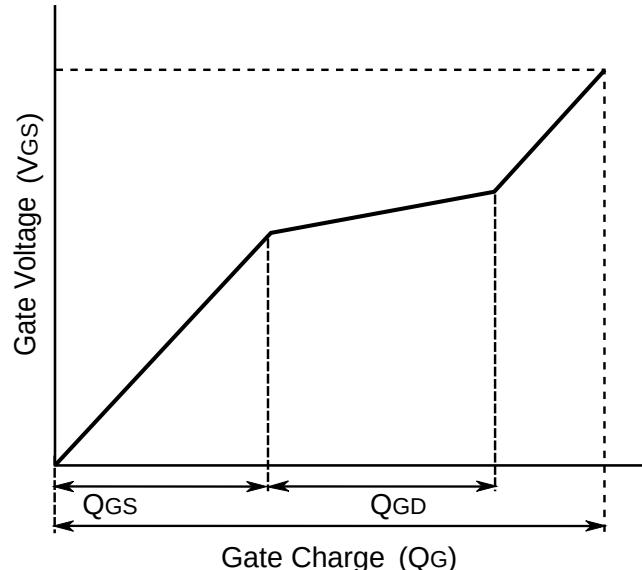


#### Switching Time Circuit

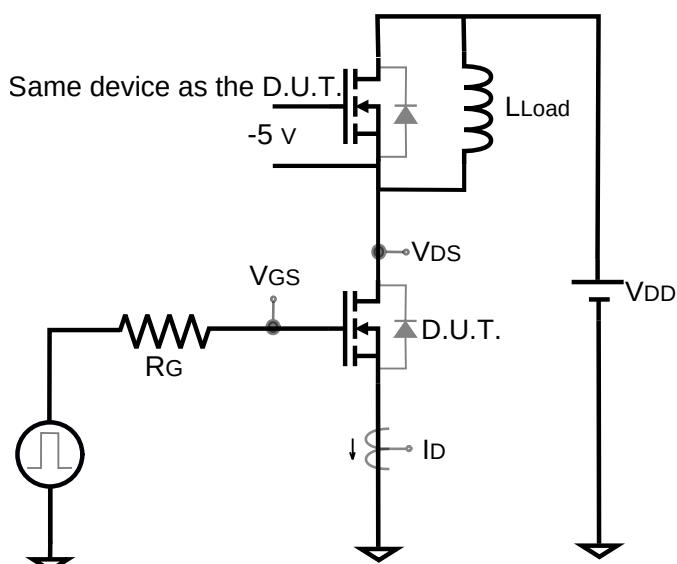


#### Switching Time Waveform

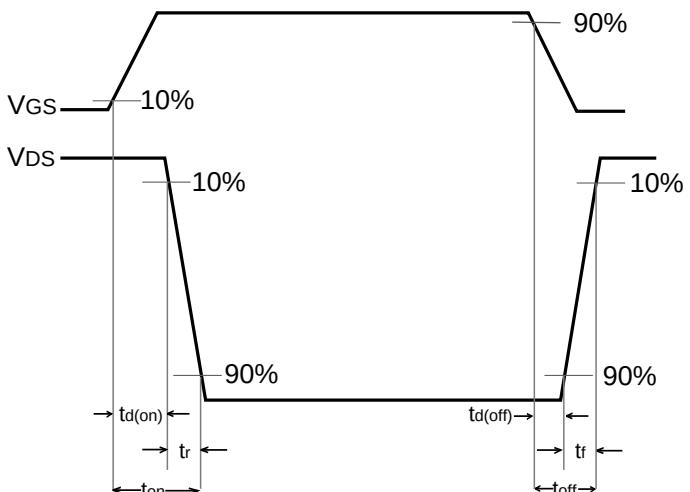


#### Switching Energy Circuit

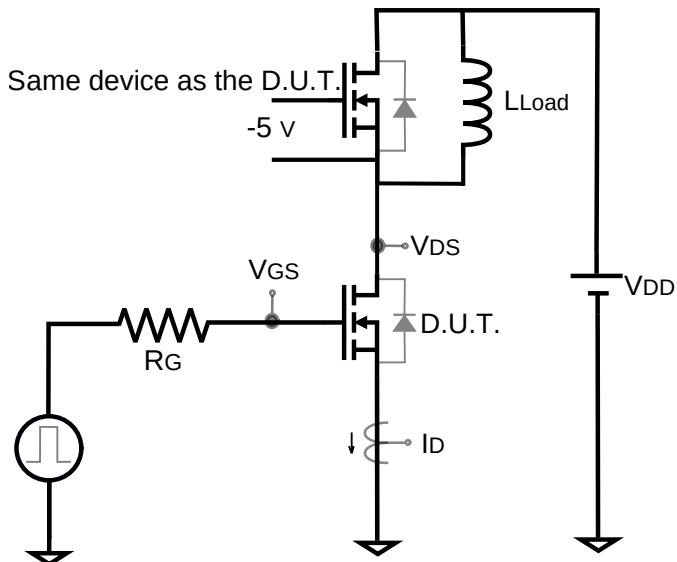


#### Switching Energy Waveform

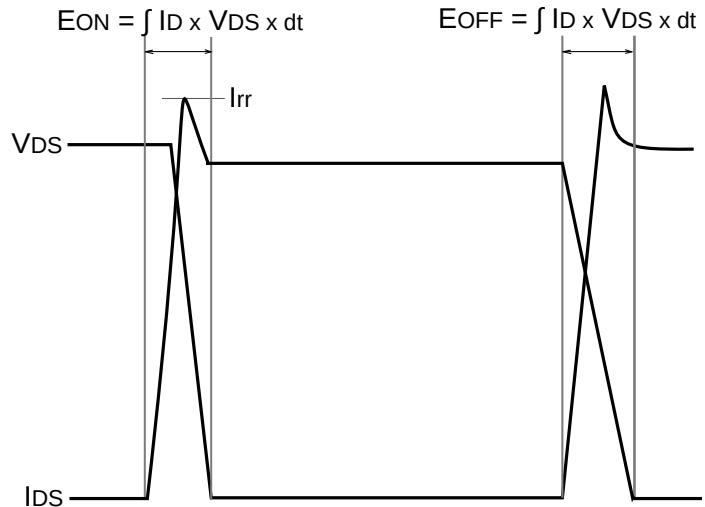

#### Reverse Recovery Circuit

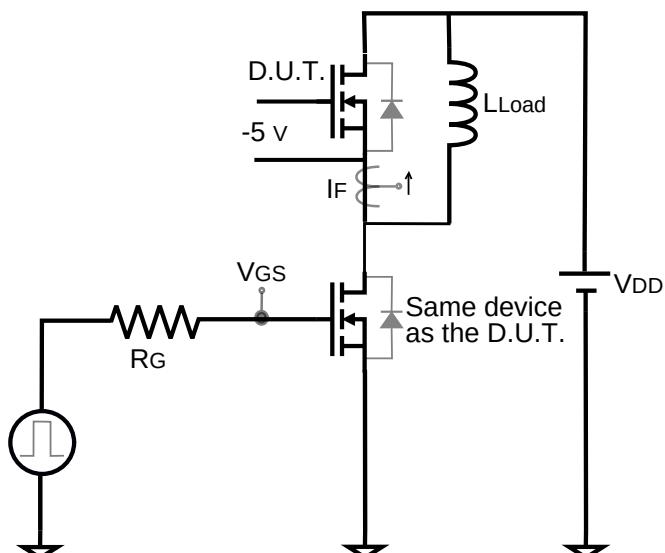


#### Reverse Recovery Waveform

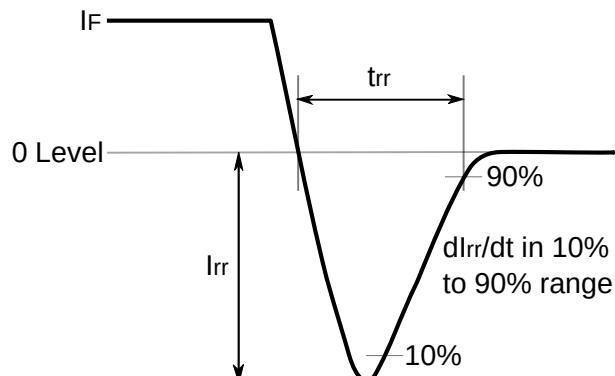


### Package Dimensions


#### TO-263-7 Package Outline

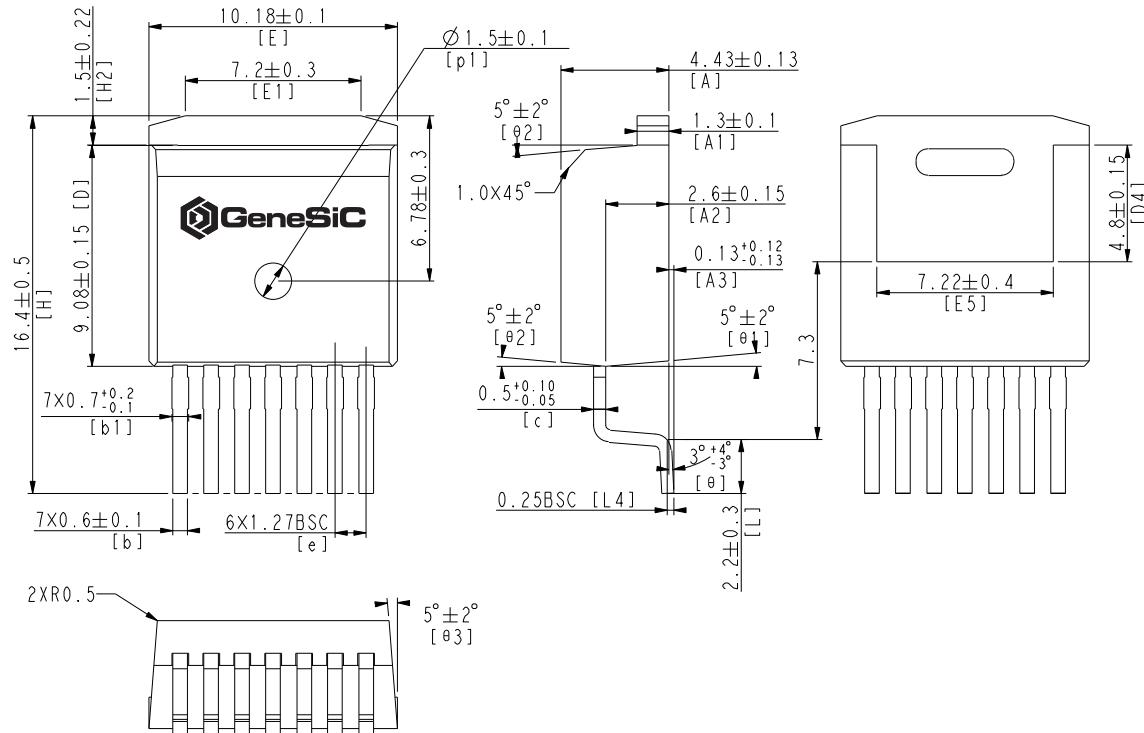

#### Recommended Solder Pad Layout

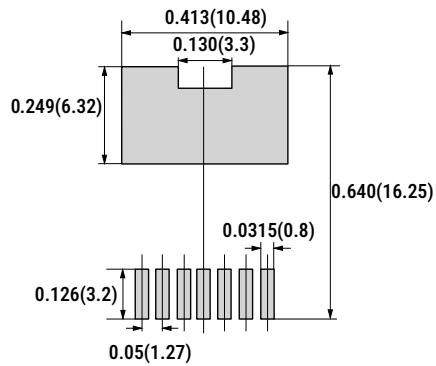

#### Package View

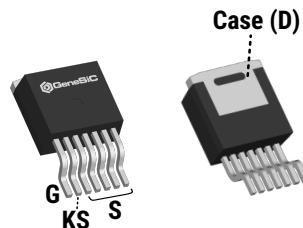

#### NOTE

1. CONTROLLED DIMENSION IS INCH. DIMENSION IN BRACKET IS MILLIMETER.
2. DIMENSIONS DO NOT INCLUDE END FLASH, MOLD FLASH, MATERIAL PROTRUSIONS.
3. THE SOURCE AND KELVIN-SOURCE PINS ARE NOT INTERCHANGABLE. THEIR EXCHANGE MIGHT LEAD TO MALFUNCTION.

## Compliance

### RoHS Compliance

The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/EC (RoHS 2), as adopted by EU member states on January 2, 2013 and amended on March 31, 2015 by EU Directive 2015/863. RoHS Declarations for this product can be obtained from your GeneSiC representative.

### REACH Compliance

REACH substances of high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, please contact a GeneSiC representative to insure you get the most up-to-date REACH SVHC Declaration. REACH banned substance information (REACH Article 67) is also available upon request.

## Disclaimer

GeneSiC Semiconductor, Inc. reserves right to make changes to the product specifications and data in this document without notice. GeneSiC disclaims all and any warranty and liability arising out of use or application of any product. No license, express or implied to any intellectual property rights is granted by this document.

Unless otherwise expressly indicated, GeneSiC products are not designed, tested or authorized for use in life-saving, medical, aircraft navigation, communication, air traffic control and weapons systems, nor in applications where their failure may result in death, personal injury and/or property damage.

## Related Links

- SPICE Models: [https://www.genesicsemi.com/sic-mosfet/G2R1000MT33J/G2R1000MT33J\\_SPICE.zip](https://www.genesicsemi.com/sic-mosfet/G2R1000MT33J/G2R1000MT33J_SPICE.zip)
- PLECS Models: [https://www.genesicsemi.com/sic-mosfet/G2R1000MT33J/G2R1000MT33J\\_PLECS.zip](https://www.genesicsemi.com/sic-mosfet/G2R1000MT33J/G2R1000MT33J_PLECS.zip)
- CAD Models: [https://www.genesicsemi.com/sic-mosfet/G2R1000MT33J/G2R1000MT33J\\_3D.zip](https://www.genesicsemi.com/sic-mosfet/G2R1000MT33J/G2R1000MT33J_3D.zip)
- Gate Driver Reference: <https://www.genesicsemi.com/technical-support>
- Evaluation Boards: <https://www.genesicsemi.com/technical-support>
- Reliability: <https://www.genesicsemi.com/reliability>
- Compliance: <https://www.genesicsemi.com/compliance>
- Quality Manual: <https://www.genesicsemi.com/quality>

## Revision History

- Rev 21/Jun: Updated switching time and switching energy data
- Supersedes: Rev 20/Nov, Rev 21/Jan



[www.genesicsemi.com/sic-mosfet/](http://www.genesicsemi.com/sic-mosfet/)

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for SiC MOSFETs category:*

*Click to view products by GeneSiC Semiconductor manufacturer:*

Other Similar products are found below :

[NTC040N120SC1](#) [HC3M001K170J](#) [IMBG65R048M1HXTMA1](#) [IMW120R045M1](#) [SCT3080ALGC11](#) [C3M0120100K](#) [C2M1000170J](#)  
[C3M0120090J](#) [C3M0065090J](#) [C3M0280090J](#) [SCT2750NYTB](#) [SCT2H12NYTB](#) [C3M0021120D](#) [C3M0016120K](#) [C3M0045065D](#)  
[C3M0045065K](#) [E3M0120090J](#) [C3M0065090J-TR](#) [C3M0120100J](#) [C3M0075120J](#) [DMWS120H100SM4](#) [DMWSH120H28SM4](#)  
[DMWSH120H90SM4](#) [DMWSH120H90SM4Q](#) [DMWSH120H28SM4Q](#) [DMWSH120H90SCT7Q](#) [DMWSH120H28SM3](#)  
[DMWSH120H43SM3](#) [DMWSH120H90SM3](#) [DMWSH120H28SM3Q](#) [DMWSH120H90SM3Q](#) [DIF120SIC053-AQ](#) [DIW120SIC059-AQ](#)  
[G2R1000MT17D](#) [G3R60MT07K](#) [G2R50MT33K](#) [G3R12MT12K](#) [G3R160MT12D](#) [G3R160MT12J-TR](#) [G3R160MT17D](#) [G3R160MT17J-TR](#)  
[G3R20MT12K](#) [G3R20MT12N](#) [G3R20MT17K](#) [G3R20MT17N](#) [G3R30MT12J-TR](#) [G3R30MT12K](#) [G3R350MT12D](#) [G3R40MT12D](#)  
[G3R40MT12J](#)